DESCRIPTIVE ANALYTICS REPORT

Myntra Product Pricing & Category Analysis

Theme: Understanding Price Patterns Across Selected Myntra Fashion Categories

SUBMITTED BY

DEEPANJALI CHAUBEY

Roll No.: 17

BCA Data Science & AI | Semester III

SUBMITTED TO

Ms. Monika Rao

BBD UNIVERSITY

Table of Contents

Section	Page
Note on Data	3
Objectives	4
How This Would Work at Real Scale	5
1. Category Average — Visualization	6
2. Price Frequency — Visualization	7
3. Gender × Price Band — Visualization	8
4. Maximum Price by Category — Visualization	9
5. Collection-Date Snapshot — Visualization	10
KPI Findings	11
KPI Definitions Used	12
Key Findings	13
Recommendations	14
References	15
Appendix A — Data Cleaning & Methodology (Short)	16
Appendix B — Statistical Snapshot	17
Appendix C — Price Distribution Snapshot	18
Appendix D — Category & Collection Snapshot	19
Key Points for Presentation	20

This report follows the verified PUBG descriptive-analytics presentation flow: data note → objectives → real-scale workflow → visual analysis → KPI summary → findings/recommendations → concise appendix.

Note on Data

This descriptive analytics project uses a selected sample of **50 product listings** visible on Myntra category/price-list pages during July 2026. The sample contains five categories: Men T-Shirts, Men Shirts, Women Tops, Women Jeans and Women Heels. Ten products were selected from each category so that category representation remained balanced.

The dataset is a **cross-sectional catalog snapshot**, not transaction or sales-history data. The main analytical fields are product, category, gender, listed price and collection/source date. Therefore, the analysis describes catalog pricing patterns rather than revenue, demand, conversion or profitability.

Data Coverage

Item	Value
Product	Myntra selected fashion listings
Platform	Myntra
Period	July 2026 snapshot
Observations	50 product records
Unit	One product listing
Price unit	Indian Rupees (INR)

Important limitation: listed price is not necessarily the final checkout price and the sample is not the entire Myntra catalog. The findings therefore apply only to the selected snapshot.

Objectives

The project aims to apply descriptive analytics to a real e-commerce product-pricing dataset. The analysis addresses the following questions:

1. What is the typical listed price of the selected Myntra products?
2. Which selected product category has the highest average listed price?
3. How widely do listed prices vary across the 50-product sample?
4. Which price band contains the largest number of products?
5. How do price-band distributions differ between men's and women's products?
6. Which category has the highest maximum listed price?
7. Which category shows the greatest price dispersion in the selected sample?
8. What does the collection-date snapshot comparison reveal?
9. Which KPIs provide the clearest summary of the pricing pattern?
10. What are the major descriptive findings revealed by the dataset?

How This Would Work at Real Scale

At real scale, an e-commerce pricing analytics system would collect product listings continuously, validate the fields, standardize prices, classify products into categories and price bands, calculate descriptive statistics, and publish dashboards for analysts or business teams.

The same workflow can be reproduced in Microsoft Excel for this academic project. A larger production system could additionally store product IDs, timestamps, discounts, stock status, seller information and transaction outcomes. Those extra fields would allow deeper analysis, but they are outside the scope of this catalog snapshot.

Step	Method
1. Collect	Record product name, category, gender, listed price and source date.
2. Validate	Check that product, category and price are present.
3. Standardize	Store prices as numeric INR values.
4. Derive	Create price bands for frequency analysis.
5. Aggregate	Calculate count, mean, median, minimum, maximum and standard deviation.
6. Compare	Use gender × price-band cross-tabulation.
7. Visualize	Use bar, line and comparison charts.
8. Interpret	Describe the sample without making predictive claims.

1. Category Average — Visualization

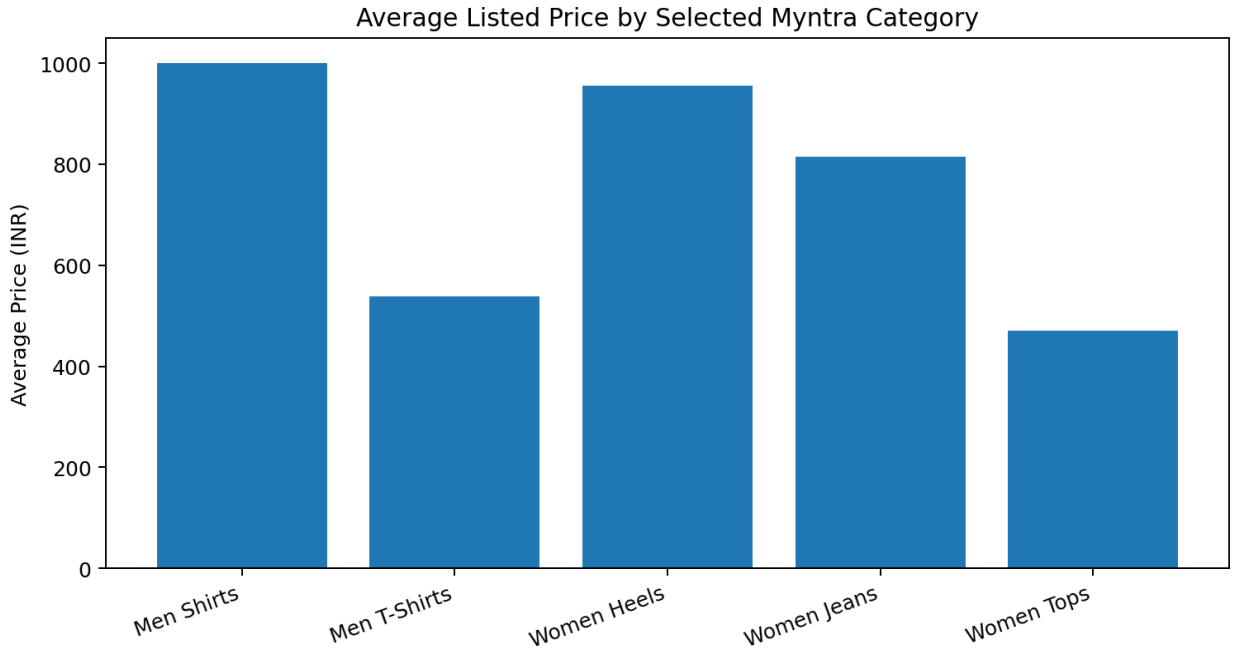


Figure 1. Average listed price by selected Myntra category.

The chart shows a clear separation between categories. **Men Shirts** have the highest average listed price at ■999.80, while **Women Tops** have the lowest at ■469.70. Women Heels and Women Jeans occupy the middle-to-upper portion of the sample.

Interpretation: Category membership is an important descriptive factor in the selected pricing snapshot. This does not imply that every product in the full Myntra catalog follows the same pattern.

2. Price Frequency — Visualization

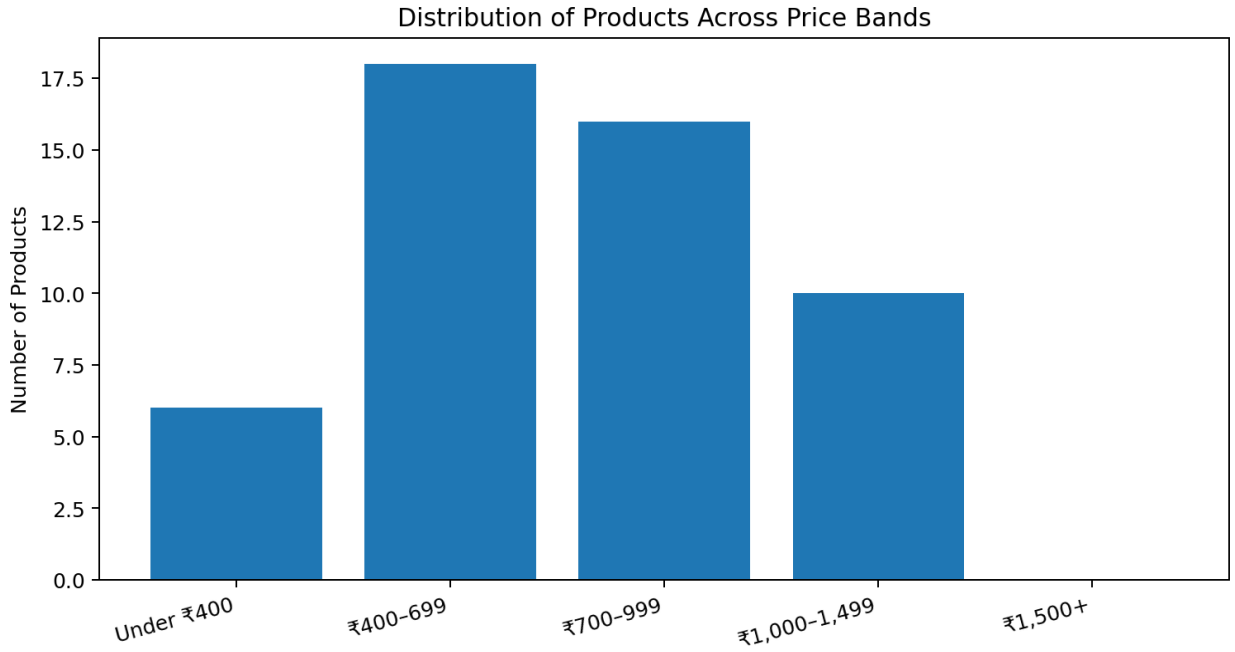


Figure 2. Distribution of products across price bands.

The ■400–699 band contains **18 products (36%)**, making it the most common price band. The ■700–999 band contains 16 products (32%). Together, these two middle bands account for **34 of 50 products, or 68%** of the sample.

Interpretation: The selected catalog snapshot is concentrated in the middle price ranges rather than at the very low or very high end.

3. Gender × Price Band — Visualization



Figure 3. Gender-wise distribution across price bands.

The cross-tabulation shows that the men's sample contains 2, 7, 6 and 5 products across the first four price bands, while the women's sample contains 4, 11, 10 and 5. The comparison is about the composition of this selected sample.

Interpretation: Women have more observations in the ■400–699 and ■700–999 bands because the sample includes three women's categories and two men's categories. It should not be interpreted as evidence that women buy more or spend more.

4. Maximum Price by Category — Visualization



Figure 4. Maximum listed price observed in each selected category.

The highest single listed price in the sample is ■**1,414** in Women Jeans. Women Heels reach ■1,333 and Men Shirts reach ■1,319. The remaining categories have lower sample-level maximums.

Interpretation: These are maximums among the selected records only. They are not claims about the maximum price available across the entire Myntra catalog.

5. Collection-Date Snapshot — Visualization

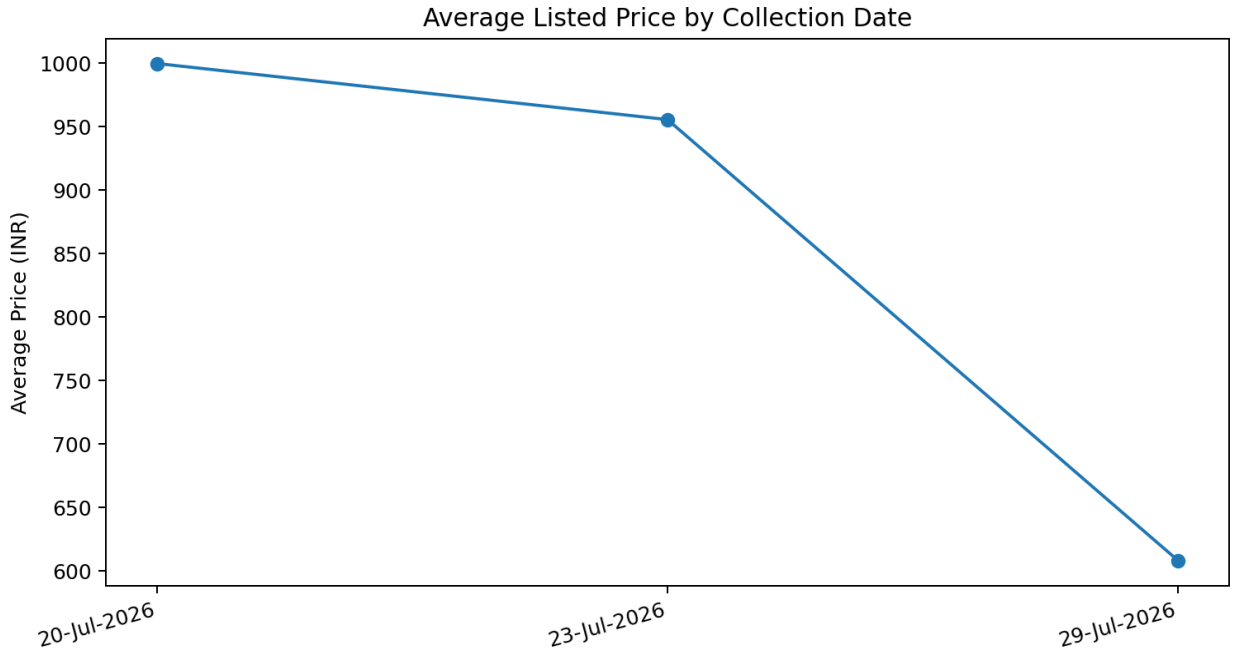


Figure 5. Average listed price by collection/source date.

The selected 20-Jul-2026 records average ■999.80, the 23-Jul-2026 records average ■955.60, and the 29-Jul-2026 records average ■608.03. The difference is largely influenced by which categories were sampled on each date.

Interpretation: This is a source-snapshot comparison, not a true longitudinal price trend. A genuine trend study would repeatedly collect the same or comparable products over many dates.

KPI Findings

Key Performance Indicators summarize the most important pricing measures in the selected sample.

KPI	Finding
Total Products Analysed	50
Overall Mean Listed Price	■755.90
Overall Median Listed Price	■720.00
Minimum Listed Price	■131
Maximum Listed Price	■1,414
Standard Deviation	■309.62
Total Listed-Price Value	■37,795
Largest Category Mean	Men Shirts — ■999.80
Smallest Category Mean	Women Tops — ■469.70
Most Common Price Band	■400–699 — 18 products

These KPIs summarize the selected catalog snapshot without making predictive or sales-performance claims.

KPI Definitions Used

KPI	Definition	Purpose
Mean	Sum of prices divided by number of products.	Measures average listed price.
Median	Middle value after sorting prices.	Shows a typical midpoint less affected by extremes.
Minimum	Smallest observed listed price.	Identifies the lowest observed price.
Maximum	Largest observed listed price.	Identifies the highest observed price.
Range	Maximum minus minimum.	Shows total observed spread.
Standard Deviation	Typical distance of observations from the mean.	Measures price variability.
Variance	Square of standard deviation.	Quantifies spread in squared units.
Frequency	Count of observations in each price band.	Shows concentration of products.
Cross-Tabulation	Counts observations across two categorical dimensions.	Compares gender and price bands.

Key Findings

1. The overall mean listed price is ■755.90, while the median is ■720.00.
2. Men Shirts have the highest category mean at ■999.80.
3. Women Tops have the lowest category mean at ■469.70.
4. The most common price band is ■400–699 with 18 products (36%).
5. The ■700–999 band contains 16 products (32%); the two middle bands together contain 68% of the sample.
6. The maximum observed listed price is ■1,414, recorded for a sampled Women Jeans product.
7. Women Heels have the highest category standard deviation at ■270.96, indicating greater price dispersion within that sample.
8. The dataset supports descriptive catalog analysis, but not conclusions about sales, demand, customer spending or profitability.

Recommendations

1. Use category-level price bands to make catalog comparisons easier for shoppers and analysts.
2. Monitor categories with wider price dispersion because they may contain clearer value-to-premium segmentation.
3. Repeat the same collection process weekly or monthly if a genuine price trend study is required.
4. Add transaction variables such as units sold, order value, discount amount and final checkout price for commercial analysis.
5. Expand the category coverage to dresses, footwear, beauty and accessories for a broader catalog view.
6. Maintain consistent sampling rules when comparing dates so that changes are not driven only by category composition.

These recommendations are based on the descriptive evidence in the selected sample and do not forecast future performance.

References

1. Myntra public category and price-list pages used for the selected product records.
2. Men T-Shirts category/price-list page — source snapshot dated 29 July 2026.
3. Men Shirts category/price-list page — source snapshot dated 20 July 2026.
4. Women Tops category/price-list page — source snapshot dated 29 July 2026.
5. Women Jeans category/price-list page — source snapshot dated 29 July 2026.
6. Women Heels category/price-list page — source snapshot dated 23 July 2026.
7. Microsoft Excel — used/recommended for descriptive-statistics calculations, tabulation and chart preparation.

Source note: Product prices are snapshot values and may change after collection. The report uses the supplied dataset record as the analytical source.

Appendix A — Data Cleaning & Methodology

Data Cleaning: The raw observations were arranged in a consistent row-wise structure with one product per row. Product names were retained as text, categories and gender labels were standardized, and prices were treated as numeric INR values. The supplied sample contains no missing product names, categories, gender labels or prices, and no duplicate row IDs were reported.

Derived Variable: A price-band variable was created to support frequency analysis and cross-tabulation. The bands were Under ■400, ■400–699, ■700–999, ■1,000–1,499 and ■1,500+.

Methodology: The analysis follows a descriptive workflow: collect → validate → standardize → derive price bands → aggregate → compare → visualize → interpret. Category-level count, mean, median, minimum, maximum and standard deviation were calculated, followed by frequency distribution and gender × price-band comparison.

Tools: Microsoft Excel can reproduce the calculations and charts. The final report is presented as a PDF. No predictive model is used.

Appendix B — Statistical Snapshot

The 50 selected products have a total listed-price value of ■37,795. The overall mean is ■755.90 and the median is ■720.00. Because the mean is above the median, some higher-priced listings pull the arithmetic average upward.

The lowest observed listed price is ■131 and the highest is ■1,414, giving an overall range of ■1,283. The sample standard deviation is ■309.62 and the variance is 95,862.01. These measures show that prices are spread substantially around the overall average.

At category level, mean prices range from ■469.70 for Women Tops to ■999.80 for Men Shirts. The category-level spread also differs, with Women Heels showing the highest standard deviation.

Appendix C — Price Distribution Snapshot

The most common price band is ■400–699 with 18 products, representing 36% of the sample. The ■700–999 band follows with 16 products, representing 32%. Together, these two bands contain 68% of all observations.

The Under ■400 band contains 6 products (12%), while the ■1,000–1,499 band contains 10 products (20%). No selected product falls into the ■1,500+ band.

In the gender cross-tabulation, men have 2 products below ■400, 7 in ■400–699, 6 in ■700–999 and 5 in ■1,000–1,499. Women have 4, 11, 10 and 5 respectively. This is a sample-composition comparison only.

Appendix D — Category & Collection Snapshot

Category aggregation shows that Men Shirts have the highest average listed price at ■999.80, followed by Women Heels at ■955.60, Women Jeans at ■815.50, Men T-Shirts at ■538.90, and Women Tops at ■469.70.

The source-date comparison gives average listed prices of ■999.80 for 20-Jul-2026, ■955.60 for 23-Jul-2026, and ■608.03 for 29-Jul-2026. The difference is affected by category composition on each collection date.

Because the dataset is a July 2026 catalog snapshot rather than a repeated time series, these date comparisons should not be presented as evidence of rising or falling market prices.

Key Points for Presentation

1. What is the project about? — Descriptive analysis of listed prices across 50 selected Myntra fashion products.
2. What is the main KPI? — Overall mean listed price, supported by median, minimum, maximum and standard deviation.
3. What is the mean? — The arithmetic average of all 50 listed prices.
4. What is the median? — The middle price after arranging the 50 observations in order.
5. What is the most common price band? — ■400–699, containing 18 products.
6. Which category has the highest average? — Men Shirts, ■999.80.
7. Which category has the lowest average? — Women Tops, ■469.70.
8. What is the maximum observed price? — ■1,414 in a sampled Women Jeans listing.
9. Why use descriptive analytics? — To summarize and understand existing data without predicting future outcomes.
10. Main limitation? — The dataset is a selected catalog snapshot, not transaction or sales data.
11. Excel workflow to remember — clean data → calculate statistics → create bands → aggregate → cross-tabulate → create charts → interpret findings.

Important viva line: “These findings describe the selected Myntra catalog snapshot and should not be interpreted as evidence of sales, demand or profitability.”