UPI Remittances TSD

V1.4

Copyright © 2004-2024 NPCI ® All Rights Reserved

National Payments Corporation of India (NPCI), Mumbai, Maharashtra, India the Programs, which include both the software and documentation, contain information that is proprietary to National Payments Corporation of India and its licensors; they are provided under a license agreement containing restrictions on use and disclosure and are also protected by copyright and other intellectual and industrial property laws. Except as may be expressly permitted in such license agreement, no part of the Programs may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose. The information contained in this document is subject to change without notice. If you find any problems in the documentation, please report them to us in writing. This document is not warranted to be error-free. NPCI product names are trademarks of National Payments Corporation of India. Other names may be trademarks of their respective owners.

CONFIDENTIAL

Version Control Summary

Version	Created by	Created on	Reviewed by	Remarks
Version1.0	Stafford Crasto	29 Nov 2023	Anindita Joardar	Initial draft
Version1.1	Stafford Crasto	15 Dec 2023	Anindita Joardar	Central mapper related changes; Added Fx TSD reference in section 8
Version1.2	Stafford Crasto	01 Mar 2024	Anindita Joardar	Updated FIR Scenarios in section 4; Added ReqPay split for Beneficiary and Settlement Banks in section 5.3
Version1.3	Stafford Crasto	09 Apr 2024	Anindita Joardar	Central mapper related changes removed and moved to Annexure 2; API Specs updated in section 5; Tag specifications updated in section 6
Version1.4	Stafford Crasto	10 Apr 2024	Anindita Joardar	Hbt Api specs and tag specifications removed and moved to preface document; FIR scenarios updated in section 4

CONTENTS

1. Introduction **6**

1.1 Purpose *6*

1.2 Scope *7*

1.3 Table of Abbreviations *7*

2. Architecture **8**

3. Foreign Inward Remittance Flow **9**

3.1 User Journey *9*

3.2 Use Case *9*

3.3 Validate user *10*

3.4 Financial Leg *11*

4.FIR Scenarios **13**

4.1 Validate Process *13*

4.1.1 Success 13

4.1.2 Timeout 13

4.1.3 VPA Validation Failure 13

4.1.4 Failure Due to Consent 13

4.1.5 Name Screening Validation (Compliance Screening bank) 13

4.1.6 Compliance Bank Timeout (Compliance Screening Bank) 13

4.2 Financial Process *13*

4.2.1 Settlement bank fails to send debit Response (Settlement Bank) 13

4.2.2 Unable to process credit to Beneficiary Bank (Settlement Bank) 14

4.2.3 Insufficient balance in pre-funded account (Settlement Bank) 14

4.2.4 Per Transaction Limit Exceeded (Settlement Bank) 14

4.2.5 Beneficiary Bank Fails To Send Respcredit To UPI (Beneficiary Bank) 14

4.2.6 Beneficiary Bank Credit Reversal Success (Beneficiary Bank) 15

5. API Specification **15**

5.1 List of APIs *15*

5.2 ValCust API *16*

CONFIDENTIAL

5.2.1 ReqValCust API (VerifyUser- For PSP) 16
5.2.2 RespValCust API (VerifyUser- For PSP) 18
5.2.3 ReqValCust API (CompScr- For AD Banks) 18
5.2.4 RespValCust API (CompScr- For AD Banks) 19
5.3 ReqPay API *21*
5.3.1 ReqPay API (IRP to iUPI) 21
5.3.2 ReqPay (IUPI/UPI to Settlement bank) 22
5.3.3 ReqPay (IUPI/UPI to Beneficiary bank) 24
5.3.4 RespPay API (Settlement Bank to UPI/iUPI) 26
5.3.5 RespPay API (Beneficiary Bank to UPI/iUPI) 27
5.3.6 ResPPay API (UPI/iUPI to IRP) 27
5.4 ChkTxn API *28*
5.4.1 ReqChkTxn API 28
5.4.2 RespChkTxn API 28
5.5 TxnConfirmation API *28*
5.5.1 ReqTxnConfirmation 28
5.5.2 RespTxnConfirmation 29
6. Tag Specifications 29
6.1 ReqValCust (VerifyUser) *29*
6.2 RespValCust (VerifyUser) *34*
6.3 ReqValCust (CompScr) *37*
6.4 RespValCust (CompScr) *44*
6.5 ReqChkTxn *46*
6.6 RespChkTxn *50*
6.7 ReqPay *55*
6.8 RespPay *66*
6.9 ReqTxnConfirmation *71*
6.10 RespTxnConfirmation *76*
7. Rules - Appendix 80

CONFIDENTIAL

8. References……105

CONFIDENTIAL

1. INTRODUCTION

Unified Payments Interface (UPI) is an instant payment system that facilitates interbank person-to-person and person-to-merchant transactions.

The International Remittance Implementation includes extending the current domestic UPI setup and adding new services for the International partners.

The transaction types supported are:

- **Foreign Inward Remittance (FIR)**

  It is a person-to-person transaction initiated from a foreign country (outside India) to an Indian beneficiary account for any purpose that is approved under the Foreign Exchange Management Act (FEMA).

- **Foreign Outward Remittance (FOR)**

  It is a person-to-person transaction from an Indian account to a beneficiary account which is located outside India for any purpose that is approved under the Foreign Exchange Management Act (FEMA).

1.1 PURPOSE

This document gives an understanding of one of the person-to-person transactions known as **Foreign Inward Remittance (FIR).**

The FIR model can be broadly classified into 3 segments:

1. **Validation process**: includes validation of Payer and Payee before initiation of financial leg.
2. **Payment process**: financial leg i.e., DEBIT and CREDIT post successful screening.
3. **Prefunding process (for future use)**: includes Fx conversion calculation and pre-funding of a pre-configured Settlement a/c (in INR) for subsequent DEBITs.

Note: Prefunding process is subject to agreement between IRP and Settlement Bank.

The transaction types to be supported are:

SR. NO.	MODEL	PAYER	PAYEE
1	FIR	Pre-approved (Pre-funded a/c)	UPI ID/VPA
2			UPI Number (Mobile number & numeric id)

CONFIDENTIAL

1.2 SCOPE

The scope of this document contains:

a. The changes in existing architecture for UPI International Remittance.
b. User Journey for Foreign Inward Remittance.
c. API Specifications and message structure of each API used in the Foreign Inward Remittance flow.

1.3 TABLE OF ABBREVIATIONS

Table of Abbreviations	
RBI	Reserve Bank of India
NPCI	National Payment Corporation of India
UPI	Unified Payment Interface
iUPI	International Stack of UPI
TPAPs	Third Party Application Providers
IRP	International Remittance Partner
FIR	Foreign Inward Remittance
FOR	Foreign Outward Remittance
E-FRM	Enterprise Fraud Risk Management
aURCS	Acceptance UPI Real Time Clearing and Settlement System
iURCS	International UPI Real Time Clearing and Settlement System
rURCS	Remittance UPI Real Time Clearing and Settlement System
PSPs	Payment Service Providers
FX	Foreign Exchange
CSB	Compliance Screening Bank
VPA	Virtual Payment Address
AD	Authorized Dealer Banks

CONFIDENTIAL

2. ARCHITECTURE

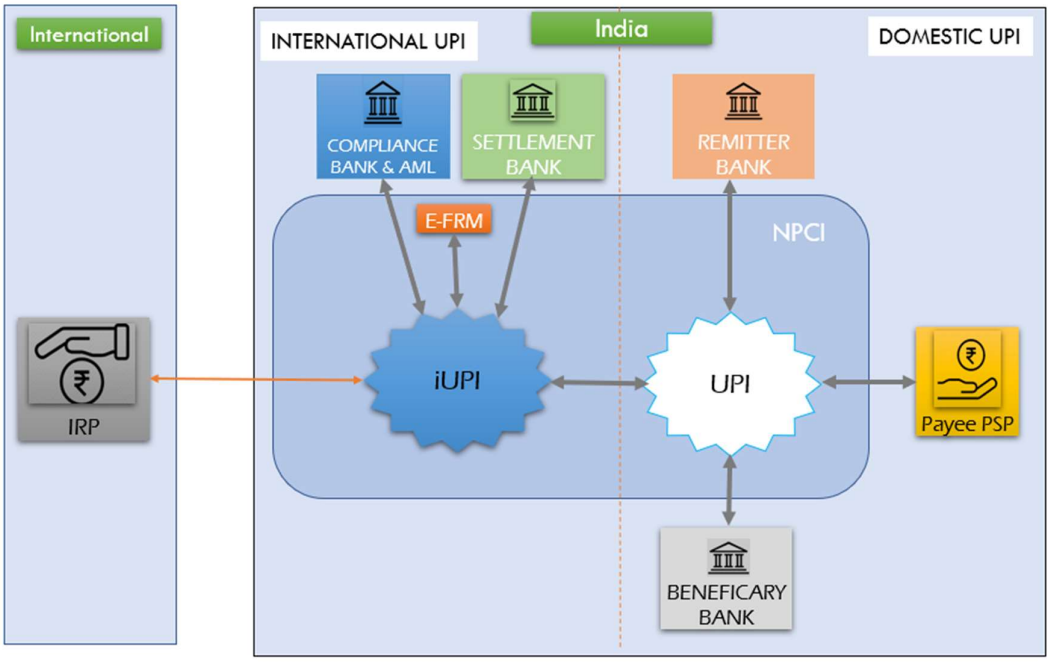

Fig1. Architecture Diagram

The proposed architecture consists of:

1. IRP (International Remittance Partner): Entity providing payment option of UPI to their customers.
    - These shall be on-boarded on and directly connected to UPI platform.
    - IRP shall be on-boarded with a pre-decided set of partner banks for the roles of Fx, Compliance screening and Settlement A/c management respectively.
    - IRP may have more than 1 bank in each respective role – Fx bank, Settlement bank and Compliance screening bank.
2. iUPI: Central switch processing FIR transactions.
3. Compliance Screening Bank: Banks processing the validation of payer and payee for AML and other regulatory checks etc.
4. Settlement Bank: Used for maintaining Prefunded account for FIR transaction debits.
5. Beneficiary Bank: Bank which holds the account to which the transaction is credited.
6. Enterprise Fraud Risk Management
7. Remitter Bank: Customer's bank which is debited.

3. FOREIGN INWARD REMITTANCE FLOW

Foreign Inward Remittance is a person-to-person transaction initiated from a foreign country (outside India) to an Indian beneficiary account for any purpose that is approved under the Foreign Exchange Management Act (FEMA).

3.1 USER JOURNEY

The user journey for Foreign Inward Remittance is as follows:

- Payer (outside India) uses Internet Banking/ apps to send FIR using UPI ID of the payee.
- The payer shares necessary details including Payer name, Address, Location, A/c number, Payee name and Payee UPI ID etc. to the IRP.
- IRP sends the said transaction to UPI for UPI validation.
- UPI ID is validated with the payee PSP and in return account details (Payee name, Account Number, IFSC) are shared with UPI.
- Here, the consent of the customer for sharing PII details is validated and if the same is not present then the transaction is declined.
- The Authorized Dealer (AD) banks perform necessary AML/ Compliance screening.
- The consolidated response is then sent from UPI to the IRP
- If the validation process is successful, the Payer then authorizes the transaction.
- IRP sends the necessary details to UPI.
- UPI then communicates with the necessary entities which include E-FRM, Payee PSP, Settlement Bank, Beneficiary Bank and sends final status of the transaction to the IRP.
- The IRP then communicates the response received from UPI to the Payer application.

3.2 USE CASE

Let us consider a sample use case basis the journey explained above

- An outside India payer John uses Internet Banking to transfer amount (FIR) to Mary who is an Indian account holder using UPI ID.
- John inputs the necessary details including his name, A/c number, address, location, Mary's name, and her UPI ID.
- The IRP forwards these details to UPI and the same is validated at UPI end basis communication with appropriate partners.
- UPI sends a consolidated response to the IRP post which John goes ahead and authorizes the transaction.

CONFIDENTIAL

- IRP forwards the same to UPI and UPI performs the necessary legs and sends a successful response to the IRP and John and sends a notification to Mary's account where the amount is credited.

3.3 VALIDATE USER

This flow is used to verify the End payee before initiating the payment.

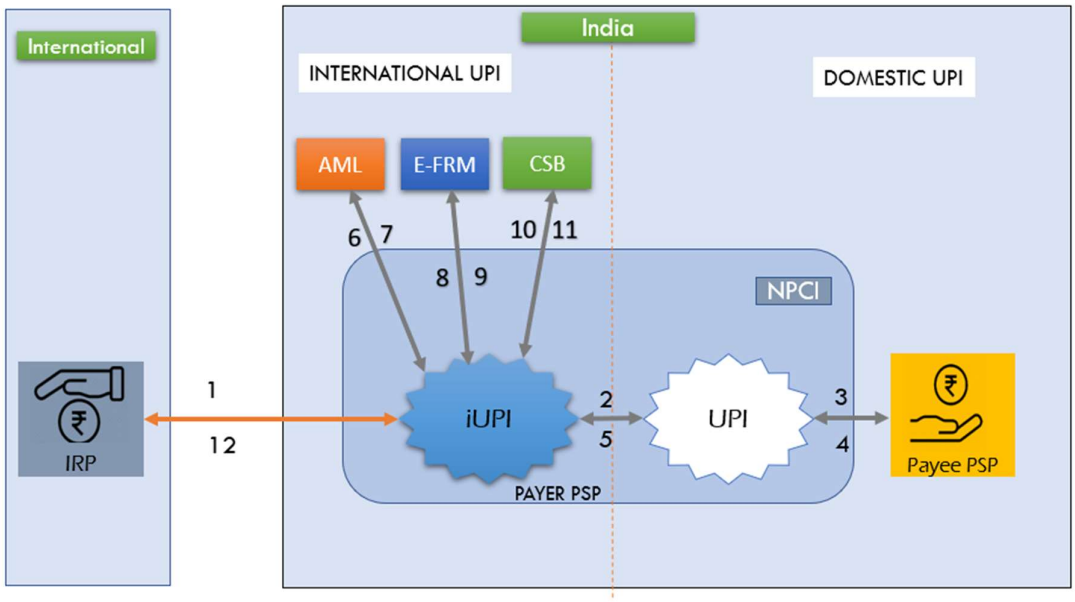

Fig2. Validate User

1. International Remittance Partner (IRP) initiates Validate transaction with below details to UPI:
    a. Payer name, address, geocode
    b. Payee account details – VPA or Account+IFSC or UPI Number
    c. Payee address and name
    d. Transfer currency code
    e. Settlement bank details
    f. Amount
    g. Purpose code as per pre-defined list
    h. MTO/ Intermediary's institution id and details
    i. Sender ID (Optional)

- iUPI will check the NDC limit for the respective settlement bank.
- If the limit is not breached, iUPI will initiate a request to Payee PSP Bank. If breached, failure response is sent to the IRP with error code of NDC limit breach.

2. iUPI initiates ReqValCust to UPI

3. UPI forwards the ValCust (VerifyUser) request to Payee PSP Bank for Payee name, Payee bank IFSC code.

4. Payee PSP sends the response to UPI.

5. UPI forwards the response from Payee PSP to iUPI.

6. iUPI shall now pass the request to the NPCI AML module internally (for future use).

7. The score is generated from the NPCI AML module. (This module will not decline any transaction as of now. It is only for monitoring and data analysis – For future use).

8. iUPI sends an internal call to the E-FRM.

9. E-FRM does all the necessary checks and sends a response back to iUPI.

10. The ValCust (CompScr) request is sent to the Compliance bank for screening and validations.

11. Compliance bank shall send the response post screening.

12. Post successful response from compliance bank, the response is sent back to the IRP

3.4 FINANCIAL LEG

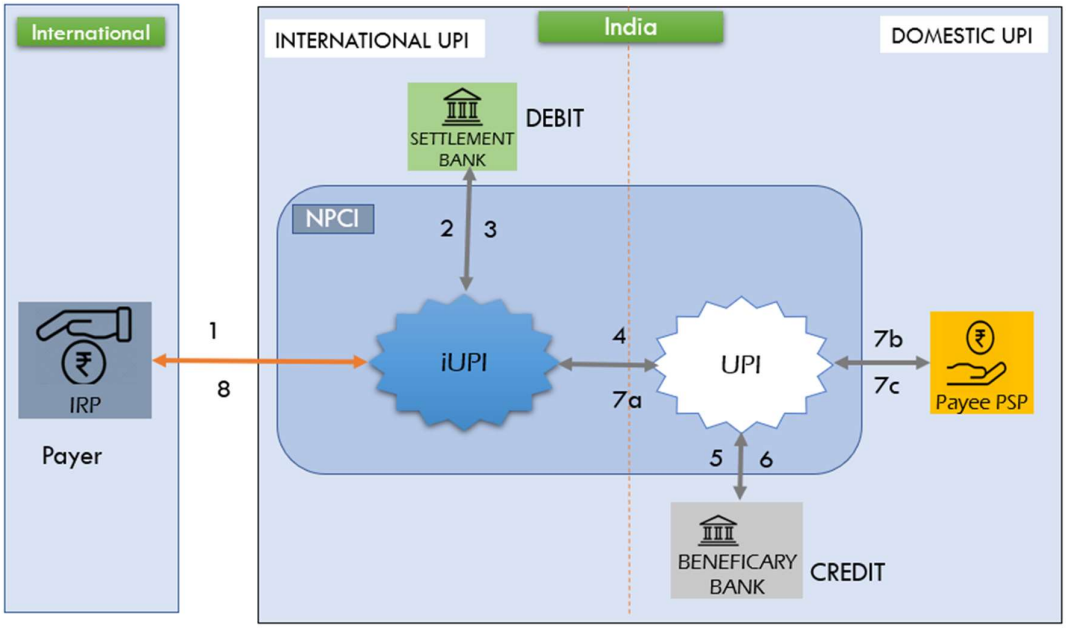

Fig3. Financial Leg

1. Post successful Validation transaction IRP will initiate ReqPay to iUPI.
2. iUPI will initiate ReqPay DEBIT to the Settlement bank.
3. The settlement bank shall respond with successful DEBIT to the prefunded settlement account of the IRP.
4. On successful DEBIT of the pre-funded account, iUPI will initiate ReqPay to UPI for crediting the beneficiary.
5. UPI shall initiate ReqPay CREDIT to beneficiary bank.
6. Beneficiary bank shall send successful response post crediting the Payee.
7. UPI will send final response to iUPI and TxnConfirmation to Payee PSP.

   7a. UPI sends final response to iUPI.

   7b. UPI sends TxnConfirmation request to Payee PSP.

   7c. Payee PSP sends TxnConfirmation response to UPI.
8. UPI shall send final response to IRP and TxnConfirmation to Payee PSP.

NOTE: In the current implementation, the prefunding process is managed by the IRP and their respective settlement partner bank outside of UPI. Please refer to the Annexure for prefunding process using UPI and the same can be adopted by the network partner as per the business agreement with NPCI.

CONFIDENTIAL

4.FIR SCENARIOS

4.1 VALIDATE PROCESS

4.1.1 SUCCESS

- If the VPA sent to Payee PSP is valid, the Payee PSP shall respond with status="SUCCESS" and the respective account details.
- These details shall be sent further for compliance screening to the AD banks.

4.1.2 TIMEOUT

- If Payee PSP fails to respond within 15 seconds for customer validation, UPI shall close the transaction as timeout.
- If Payee PSP responds with an incorrect RespValCust, UPI shall reject the same with negative ack. This transaction shall be closed as timeout.

4.1.3 VPA VALIDATION FAILURE

- If the VPA sent to payee PSP is invalid, the Payee PSP can decline with status="FAILURE" and appropriate response code.

4.1.4 FAILURE DUE TO CONSENT

- If the user's consent is not available for the request VPA, Payee PSP shall decline the same with status="FAILURE" and appropriate response code.

4.1.5 NAME SCREENING VALIDATION (COMPLIANCE SCREENING BANK)

- iUPI initiates ReqValcust (type-CompScr) with Payer and Payee details to Compliance/AML Bank for validation
- Compliance Bank validates and finds the payer /Payee detail as blacklisted customer and hence sends RespValCust with result failure and appropriate response code to iUPI.

4.1.6 COMPLIANCE BANK TIMEOUT (COMPLIANCE SCREENING BANK)

- iUPI initiates ReqValcust (type-CompScr) with Payer and Payee details to Compliance/AML Bank for validation
- Compliance Bank fails to respond to iUPI.
- iUPI sends the respValCust with appropriate error code to IRP.

4.2 FINANCIAL PROCESS

4.2.1 SETTLEMENT BANK FAILS TO SEND DEBIT RESPONSE (SETTLEMENT BANK)

CONFIDENTIAL

- IRP initiates Reqpay with payer account details and payee account number (received in RespValCust) and orgTxnId (reqValCust txn Id) and necessary details to iUPI.
- iUPI validates the payee details sent in reqpay with the respective RespValCust and initiates request to eFRM.
- Post eFRM , iUPI forwards the reqPay DEBIT (Pre Auth) to Settlement bank basis the IFSC received in ReqPay from IRP.
- Settlement bank does not respond with respPay debit
  iUPI to send ReqChkTxn to settlement Bank, and no response received from settlement bank
- iUPI to send debit reversal (advice message) to Settlement Bank.
- iUPI will send the final Resp Pay with result-Failure and appropriate error code to IRP.

4.2.2 UNABLE TO PROCESS CREDIT TO BENEFICIARY BANK (SETTLEMENT BANK)

- Post securing the Debit, iUPI initiates pre-approved ReqPay for processing credit to the beneficiary bank
- UPI to sends the ReqPay credit to beneficiary bank and Beneficiary declines the credit with appropriate respcode.
- UPI initiates Debit reversal to iUPI and iUPI forwards the same to Settlement Bank
- Settlement bank processes the Debit reversal and send success response to iUPI
- iUPI forwards the respPay to IRP with appropriate error code.

4.2.3 INSUFFICIENT BALANCE IN PRE-FUNDED ACCOUNT (SETTLEMENT BANK)

- Post eFRM , iUPI forwards the ReqPay debit to Settlement bank basis the IFSC received in ReqPay.
- Settlement bank does not have sufficient funds and sends appropriate rejection code in respPay Debit to iUPI
- iUPI forwards the same to IRP

4.2.4 PER TRANSACTION LIMIT EXCEEDED (SETTLEMENT BANK)

- Post eFRM , iUPI forwards the ReqPay debit to Settlement bank basis the IFSC received in ReqPay
- Settlement bank rejects the transaction due to limit breach per transaction and sends appropriate response code to Iupi
- iUPI forwards the same to IRP

4.2.5 BENEFICIARY BANK FAILS TO SEND RESPCREDIT TO UPI (BENEFICIARY BANK)

- UPI to sends the ReqPay credit to beneficiary bank
- Beneficiary Bank does not respond with RespPay Credit to UPI
- UPI sends ReqChkTxn and ReqPay Credit Reversal to Beneficiary bank, for which no response received from Beneficiary Bank

CONFIDENTIAL

- UPI sends the Final RespPay with result-DEEMED to iUPI
- iUPI forwards the respPay to IRP

4.2.6 BENEFICIARY BANK CREDIT REVERSAL SUCCESS (BENEFICIARY BANK)

- UPI to sends the ReqPay credit to beneficiary bank
- Beneficiary Bank does not respond with Resppay Credit to UPI
- UPI sends ReqChkTxn to Beneficiary bank, for which no response received from Beneficiary Bank
- UPI sends the Reqpay Credit reversal to Beneficiary Bank, for which Beneficiary bank responds with RespPay credit Reversal as success
- UPI sends the final RespPay with appropriate error code and response code to iUPI and iUPI forwards the respPay to IRP.

Note: For error codes please refer to the error code sheet

5. API SPECIFICATION

5.1 LIST OF APIS

SR. NO.	API NAME	DESCIPTION
Validate process		
1.	ReqValCust	The types used are: 1.type="VerifyUser" This is used between UPI and PSP to validate the customer. 2.type="CompScr" This is used between iUPI and AD Banks for compliance screening.
2.	RespValCust	The types used are: 1.type= "VerifyUser" This is used between PSP and iUPI to send Payee details. 2.type= "CompScr" This is used between the AD Banks and iUPI for compliance screening.
Financial leg		
3.	ReqPay	This is used to initiate payment request: 1.IRP to iUPI 2.UPI to Remitter/bene bank

		Note: Not applicable for PSP
4.	RespPay	This is used to initiate response for the payment request: 1.Remitter/bene bank to iUPI 2.UPI to IRP Note: Not applicable for PSP
5.	ReqTxnConfirmation	Payment confirmation from UPI to Payee PSP
6.	RespTxnConfirmation	Response as an acknowledgment for the confirmation from Payee PSP
7.	ReqChkTxn	Used by IRP to check the status of the transaction at iUPI
8.	RespChkTxn	Used by iUPI to share the status of the transaction to IRP
System uptime monitoring (Refer Preface document)		
9.	ReqHbt	Sent by IRP/Fx bank/ settlement bank/ compliance screening bank to iUPI and vice-versa for checking system uptime.
10.	RespHbt	Response sent to IRP/Fx bank/ settlement bank/ compliance screening bank by iUPI and vice-versa for Hbt request.
Prefunding process (As per respective IRP agreement - Refer Annexure)		

5.2 VALCUST API

NOTE:

1. The “VerifyUser” type shall be used for the Proxy Lookup / validate process. This shall be populated by the IRP in the request to iUPI.

- This shall be forwarded to the PSP for further processing.

2. The “CompScr” type shall be used for Compliance screening leg. This shall be populated in the leg from iUPI to AD Banks.

5.2.1 REQVALCUST API (VERIFYUSER- FOR PSP)

```
<upi:ReqValCust xmlns:upi="http://npci.org/upi/schema/">
        <Head ver="2.0" ts="" orgId="" msgId="" prodType= "UPI"/>
        <Txn id="" note="" refId="" refUrl="" ts="" type="VerifyUser" custRef="” initiationMode="” purpose="”/>
        <Payer addr="" name="" seqNum="" type="PERSON" code="">
<Ac addrType="ACCOUNT">
```

```
                    <Detail name="ACTYPE" value=""/>
                    <Detail name="ACNUM" value=""/> <!—Settlement Bank Account no->
                    <Detail name="IFSC" value=""/> <!-- Settlement Bank IFSC->

            </Ac>
<ReqIdDetails>
        <Id name="" value=""/> </ReqIdDetails>
<Institution type="" route=""> <!—Institution tag shall have all the details of the end payer -
->
                    <Name value="" acNum=""/>  <!—Account no of end payer->
                    <Purpose code="" note=""/>
                    <Originator name="" type="" refNo="">
                            <Address location="" city="" country="" geocode=""/>
                    </Originator>
                    <Beneficiary name=""/><!—End beneficiary/ payee name -->
            </Institution>

        </Payer>
        <Payee addr="" name="" seqNum="" type=" PERSON" code="0000">
</Payee>
</upi:ReqValCust>
```

CONFIDENTIAL

5.2.2 RESPVALCUST API (VERIFYUSER- FOR PSP)

```
<upi:RespValCust xmlns:upi="http://npci.org/upi/schema/">
        <Head ver="2.0" ts="" orgId="" msgId="" prodType= "UPI"/>
        <Txn id="" note="" refId="" refUrl="" ts="" type="VerifyUser" custRef="”” initiationMode="” purpose="” />
        <Resp reqMsgId="" result="" errCode="">
                <RespIdDetails addr = ""> <!-- VPA of beneficiary -->
        <Id>
        <Detail name="MASKNAME" value=""/> <!-- Beneficiary Account details. Name shall be in clear text-->
                                < Detail name="IFSC" value=""/>
                                <Detail name="ACTYPE" value=""/>
                                <Detail name="ACNUM" value=""/>
                                < Detail name="CODE" value="0000"/>
                                < Detail name="TYPE" value="PERSON"/>
        </Id>
        </RespIdDetails>
    <Consent name="” type="” value="”/>
                </Resp>
</upi:RespValCust>
```

5.2.3 REQVALCUST API (COMPSCR- FOR AD BANKS)

```
<upi:ReqValCust xmlns:upi="http://npci.org/upi/schema/">
        <Head ver="2.0" ts="" orgId="" msgId="" prodType= "UPI"/>
        <Txn id="" note="" refId="" refUrl="" ts="" type="CompScr" custRef="”” initiationMode="” purpose="”/>
        <Payer addr="" name="" seqNum="" type="PERSON" code="">
<ReqIdDetails>
        <Id name="" value=""/> </ReqIdDetails>
<Institution type="" route=""> <!—Institution tag shall have all the details of the end payer -->
                        <Name value="" acNum=""/>
                        <Purpose code="" note=""/>
                        <Originator name="" type="" refNo="">
                                <Address location="" city="" country="" geocode=""/>
                        </Originator>
                        <Beneficiary name=""/><!—End beneficiary/ payee name -->
                </Institution>
<Ac addrType="ACCOUNT"> <!—The Prefunded settlement bank account details shall be populated here -->
```

CONFIDENTIAL

```
                <Detail name="ACTYPE" value=""/>
                <Detail name="ACNUM" value=""/>
                <Detail name="IFSC" value=""/>


        </Ac>
                <Amount value="" curr="INR">
                        <Split name="" value=""/>
                </Amount>
    </Payer>
    <Payee addr="" name="" seqNum="" type=" PERSON" code="0000">
<Ac addrType="ACCOUNT">
                <Detail name="IFSC" value=""/>
                <Detail name="ACTYPE" value=""/>
                <Detail name="ACNUM" value=""/>
        </Ac>
  <Consent name="" type="" value=""/>
</Payee>
</upi:ReqValCust>
```

5.2.4 RESPVALCUST API (COMPSCR- FOR AD BANKS)

```
<upi:RespValCust xmlns:upi="http://npci.org/upi/schema/">
    <Head ver="2.0" ts="" orgId="" msgId="" prodType= "UPI"/>
    <Txn id="" note="" refId="" refUrl="" ts="" type="CompScr" custRef="" 
initiationMode="" purpose="" />
    <Resp reqMsgId="" result="" errCode="">
        <RespIdDetails addr = ""> <!-- VPA of bene -->
<Id>
    <Detail name="MASKNAME" value=""/> <!-- Bene Account details. Name shall be in 
clear text -->
                < Detail name="IFSC" value=""/>
                <Detail name="ACTYPE" value=""/>
                <Detail name="ACNUM" value=""/>
                < Detail name="CODE" value="0000"/>
                < Detail name="TYPE" value="PERSON"/>
</Id>
        </RespIdDetails>
```

CONFIDENTIAL

```
            </Resp>
</upi:RespValCust>
```

CONFIDENTIAL

5.3 REQPAY API

5.3.1 REQPAY API (IRP TO IUPI)

```
<upi:ReqPay xmlns:upi="http://npci.org/upi/schema/">
        <Head ver="2.0" ts="" orgId="" msgId="" prodType= "UPI"/>
        <Meta>
                <Tag name="PAYREQSTART" value=""/>
                <Tag name="PAYREQEND" value=""/>
        </Meta>
        <Txn id="" note="" custRef="" refId="" refUrl="" ts=""    refCategory="" type="" 
orgTxnId="" purpose="" initiationMode="" orgRespCode="">
                <RiskScores>
                        <Score provider="sp" type="TXNRISK" value=""/>
                        <Score provider="npci" type="TXNRISK" value=""/>
                </RiskScores>
        </Txn>
        <Payer addr="" name="" seqNum="" type="" code="">
                <Institution type="" route="">
                        <Name value="" acNum=""/>
                        <Purpose code="" note=""/>
                        <Originator name="" type="" refNo="">
                                <Address location="" city="" country="" geocode=""/>
                        </Originator>
                        <Beneficiary name=""/>
                </Institution>
                <Info>
                        <Identity id="" type="" verifiedName="" />
                        <Rating VerifiedAddress=""/>
                </Info>
                <Device>
                        <Tag name="" value=""/>
                </Device>
                <Ac addrType="ACCOUNT">
                        <Detail name="IFSC" value=""/>
                        <Detail name="ACTYPE" value=""/>
```

CONFIDENTIAL

```
                <Detail name="ACNUM" value=""/>
            </Ac>
            <Creds>
                <Cred  type="PREAPPROVED"  subType="NA">
                    <Data>  base-64 encoded</Data>
                </Cred>
                <Cred type="PREAUTH" subType="NA">
                    <Data code="" ki=""> base-64 encoded/encrypted
                authentication data</Data>
                </Cred>
            </Creds>
            <Amount value="" curr="INR">
                <Split name="" value=""/>
            </Amount>
        </Payer>
        <Payees>
            <Payee addr="" name="" seqNum="" type="PERSON" code="" >
                <Device>
                    <Tag name="" value=""/>
                </Device>
                <Ac addrType="ACCOUNT">
                    <Detail name="IFSC" value=""/>
                    <Detail name="ACTYPE" value=""/>
                    <Detail name="ACNUM" value=""/>
                </Ac>
                <Amount value="" curr="INR">
                    <Split name="" value=""/>
                </Amount>
            </Payee>
        </Payees>
</upi:ReqPay>
```

5.3.2 REQPAY (IUPI/UPI TO SETTLEMENT BANK)

```
<upi:ReqPay xmlns:upi="http://npci.org/upi/schema/">
        <Head ver="2.0" ts="" orgId="" msgId="" prodType= "UPI"/>
        <Meta>
```

CONFIDENTIAL

```
            <Tag name="PAYREQSTART" value=""/>
            <Tag name="PAYREQEND" value=""/>
        </Meta>
        <Txn id="" note="" custRef="" refId="" refUrl="" ts=""    refCategory="" type="" orgTxnId="" purpose="" initiationMode="" subType="" orgRespCode="" >
            <RiskScores>

                <Score provider="npci" type="TXNRISK" value=""/>
            </RiskScores>
        </Txn>
        <Payer addr="" name="" seqNum="" type="PERSON” code="">

            <Institution type="" route="" netInstId=”” >
                <Name value="" acNum=""/>
                <Purpose code="" note=""/>
                <Originator name="" type="" refNo="">
                    <Address location="" city="" country="" geocode=""/>
                </Originator>
                <Beneficiary name=""/>
            </Institution>
            <Info>
                <Identity id="" type="ACCOUNT" verifiedName="" />
                <Rating VerifiedAddress="TRUE|FALSE"/>
            </Info>
            <Device>
                <Tag name="" value=""/>
            </Device>
            <Ac addrType="ACCOUNT">
                <Detail name="IFSC" value=""/>
                <Detail name="ACTYPE" value=""/>
                <Detail name="ACNUM" value=""/>
            </Ac>
            <Creds>
            <Cred type="PREAUTH" subType="NA">
<Data code="" ki=""> base-64 encoded/encrypted authentication data</Data>
```

CONFIDENTIAL

```
                </Cred>
        </Creds>
                <Amount value="" curr="INR">
                        <Split name="" value=""/>
                </Amount>
        </Payer>
        <Payees>
                <Payee addr="" name="" seqNum="" type="" code="" >
                        <Info>
                        <Identity id="" type="" verifiedName=""/>
                                <Rating VerifiedAddress=""/>
                        </Info>
                        <Device>
                                <Tag name="" value=""/>
                        </Device>
                        <Ac addrType="ACCOUNT">
                                <Detail name="IFSC" value=""/>
                                <Detail name="ACTYPE" value=""/>
                                <Detail name="ACNUM" value=""/>
                        </Ac>
                        <Amount value="" curr="INR">
                                <Split name="" value=""/>
                        </Amount>
                </Payee>
        </Payees>
</upi:ReqPay>
```

5.3.3 REQPAY (IUPI/UPI TO BENEFICIARY BANK)

```
<upi:ReqPay xmlns:upi="http://npci.org/upi/schema/">
        <Head ver="2.0" ts="" orgId="" msgId="" prodType= "UPI"/>
        <Meta>
                <Tag name="PAYREQSTART" value=""/>
                <Tag name="PAYREQEND" value=""/>
        </Meta>
```

CONFIDENTIAL

```
<Txn id="" note="" custRef="" refId="" refUrl="" ts="" refCategory="" type="" orgTxnId="" purpose="" initiationMode="" subType="" orgRespCode="" >
    <RiskScores>
        <Score provider="sp" type="TXNRISK" value=""/>
        <Score provider="npci" type="TXNRISK" value=""/>
    </RiskScores>
</Txn>
<Payer addr="" name="" seqNum="" type="PERSON code="">

    <Institution type="" route="" netInstId="">
        <Name value="" acNum=""/>
        <Purpose code="" note=""/>
        <Originator name="" type="" refNo="">
            <Address location="" city="" country="" geocode=""/>
        </Originator>
        <Beneficiary name=""/>
    </Institution>
    <Info>
        <Identity id="" type="ACCOUNT" verifiedName="" />
        <Rating VerifiedAddress="TRUE|FALSE"/>
    </Info>
    <Device>
        <Tag name="" value=""/>
    </Device>
    <Ac addrType="ACCOUNT">
        <Detail name="IFSC" value=""/>
        <Detail name="ACTYPE" value=""/>
        <Detail name="ACNUM" value=""/>
    </Ac>
    <Amount value="" curr="INR">
        <Split name="" value=""/>
    </Amount>
</Payer>
<Payees>
    <Payee addr="" name="" seqNum="" type="" code="" >
```

CONFIDENTIAL

```
                <Info>
                <Identity id="" type="" verifiedName=""/>
                        <Rating VerifiedAddress=""/>
                </Info>
                <Device>
                        <Tag name="" value=""/>
                </Device>
                <Ac addrType="ACCOUNT">
                        <Detail name="IFSC" value=""/>
                        <Detail name="ACTYPE" value=""/>
                        <Detail name="ACNUM" value=""/>
                </Ac>
                <Amount value="" curr="INR">
                        <Split name="" value=""/>
                </Amount>
            </Payee>
        </Payees>
</upi:ReqPay>
```

5.3.4 RESPPAY API (SETTLEMENT BANK TO UPI/IUPI)

```
<upi:RespPay xmlns:upi="http://npci.org/upi/schema/">
        <Head ver="2.0" ts="" orgId="" msgId="" prodType= "UPI"/>
        <Txn id="" note="" refId="" custRef="" refUrl="" ts="" purpose="" type="" subType=""
initiationMode="" orgTxnId="" refCategory="">
            <RiskScores>
                <Score provider="sp" type="TXNRISK" value=""/>
                <Score provider="npci" type="TXNRISK" value=""/>
            </RiskScores>
        </Txn>
        <Resp reqMsgId="" result="" errCode="">
            <Ref type="PAYER" seqNum="" addr="" code="" settAmount="" orgAmount=""
settCurrency="" approvalNum="" respCode="" reversalRespCode="" IFSC="” acNum="”
accType="” regName="”/>

</Resp>
```

CONFIDENTIAL

```
</upi:RespPay>
```

5.3.5 RESPPAY API (BENEFICIARY BANK TO UPI/IUPI)

```
<upi:RespPay xmlns:upi="http://npci.org/upi/schema/">
	<Head ver="2.0" ts="" orgId="" msgId="" prodType= "UPI"/>
	<Txn id="" note="" refId="" custRef="" refUrl="" ts="" purpose="" type="" subType="" initiationMode="" orgTxnId="" refCategory="">
		<RiskScores>
			<Score provider="sp" type="TXNRISK" value=""/>
			<Score provider="npci" type="TXNRISK" value=""/>
		</RiskScores>
	</Txn>
	<Resp reqMsgId="" result="" errCode="">
		<Ref type="PAYEE" seqNum="" addr="" code="" settAmount="" orgAmount="" settCurrency="" approvalNum="" respCode="" reversalRespCode="" IFSC="” acNum="” accType="” regName="”/>
</Resp>
	</upi:RespPay>
```

5.3.6 RESPPAY API (UPI/IUPI TO IRP)

```
<upi:RespPay xmlns:upi="http://npci.org/upi/schema/">
	<Head ver="2.0" ts="" orgId="" msgId="" prodType= "UPI"/>
	<Txn id="" note="" refId="" custRef="" refUrl="" ts="" purpose="" type="PAY" subType="" initiationMode="" orgTxnId="" refCategory="">
		<RiskScores>
			<Score provider="sp" type="TXNRISK" value=""/>
			<Score provider="npci" type="TXNRISK" value=""/>
		</RiskScores>
	</Txn>
	<Resp reqMsgId="" result="" errCode="">
		<Ref type="PAYER" seqNum="" addr="" code="" settAmount="" orgAmount="" settCurrency="" approvalNum="" respCode="" reversalRespCode="" IFSC="” acNum="” accType="” regName="”/>
		<Ref type="PAYEE" seqNum="" addr="" code="" settAmount="" orgAmount="" settCurrency="" approvalNum="" respCode="" reversalRespCode="" IFSC="” acNum="” accType="” regName="” />
```

CONFIDENTIAL

```
        </Resp>
    </upi:RespPay>
```

5.4 CHKTXN API

5.4.1 REQCHKTXN API

```
<upi:ReqChkTxn xmlns:upi="http://npci.org/upi/schema/">
    <Head ver="2.0" ts="" orgId="" msgId="" prodType= "UPI"/>
    <Txn id="" note="" refId="" refUrl="" refCategory="" ts="" type="ChkTxn" orgMsgId="" orgTxnId="" orgRrn="" subType="" orgTxnDate="" initiationMode="" purpose="" custRef="" />
</upi:ReqChkTxn>
```

5.4.2 RESPCHKTXN API

```
<upi:RespChkTxn xmlns:upi="http://npci.org/upi/schema/">
    <Head ver="2.0" ts="" orgId="" msgId="" prodType= "UPI" />
    <Txn id="" note="" refId="" refUrl="" refCategory="" ts="" type="ChkTxn" orgMsgId="" orgTxnId="" orgTxnDate="" initiationMode="" purpose="" custRef="" subType="" />
    <Resp reqMsgId="" result="" errCode="">
        <Ref type="PAYER" seqNum="" addr="" code="" settAmount="" orgAmount="" settCurrency="" approvalNum="" respCode="" reversalRespCode="" IFSC="" acNum="" accType="" regName=""/>
        <Ref type="PAYEE" seqNum="" addr="" code="" settAmount="" orgAmount="" settCurrency="" approvalNum="" respCode="" reversalRespCode="" IFSC="" acNum="" accType="" regName="" />
    </Resp>
</upi:RespChkTxn>
```

5.5 TXNCONFIRMATION API

5.5.1 REQTXNCONFIRMATION

```
<upi:ReqTxnConfirmation    xmlns:upi="http://npci.org/upi/schema/">
    <Head ver="2.0" ts="" orgId="" msgId="" prodType=""/>
    <Txn id="" note="" refId="" refUrl="" ts="" type="TxnConfirmation" orgTxnId="" initiationMode="" custRef="" subtype="" refCategory="" purpose=""/>
    <TxnConfirmation note="" orgStatus="" orgErrCode="" type="">
```

CONFIDENTIAL

```
                <Ref type="PAYER|PAYEE" seqNum="" addr="" regName="" settAmount="" orgAmount="" settCurrency="" approvalNum="" acNum="" IFSC="" code="" accType="" respCode="" reversalRespCode=""/>
        </TxnConfirmation>
</upi:ReqTxnConfirmation>
```

5.5.2 RESPTXNCONFIRMATION

```
<upi:RespTxnConfirmation xmlns:upi="http://npci.org/upi/schema/">
        <Head ver="2.0" ts="" orgId="" msgId=""/>
        <Txn id="" custRef="" note="" refId="" refUrl="" ts="" type="TxnConfirmation" refCategory="" orgTxnId=""initiationMode="" purpose="" />
                <Resp reqMsgId="" result="SUCCESS|FAILURE" errCode=""/>
</upi:RespTxnConfirmation>
```

6. TAG SPECIFICATIONS

6.1 REQVALCUST (VERIFYUSER)

Sr. No.	Tag Description	<XML Tag>	Occurrence	DataType	Length	M/O	Rule
1	**API Name**	ReqValCust	1..1			M	
2	**API Schema namespace**	xmlns	1..1	Alphanumeric	Min: 1 Max: 255	M	
3	**Header**	<Head>	1..1	Alphabetic	Fixed value	M	
4	**This field indicates the Version of the API**	ver	1..1	Numeric	Min: 1 Max: 6	M	019_Head_Version
5	**This field indicates the Request time set by the creator of the message**	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020_Head_ts
6	**This field indicates the ID of the Organization that created the message**	orgId	1..1	Alphanumeric	Min: 1 Max: 20	M	059_orgId

CONFIDENTIAL

Sr. No.	Tag Description	<XML Tag>	Occurrence	DataType	Length	M/O	Rule
7	**This field indicates the Message identifier- used to correlate between request and response**	msgId	1..1	Alphanumeric	35	M	021_Head_MsgId
8	**This field denotes the Product Type**	prodType	0..1	Alphanumeric	Fixed Value	O	082_prodType
9	**This field indicates the Transaction information, Carried throughout the system which is visible to all parties**	<Txn>	1..1	Alphabetic	Fixed value	M	
10	**This field indicates the Unique Identifier of the transaction across all entities, created by the originator**	id	1..1	Alphanumeric	35	M	022_Txn_UID
11	**This field indicates Remarks/ note**	note	1..1	Alphanumeric	Min: 1 Max: 50	M	067_note
12	**This field indicates the reference identifier value**	refId	1..1	Alphanumeric	Min: 1 Max: 35	M	056_refId
13	**This field indicates the URL for the transaction**	refUrl	1..1	Alphanumeric	Min: 1 Max: 35	M	068_refUrl
14	**This field indicates the Request time set by the creator of the message**	ts	1..1	ISODateTime	Min: 1 Max: 255	M	058_txn_ts

CONFIDENTIAL

Sr. No.	Tag Description	<XML Tag>	Occurrence	DataType	Length	M/O	Rule
15	Type of the Transaction	type	1..1	Code	Min: 1 Max: 20	M	069_txnType
16	Initiation mode	initiationMode	1..1	Code	Min: 1 Max: 35	M	031_Txn_Initiation mode
17	This field indicates the purpose of the txn	purpose	1..1	Code	Fixed value	M	045_ReqPay_Txn_purpose
18	**This field indicates the Customer reference number provided by the initiating party for the initiated transaction**	custRef	1..1	Numeric	12	M	066_custRef
19	**This field indicates Details related to the Payer**	<Payer>	1..1	Alphabetic	Fixed value	M	
20	**This field indicates Address of the Payer**	addr	1..1	Alphanumeric	Min: 1 Max: 255	M	072_addr
21	**This field indicates Name of the Payer**	name	1..1	Alphanumeric	Min: 1 Max: 99	M	084_payer_Name
22	**This field indicates Unique identifier for each transaction inside a file including payer and payee. (Default value should be set to 1 except for Autopay)**	seqNum	1..1	Numeric	Min: 1 Max: 3	M	074_seqNum
23	**This field indicates Type of the Payer**	type	1..1	Code	Fixed value	M	029_Payer/Payee_Type
24	**This field indicates Merchant Classification Code - MCC**	code	1..1	Numeric	4	M	024_Txn_code

CONFIDENTIAL

Sr. No.	Tag Description	<XML Tag>	Occurrence	DataType	Length	M/O	Rule
25	**Payer identifier details**	<ReqIdDetails>	1..1	Alphanumeric		M	
26	**This field denotes the payer identifier**	ReqIdDetails.Id	1..n	Alphanumeric		M	081_reqId
27	**This field indicates the Name of the property.**	name	1..1	Code	Min: 1 Max: 20	M	081_reqId
28	**This field indicates the Value of the property.**	value	1..1	Alphanumeric	Min: 1 Max: 255	M	081_reqId
29	**Only one entity is allowed for a payer**	<Payer.Ac>	1..1	Alphabetic	Fixed value	M	
30	**Type of the address**	addrType	1..1	Code	Min: 1 Max: 20	M	046_ReqPay_Ac_addrType
31	**Details related to Payer Address**	<Payer.Ac.Detail>	1..n	Alphabetic	Min: 1 Max: 255	M	
32	**Name of the property**	name	1..n	Code	Fixed value	M	048_ReqPay_Ac_name_Account
33	**Value of the property**	value	1..n	Alphanumeric	Min: 1 Max: 20	M	048_ReqPay_Ac_name_Account
34	**It consists of the end payer details and beneficiary details as shared by the Payer**	<Institution>	1..n	Alphabetic	Fixed value	M	
35	**This field denotes the institution type**	type	1..n	Code	Fixed value	M	088_Institution_Type
36	**Route**	route	1..n	Code	Fixed value	M	089_Route
37	**Name**	<name>	1..n	Alphabetic	Fixed value	M	
38	**End Payer/sender's Account BIC**	value	1..n	Alphanumeric	Min: 1 Max: 100	M	

CONFIDENTIAL

Sr. No.	Tag Description	<XML Tag>	Occurrence	DataType	Length	M/O	Rule
39	**End Payer/sender's account number**	acNum	1..n	Alphanumeric	Min: 1 Max: 30	M	
40	**purpose**	<purpose>	1..n	Alphabetic	Fixed value	M	
41	**This contains RBI purpose code**	code	1..n	Code	Min: 1 Max: 50	M	090_Institution_purpose_code
42	This contains the end payer/sender's remarks	note	1..n	Alphanumeric	Min: 1 Max: 50	M	
43	End Originator details	<Originator>	1..n	Alphabetic	Fixed value	M	
44	End Sender’s Name	Name	1..n	Alphanumeric	Min: 1 Max: 50	M	
45	Type of sender	Type	1..n	Code	Fixed value	M	
46	IP’s reference Number for end sender	refNo	1..n	Alphanumeric	Min: 1 Max: 30	M	
47	End sender’s address details	<address>	1..n	Alphabetic	Fixed value	M	
48	End sender’s address	location	1..n	Alphanumeric	Min: 1 Max: 40	M	
49	End sender’s City	city	1..n	Alphanumeric	Min: 1 Max: 100	M	
50	End sender’s Country	country	1..n	Alphanumeric	Min: 1 Max: 100	M	
51	End sender’s Geocode Eg: "85.3318, 27.6974"	geocode	1..n	Alphanumeric		M	034__ReqPay_DeviceDetails_Values
52	End Beneficiary detailss	<Beneficiary name>	1..n	Alphabetic	Fixed value	M	
53	**Details related to the Payees**	<Payee>	1..1	Alphabetic	Fixed value	M	
54	**Address of the Payee**	addr	1..1	Alphanumeric	Min: 1 Max: 255	M	072_addr
55	**This field denotes the name of the Payee**	name	1..1	Alphanumeric	Min: 1 Max: 99	M	083_payee_Name

CONFIDENTIAL

Sr. No.	Tag Description	<XML Tag>	Occurrence	DataType	Length	M/O	Rule
56	**This field indicates Unique identifier for each transaction inside a file including payer and payee.**	seqNum	1..1	Numeric	Min: 1 Max: 3	M	074_seqNum
57	**Type of the Payee**	type	1..1	Code	Fixed value	M	029_Payer/Payee_Type
58	**This field indicates Merchant Classification Code - MCC**	code	1..1	Numeric	4	M	024_Txn_code

6.2 RESPVALCUST (VERIFYUSER)

CONFIDENTIAL

Sr. No.	Tag Description	<XML Tag>	Occurrence	DataType	Length	M/O	Rule
1	**API Name**	RespValCust	1..1			M	
2	**API Schema namespace**	xmlns	1..1	Alphanumeric	Min: 1 Max: 255	M	
3	**Header**	<Head>	1..1	Alphabetic	Fixed value	M	
4	**This field indicates the Version of the API**	ver	1..1	Numeric	Min: 1 Max: 6	M	019_Head_Version
5	**This field indicates the Request time set by the creator of the message**	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020_Head_ts
6	**This field indicates the ID of the Organization that created the message**	orgId	1..1	Alphanumeric	Min: 1 Max: 255	M	059_orgId
7	**This field indicates the Message identifier- used to correlate between request and response**	msgId	1..1	Alphanumeric	35	M	021_Head_MsgId
8	**This field denotes the Product Type**	prodType	0..1	Alphanumeric	Fixed value	O	082_prodType
9	**This field indicates the Transaction information, carried throughout the system which is visible to all parties**	<Txn>	1..1	Alphabetic	Fixed value	M	
10	**This field indicates the Unique Identifier of the transaction across all entities,**	id	1..1	Alphanumeric	35	M	022_Txn_UID

CONFIDENTIAL

	created by the originator						
11	**This field indicates Remarks/ note**	note	1..1	Alphanumeric	Min: 1 Max: 50	M	067_note
12	**This field indicates the reference identifier value**	refId	1..1	Alphanumeric	Min: 1 Max: 35	M	056_refId
13	**This field indicates the URL for the transaction**	refUrl	1..1	Alphanumeric	Min: 1 Max: 35	M	068_refUrl
14	**This field indicates the Request time set by the creator of the message**	ts	1..1	ISODateTime	Min: 1 Max: 255	M	058_txn.ts
15	**Type of the Transaction**	type	1..1	Code	Min: 1 Max: 20	M	069_txnType
16	**Initiation mode**	initiationMode	1..1	Code	Min: 1 Max: 35	M	031_Txn_Initiation mode
17	**This field indicates the purpose of the txn**	purpose	1..1	Code	Fixed value	M	045_ReqPay_Txn_purpose
18	**This field indicates the Customer reference number provided by the initiating party for the initiated transaction**	custRef	1..1	Numeric	12	M	066_custRef
19	This field indicates the Response	<Resp>	1..1	Alphabetic	Fixed value	M	
20	This field indicates the Request Message identifier	reqMsgId	1..1	Alphanumeric	35	M	060_reqMsgId
21	**This field indicates the Result of the transaction**	result	1..1	Code	Min: 1 Max: 20	M	053_Response_result 061_Resp_Result

CONFIDENTIAL

22	**This field indicates the Error code if failed**	errCode	1..1	Alphanumeric	Min: 1 Max: 20	M	062_errCode
23	**Defines the Response of the identity details**	<RespIdDetails>	1..1			M	
24	**Address of the Payee**	addr	1..1	Alphanumeric	Min: 1 Max: 255	M	072_addr
25	**This contains the Id details**	<Id>	1..1			M	
26	**Beneficiary account details**	<Detail>	1..n			M	
27	**This field indicates the Name of the property**	name	1..1	Code	Fixed value	M	
28	**This field indicates the Value of the property**	value	1..1	Alphanumeric	Min: 1 Max: 99	M	081_reqId
29	**This contains the consent of the Payee**	<Consent>	0..1			O	
30	**This field indicates the Name of the property**	name	1..1	Code	Fixed value	M	085_consent_Name
31	**This field indicates the Type of the property**	type	1..1	Code	Fixed value	M	086_consent_Type
32	**This field indicates the Value of the property**	value	1..1	Alphanumeric	Min: 1 Max: 99	M	087_consent_Value

6.3 REQVALCUST (COMPSCR)

Sr. No.	Tag Description	<XML Tag>	Occurrence	DataType	Length	M/O	Rule
1	**API Name**	ReqValCust	1..1			M	
2	**API Schema namespace**	xmlns	1..1	Alphanumeric	Min:1 Max:255	M	

CONFIDENTIAL

Sr. No.	Tag Description	<XML Tag>	Occurrence	DataType	Length	M/O	Rule
3	**Header**	<Head>	1..1	Alphabetic	Fixed value	M	
4	**This field indicates the Version of the API**	ver	1..1	Numeric	Min:1 Max:6	M	019_Head_Version
5	**This field indicates the Request time set by the creator of the message**	ts	1..1	ISODateTime	Min:1 Max:255	M	020_Head_ts
6	**This field indicates the ID of the Organization that created the message**	orgId	1..1	Alphanumeric	Min : 1 Max : 20	M	059_orgId
7	**This field indicates the Message identifier- used to correlate between request and response**	msgId	1..1	Alphanumeric	35	M	021_Head_MsgId
8	**This field denotes the Product Type**	prodType	0..1	Alphanumeric	Fixed value	O	082_prodType
9	**This field indicates the Transaction information, Carried throughout the sMstem which is visible to all parties**	<Txn>	1..1	Alphabetic	Fixed value	M	
10	**This field indicates the Unique Identifier of the transaction across all entities, created bM the originator**	id	1..1	Alphanumeric	35	M	022_Txn_UID

CONFIDENTIAL

Sr. No.	Tag Description	<XML Tag>	Occurrence	DataType	Length	M/O	Rule
11	**This field indicates Remarks/ note**	note	1..1	Alphanumeric	Min: 1 Max: 50	M	067_note
12	**This field indicates the reference identifier value**	refId	1..1	Alphanumeric	Min: 1 Max: 35	M	056_refId
13	**This field indicates the URL for the transaction**	refUrl	1..1	Alphanumeric	Min: 1 Max: 35	M	068_refUrl
14	**This field indicates the Request time set by the creator of the message**	ts	1..1	ISODateTime	Min: 1 Max: 255	M	058_txn.ts
15	Type of the Transaction	type	1..1	Code	Min: 1 Max: 20	M	069_txnType
16	Initiation mode	initiationMode	1..1	Code	Min: 1 Max: 35	M	031_Txn_Initiation mode
17	This field indicates the purpose of the txn	purpose	1..1	Code	Fixed value	M	045_ReqPay_Txn_purpose
18	**This field indicates the Customer reference number provided by the initiating party for the initiated transaction**	custRef	1..1	Numeric	12	M	066_custRef
19	**This field indicates Details related to the Payer**	<Payer>	1..1	Alphabetic	Fixed value	M	
20	**This field indicates Address of the Payer**	addr	1..1	Alphanumeric	Min:1 Max:255	M	072_addr

CONFIDENTIAL

Sr. No.	Tag Description	<XML Tag>	Occurrence	DataType	Length	M/O	Rule
21	**This field indicates Name of the Payer**	name	1..1	Alphanumeric	Min: 1 Max: 99	M	084_payer_Name
22	**This field indicates Unique identifier for each transaction inside a file including payer and payee. (Default value should be set to 1 except for Autopay)**	seqNum	1..1	Numeric	Min: 1 Max: 3	M	074_seqNum
23	**This field indicates Type of the Payer**	type	1..1	Code	Fixed value	M	029_Payer/Payee_Type
24	**This field indicates Merchant Classification Code - MCC**	code	1..1	Numeric	4	M	024_Txn_code
25	**Payer identifier details**	<ReqIdDetails>	1..1	Alphanumeric		M	
26	**This field denotes the payer identifier**	ReqIdDetails.Id	1..n	Alphanumeric		M	081_reqId
27	**This field indicates the Name of the property.**	name	1..1	Code	Min: 1 Max: 20	M	081_reqId
28	**This field indicates the Value of the property.**	value	1..1	Alphanumeric	Min: 1 Max: 255	M	081_reqId
29	**Only one entity is allowed for a payer**	<Payer.Ac>	1..1	Alphabetic	Fixed value	M	
30	**Type of the address**	addrType	1..1	Code	Min: 1 Max: 20	M	046_ReqPay_Ac_addrType
31	**Details related to Payer Address**	<Payer.Ac.Detail>	1..n	Alphabetic	Min: 1 Max: 255	M	

CONFIDENTIAL

Sr. No.	Tag Description	<XML Tag>	Occurrence	DataType	Length	M/O	Rule
32	**Name of the property**	name	1..n	Code	Fixed value	M	048_ReqPay_Ac_name_Account
33	**Value of the property**	value	1..n	Alphanumeric	Min: 1 Max: 20	M	
34	**Information related to the amounts in the transaction**	<Payer.Amount>	0..1	Alphabetic	Fixed value	O	
35	**Transaction amount**	value	1..1	Numeric	minInclusive: 0 totalDigits: 15	M	051_ReqPay_Amount_Value
36	**Currency of the transaction**	curr	1..1	Text	Min: 1 Max: 3	M	
37	**Details of transaction amount**	<Payer.Amount.Split>	0..1	Alphabetic	Fixed value	O	
38	**Name of the property**	name	1..n	Code	Min: 1 Max: 20	M	
39	**Value of the property**	value	1..n	Alphanumeric	Min: 1 Max: 99	M	
40	**It consists of the end payer details and beneficiary details as shared by the Payer**	<Institution>	1..n	Alphabetic	Fixed value	M	
41	**This field denotes the institution type**	type	1..n	Code	Fixed value	M	088_Institution_Type
42	**Route**	route	1..n	Code	Fixed value	M	089_Route
43	**Name**	<name>	1..n	Alphabetic	Fixed value	M	
44	**End Payer/sender's Account BIC**	value	1..n	Alphanumeric	Min: 1 Max: 100	M	

CONFIDENTIAL

Sr. No.	Tag Description	<XML Tag>	Occurrence	DataType	Length	M/O	Rule
45	**End Payer/sender's account number**	acNum	1..n	Alphanumeric	Min: 1 Max: 30	M	
46	**purpose**	<purpose>	1..n	Alphabetic	Fixed value	M	
47	**This contains RBI purpose code**	code	1..n	Code	Min: 1 Max: 50	M	090_Institution_purpose_code
48	This contains the end payer/sender's remarks	note	1..n	Alphanumeric	Min: 1 Max: 50	M	
49	End Originator details	<Originator>	1..n	Alphabetic	Fixed value	M	
50	End Sender's Name	Name	1..n	Alphanumeric	Min: 1 Max: 50	M	
51	Type of sender	Type	1..n	Code	Fixed value	M	
52	IP's reference Number for end sender	refNo	1..n	Alphanumeric	Min: 1 Max: 30	M	
53	End sender's address details	<address>	1..n	Alphabetic	Fixed value	M	
54	End sender's address	location	1..n	Alphanumeric	Min: 1 Max: 40	M	
55	End sender's City	city	1..n	Alphanumeric	Min: 1 Max: 100	M	
56	End sender's Country	country	1..n	Alphanumeric	Min: 1 Max: 100	M	
57	End sender's Geocode Eg: "85.3318, 27.6974"	geocode	1..n	Alphanumeric		M	034__ReqPay_DeviceDetails_Values
58	End Beneficiary detailss	<Beneficiary name>	1..n	Alphabetic	Fixed value	M	
59	**Details related to the Payees**	<Payee>	1..1	Alphabetic	Fixed value	M	

CONFIDENTIAL

Sr. No.	Tag Description	<XML Tag>	Occurrence	DataType	Length	M/O	Rule
60	**Address of the Payee**	addr	1..1	Alphanumeric	Min: 1 Max: 255	M	072_addr
61	**This field denotes the name of the Payee**	name	1..1	Alphanumeric	Min: 1 Max: 99	M	083_payee_Name
62	**This field indicates Unique identifier for each transaction inside a file including payer and payee.**	seqNum	1..1	Numeric	Min: 1 Max: 3	M	074_seqNum
63	**Type of the Payee**	type	1..1	Code	Fixed value	M	029_Payer/Payee_Type
64	**This field indicates Merchant Classification Code - MCC**	code	1..1	Numeric	4	M	024_Txn_code
65	**Only one entity is allowed for a Payee**	<Payee.Ac>	1..1	Alphabetic	Fixed value	M	
66	**Type of the address**	addrType	1..1	Code	Min: 1 Max: 20	M	
67	**Details related to Payee Address**	<Payee.Ac.Detail>	1..n	Alphabetic	Fixed value	M	
68	**Name of the property**	name	1..n	Code	Fixed value	M	
69	**Value of the property**	value	1..n	Alphanumeric	Min: 1 Max: 99	M	
70	**This contains the consent of the Payee**	<Consent>	0..1			O	
71	**This field indicates the Name of the property**	name	1..1	Code	Fixed value	M	085_consent_Name
72	**This field indicates the Type of the property**	type	1..1	Code	Fixed value	M	086_consent_Type

CONFIDENTIAL

Sr. No.	Tag Description	<XML Tag>	Occurrence	DataType	Length	M/O	Rule
73	**This field indicates the Value of the property**	value	1..1	Alphanumeric	Min: 1 Max: 99	M	087_consent_Value

6.4 RESPVALCUST (COMPSCR)

Sr. No.	Tag Description	<XML Tag>	Occurrence	DataType	Length	M/O	Rule
1	**API Name**	RespValCust	1..1			M	
2	**API Schema namespace**	xmlns	1..1	Alphanumeric	Min: 1 Max: 255	M	
3	**Header**	<Head>	1..1	Alphabetic	Fixed value	M	
4	**This field indicates the Version of the API**	ver	1..1	Numeric	Min: 1 Max: 6	M	019_Head_Version
5	**This field indicates the Request time set by the creator of the message**	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020_Head_ts
6	**This field indicates the ID of the Organization that created the message**	orgId	1..1	Alphanumeric	Min: 1 Max: 20	M	059_orgId
7	**This field indicates the Message identifier- used to correlate between request and response**	msgId	1..1	Alphanumeric	35	M	021_Head_MsgId
8	**This field denotes the Product Type**	prodType	0..1	Alphanumeric	Fixed value	O	082_prodType
9	**This field indicates the Transaction information, Carried throughout the sMstem which is**	<Txn>	1..1	Alphabetic	Fixed value	M	

CONFIDENTIAL

Sr. No.	Tag Description	<XML Tag>	Occurrence	DataType	Length	M/O	Rule
	visible to all parties						
10	**This field indicates the Unique Identifier of the transaction across all entities, created by the originator**	id	1..1	Alphanumeric	35	M	022_Txn_UID
11	**This field indicates Remarks/ note**	note	1..1	Alphanumeric	Min: 1 Max: 50	M	067_note
12	**This field indicates the reference identifier value**	refId	1..1	Alphanumeric	Min: 1 Max: 35	M	056_refId
13	**This field indicates the URL for the transaction**	refUrl	1..1	Alphanumeric	Min: 1 Max: 35	M	068_refUrl
14	**This field indicates the Request time set by the creator of the message**	ts	1..1	ISODateTime	Min: 1 Max: 255	M	058_txn.ts
15	Type of the Transaction	type	1..1	Code	Min: 1 Max: 20	M	069_txnType
17	Initiation mode	initiationMode	1..1	Code	Min: 1 Max: 35	M	031_Txn_Initiation mode
18	This field indicates the purpose of the txn	purpose	1..1	Code	Fixed value	M	045_ReqPay_Txn_purpose
19	**This field indicates the Customer reference number provided by the initiating party for the initiated transaction**	custRef	1..1	Numeric	12	M	066_custRef
20	This field indicates the Response	<Resp>	1..1	Alphabetic	Fixed value	M	

CONFIDENTIAL

Sr. No.	Tag Description	<XML Tag>	Occurrence	DataType	Length	M/O	Rule
21	This field indicates the Request Message identifier	reqMsgId	1..1	Alphanumeric	35	M	060_reqMsgId
22	**This field indicates the Result of the transaction**	result	1..1	Code	Min: 1 Max: 20	M	053_Response_result 061_Resp_Result
23	**This field indicates the Error code if failed**	errCode	1..1	Alphanumeric	Min: 1 Max: 20	**M**	**062_errCode**
24	**Defines the Response of the identity details**	<RespIdDetails>	1..1				
25	**Address of the Payee**	addr	1..1	Alphanumeric	Min: 1 Max: 255	M	072_addr
26	**This contains the Id details**	<Id>	1..1			M	
27	**Beneficiary account details**	<Detail>	1..n			**M**	
28	**This field indicates the Name of the property.**	name	1..1	Code	Fixed value	M	
29	**This field indicates the Value of the property.**	value	1..1	Alphanumeric	Min: 1 Max: 99	M	

6.5 REQCHKTXN

Sr. No.	Tag Description	<XMLTag>	Occurrence	Datatype	Length	M/O	Rules
1	**API Name**	ReqChkTxn	1..1			M	
2	**API Schema namespace**	xmlns	1..1	Alphanumeric	Min:1 Max:255	M	

CONFIDENTIAL

Sr. No.	Tag Description	<XMLTag>	Occurrence	Datatype	Length	M/O	Rules
3	**Header**	<Head>	1..1	Alphabetic	Fixed value	M	
4	**This field indicates the Version of the API**	ver	1..1	Numeric	Min:1 Max: 6	M	019_Head_Version
5	**This field indicates the Request time set by the creator of the message**	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020_Head_ts
6	**This field indicates the ID of the Organization that created the message**	orgId	1..1	Alphanumeric	Min: 1 Max: 20	M	059_OrgId
7	**This field indicates the Message identifier- used to correlate between request and response**	msgId	1..1	Alphanumeric	35	M	021_Head_MsgId
8	**This field denotes the Product Type**	prodType	0..1	Alphanumeric	Fixed value	O	082_prodType
9	**This field indicates the Transaction information, carried throughout the system which is**	<Txn>	1..1	Alphabetic	Fixed value	M	

CONFIDENTIAL

Sr. No.	Tag Description	<XMLTag>	Occurrence	Datatype	Length	M/O	Rules
	visible to all parties						
10	**This field indicates the Unique Identifier of the transaction across all entities, created by the originator**	id	1..1	Alphanumeric	35	M	022_Txn_UID
11	**This field indicates Remarks/ note** **Description of the transaction (which will be printed on Passbook)**	note	1..1	Alphanumeric	Min: 1 Max: 50	M	067_note
12	**This field indicates the Consumer reference number to identify (like Loan number, consumer account number, etc.)**	refId	1..1	Alphanumeric	Min: 1 Max: 35	M	056_refId
13	**This field indicates the URL for the transaction**	refUrl	1..1	Alphanumeric	Min: 1 Max: 35	M	068_refUrl
14	**This field indicates the Reference Category**	refCategory	1..n	Code	Fixed value	M	052_ReqPay_Txn_refCategory

CONFIDENTIAL

Sr. No.	Tag Description	<XMLTag>	Occurrence	Datatype	Length	M/O	Rules
	This field indicates the Request time set by the creator of the message	ts	1..1	ISODateTime	Min:1 Max:255	M	020_Head_ts
15	**This field indicates the Subtype of transaction**	subType	0..1	Code	Min: 1 Max: 20	O	030_Txn_SubTMpe
16	**Type of the Transaction**	type	1..1	Code	Min: 1 Max: 20	M	001_ReqPaM_Pay 003_ReqPaM_Debit 004_ReqPaM_Credit 005_ReqPaM_DebitReversal 006_ReqPaM_CreditReversal
17	**Original Date of the txn**	orgTxnDate	0..1	ISODateTime	Min: 1 Max: 255	O	075_orgTxnDate
18	**Initiation mode**	InitiationMode	1..1	Code	Min: 1 Max: 35	M	031_Txn_Initiation mode
19	**This field indicates the original transaction ID when reversal has to be done**	orgTxnId	1..1	Alphanumeric	35	M	023_Txn_orgTxnId
20	**Original message Id**	orgMsgId	0..1	Alphanumeric	35	O	078_orgMsgId
21	**Initiation mode**	initiationMode	1..1	Code	Min: 1 Max: 35	M	031_Txn_Initiation mode
22	**This field indicates the Purpose of the transaction**	purpose	1..1	Code	Fixed value	M	045_ReqPaM_Txn_purpose
23	**This field indicates the Customer reference number provided by the initiating party for the**	custRef	1..1	Numeric	12	M	066_custRef

CONFIDENTIAL

Sr. No.	Tag Description	<XMLTag>	Occurrence	Datatype	Length	M/O	Rules
	initiated transaction						
24	Original RRN	orgRrn	0..1	Numeric	12	O	065_orgRRN

6.6 RESPCHKTXN

CONFIDENTIAL

Sr. No.	Tag Description	<XMLTag>	Occurrence	Datatype	Length	M/O	Rules
1	**API Name**	RespChkTxn	1..1			M	
2	**API Schema namespace**	xmlns	1..1	Alphanumeric	Min:1 Max:255	M	
3	**Header**	<Head>	1..1	Alphabetic	Fixed value	M	
4	**This field indicates the Version of the API**	ver	1..1	Numeric	Min:1 Max: 6	M	019_Head_Version
5	**This field indicates the Request time set by the creator of the message**	ts	1..1	ISODateTime	Min:1 Max:255	M	020_Head_ts
6	**This field indicates the ID of the Organization that created the message**	orgId	1..1	Alphanumeric	Min: 1 Max:20	M	059_OrgId
7	**This field indicates the Message identifier- used to correlate between request and response**	msgId	1..1	Alphanumeric	35	M	021_Head_MsgId
8	**This field denotes the Product Type**	prodType	0..1	Alphanumeric	Fixed Value	O	082_prodType

CONFIDENTIAL

9	**This field indicates the Transaction information, carried throughout the system which is visible to all parties**	<Txn>	1..1	Alphabetic	Fixed value	M	
10	**This field indicates the Unique Identifier of the transaction across all entities, created by the originator**	id	1..1	Alphanumeric	35	M	022_Txn_UID
11	**This field indicates Remarks/ note**	note	1..1	Alphanumeric	Min: 1 Max: 50	M	067_note
12	**This field indicates the Consumer reference number to identify (like Loan number, consumer account number, etc.)**	refId	1..1	Alphanumeric	Min: 1 Max: 35	M	056_refId
13	**This field indicates the URL for the transaction**	refUrl	1..1	Alphanumeric	Min: 1 Max: 35	M	068_refUrl
14	**This field indicates the Reference Category**	refCategory	1..n	Code	Fixed value	M	052_ReqPaM_Txn_refCategorM

CONFIDENTIAL

15	**This field indicates the Request time set by the creator of the message**	ts	1..1	ISODate Time	Min:1 Max:255	M	020_Head_ts
16	**This field indicates the Subtype of transaction**	subType	0..1	Code	Min: 1 Max: 20	O	030_Txn_SubTMpe
17	**Type of the Transaction**	type	1..1	Code	Min: 1 Max: 20	M	069_txnType
18	**This field indicates the Purpose of the transaction**	purpose	1..1	Code	Fixed value	M	045_ReqPaM_Txn_purpose
19	**This field indicates the Customer reference number provided by the initiating party for the initiated transaction**	custRef	1..1	Numeric	12	M	066_custRef
20	**Original Date of the transaction**	orgTxnDate	0..1	ISODateTime	Min: 1 Max: 255	O	075_orgTxnDate
21	**Initiation mode**	initiationMode	1..1	Code	Min: 1 Max: 35	M	031_Txn_Initiation mode
22	**This field indicates the original transaction ID when reversal/Refund has to be done**	orgTxnId	1..1	Alphanumeric	35	M	023_Txn_orgTxnId
23	**Original message Id**	orgMsgId	0..1	Alphanumeric	35	O	078_orgMsgId
24	**This field indicates the Request Message identifier**	reqMsgId	1..1	Alphanumeric	35	M	060_reqMsgId

CONFIDENTIAL

25	**This field indicates the Result of the transaction**	result	1..1	Code	Min: 1 Max: 20	M	053_Response_result 061_Resp_Result
26	**This field indicates the Error code if failed**	errCode	1..1	Alphanumeric	Min: 1 Max: 20	M	062_errCode
27	Response Reference	<Ref>	1..n	Alphabetic	Fixed value	M	
28	Reference type	type	1..1	Code	Fixed value	M	016_RespPay_Pay 017_RespPay_Collect
29	Sequence Number	seqNum	1..1	Numeric	Min: 1 Max: 3	M	074_seqNum
30	Payment address	addr	1..1	Alphanumeric	Min: 1 Max: 255	M	072_addr
31	Settlement Amount	settAmount	1..1	Numeric	minInclusive: 0 totalDigits: 15	M	051_ReqPay_Amount_Value
32	Settlement Currency	settCurrency	1..1	Text	Min: 1 Max: 3	M	081_settCurrency
33	Approval Reference Number	approvalNum	1..1	Alphanumeric	6	M	025_Response_ApprovalNum
34	Response code	respCode	1..1	Alphanumeric	Min: 1 Max: 20	M	064_respCode
35	Registered name with bank	regName	1..1	Alphanumeric	Min: 1 Max: 99	M	082_regName
36	Original amount	orgAmount	1..1	Numeric	minInclusive: 0 totalDigits: 15	M	051_ReqPay_Amount_Value
37	Reversal Response Code	reversalRespCode	1..1	Alphanumeric	Min: 1 Max: 20	M	028_Response_Reversal
38	Account number	acNum	1..1	Alphanumeric	Min: 1 Max: 30	M	083_acNum
39	Merchant Classification Code - MCC	code	1..1	Numeric	4	M	024_Txn_code
40	IFSC code	IFSC	1..n	Alphanumeric	11	M	032_RespPay_RefTag_IFSC
41	Account type	accType	1..n	Code	Fixed Value	M	048_ReqPay_Ac_name_Account

CONFIDENTIAL

6.7 REQPAY

Sr. No.	Tag Description	<XML Tag>	Occurrence	Data Type	Length	M/O	Rules
1	API Name	ReqPay	1..1			M	
2	API Schema namespace	xmlns	1..1	Alphanumeric	Min:1 Max: 255	M	
3	Header	<Head>	1..1	Alphabetic	Fixed value	M	
4	Version of the API	ver	1..1	Numeric	Min: 1 Max: 6	M	019_Head_Version
5	Time of request from the creator of the message	ts	1..1	ISODate Time	Min: 1 Max: 255	M	020_Head_ts
6	Organization id that created the message	orgId	1..1	Alphanumeric	Min: 1 Max: 20	M	059_OrgId
7	Message identifier- used to correlate between request and response	msgId	1..1	Alphanumeric	35	M	021_Head_MsgId
8	This field denotes the Product Type	prodType	0..1	Alphanumeric	Fixed value	M	082_prodType
9	Meta data primarily for analytics purposes	<Meta>	0..1	Alphabetic	Fixed value	O	
10	Meta data primarily for analytics purposes	<Meta.Tag	0..1	Alphabetic	Fixed value	O	

CONFIDENTIAL

Sr. No.	Tag Description	<XML Tag>	Occurrence	Data Type	Length	M/O	Rules
11	Name of the property	name	1..n	Code	Min: 1 Max: 20	M	
12	Value of the property	value	1..n	ISODate	Min: 1 Max: 255	M	071_value
13	Transaction information, Carried throughout the system, visible to all parties	<Txn>	1..1	Alphabetic	Fixed value	M	
14	Unique Identifier of the transaction across all entities, created by the originator	id	1..1	Alphanumeric	35	M	022_Txn_UID
15	Description of the transaction (which will be printed on Passbook)	note	1..1	Alphanumeric	Min: 1 Max: 50	M	067_note
16	Consumer reference number to identify (like Loan number, etc.)	refId	1..1	Alphanumeric	Min: 1 Max: 35	M	056_refId
17	URL for the transaction	refUrl	1..1	Alphanumeric	Min: 1 Max: 35	M	068_refUrl
18	Transaction origination time by the creator of the message	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020_Head_ts

CONFIDENTIAL

Sr. No.	Tag Description	<XML Tag>	Occurrence	Data Type	Length	M/O	Rules
19	Type of the Transaction	type	1..1	Code	Min: 1 Max: 20	M	001_ReqPay_Pay 003_ReqPa y_Debit 004_ReqPay_Credit 005_ReqPay_DebitReversal 006_ReqPa y_CreditReversal
20	Original transaction ID when reversal must be done	orgTxnId	1..1	Alphanumeric	35	M	023_Txn_orgTxnId
21	Customer reference number for the initiated transaction	custRef	1..1	Numeric	12	M	066_custRef
22	Subtype of transaction	subType	0..1	Code	Min: 1 Max: 20	O	030_Txn_SubType
23	Initiation mode	InitiationMode	1..1	Code	Min: 1 Max: 35	M	031_Txn_Initiation mode
24	OrgRespCode of the transaction	OrgRespCode	0..1	Alphanumeric	Min: 1 Max: 20	O	039_ReqPay_OrgRespCode
25	Purpose of the txn	purpose	1..1	Code	Fixed value	M	045_ReqPay_Txn_purpose
26	Original RRN	orgRrn	0..1	Numeric	12	O	065_orgRRN
27	Original Date of the txn	orgTxnDate	0..1	ISODateTime	Min: 1 Max: 255	O	075_orgTxnDate

CONFIDENTIAL

Sr. No.	Tag Description	<XML Tag>	Occurrence	Data Type	Length	M/O	Rules
28	Reference Category	refCategory	0..1	Code	Fixed value	O	052_ReqPay_Txn_refCategory
29	Risk Score related to the transaction and the entities	<Txn.RiskScores>	0..1	Alphabetic	Fixed value	O	
30	Risk Score related to the transaction and the entities	<Txn.RiskScores.Score>	0..n	Alphabetic	Fixed value	O	095_Txn_riskScore
31	Entity providing the risk score	provider	1..1	Code	Min: 1 Max: 20	M	080_provider
32	Type of risk	type	1..1	Code	Min: 1 Max: 99	M	096_Txn_riskScore_Type
33	Value of risk evaluation ranging from 0 (No Risk) to 100(Maximum Risk)	value	1..1	Integer	Min: 1 Max: 50	M	097_Txn_riskScore_Value
34	Details related to the Payer	<Payer>	1..1	Alphabetic	Fixed value	M	
35	Address of the Payer	addr	1..1	Alphanumeric	Min: 1 Max: 255	M	072_addr
36	Name of the Payer	name	1..1	Alphanumeric	Min: 1 Max: 99	M	
37	Unique identifier for each transaction inside a file including payer and payee	seqNum	1..1	Numeric	Min: 1 Max: 35	M	074_seqNum

CONFIDENTIAL

Sr. No.	Tag Description	<XML Tag>	Occurrence	Data Type	Length	M/O	Rules
38	Type of the Payer	type	1..1	Code	Fixed value	M	029_Payer/Payee_Type
39	Merchant Classification Code - MCC	code	1..1	Numeric	4	M	024_Txn_code
40	**It consists of the end payer details and beneficiary details as shared by the Payer** Note: The institution block received in Valcust to be shared in ReqPay	<Institution>	1..n	Alphabetic	Fixed value	M	
41	**This field denotes the institution type**	type	1..n	Code	Fixed value	M	088_Institution_Type
42	Route	route	1..n	Code	Fixed value	M	089_Route
43	Organization Id of the IRP Will only be present in ReqPay(Debit) and ReqPay (Credit) request from iUPI to Settlement Bank and Beneficiary Bank respectively	netInstId	1..1	Numeric	Min: 1 Max: 20	C	
44	Name	<name>	1..n	Alphabetic	Fixed value	M	

CONFIDENTIAL

Sr. No.	Tag Description	<XML Tag>	Occurrence	Data Type	Length	M/O	Rules
45	Value	value	1..n	Alphanumeric	Min: 1 Max: 100	M	
46	**End Payer/sender's account number**	acNum	1..n	Alphanumeric	Min: 1 Max: 30	M	
47	purpose	<purpose>	1..n	Alphabetic	Fixed value	M	090_Institution_purpose_code
48	**This contains RBI purpose code**	code	1..n	Code	Min: 1 Max: 50	M	024_Txn_code
49	Remarks entered by end sender	note	1..n	Alphanumeric	Min: 1 Max: 50	M	
50	End Originator details	<Originator>	1..n	Alphabetic	Fixed value	M	
51	End Sender’s Name	Name	1..n	Alphanumeric	Min: 1 Max: 50	M	
52	Type of sender	Type	1..n	Code	Fixed value	M	
53	IP’s reference Number for end sender	refNo	1..n	Alphanumeric	Min: 1 Max: 30	M	
54	End sender’s address details	<address>	1..n	Alphabetic	Fixed value	M	
55	End sender’s address	location	1..n	Alphanumeric	Min: 1 Max: 40	M	
56	End sender’s City	city	1..n	Alphanumeric	Min: 1 Max: 100	M	
57	End sender’s Country	country	1..n	Alphanumeric	Min: 1 Max: 100	M	

CONFIDENTIAL

Sr. No.	Tag Description	<XML Tag>	Occurrence	Data Type	Length	M/O	Rules
58	End sender's Geocode Eg: "85.3318, 27.6974"	geocode	1..n	Alphanumeric	Min: 1 Max: 100	M	034__ReqPay_DeviceDetails_Values
59	End Beneficiary details	<Beneficiary>	1..1	Alphabetic	Fixed value	M	
60	End Beneficiary's name as provided by sender	name	1..1	Alphabetic	Min: 1 Max: 50	M	
61	Information related to the Payer	<Payer.Info>	1..1	Alphabetic	Fixed value	M	
62	Payer Identity	<Payer.Info.Identity>	0..1	Alphabetic	Min: 1 Max: 20	O	
63	Id of the identifier	id	1..1	Alphanumeric	Min: 1 Max: 99	M	
64	Type of the identifier	Type	1..1	Code	Fixed value	M	029_Payer/Payee_Type
65	Name as per the identifier	verifiedName	1..1	Alphanumeric	Min: 1 Max: 99	M	
66	Rating of the payer	<Payer.Info.Rating>	1..1	Alphabetic	Fixed value	O	
67	Verified Address	verified Address	0..1	Code	Boolean TRUE/FALSE	M	026_Payer/ Payee_InfoRating
68	Details of device from which the transaction was initiated	<Payer.Device>	1..1	Alphabetic	Fixed value	M	
69	Device Tag	<Payer.Device.Tag>	1..n	Alphabetic	Fixed value	M	

CONFIDENTIAL

Sr. No.	Tag Description	<XML Tag>	Occurrence	Data Type	Length	M/O	Rules
70	Name of the property	name	1..n	Code	Fixed value	M	
71	Value of the property	value	1..n	Alphanumeric	Min: 1 Max: 20	M	034_ReqPay_DeviceDetails_Values 035_ReqPay_DeviceDetails_type 036_ReqPay_DeviceDetails_OS
72	Only one entity is allowed for a payer	<Payer.Ac>	1..1	Alphabetic	Fixed value	M	
73	Type of the address	addrType	1..1	Code	Min: 1 Max: 20	M	046_ReqPay_Ac_addrType
74	Details related to Payer Address	<Payer.Ac.Detail>	1..n	Alphabetic	Min: 1 Max: 255	M	
75	Name of the property	name	1..n	Code	Fixed value	M	048_ReqPay_Ac_name_Account
76	Value of the property	value	1..n	Alphanumeric	Min: 1 Max: 20	M	
77	Information related to Payer Credentials	<Payer.Creds>	1..1	Alphabetic	Min: 1 Max: 20	M	

CONFIDENTIAL

Sr. No.	Tag Description	<XML Tag>	Occurrence	Data Type	Length	M/O	Rules
78	Credentials are used to authentic ate the request Note: Applicable only for Initial request and Debit request. Will not be present in Credit leg	<Payer.Creds.Cred>	1..1	Alphabetic	Min: 1 Max: 20	M	040_ReqPay_Credblock 041_RespAuthDetailUPImandate_CollectCredblock 007_ReqPay_PreApproved 025_Response_ApprovalNum
79	Type of financial instrument used for authentication	type	1..1	Code	Fixed value	M	
80	Sub Type	subType	1..1	Code	Fixed	M	040_ReqPay_Credblock
81	base-64 encoded/ encrypted authentication data	<Payer.Creds.Cred.Data>	1..1	Alphabetic	Fixed value	M	
82	Data Code	Data.Code	1..1	Code	Fixed value	M	
83	Key Index	Ki	1..1	Code	Fixed value	M	
84	Information related to the amounts in the transaction	<Payer.Amount>	1..1	Alphabetic	Fixed value	M	
85	Transaction amount	value	1..1	Numeric	minInclusive: 0 totalDigits: 15	M	051_ReqPay_Amount_Value

CONFIDENTIAL

Sr. No.	Tag Description	<XML Tag>	Occurrence	Data Type	Length	M/O	Rules
86	Currency of the transaction	curr	1..1	Text	Min: 1 Max: 3	M	
87	Details of transaction amount	<Payer.Amount.Split>	0..1	Alphabetic	Fixed value	O	
88	Name of the property	name	1..n	Code	Min: 1 Max: 20	M	
89	Value of the property	value	1..n	Alphanumeric	Min: 1 Max: 99	M	
90	Details related to the Payees	<Payees>	1..1	Alphabetic	Fixed value	M	
91	Details related to the Payees	<Payee>	1..1	Alphabetic	Fixed value	M	
92	Address of the Payee	addr	1..1	Alphanumeric	Min: 1 Max: 255	M	072_addr
93	Name of the Payee	name	1..1	Alphanumeric	Min: 1 Max: 99	M	083_payee_Name
94	Unique identifier for each transaction inside a file including Payee and payee	seqNum	1..1	Numeric	Min: 1 Max: 3	M	074_seqNum
95	Type of the Payee	type	1..1	Code	Fixed value	M	029_Payer/Payee_Type
96	Payee Identity	<Payee.Info.Identity>	0..1	Alphabetic	Fixed value	O	
97	Type of the identifier	type	1..1	Code	Fixed value	M	

CONFIDENTIAL

Sr. No.	Tag Description	<XML Tag>	Occurrence	Data Type	Length	M/O	Rules
98	This field indicates Merchant Classification Code - MCC	code	1..1	Numeric	4	M	024_Txn_code
99	Name as per the identifier	verifiedName	1..1	Alphanumeric	Min: 1 Max: 99	M	
100	Id of the identifier	id	1..1	Alphanumeric	Min: 1 Max: 99	M	
101	Rating of the Payee	<Payee.Info.Rating>	0..1	Alphabetic	Fixed value	O	
102	verified Address	verified Address	0..1	Code	Boolean TRUE/FALSE	O	026_Payer/Payee_InfoRating
103	Details of Device from which the transaction was initiated	<Payee.Device>	0..1	Alphabetic	Fixed value	O	
104	Device Tag	<Payee.Device.Tag>	1..n	Alphabetic	Fixed value	M	
105	Name of the property	name	1..n	Code	Fixed value	M	
106	Value of the property	value	1..n	Alphanumeric	Min: 1 Max: 99	M	
107	Only one entity is allowed for a Payee	<Payee.Ac>	1..1	Alphabetic	Fixed value	M	
108	Type of the address	addrType	1..1	Code	Min: 1 Max: 20	M	
109	Details related to Payee Address	<Payee.Ac.Detail>	1..n	Alphabetic	Fixed value	M	

CONFIDENTIAL

Sr. No.	Tag Description	<XML Tag>	Occurrence	Data Type	Length	M/O	Rules
110	Name of the property	name	1..n	Code	Fixed value	M	
111	Value of the property	value	1..n	Alphanu	Min: 1 Max: 99	M	
112	Information related to the amounts in the transaction	<Payee.Amount>	1..1	Alphabetic	Fixed value	M	055_Payee.Amount
113	Transaction amount	value	1..1	Numeric	minInclusive: 0 totalDigits: 15	M	051_ReqPay_Amount_Value
114	Currency of the transaction	curr	1..1	Text	Min: 1 Max:3	M	
115	Details of transaction amount	<Payee.Amount.Split>	0..1	Alphabetic	Fixed value	O	
116	Name of the property	name	1..n	Code	Fixed value	M	
117	Value of the property	value	1..n	Alphanumeric	Min: 1 Max: 99	M	

6.8 RESPPAY

CONFIDENTIAL

Sr. No.	Message Item	<XMLTag>	Occurrence	Datatype	Length	M/O	Rules
1	API Name	<RespPay>	1..1			M	
2	API Schema namespace	xmlns	1..1	Alphanumeric	Min:1 Max: 255	M	
3	Header for the message	<Head>	1..1	Alphabetic	Fixed value	M	
4	Version of the API	Ver	1..1	Numeric	Min: 1 Max: 6	M	019_Head_Version
5	Time of request from the creator of the message	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020_Head_ts
6	Organization id that created the message	orgId	1..1	Alphanumeric	Min: 1 Max: 20	M	059_OrgId
7	Message identifier- used to correlate between request and response	msgId	1..1	Alphanumeric	35	M	021_Head_MsgId
8	This field denotes the Product Type	prodType	0..1	Alphanumeric	Fixed value	M	082_prodType

CONFIDENTIAL

Sr. No.	Message Item	<XMLTag>	Occurrence	Datatype	Length	M/O	Rules
9	Transaction information, Carried throughout the system, visible to all parties	<Txn>	1..1	Alphabetic	Fixed value	M	
10	Unique Identifier of the transaction across all entities created by the originator	id	1..1	Alphanumeric	35	M	022_Txn_UUID
11	Description of the transaction (which will be printed on Passbook)	note	1..1	Alphanumeric	Min: 1 Max: 50	M	067_note
12	Consumer reference number to identify (like Loan number, etc.)	refId	1..1	Alphanumeric	Min: 1 Max: 35	M	056_refId

CONFIDENTIAL

Sr. No.	Message Item	<XMLTag>	Occurrence	Datatype	Length	M/O	Rules
13	URL for the transaction	refUrl	1..1	Alphanumeric	Min: 1 Max: 35	M	068_refUrl
14	Transaction origination time by the creator of the message	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020_Head_ts
15	Type of the Transaction	type	1..1	Code	Min: 1 Max: 20	M	016_RespPay_Pay 017_RespPay_Collect 018_RespPay_Reversal
16	Original transaction ID when reversal/Refund has to be done	orgTxnId	1..1	Alphanumeric	35	M	023_Txn_orgTxnId
17	Subtype of transaction	subType	0..1	Code	Min: 1 Max: 20	O	
18	Reference Category	refCategory	0..1	Code	Fixed value	O	052_ReqPay_Txn_refCategory
19	Initiation mode	initiation mode	1..1	Code	Min: 1 Max: 3	M	030_Txn_SubType
20	Response	<Resp>	1..1	Alphabetic	Fixed value	M	

CONFIDENTIAL

Sr. No.	Message Item	<XMLTag>	Occurrence	Datatype	Length	M/O	Rules
21	Request Message identifier	reqMsgId	1..1	Alphanumeric	35	M	060_reqMsgId
22	Result of the transaction	result	1..1	Code	Min: 1 Max: 20	M	025_Response_ApprovalNum 053_Response_result
23	Error code if transaction failed	errCode	1..1	Alphanumeric	Min: 1 Max: 20	M	062_errCode
24	Authentication code	actn	0..n	Numeric	Min: 1 Max: 40	O	
25	Response Reference	<Ref>	1..n	Alphabetic	Fixed value	M	
26	Reference type	type	1..1	Code	Fixed value	M	016_RespPay_Pay 017_RespPay_Collect
27	Sequence Number	seqNum	1..1	Numeric	Min: 1 Max: 3	M	074_seqNum
28	Payment address	addr	1..1	Alphanumeric	Min: 1 Max: 255	M	072_addr
29	Settlement Amount	settAmount	1..1	Numeric	minInclusive: 0 totalDigits: 15	M	051_ReqPay_Amount_Value
30	Settlement Currency	settCurrency	1..1	Text	Min: 1 Max: 3	M	081_settCurrency
31	Approval Reference Number	approvalNum	1..1	Alphanumeric	6	M	025_Response_ApprovalNum

CONFIDENTIAL

Sr. No.	Message Item	<XMLTag>	Occurrence	Datatype	Length	M/O	Rules
32	Response code	respCode	1..1	Alphanumeric	Min: 1 Max: 20	M	064_respCode
33	Registered name with bank	regName	1..1	Alphanumeric	Min: 1 Max: 99	M	082_regName
34	Original amount	orgAmount	1..1	Numeric	minInclusive: 0 totalDigits: 15	M	051_ReqPay_Amount_Value
35	Reversal Response Code	reversalResp Code	1..1	Alphanumeric	Min: 1 Max: 20	M	028_Response_Reversal
36	Account number	acNum	1..1	Alphanumeric	Min: 1 Max: 30	M	083_acNum
37	Merchant Classification Code - MCC	code	1..1	Numeric	4	M	024_Txn_code
38	IFSC code	IFSC	1..n	Alphanumeric	11	M	032_RespPay_RefTag_IFSC
39	Account type	accType	1..n	Code	Fixed Value	M	048_ReqPay_Ac_name_Account

6.9 REQTXNCONFIRMATION

Sr. No.	Message Item	<XML Tag>	Occurrence	Datatype	Length	M/O	Rules
1	API Name	ReqTxnConfirmation	1..1			M	
2	API Schema	xmlns	1..1	Alphanumeric	Min:1 Max:255	M	
3	Header for the message	<Head>	1..1	Alphabetic	Fixed value	M	

CONFIDENTIAL

4	Version of the API	ver	1..1	Numeric	Min:1 Max:6	M	019_Head_Version
5	Time of request from the creator of the message	ts	1..1	ISODateTime	Min:1 Max:255	M	020_Head_ts
6	Organization id that created the message	orgId	1..1	Alphanumeric	Min:1 Max:20	M	059_OrgId
7	Message identifier- used to correlate between request and response	msgId	1..1	Alphanumeric	35	M	021_Head_MsgId
8	This field denotes the Product Type	prodType	0..1	Alphanumeric	Fixed value	O	082_prodType
9	Transaction information, Carried throughout the system, visible to all parties	<Txn>	1..1	Alphabetic	Fixed value	M	
10	Unique Identifier of the transaction across all entities, created by the originator	id	1..1	Alphanumeric	35	M	022_Txn_UUID
11	Description of the transaction (which will be printed on Passbook)	note	1..1	Alphanumeric	Min:1 Max:50	M	067_note

CONFIDENTIAL

12	Consumer reference number to identify (like Loan number, etc.)	refId	1..1	Alphanumeric	Min:1 Max:35	M	056_refId
13	URL for the transaction	refUrl	1..1	Alphanumeric	Min:1 Max:35	M	068_refUrl
14	Transaction origination time by the creator of the message	ts	1..1	ISODateTime	Min:1 Max:255	M	020_Head_ts
15	Original transaction ID when reversal/Ref und has to be done	orgTxnId	1..1	Alphanumeric	35	M	023_Txn_orgTxnId
16	Customer reference number for the initiated transaction	custRef	1..1	Numeric	12	M	066_custRef
17	Initiation mode	initiationMode	1..1	Code	Min:1 Max:3	M	031_Txn_Initiation mode
18	This field indicates the purpose of the txn	purpose	1..1	Code	Fixed value	M	045_ReqPay_Txn_purpose
19	Transaction Type	Type	1..1	Code	Min:1	M	069_txnType
20	This field indicates the Subtype of transaction	subType	1..1	Code	Min: 1 Max: 20	O	030_Txn_SubTMpe
21	This field indicates the Reference Category	refCategory	1..n	Code	Fixed value	M	052_ReqPay_Txn_refCategory
22	Transaction Confirmation	<TxnConfirmation>	1..1	Alphabetic	Fixed value	M	

CONFIDENTIAL

23	Description of the transaction (which will be printed on Passbook)	note	1..1	Alphanumeric	Min:1 Max:50	M	067_note
24	Type of the Transaction	type	1..1	Code	Min:1 Max:20	M	012_ReqTxn_Pay 069_txnType
25	Original transaction error code	orgErrorCode	0..1	Code	Min:1 Max:20	O	
26	Original transaction status	orgStatus	1..1	Code	Min:1 Max:20	M	
27	Details related to the Payer/Payee	<Payer>	1..1	Alphabetic	Fixed value	M	
28	Address of the Payer	addr	1..1	Alphanumeric	Min:1 Max:99	M	072_addr
29	Reversal Response Code	reversalResp Code	0..n	Code	Min:1 Max:20	O	028_Response_Reversal
30	Ref type	type	1..1	Code		M	029_Payer/Payee_Type
31	Sequence Number	seqNum	1..1	Numeric	4	M	074_seqNum
32	Payment address	addr	1..1	Alphanumeric	Min:1 Max:255	M	072_addr
33	Settlement Amount	settAmount	1..1	Numeric	minInclusive: 0 totalDigits: 15	M	051_ReqPay_Amount_Value
34	Settlement Currency	settCurrency	1..1	Text	Min:1 Max:3	M	
35	Approval Reference Number	approvalNum	1..1	Alphanumeric	6	M	025_Response_ApprovalNum
36	Response code	respCode	1..1	Alphanumeric	Min:1 Max:20	M	
37	Registered name with bank	regName	1..1	Alphanumeric	Min:1 Max:99	M	

CONFIDENTIAL

38	Original amount	orgAmount	1..1	Numeric	minInclusive: 0totalDigi ts: 15	M	051_ReqPay_Amount_Value
39	Account number	acNum	1..1	Alphanumeric	Min:1 Max:30	M	
40	Merchant Classification Code - MCC	code	1..1	Numeric	4 digit	M	024_Txn_code
41	IFSC code	IFSC	1..n	Alphanumeric	11	M	032_RespPay_RefTag_ IFSC
42	Account type	accType	1..n	Code	Fixed Value	M	048_ReqPay_Ac_name_Account

CONFIDENTIAL

6.10 RESPTXNCONFIRMATION

Sr. No.	Message Item	<XML Tag>	Occurrence	Datatype	Length	M/O	Rules
1	API Name	RespTxnConfirmation	1..1			M	
2	API Schema namespace	xmlns	1..1	Alphanumeric	Min:1 Max:255	M	
3	Header for the message	<Head>	1..1	Alphabetic	Fixed value	M	
4	Version of the API	ver	1..1	Numeric	Min:1 Max:6	M	019_Head_Version
5	Time of request from the creator of the message	ts	1..1	ISODateTime	Min:1 Max:255	M	020_Head_ts
6	Organization id that created the message	orgId	1..1	Alphanumeric	Min:1 Max:20	M	059_OrgId
7	Message identifier-used to correlate between request and response	msgId	1..1	Alphanumeric	35	M	021_Head_MsgId

CONFIDENTIAL

8	Transaction information, Carried throughout the system, visible to all parties	<Txn>	1..1	Alphabetic	Fixed value	M	
9	Unique Identifier of the transaction across all entities, created by the originator	id	1..1	Alphanumeric	35	M	022_Txn_UUID
10	Description of the transaction (which will be printed on Passbook)	note	1..1	Alphanumeric	Min:1 Max:50	M	067_note
11	Consumer reference number to identify (like Loan number, etc.)	refId	1..1	Alphanumeric	Min:1 Max:35	M	056_refId
12	URL for the transaction	refUrl	1..1	Alphanumeric	Min:1 Max:35	M	068_refUrl

CONFIDENTIAL

13	Transaction origination time by the creator of the message	ts	1..1	ISODateTime	Min:1 Max:255	M	020_Head_ts
14	Original transaction ID when reversal/Refun d has to be done	orgTxnId	1..1	Alphanumeric	35	M	023_Txn_orgTxnId
15	Customer reference number for the initiated transaction	custRef	1..1	Numeric	12	M	066_custRef
16	Transaction Type	Type	1..1	Code	Min:1 Max:20	M	069_txnType
17	Initiation mode	initiationMode	1..1	Code	Min:1 Max:35	M	031_Txn_Initiation mode
18	This field indicates the purpose of the txn	purpose	1..1	Code	Fixed value	M	045_ReqPay_Txn_purpose
	This field indicates the Reference Category	refCategory	1..n	Code	Fixed value	M	052_ReqPay_Txn_refCategory
19	Response	<Resp>	1..1	Alphabetic	Fixed value	M	
20	Request Message Identifier	reqMsgId	1..1	Alphanumeric	35	M	060_reqMsgId

CONFIDENTIAL

21	Result of the transaction	result	1..1	Code	Min:1 Max:20	M	025_Response_ApprovalNum 053_Response_result

CONFIDENTIAL

7. RULES - APPENDIX

Rule Id	Condition	Value	Action
001_ReqPay_Pay	if(type=PAY)	PAY	If it is a PAY txn below tags are mandatory Under Payer 1. Info Tag 2. Device tag 3. Account tag 4. Amount tag. 5. Cred tag Under Payee 1. Payee tag. 2. Amount tag.

CONFIDENTIAL

Rule Id	Condition	Value	Action
002_ReqPay_Collect	if(type=COLLECT)	COLLECT	If it is a COLLECT txn below tags are mandatory. Under payeetag 1. Info Tag 2. Device tag details 3. Account tag 4. Amount tag. Under Payer tag 1. Amount tag.
003_ReqPay_Debit	if(type=DEBIT)	DEBIT	If type is DEBIT below tags are mandatory.

CONFIDENTIAL

Rule Id	Condition	Value	Action
			Under Payer tag 1. Info Tag 2. Device tag 3. Account tag 4. Amount tag. 5. Cred tag Under Payee tag 1. Info tag 2. Account tag 3. Amount tag 4. Device tag (applicable only in case of COLLECT)

CONFIDENTIAL

Rule Id	Condition	Value	Action
004_ReqPay_Credit	if(type=CREDIT)	CREDIT	If type is CREDIT below tags are mandatory. Under Payer tag 1. Info Tag 2. Device tag 3. Account tag 4. Amount tag
			Under Payee tag 1. Info tag 2. Device tag (applicable only in case if COLLECT) 3. Account tag Amount tag
005_ReqPay_DebitReversal	if(type= REVERSAL)	REVERSAL	This leg will be sent for reversal from UPI to Remitter If type is REVERSAL below tags are mandatory. Under Payer tag 1. Info Tag 2. Account tag 3. Amount tag

CONFIDENTIAL

Rule Id	Condition	Value	Action
006_ReqPay_CreditReversal	if(type=REVERSAL)	REVERSAL	This leg will be sent for reversal from UPI to Beneficiary If type is REVERSAL below tags are mandatory. Under Payee tag 1. Info Tag 2. Account tag 3. Amount tag
007_ReqPay_PreApproved	if(type=PAY&&Cred.type="PREAPP ROVED") /(type=COLLECT &&Cred.type="PR EAPPROVED")	PREAPPR OVED	1. If txn type is PAY and PREAUTH/PREAPPROVED then the following cred block should be present in ReqPay 2. If txn type is COLLECT and PREAUTH/PREAPPROVED then the following cred block should be present in RespAuthDetails <Cred type="PREAUTH/PREAPPROVED" subType="NA""> Format: respCode|approvalNum Example –00|972345 "|" - to be used as delimiter

CONFIDENTIAL

Rule Id	Condition	Value	Action
008_ReqAuth_Pay	if(type=PAY)	PAY	If type is PAY below tags are mandatory in ReqAuthDetails Under Payer tag 1. Info Tag 2. Account tag 3. Amount tag Under Payee tag 1. Amount tag
010_RespAuth_Pay	if(type=PAY)	PAY	If type is PAY below tags are mandatory in RespAuthDetails Under Payer tag 1. Info Tag 2. Account tag 3. Amount tag Under Payee tag 1. Info Tag 2. Account tag 3. Amount tag
012_ReqTxn_Pay	if(type=PAY)	PAY	Ref tag of payee details will be present in the ReqTxnConfirmation.

CONFIDENTIAL

Rule Id	Condition	Value	Action
016_RespPay_Pay	if(type=DEBIT)	DEBIT	Ref tag of payer details will only be sent in the RespPay
017_RespPay_Collect	if(type=CREDIT)	CREDIT	Ref tag of payee details will only be sent in the RespPay
018_RespPay_Reversal	if(type=REVERSAL)	REVERSAL	Ref tag of Payer details will be sent in debit reversal. Ref tag of Payee details will be sent in credit reversal
019_Head_Version	General	Numeric	Default is '2.0'

CONFIDENTIAL

Rule Id	Condition	Value	Action
020_Head_ts	General	ISO Date time format	The string format should be: YYYY-MM-DDTHH:mm:ss.sssZ, where: YYYY-MM-DD – is the date: year- month-day. The character "T" is used as the delimiter. HH:mm:ss: sss – is the time: hours, minutes, seconds and milliseconds. The 'Z' part denotes the time zone in the format +- hh:mm HH/hh = two digits of hour (00 through 23) (am/pm NOT allowed) mm = two digits of minute (00 through 59) ss = two digits of second (00 through 59) sss= three digit of milli second (000 through 999) +/- hh:mm = followed by time zone difference from GMT in hours and minutes. This is Mandatory, this keeps on changing with each leg of the transaction

CONFIDENTIAL

Rule Id	Condition	Value	Action
021_Head_MsgId	General	Alphanum eric	Message ID is unique for particular API leg as well as all transactions. It should be always 35 Digits. First 3 digits should be bank Participation code assigned by NPCI followed by 32 digit generated by UUID logic No special Characters permitted. Message id changes with each leg.
022_Txn_UUID	General	Alphanum eric	Transaction ID is unique for the any transaction. It should be always 35 Digits. First 3 digits should be bank Participation code assigned by NPCI followed by 32 digit generated by UUID logic No special Characters permitted For FIR, Txn->id should be same across all APIs
023_Txn_ orgTxnId	A. if(type= REVERSAL) B.if (type = REFUND) C. chkTxn linked to payment	Alphanum eric	A.REVERSAL : In case of timeout, ReqPay (type = REVERSAL) shall be initiated from NPCI to the IP. The txnId in REVERSAL changes to a new value. The orgTxnId shall have the value of the original transaction id from payment request linked to which the REVERSAL is initiated

CONFIDENTIAL

Rule Id	Condition	Value	Action
			B. REFUND : IP can initiate a refund against a successful payment transaction. The REFUND will be initiated with the details from the payment transaction. The orgTxnId in ReqPay (type = REFUND) shall have the value of the original transaction id linked to it. C. chkTxn linked to payment: IP can raise a chkTxn to NPCI for fetching the final status of a payment .

CONFIDENTIAL

Rule Id	Condition	Value	Action
			.The ReqChkTxn shall contain the txnId of the payment in the orgTxnId tag. D. ValCust linked Payment : The payment is initiated against ValCust API orgTxnId in ReqPay contains the transaction id of the ValCusttransaction done prior. In FIR, Txn->id is the same across all APIs and hence orgTxnId will be same as Txn->id.
024_Txn_code			It contains MCC(Merchant Category Code) of the entity. In this case, code="0000"
025_Response_ApprovalNum	if(Result=SUCCESS|FAILURE|PARTIAL|DEEMED)	Alphanum eric	6 digits must be Alphanumeric. If result is success, Approval number is mandatory
026_Payer/Payee_Info Rating	General	Numeric	TRUE|FALSE

CONFIDENTIAL

Rule Id	Condition	Value	Action
027_Response_ErrCode	General	Alphanum eric	only if FAILURE
028_Response_Reversal	if(type=REVERSAL)	Numeric	Mandatory only if FAILURE
029_Payer/Payee_Type	General	PERSON/ ENTITY	Either PERSON/ENTITY
030_Txn_SubType			1. ChkTxn API - for ChkTxn from IP to UPI, subType="PAY" for Chktxn from UPI to IP, subType="CREDIT" (Refer section for credit timeout flow) 2. ReqPay API - if(type="CREDIT"), then(subType="PAY")

CONFIDENTIAL

Rule Id	Condition	Value	Action
031_Txn_Initiation mode	If(type=PAY| COLLECT|DEBIT| CREDIT|REVERSAL| REFUND|ChkTxn| TxnConfirmation) In mandate, if (type=CREATE|U PDATE|REVOKE)	01/02/ 03/ 04/05/ 06/ 07//08 /09 /10/11 /12 /13/14 /00	00=Default 01=QR Code 02=Secure QR Code 04=Intent 05=Secure Intent 06=NFC(Near Field Communication) 07=BLE (Bluetooth) 08=UHF(Ultra High Frequency) 09=Aadhaar 10=SDK (Software Development Kit) 15-18 for future purpose - - -
032_RespPay_RefTag_ IFSC	if(Response.result =SUCCESS)	IFSC	IFSC code of the respective bank branch and should be 11 digits

CONFIDENTIAL

Rule Id	Condition	Value	Action
034_ReqPay_DeviceDetails_ Values	if(DEVICE.Tag occurs)	Device Values	MOBILE:91nnnnnnnnnn GEOCODE:nn.nnnn,nn.nnnn LOCATION:Area with city, state and Country Code 01-23- Terminal Address 24-36- Terminal City 37-38- Terminal State Code 39-40- Terminal Country Code IP:Valid IP address format(v4,v6) TYPE:Min - 1 , Max - 20 (Refer Rule_035) ID:Min - 1 , Max - 35 OS:Min - 1 , Max - 20 APP:Min - 1 , Max - 20 CAPABILITY:Min - 1 , Max - 99 (refer to DE-
			61) e.g: “5200000200010004000639292929292 “. For more details, refer annexure document TELECOM OPERATOR:Min -1,Max -99 (It is mandatory for USSD)

CONFIDENTIAL

Rule Id	Condition	Value	Action
035_ReqPay_DeviceDetails_ type	If(Device.tag.name="Type")	Device type	Initiating Channel 1. MOB(Mobile) 2. INET(Internet) 3. USDC/USDB(USSD) 4. POS(Point of Sale)
036_ReqPay_DeviceDetails_ OS	If(Device.tag.nam e="OS")	Device OS	OS of the initiating Device 1. iOS 2. Android
039_ReqPay_OrgRespCode	If(txn.type=REVERSAL)	Txn tag_Re ver sal	Possible only if Reversal/Refund scenario occurs
045_ReqPay_Txn_purpose	If(txn_type=PAY|REVERSAL|DEBIT|CREDIT)		Purpose="48" for FIR

CONFIDENTIAL

Rule Id	Condition	Value	Action
046_ReqPay_Ac_addrType	If(addrType=AAD HAAR|ACCOUNT|MOBILE|CARD)	Account values	If addrType=ACCOUNT is applicable for account + IFSC txn's
048_ReqPay_Ac_name_Account	If(addrType=ACCOUNT)	Account values	If addrType=ACCOUNT, then three below details are mandatory IFSC= It should be 11 digits alphanumeric ACTYPE= It should be a fixed value SAVINGS|DEFAULT|CURRENT|NRE|NRO|PPIWALLET| BANKWALLET|CREDIT|SOD | UOD ACNUM= it should be max 30 digits

CONFIDENTIAL

Rule Id	Condition	Value	Action
051_ReqPay_Amount_Value	If(amount, orgAmount, settamount)	Amount value	The amount value should be numeric. It should be populated in below format. 2 digits should come after the decimal. E.g.(Amount Value="100.00")
052_ReqPay_Txn_refCategory	If(txn_type=PAY|COLLECT|REFUND|REVERSAL|DEBIT|CREDIT)		If refUrl is present, then refCatergory is mandatory. The refCategory field is used to identify the category of the transaction

CONFIDENTIAL

Rule Id	Condition	Value	Action
053_Response_result	if(result=FAILURE)		Following tags are only mandatory- 1. Head tag 2. Resp tag 3. Txn tag (This rule represents that the tags mentioned or listed are the only mandatory tags needed for both failure and timeout responses)
056_refId			This is a unique 35 digit alphanumeric value.
057_Payer.info			Is mandatory for “pay” and optional for “collect”

CONFIDENTIAL

Rule Id	Condition	Value	Action
058_txn_ts			The string format should be: YYYY-MM-DDTHH:mm:ss.sssZ, where: YYYY-MM-DD – is the date: year- month-day. The character "T" is used as the delimiter. HH:mm:ss: sss – is the time: hours, minutes, seconds and milliseconds. The 'Z' part denotes the time zone in the format +- hh:mm HH/hh = two digits of hour (00 through 23) (am/pm NOT allowed) mm = two digits of minute (00 through 59) ss = two digits of second (00 through 59) sss= three digit of milli second (000 through 999) (+/-) hh:mm = followed by time zone difference from GMT in hours and minutes. Transaction Timestamp remains constant for the entire transaction leg

CONFIDENTIAL

Rule Id	Condition	Value	Action
059_OrgId			Value assigned by NPCI to be shared by partner. When it is originated by NPCI, it is iUPI/NPCI/UPI
060_reqMsgId			the message id of request will be passed in reqMsgId
061_Resp_Result			1. Non-financial/meta APIs has possible values: SUCCESS|FAILURE 2. The financial API will have values: SUCCESS|FAILURE|DEEMED 3. Only for ChkTxn initiated by IP to NPCI, if the payment/ financial txn is in progress result will be: PENDING
062_errCode			1. Error Code doc reference as provided by NPCI 2. Error Code
064_respCode			Failure Reasons/ Response codes shared by IRP/IMA. Kindly refer the doc (Response Code sheet v1)
065_orgRRN			It Contains the respective original Payment custRef tag value (Customer Reference). This will only be present in the reqChkTxn from IP to NPCI

CONFIDENTIAL

Rule Id	Condition	Value	Action
066_custRef			Specific format as per product revised office circular (refer NPCI/UPI/OC-107/2020/21)
067_note			Description of the transaction (which will be printed on Pass book)
068_refUrl			This will be the website url for the sender of the message
069_txnType			1. hbt API type="Hbt" 2. ReqPay API-enumeration lists:"PAY|CREDIT|REVERSAL" 3.ChkTxn API type="ChkTxn" 4.ValCust API type="VerifyUser" (For Verify User Leg)
			5.ValCust API type="CompScr" (For Compliance Screening leg)
070_HbtMsg_type			HbtMsg_type="EOD|ALIVE"
071_value			value="DATE|NA"

CONFIDENTIAL

Rule Id	Condition	Value	Action
072_addr			1. This contains the UPI id or VPA 2. Permitted special Characters (.) (-) 3. VPA should not begin with special characters 4. Unique identifier of the payer before @ handle will be given by NPCI 5. Total length of VPA is inclusive of the handle
073_refType			It defines the type of the sender Enumeration are :"PAYER|PAYEE" 1. RespPay API . if txn type = "CREDIT", refType="PAYEE" .if txn type = "REVERSAL", refType="PAYEE" 2. ChkTxn API

CONFIDENTIAL

Rule Id	Condition	Value	Action
			.if txn type refType="PAYEE"
074_seqNum			It Denotes the number of payers and payees Default value is 1
075_orgTxnDate			orgTxnDate is used in a refund transaction (refer the refund doc) It is Used to link the original payment transaction timestamp to the refund transaction The string format should be: YYYY-MM-DDTHH:mm:ss.sssZ, where: YYYY-MM-DD – is the date: year- month-day. The character "T" is used as the delimiter. HH:mm:ss: sss – is the time: hours, minutes, seconds and milliseconds. The 'Z' part denotes the time zone in the format +- hh:mm HH/hh = two digits of hour (00 through 23) (am/pm NOT allowed) mm = two digits of minute (00 through 59) ss = two digits of second (00 through 59) sss= three digit of milli second (000 through 999)

CONFIDENTIAL

Rule Id	Condition	Value	Action
			+/- hh:mm = followed by time zone difference from GMT in hours and minutes. This is Mandatory, this keeps on changing with each leg of the transaction
078_orgMsgId			It contains the message Id of the linked payment
080_provider			Default value of the 'provider' tag is NPCI In case of other initiating PSP populating risk Score provider shall contain the name of the PSP
081_reqId			Existing identifier has the name as "MOBILE" and value as the mobile number -Without any special char -Country Code can appended before the mobile number
082_prodType			Default value "UPI"
083_payee_Name			Contains the Payee name as shared by the sender Contains the KYC name as shared by the Indian Customer's Bank in response
084_payer_Name			Name of the Payer/sender
085_consent_Name			Default value "InternationalServices"
086_consent_Type			Default value "FIR"
087_consent_Value			Possible enumerations 1. "Y": When user/payee has activated the consent for international services, payee PSP will send the value as "Y" 2. "N": When user/payee has not activated the consent for international services, payee PSP will send the value as "N" For Value as "N", Payee PSP will not share the

CONFIDENTIAL

Rule Id	Condition	Value	Action
			account details of the Beneficiary
088_Institution_Type			The possible enumerations are 1. MTO (Money Transfer Operator) 2. BANK
089_Institution_Route			This contains the RBI scheme followed for the particular transaction The possible enumerations are 1. MTSS (Money Transfer Service scheme) 2. RDA (Rupee drawing arrangement 3. CBA - (Corresponding Banking Agreement)
090_Institution_purpose_code			This contains the RBI purpose code as below 1. P1301 - Inward remittance from Indian nonresidents towards family maintenance and savings. 2. P1302 - Personal gifts and donations.
095_Txn_riskScore			Txn_riskScore contains the score calculated by NPCI post validation of platform specific rules These rules include txn velocity and amount validation In case if any rule is breached UPI shall decline the same without further processing of debit and credit. This is used by the Remitter bank for fraud detection at the time of

CONFIDENTIAL

Rule Id	Condition	Value	Action
			debit. To be ignored by the Bene bak/IP
096_Txn_riskScore_Type			The Default Value = "TXNRISK"
097_Txn_riskScore_Value			Txn_riskScore_Value contains the score.

8. REFERENCES

1. BRD_ Remittance V 2.4_29052021.docx
2. DOU-FIRFOR_v1.0
3. Remittances Impact Analysis_FIR_v8
4. Fx P2M TSD – Phase 1 – v1.4
5. UPI Preface – International v1.3
6. UPI Remittances Annexure 1
7. UPI Remittances Annexure 2
8. OC-107-Change-in-nomenclature-of-Retrieval-Reference-number-RRN-in-UPI-to-avoid-duplicates 2
9. UPI Linking Specification cer 1 7 2_V06

End of Document

CONFIDENTIAL