



Congratulations! You passed!

TO PASS 80% or higher

Keep Learning

GRADE

100%

Dynamic Programming

TOTAL POINTS 14

1. The value of any state under an optimal policy is ___ the value of that state under a non-optimal policy.
[Select all that apply]

1 / 1 point

- ☐ Strictly greater than
- ☒ Greater than or equal to



Correct

Correct! This follows from the policy improvement theorem.

- ☐ Strictly less than
- ☐ Less than or equal to

2. If a policy is greedy with respect to the value function for the equiprobable random policy, then it is **guaranteed** to be an optimal policy.

1 / 1 point

- ☒ False
- ☐ True



Correct

Correct! Only policies greedy with respect to the optimal value function are guaranteed to be optimal.

3. If a policy π is greedy with respect to its own value function v_π , then it is an optimal policy.

1 / 1 point

- ☒ True
- ☐ False



Correct

Correct! If a policy is greedy with respect to its own value function, it follows from the policy improvement theorem and the Bellman optimality equation that it must be an optimal policy.

4. Let v_π be the state-value function for the policy π . Let π' be greedy with respect to v_π . Then $v_{\pi'} \geq v_\pi$.

1 / 1 point

- ☐ False
- ☒ True



Correct

Correct! This is a consequence of the policy improvement theorem.

5. Let v_π be the state-value function for the policy π . Let $v_{\pi'}$ be the state-value function for the policy π' . Assume $v_\pi = v_{\pi'}$. Then this means that $\pi = \pi'$.

1 / 1 point

☐ True

☒ False



Correct

Correct! For example, two policies might share the same value function, but differ due to random tie breaking.

6. What is the relationship between value iteration and policy iteration? [Select all that apply]

1 / 1 point

☐ Policy iteration is a special case of value iteration.

☒ Value iteration and policy iteration are both special cases of generalized policy iteration.



Correct

Correct!

☐ Value iteration is a special case of policy iteration.

7. The word synchronous means "at the same time". The word asynchronous means "not at the same time". A dynamic programming algorithm is: [Select all that apply]

1 / 1 point

☒ Asynchronous, if it updates some states more than others.



Correct

Correct! Only algorithms that update every state exactly once at each iteration are synchronous.

☒ Synchronous, if it systematically sweeps the entire state space at each iteration.



Correct

Correct! Only algorithms that update every state exactly once at each iteration are synchronous.

☒ Asynchronous, if it does not update all states at each iteration.



Correct

Correct! Only algorithms that update every state exactly once at each iteration are synchronous.

8. All Generalized Policy Iteration algorithms are synchronous.

1 / 1 point

☐ True

☒ False



Correct

Correct! A Generalized Policy Iteration algorithm can update states in a non-systematic fashion.

9. Policy iteration and value iteration, as described in chapter four, are synchronous.

1 / 1 point

☐ False

☒ True



Correct

Correct! As described in lecture, policy iteration and value iteration update all states systematic sweeps.

10. Which of the following is true?

1 / 1 point

☐ Synchronous methods generally scale to large state spaces better than asynchronous methods.

☒ Asynchronous methods generally scale to large state spaces better than synchronous methods.



Correct

Correct! Asynchronous methods can focus updates on more relevant states, and update less relevant states less often. If the state space is very large, asynchronous methods may still be able to achieve good performance whereas even just one synchronous sweep of the state space may be intractable.

11. Why are dynamic programming algorithms considered planning methods? [Select all that apply]

1 / 1 point

☒ They use a model to improve the policy.



Correct


Correct! This is the definition of a planning method.

☐ They learn from trial and error interaction.

☐ They compute optimal value functions.

12. Consider the undiscounted, episodic MDP below. There are four actions possible in each state, $A = \{\text{up, down, right, left}\}$, which deterministically cause the corresponding state transitions, except that actions that would take the agent off the grid in fact leave the state unchanged. The right half of the figure shows the value of each state under the equiprobable random policy. If π is the equiprobable random policy, what is $q(11, \text{down})$?

1 / 1 point

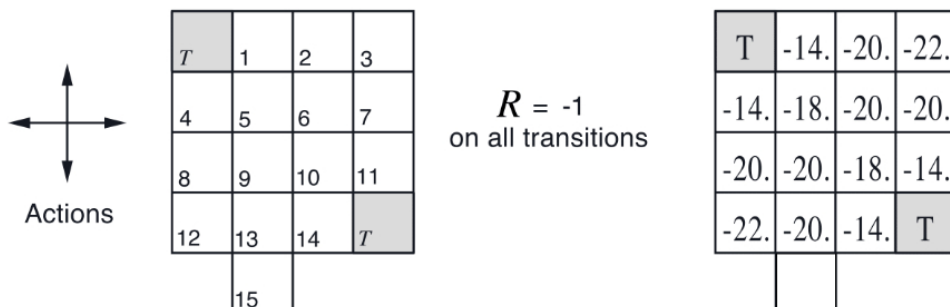

☐ $q(11, \text{down}) = -15$


- ☐ $q(11, \text{down}) = -14$
- ☒ $q(11, \text{down}) = -1$
- ☐ $q(11, \text{down}) = 0$

✓ Correct

Correct! Moving down incurs a reward of -1 before reaching the terminal state, after which the episode is over.

13. Consider the undiscounted, episodic MDP below. There are four actions possible in each state, $A = \{\text{up, down, right, left}\}$, which deterministically cause the corresponding state transitions, except that actions that would take the agent off the grid in fact leave the state unchanged. The right half of the figure shows the value of each state under the equiprobable random policy. If π is the equiprobable random policy, what is $q(7, \text{down})$?

1 / 1 point

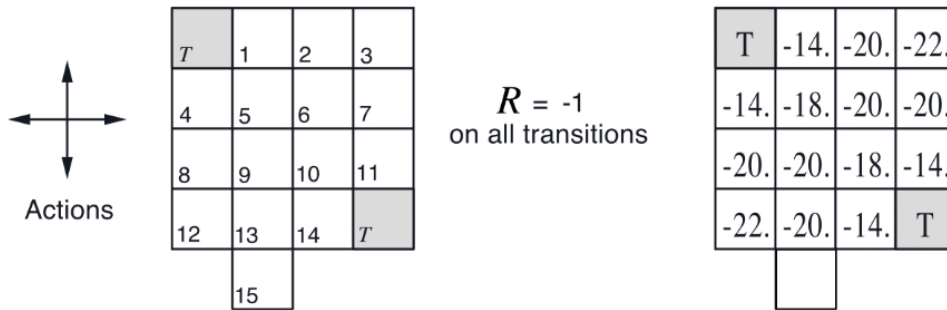


- ☐ $q(7, \text{down}) = -21$
- ☐ $q(7, \text{down}) = -14$
- ☒ $q(7, \text{down}) = -15$
- ☐ $q(7, \text{down}) = -20$

✓ Correct

Correct! Moving down incurs a reward of -1 before reaching state 11, from which the expected future return is -14.

14. Consider the undiscounted, episodic MDP below. There are four actions possible in each state, $A = \{\text{up, down, right, left}\}$, which deterministically cause the corresponding state transitions, except that actions that would take the agent off the grid in fact leave the state unchanged. The right half of the figure shows the value of each state under the equiprobable random policy. If π is the equiprobable random policy, what is $v(15)$? Hint: Recall the Bellman equation $v(s) = \sum_a \pi(a|s) \sum_{s',r} p(s', r|s, a)[r + \gamma v(s')]$.

1 / 1 point

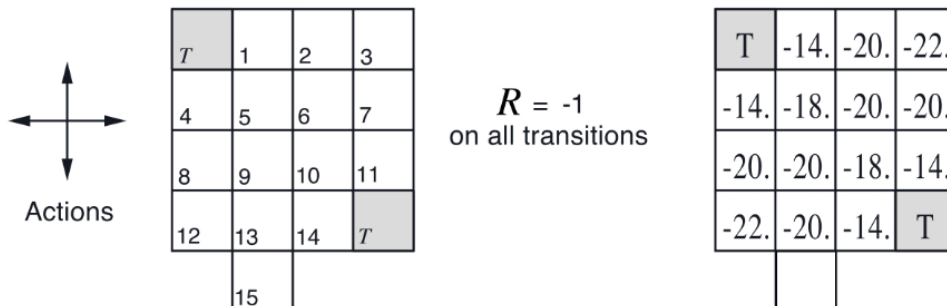

- ☐ $v(15) = -22$
- ☐ $v(15) = -25$

☐ $v(15) = -23$

☒ $v(15) = -24$

☐ $v(15) = -21$



Correct

Correct! We can get this by solving for the unknown variable $v(15)$. Let's call this unknown x . We solve for x in the equation $x = 1/4(-21) + 3/4(-1 + x)$. The first term corresponds to transitioning to state 13. The second term corresponds to taking one of the other three actions, incurring a reward of -1 and staying in state x .