

Create a Students table with StudentID, StudentName, Age, Course, Marks, City.



Display all student records

The screenshot shows a SQL query editor with two tabs. The active tab, 'SQLQuery1.s...deepa (86))*', contains the following SQL code:

```
18 INSERT INTO students VALUES (9, 'Arjun', 21, 'SQL', 82, 'Coimbatore');
19 INSERT INTO students VALUES (10, 'Priya', 22, 'Power BI', 95, 'Madurai');
20
21 INSERT INTO students VALUES (11, 'Rohan', 20, 'Python', 73, 'Salem');
22 INSERT INTO students VALUES (12, 'Kavya', 21, 'Java', 84, 'Trichy');
23 INSERT INTO students VALUES (13, 'Nikhil', 23, 'SQL', 69, 'Bangalore');
24 INSERT INTO students VALUES (14, 'Pooja', 22, 'Tableau', 87, 'Hyderabad');
25 INSERT INTO students VALUES (15, 'Sanjay', 21, 'Power BI', 79, 'Chennai');
26 INSERT INTO students VALUES (16, 'Divya', 20, 'Python', 93, 'Mumbai');
27 INSERT INTO students VALUES (17, 'Ajay', 22, 'Java', 65, 'Delhi');
28 INSERT INTO students VALUES (18, 'Keerthi', 21, 'SQL', 90, 'Pune');
29 INSERT INTO students VALUES (19, 'Manoj', 23, 'Tableau', 76, 'Coimbatore');
30 INSERT INTO students VALUES (20, 'Harini', 20, 'Power BI', 86, 'Madurai');
31
32 select * from students;
```

Below the editor, the 'Results' tab is active, displaying a table with 17 rows and 7 columns. The status bar at the bottom indicates 'Query executed successfully.' and 'DEEPA\ (17)'.

	student_id	student_name	age	course	marks	city
1	1	Aarav	20	SQL	85	Chennai
2	2	Diya	21	Python	92	Bangalore
3	3	Karan	22	Java	78	Hyderabad
4	4	Meera	20	Power BI	88	Chennai
5	5	Rahul	23	SQL	67	Mumbai
6	6	Sneha	21	Python	91	Delhi
7	7	Vikram	22	Java	75	Pune
8	8	Ananya	20	Tableau	89	Chennai
9	9	Arjun	21	SQL	82	Coimbatore
10	10	Priya	22	Power BI	95	Madurai
11	11	Rohan	20	Python	73	Salem
12	12	Kavya	21	Java	84	Trichy
13	13	Nikhil	23	SQL	69	Bangalore
14	14	Pooja	22	Tableau	87	Hyderabad
15	15	Sanjay	21	Power BI	79	Chennai
16	16	Divya	20	Python	93	Mumbai
17	17	Ajay	22	Java	65	Delhi

Display students whose marks are greater than 80.

The screenshot displays the Microsoft SQL Server Enterprise Manager interface. The Object Explorer on the left shows the database structure for 'DEEPA' (SQL Server 17.0.1000.7 - Deepa\deepa). The 'Tables' folder is expanded, showing 'dbo.student' and 'dbo.student1'. The 'Queries' folder is also expanded, showing 'SQLQuery1.s...deepa (86)*'. The 'Messages' pane at the bottom shows the query execution result.

Query executed successfully.

student_id	student_name	age	course	marks	city
1	Aarav	20	SQL	85	Chennai
2	Diya	21	Python	92	Bangalore
3	Meera	20	Power BI	88	Chennai
4	Sneha	21	Python	91	Delhi
5	Ananya	20	Tableau	89	Chennai
6	Arjun	21	SQL	82	Coimbatore
7	Priya	22	Power BI	95	Madurai
8	Kavya	21	Java	84	Trichy
9	Pooja	22	Tableau	87	Hyderabad
10	Divya	20	Python	93	Mumbai
11	Keerthi	21	SQL	90	Pune
12	Harini	20	Power BI	86	Madurai
13	Aarav	20	SQL	85	Chennai
14	Diya	21	Python	92	Bangalore
15	Meera	20	Power BI	88	Chennai
16	Sneha	21	Python	91	Delhi
17	Ananya	20	Tableau	89	Chennai
18	Arjun	21	SQL	82	Coimbatore

Display students from Chennai.


The screenshot displays the SQL Server Enterprise Manager interface. On the left, the Object Explorer shows the database structure for 'DEEPA' (SQL Server 17.0.1000.7 - Deepa\deepa). The 'Tables' folder is expanded, showing 'dbo.student' and 'dbo.student1'. The main query window, titled 'SQLQuery1.s...deepa (86))*', contains the following SQL query:

```
select * from students where city='chennai';
```

Below the query window, the 'Results' tab is active, displaying a table with 8 rows and 7 columns. The columns are 'student_id', 'student_name', 'age', 'course', 'marks', and 'city'. The data is as follows:

	student_id	student_name	age	course	marks	city
1	1	Aarav	20	SQL	85	Chennai
2	4	Meera	20	Power BI	88	Chennai
3	8	Ananya	20	Tableau	89	Chennai
4	15	Sanjay	21	Power BI	79	Chennai
5	1	Aarav	20	SQL	85	Chennai
6	4	Meera	20	Power BI	88	Chennai
7	8	Ananya	20	Tableau	89	Chennai
8	15	Sanjay	21	Power BI	79	Chennai

Display students whose age is between 18 and 22.

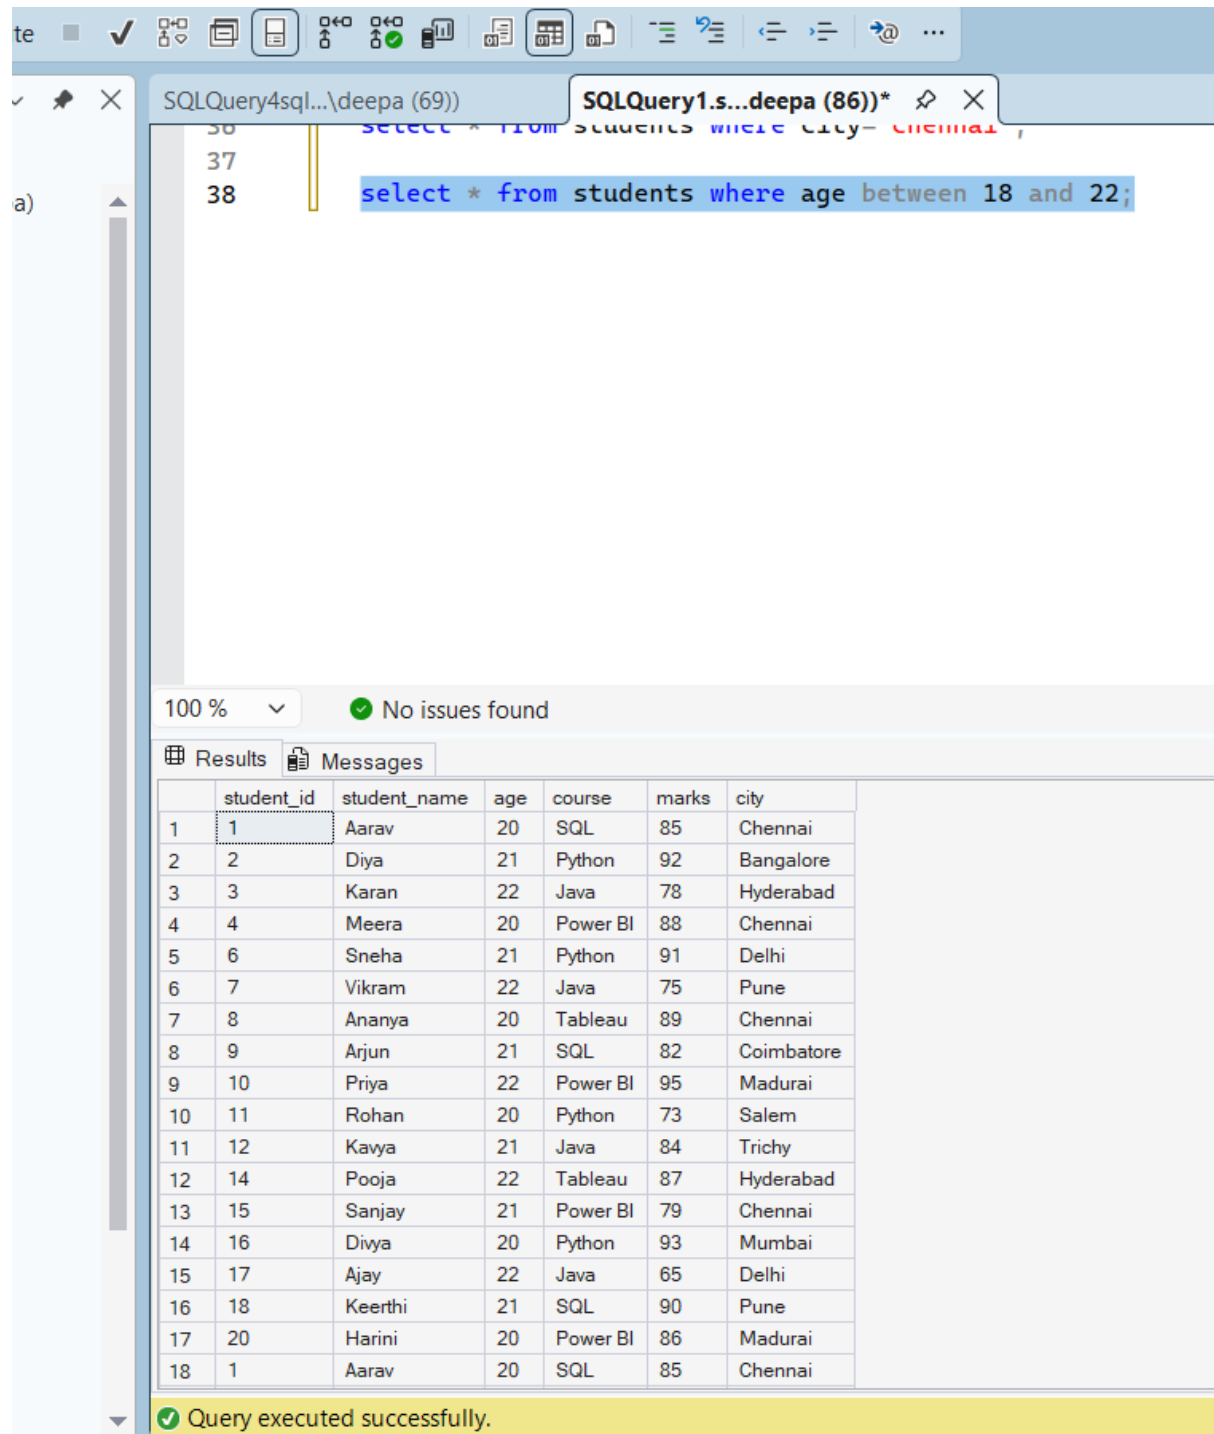

SQLQuery4sql...\\deepa (69))

SQLQuery1.s...deepa (86))*

a)

select * from students where age between 18 and 22;

100 % No issues found

Results Messages

	student_id	student_name	age	course	marks	city
1	1	Aarav	20	SQL	85	Chennai
2	2	Diya	21	Python	92	Bangalore
3	3	Karan	22	Java	78	Hyderabad
4	4	Meera	20	Power BI	88	Chennai
5	6	Sneha	21	Python	91	Delhi
6	7	Vikram	22	Java	75	Pune
7	8	Ananya	20	Tableau	89	Chennai
8	9	Arjun	21	SQL	82	Coimbatore
9	10	Priya	22	Power BI	95	Madurai
10	11	Rohan	20	Python	73	Salem
11	12	Kavya	21	Java	84	Trichy
12	14	Pooja	22	Tableau	87	Hyderabad
13	15	Sanjay	21	Power BI	79	Chennai
14	16	Divya	20	Python	93	Mumbai
15	17	Ajay	22	Java	65	Delhi
16	18	Keerthi	21	SQL	90	Pune
17	20	Harini	20	Power BI	86	Madurai
18	1	Aarav	20	SQL	85	Chennai

Query executed successfully.

Display students studying SQL or Python.

The screenshot shows a SQL query editor with two tabs. The first tab, 'SQLQuery4sql...\\deepa (69))', contains the query: `select * from students where course in ('Python','sql');`. The second tab, 'SQLQuery1.s...deepa (86))*', contains the query: `select * from students where course='python' or course='sql';`. Below the queries, the 'Results' pane displays a table with 18 rows and 7 columns: student_id, student_name, age, course, marks, and city. The data is repeated twice. A status bar at the bottom indicates 'Query executed successfully.'

100 % ✓ No issues found

Results Messages

	student_id	student_name	age	course	marks	city
1	1	Aarav	20	SQL	85	Chennai
2	2	Diya	21	Python	92	Bangalore
3	5	Rahul	23	SQL	67	Mumbai
4	6	Sneha	21	Python	91	Delhi
5	9	Arjun	21	SQL	82	Coimbatore
6	11	Rohan	20	Python	73	Salem
7	13	Nikhil	23	SQL	69	Bangalore
8	16	Diya	20	Python	93	Mumbai
9	18	Keerthi	21	SQL	90	Pune
10	1	Aarav	20	SQL	85	Chennai
11	2	Diya	21	Python	92	Bangalore
12	5	Rahul	23	SQL	67	Mumbai
13	6	Sneha	21	Python	91	Delhi
14	9	Arjun	21	SQL	82	Coimbatore
15	11	Rohan	20	Python	73	Salem
16	13	Nikhil	23	SQL	69	Bangalore
17	16	Diya	20	Python	93	Mumbai
18	18	Keerthi	21	SQL	90	Pune

✓ Query executed successfully.

Display students whose name starts with 'A'.

The screenshot shows a SQL query execution window. The query entered is `select * from students where student_name like 'A%';`. The results pane displays a table with 8 rows of student data. The first two rows, Aarav and Ananya, are highlighted in blue, indicating they are the results of the query. The status bar at the bottom confirms the query was executed successfully.

100 % ✓ No issues found

Results Messages

	student_id	student_name	age	course	marks	city
1	1	Aarav	20	SQL	85	Chennai
2	8	Ananya	20	Tableau	89	Chennai
3	9	Arjun	21	SQL	82	Coimbatore
4	17	Ajay	22	Java	65	Delhi
5	1	Aarav	20	SQL	85	Chennai
6	8	Ananya	20	Tableau	89	Chennai
7	9	Arjun	21	SQL	82	Coimbatore
8	17	Ajay	22	Java	65	Delhi

✓ Query executed successfully.

Display students whose city is not Chennai.

The screenshot shows a SQL query editor with two tabs. The active tab, 'SQLQuery1.s...deepa (86))*', contains the query: `select * from students where city != 'chennai';`. Below the query editor, the 'Results' tab is selected, displaying a table with 18 rows and 7 columns: student_id, student_name, age, course, marks, and city. The table lists students from various cities, excluding Chennai. A status bar at the bottom indicates 'Query executed successfully.'

	student_id	student_name	age	course	marks	city
1	2	Diya	21	Python	92	Bangalore
2	3	Karan	22	Java	78	Hyderabad
3	5	Rahul	23	SQL	67	Mumbai
4	6	Sneha	21	Python	91	Delhi
5	7	Vikram	22	Java	75	Pune
6	9	Arjun	21	SQL	82	Coimbatore
7	10	Priya	22	Power BI	95	Madurai
8	11	Rohan	20	Python	73	Salem
9	12	Kavya	21	Java	84	Trichy
10	13	Nikhil	23	SQL	69	Bangalore
11	14	Pooja	22	Tableau	87	Hyderabad
12	16	Divya	20	Python	93	Mumbai
13	17	Ajay	22	Java	65	Delhi
14	18	Keerthi	21	SQL	90	Pune
15	19	Manoj	23	Tableau	76	Coimbatore
16	20	Harini	20	Power BI	86	Madurai
17	2	Diya	21	Python	92	Bangalore
18	3	Karan	22	Java	78	Hyderabad

Increase marks by 5 for Python students.

The screenshot shows the SQL Server Enterprise Manager interface. The top pane displays a query: `select student_name, course, marks, marks+5 as Total_Marks from students;`. The bottom pane shows the results of the query execution, which was successful. The results are displayed in a table with 5 columns: `student_name`, `course`, `marks`, and `Total_Marks`. The table contains 18 rows of data. A status bar at the bottom indicates "Query executed successfully." and the user is identified as "DEEPA\ (17)".


100 % ✓ No issues found

Results Messages

	student_name	course	marks	Total_Marks
1	Aarav	SQL	85	90
2	Diya	Python	92	97
3	Karan	Java	78	83
4	Meera	Power BI	88	93
5	Rahul	SQL	67	72
6	Sneha	Python	91	96
7	Vikram	Java	75	80
8	Ananya	Tableau	89	94
9	Arjun	SQL	82	87
10	Priya	Power BI	95	100
11	Rohan	Python	73	78
12	Kavya	Java	84	89
13	Nikhil	SQL	69	74
14	Pooja	Tableau	87	92
15	Sanjay	Power BI	79	84
16	Divya	Python	93	98
17	Ajay	Java	65	70
18	Keerthi	SQL	90	95

✓ Query executed successfully. DEEPA\ (17)

Delete students whose marks are below 35.

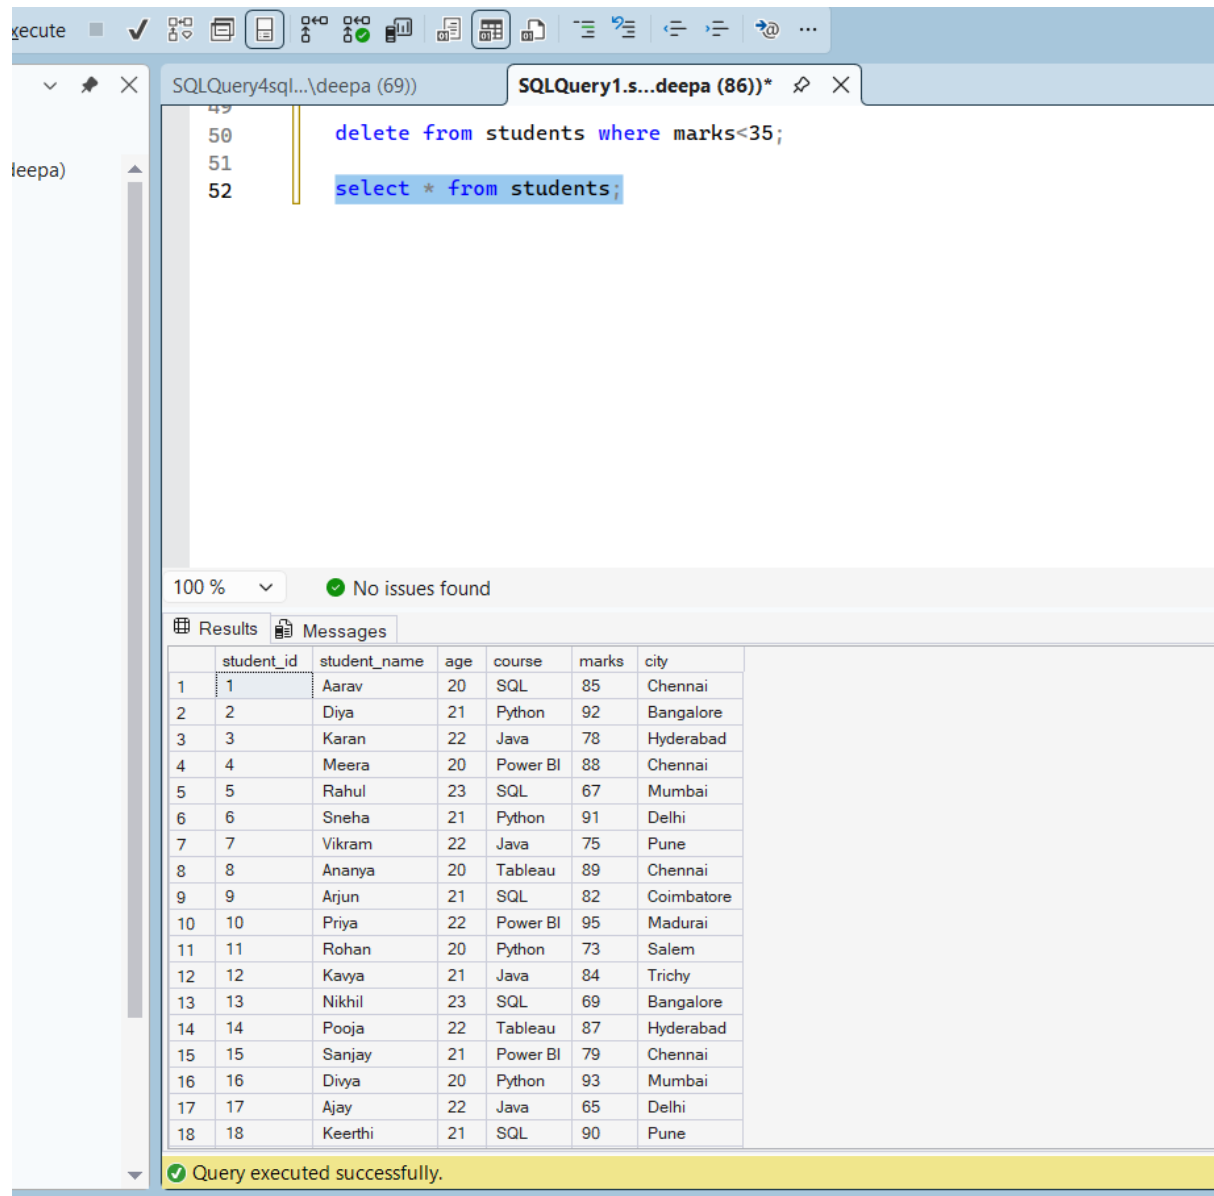


The screenshot displays the SQL Server Enterprise Manager interface. The query editor shows the following SQL commands:

```
delete from students where marks<35;  
select * from students;
```

The results pane shows a table with 18 rows of student data. The status bar at the bottom indicates "Query executed successfully."

	student_id	student_name	age	course	marks	city
1	1	Aarav	20	SQL	85	Chennai
2	2	Diya	21	Python	92	Bangalore
3	3	Karan	22	Java	78	Hyderabad
4	4	Meera	20	Power BI	88	Chennai
5	5	Rahul	23	SQL	67	Mumbai
6	6	Sneha	21	Python	91	Delhi
7	7	Vikram	22	Java	75	Pune
8	8	Ananya	20	Tableau	89	Chennai
9	9	Arjun	21	SQL	82	Coimbatore
10	10	Priya	22	Power BI	95	Madurai
11	11	Rohan	20	Python	73	Salem
12	12	Kavya	21	Java	84	Trichy
13	13	Nikhil	23	SQL	69	Bangalore
14	14	Pooja	22	Tableau	87	Hyderabad
15	15	Sanjay	21	Power BI	79	Chennai
16	16	Divya	20	Python	93	Mumbai
17	17	Ajay	22	Java	65	Delhi
18	18	Keerthi	21	SQL	90	Pune

Display Grade using CASE. Marks >=90 → A+, =80 → A, =70 → B, Else → C

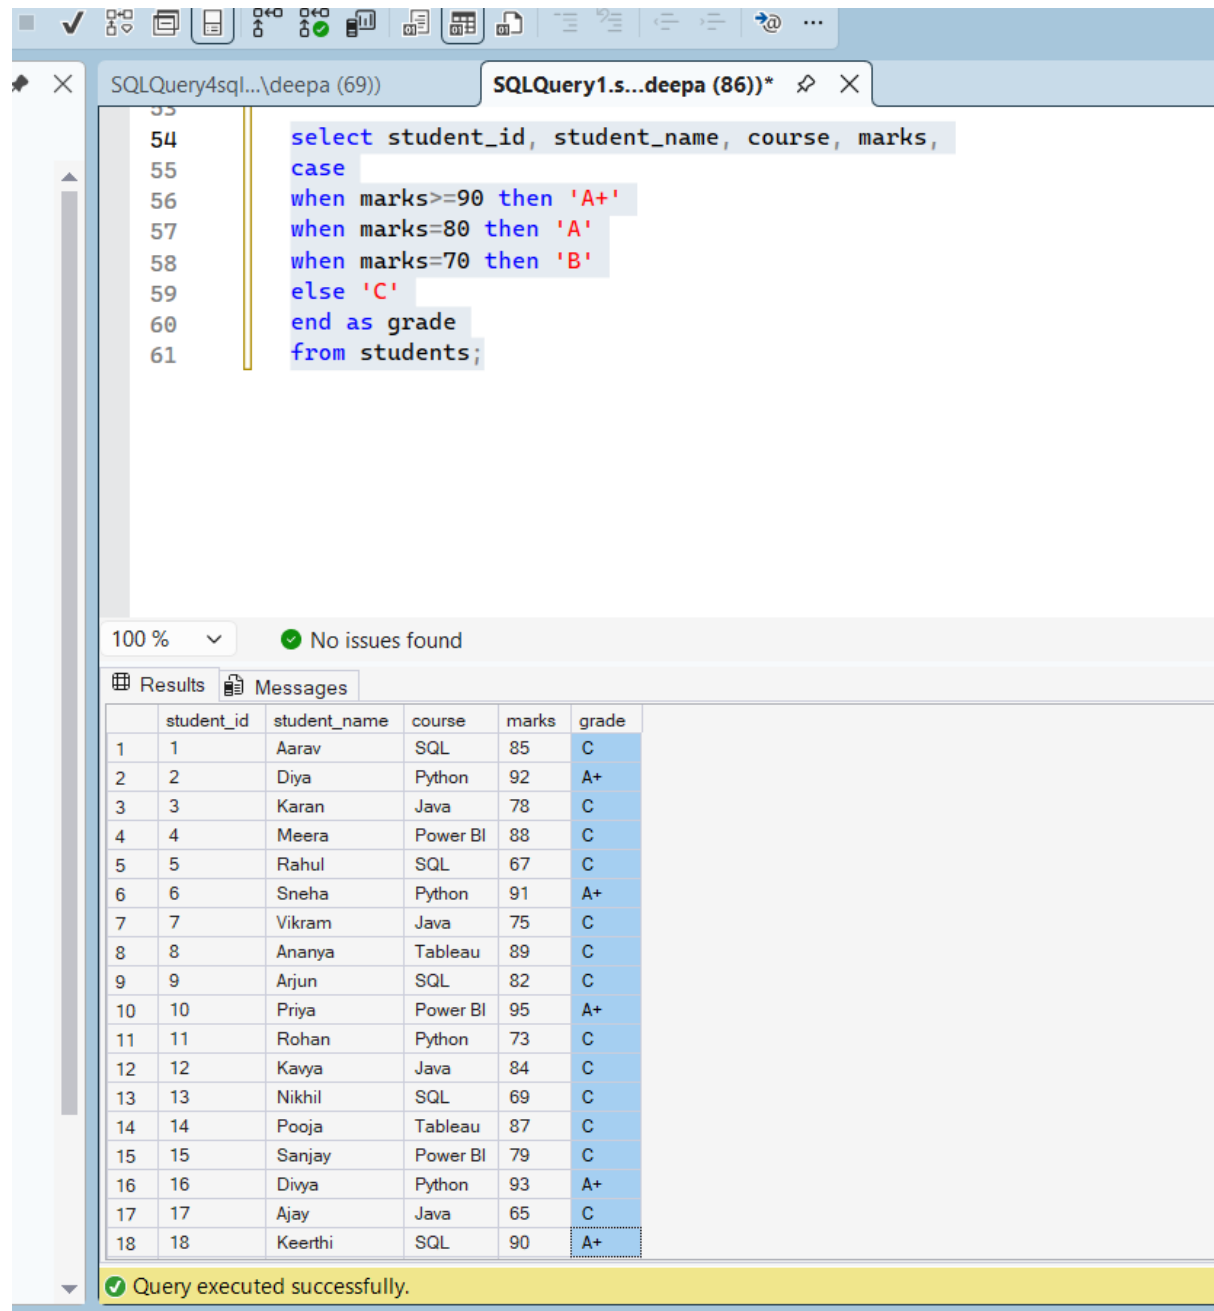

The screenshot shows a SQL IDE interface with two tabs. The active tab, 'SQLQuery1.s...deepa (86))*', contains the following SQL query:

```
54 select student_id, student_name, course, marks,
55 case
56 when marks>=90 then 'A+'
57 when marks=80 then 'A'
58 when marks=70 then 'B'
59 else 'C'
60 end as grade
61 from students;
```

Below the query editor, the 'Results' tab is active, displaying a table with 18 rows. The table has columns: student_id, student_name, course, marks, and grade. The 'marks' column is highlighted in blue. A status bar at the bottom indicates 'Query executed successfully.'

	student_id	student_name	course	marks	grade
1	1	Aarav	SQL	85	C
2	2	Diya	Python	92	A+
3	3	Karan	Java	78	C
4	4	Meera	Power BI	88	C
5	5	Rahul	SQL	67	C
6	6	Sneha	Python	91	A+
7	7	Vikram	Java	75	C
8	8	Ananya	Tableau	89	C
9	9	Arjun	SQL	82	C
10	10	Priya	Power BI	95	A+
11	11	Rohan	Python	73	C
12	12	Kavya	Java	84	C
13	13	Nikhil	SQL	69	C
14	14	Pooja	Tableau	87	C
15	15	Sanjay	Power BI	79	C
16	16	Divya	Python	93	A+
17	17	Ajay	Java	65	C
18	18	Keerthi	SQL	90	A+

Display students sorted by marks descending.

The screenshot shows a SQL query editor with two tabs. The active tab, 'SQLQuery1.s...deepa (86))*', contains the following SQL query:


```
select student_name,marks from students order by marks desc;
```

Below the query editor, the 'Results' tab is selected, displaying a table with 18 rows and 2 columns: 'student_name' and 'marks'. The table is sorted by marks in descending order. The first two rows show 'Priya' with marks of 95. The last two rows show 'Harini' with marks of 86.

	student_name	marks
1	Priya	95
2	Priya	95
3	Divya	93
4	Divya	93
5	Diya	92
6	Diya	92
7	Sneha	91
8	Sneha	91
9	Keerthi	90
10	Keerthi	90
11	Ananya	89
12	Ananya	89
13	Meera	88
14	Meera	88
15	Pooja	87
16	Pooja	87
17	Harini	86
18	Harini	86

At the bottom of the interface, a yellow status bar indicates: 'Query executed successfully.'

Rename the Course column to CourseName.

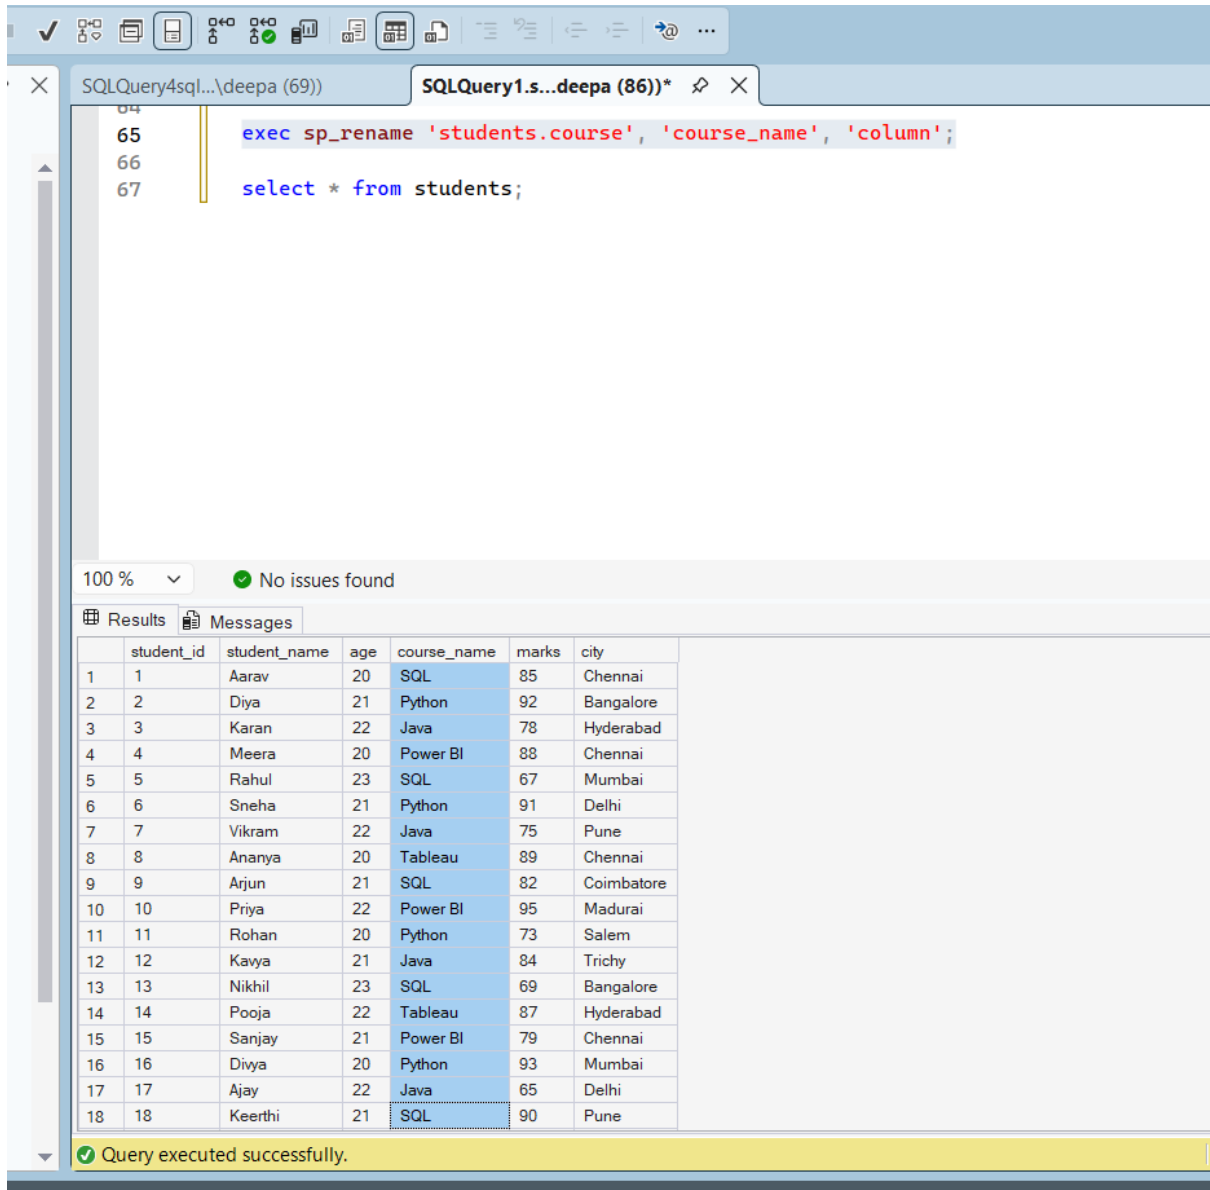

SQLQuery4sql...\\deepa (69))

SQLQuery1.s...\\deepa (86))*

```
65      exec sp_rename 'students.course', 'course_name', 'column';
66
67      select * from students;
```

100 % No issues found

Results Messages

	student_id	student_name	age	course_name	marks	city
1	1	Aarav	20	SQL	85	Chennai
2	2	Diya	21	Python	92	Bangalore
3	3	Karan	22	Java	78	Hyderabad
4	4	Meera	20	Power BI	88	Chennai
5	5	Rahul	23	SQL	67	Mumbai
6	6	Sneha	21	Python	91	Delhi
7	7	Vikram	22	Java	75	Pune
8	8	Ananya	20	Tableau	89	Chennai
9	9	Arjun	21	SQL	82	Coimbatore
10	10	Priya	22	Power BI	95	Madurai
11	11	Rohan	20	Python	73	Salem
12	12	Kavya	21	Java	84	Trichy
13	13	Nikhil	23	SQL	69	Bangalore
14	14	Pooja	22	Tableau	87	Hyderabad
15	15	Sanjay	21	Power BI	79	Chennai
16	16	Divya	20	Python	93	Mumbai
17	17	Ajay	22	Java	65	Delhi
18	18	Keerthi	21	SQL	90	Pune

Query executed successfully.

Drop the Courses table.

The screenshot shows a SQL query editor with two tabs. The active tab, 'SQLQuery1.s...deepa (86))*', contains the following SQL code:

```
68  
69     create table courses(  
70     course_name varchar(20),  
71     course_fees int,  
72     course_slot int  
73     );  
74  
75     alter table courses  
76     alter column course_slot varchar(20);  
77  
78  
79     insert into courses values  
80     ('Java',25000,'Morning'),  
81     ('Python',20000,'Evening');  
82  
83     select * from courses;
```

Below the code editor, the 'Results' tab is active, displaying a table with the following data:

	course_name	course_fees	course_slot
1	Java	25000	Morning
2	Python	20000	Evening

The interface also shows a status bar with '100 %' zoom and 'No issues found'.

SQLQuery4sql...\deepa (69))

SQLQuery1.s...deepa (86))*

69

70

71

72

73

74

75

76

77

78

79

80

81

82

83

84

85

```
create table courses(  
course_name varchar(20),  
course_fees int,  
course_slot int  
);  
  
alter table courses  
alter column course_slot varchar(20);  
  
insert into courses values  
( 'Java', 25000, 'Morning' ),  
( 'Python', 20000, 'Evening' );  
  
select * from courses;  
  
drop table courses;
```

100 %

No issues found

Messages

Msg 208, Level 16, State 1, Line 83
Invalid object name 'courses'.

Completion time: 2026-07-31T15:36:02.5750382+05:30