


Domain Mode Installation and Configuration Exercise Topology

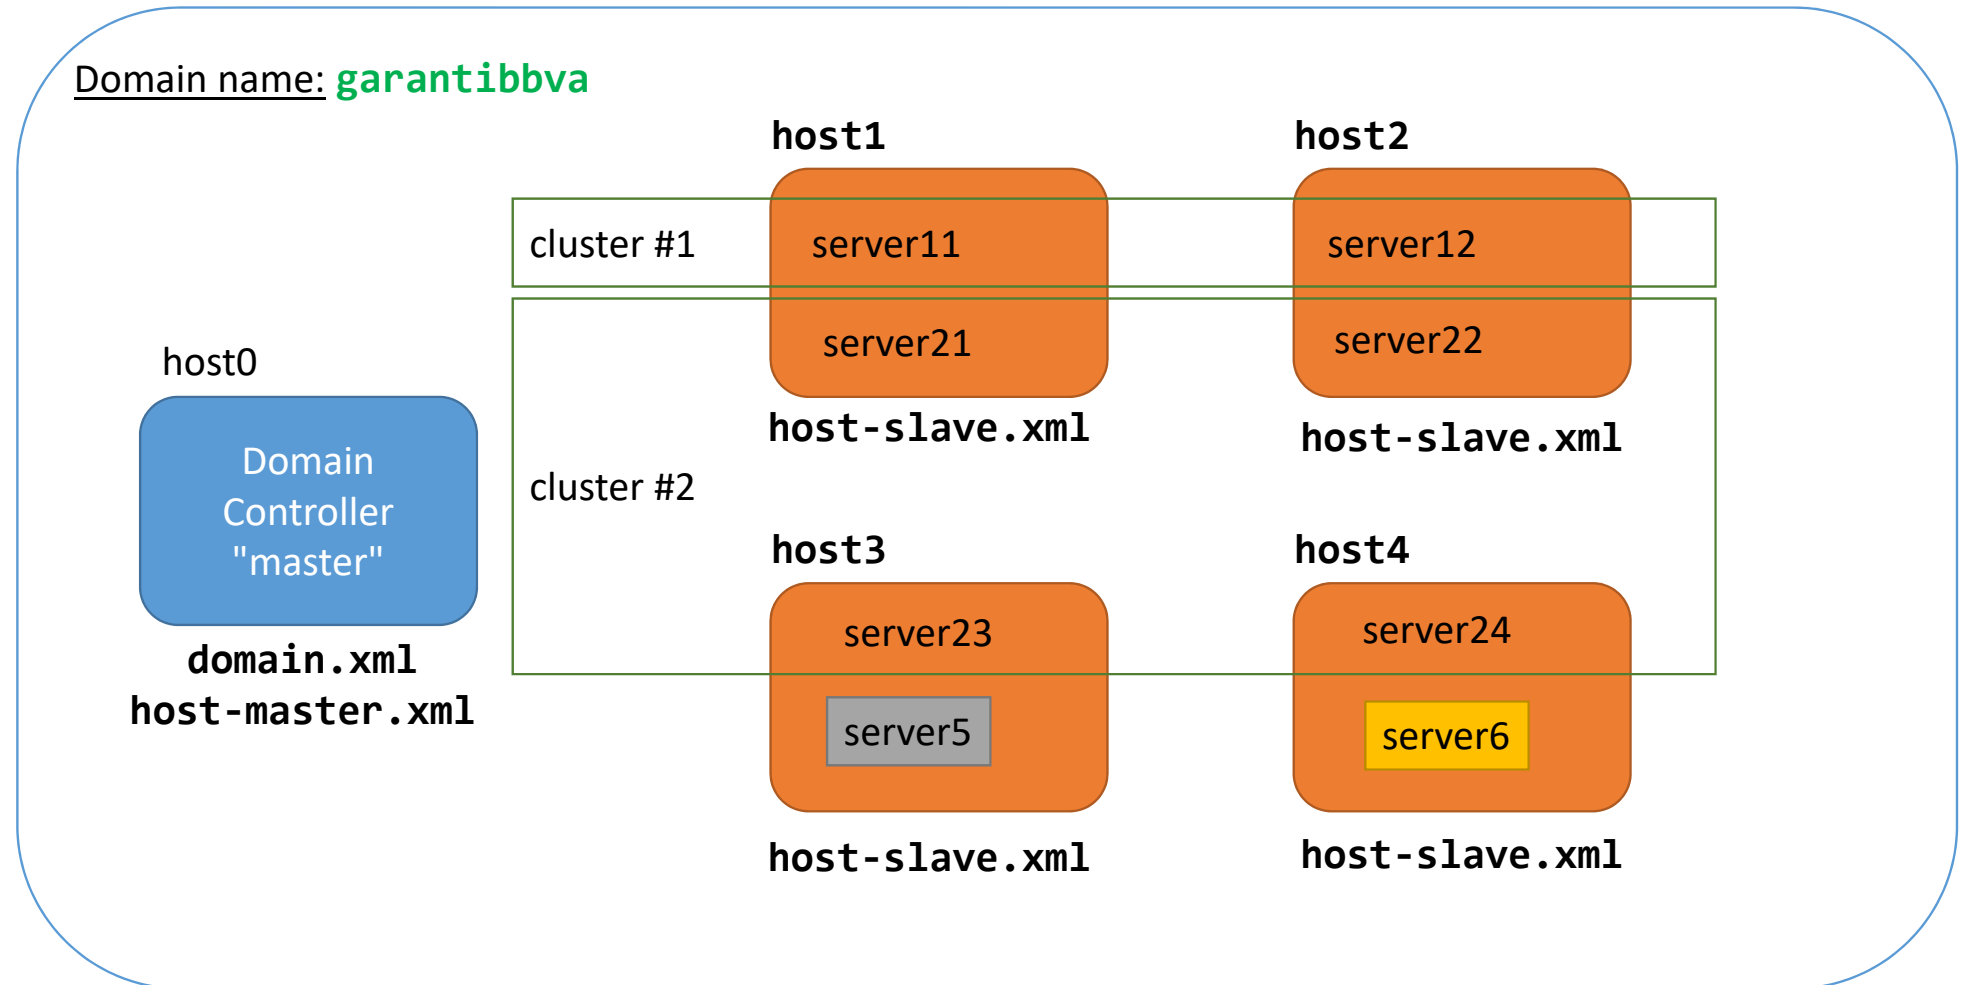

Running the JBoss EAP in Domain Mode

```
set JAVA_HOME=f:\var\jboss-domain-lab\jdk1.8.0_231
set JBOSS_HOME=f:\var\jboss-domain-lab\jboss-eap-7.4
set PATH=%JAVA_HOME%\bin;%JBOSS_HOME%\bin;%PATH%
set LAB_HOME=f:\var\jboss-domain-lab
add-user.bat admin Secret_123
start domain.bat --host-config=host-master.xml
                    -Djboss.domain.base.dir=%LAB_HOME%\host0\domain
start domain.bat --host-config=host-slave.xml
                    -Djboss.domain.base.dir=%LAB_HOME%\host1\domain
start domain.bat --host-config=host-slave.xml
                    -Djboss.domain.base.dir=%LAB_HOME%\host2\domain
start domain.bat --host-config=host-slave.xml
                    -Djboss.domain.base.dir=%LAB_HOME%\host3\domain
. . .
```