


SESSION 1-Database Introduction & SQL Basics

Task 1: Install MySQL or PostgreSQL and create a database named 'music_streaming_app'.

Query / Answer:

```
CREATE DATABASE music_streaming_app;
```

Image / Screenshot:

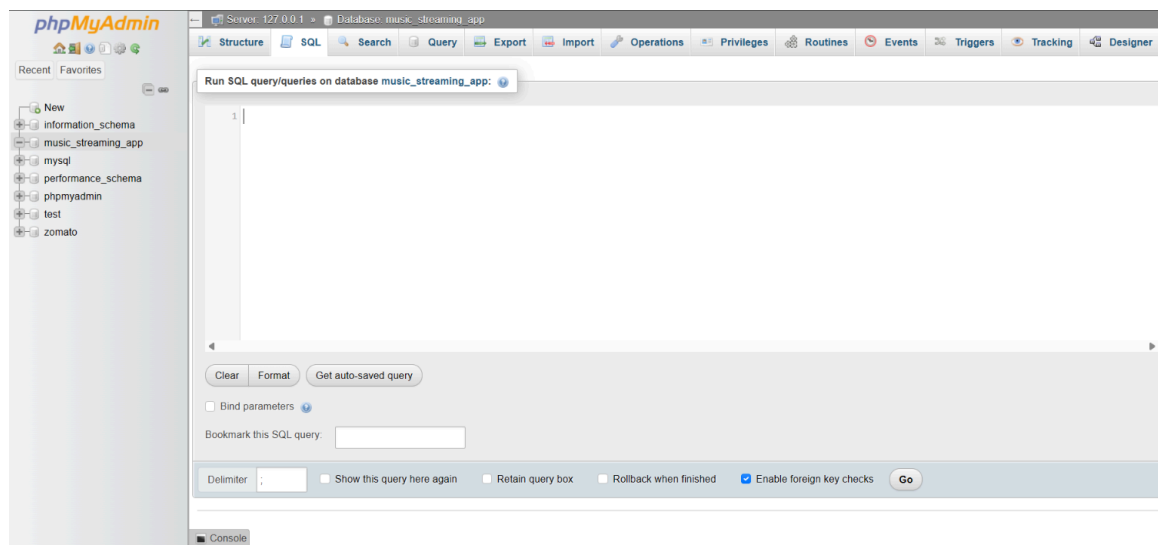


SESSION 1-Database Introduction & SQL Basics

Task 2: Create a table named 'playlists' with columns: playlist_id, name, and created_by.

Query / Answer:

```
CREATE TABLE playlist(  
    playlist_id int NOT NULL,  
    playlist_name varchar(50) NOT NULL,  
    created_by varchar(50) NOT NULL  
)
```

Image / Screenshot:

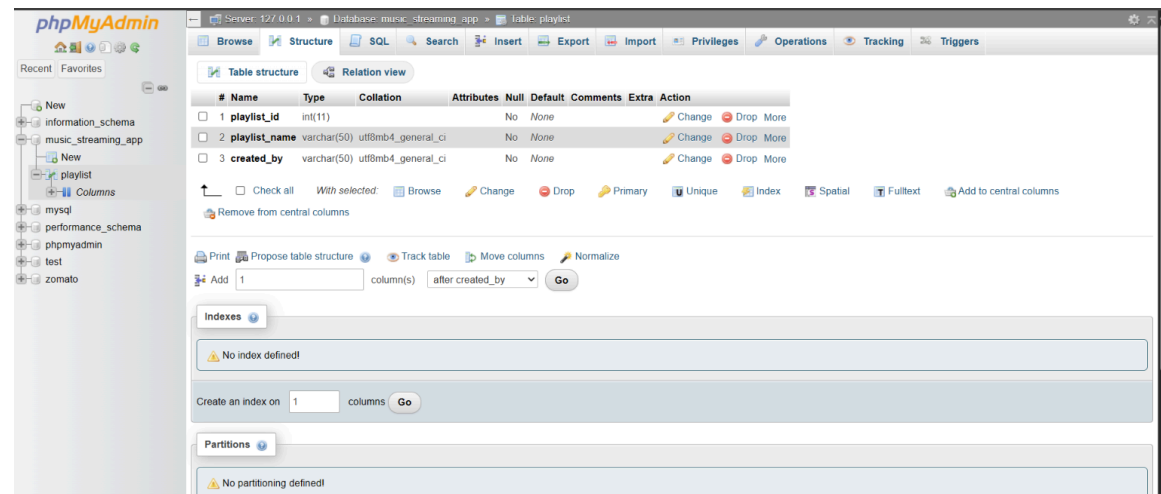

SESSION 1-Database Introduction & SQL Basics

Task 3: Insert three sample rows into the playlists table representing Bollywood Hits, Chill Vibes, and Workout Mix.

Query / Answer:

```
INSERT INTO playlist(playlist_id , playlist_name , created_by) VALUES (1 , "bollywood hits" , "T-series");  
INSERT INTO playlist(playlist_id , playlist_name , created_by) VALUES (2 , "Chill vides" , "Saregama");  
INSERT INTO playlist(playlist_id , playlist_name , created_by) VALUES (3 , "Workout mix" , "DJ");
```

Image / Screenshot:

The screenshot shows the phpMyAdmin interface. The left sidebar displays the database structure with 'music_streaming_app' selected, containing a 'playlist' table. The main panel shows the 'playlist' table with the following data:

playlist_id	playlist_name	created_by
1	bollywood hits	T-series
2	Chill vides	Saregama
3	Workout mix	DJ

The interface also shows a query result for 'SELECT * FROM `playlist`' with 3 rows displayed. The top navigation bar includes options like Browse, Structure, SQL, Search, Insert, Export, Import, Privileges, Operations, Tracking, and Tr.

SESSION 1-Database Introduction & SQL Basics

Task 4: Display all playlists created by the user 'Amit' using a SELECT query with a WHERE clause.

Query / Answer:

```
SELECT * FROM playlist WHERE created_by = "T-series";
```

Image / Screenshot:

The screenshot displays a database query interface. At the top, a green status bar indicates "Showing rows 0 - 0 (1 total, Query took 0.0003 seconds.)". Below this, the SQL query is shown: `SELECT * FROM playlist WHERE created_by = "T-series";`. A toolbar offers options: ☐ Profiling, [\[Edit inline \]](#), [\[Edit \]](#), [\[Explain SQL \]](#), [\[Create PHP code \]](#), and [\[Refresh \]](#).

Below the query, a control bar includes ☐ Show all, Number of rows: 25 (dropdown), and Filter rows: Search this table (input field).

An "Extra options" button is present. The query results are displayed in a table:

playlist_id	playlist_name	created_by
1	bollywood hits	T-series

Another control bar is located below the table, identical to the one above.

A "Query results operations" section contains buttons: [Print](#), [Copy to clipboard](#), [Export](#), [Display chart](#), and [Create view](#).

At the bottom, there is a button: [Bookmark this SQL query](#).

SESSION 1-Database Introduction & SQL Basics

Task 5: Explain the difference between a table, row, and column using a food delivery app example (e.g., Zomato).

Query / Answer:

Table :- Is a collection of data represented in a rows and Column format .

Row :- A entry consisting multiple values of multiple topics

Column :- A column is a Feature or a category

Table:

A table is a collection of related data organized into rows and columns. In a food delivery app like Zomato, a table named **Restaurants** can store information about all restaurants available on the platform.

Column:

A column represents a specific attribute or category of data in a table. For example, the **Restaurants** table may have columns such as **Restaurant_ID**, **Restaurant_Name**, **City**, and **Rating**.

Row:

A row represents a single record in a table. Each row contains information about one restaurant. For example, a row might store details of a restaurant called "Spice Villa" located in Surat with a rating of 4.5.

Image / Screenshot: