
codedsoul_05

Page No. : 9
Date : / /

HTML

(HyperText Markup Language)

9. HTML Interview Questions + Quick Answers

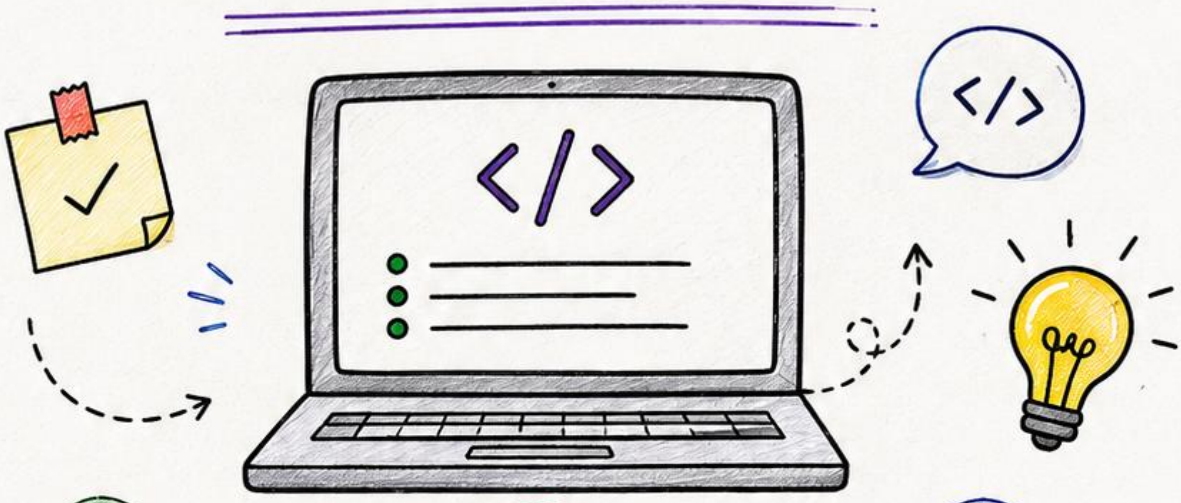

Interview Ready

- Frequently asked HTML questions
- Short and precise answers
- Covers important concepts

Quick Revision

- Easy to revise before interviews
- Clear explanations
- Boost your confidence

Ace Your Interview

- Understand better
- Answer smarter
- Stand out from the rest

"Practice today, perform tomorrow."

codedsoul_05

HTML

Page No.: 1
Date: / /

(HyperText Markup Language)

1. Introduction

- HTML stands for HyperText Markup Language.
- It is the standard language used to create web pages.
- HTML describes the structure of a web page using markup.
- It is the backbone of every website.

Why HTML ? ⭐

- ✓ Easy to learn
- ✓ Works on all browsers
- ✓ Platform independent
- ✓ Forms the base of web development

2. Basic Structure


Example :

```
<!DOCTYPE html>
<html>
  <head>
    <title> My First Page </title>
  </head>
  <body>
    <h1> Hello World! </h1>
    <p> This is my first
        web page. </p>
  </body>
</html>
```

Explanation :

- `<!DOCTYPE html>` : Declares the document type and version of HTML.
- `<html> </html>` : Root element of the HTML page.
- `<head> </head>` : Contains meta information about the page.
- `<title> </title>` : Sets the title of the page (shown on browser tab).
- `<body> </body>` : Contains the visible content of the page.
- `<h1> </h1>` : Defines a heading (level 1).
- `<p> </p>` : Defines a paragraph.

3. How It Works ?

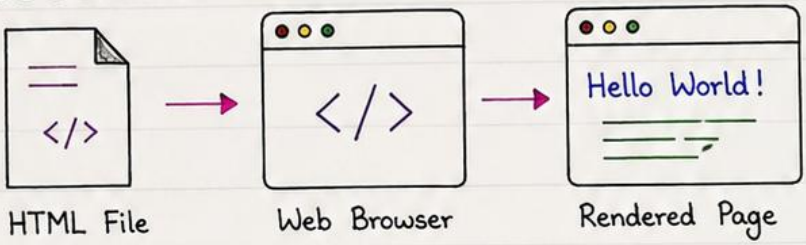

HTML File → Web Browser → Rendered Page

Note :

Browser reads the HTML code and renders it as a web page for users to view.

codedsoul_05

HTML

(HyperText Markup Language)

Page No. : 2
Date : / /

2. HTML Text Formatting + Common Tags

HTML provides various tags to format text and display content in different ways.

★ Text Formatting Tags

Tag	Description	Example
	Bold text (visual only)	Bold Text
	Important text (semantic)	Important
	Italic text (visual only)	Italic Text
	Emphasized text (semantic)	Emphasized
<u>	Underlined text	<u>Underlined</u>
<mark>	Highlighted text	<mark>Highlight</mark>
<small>	Smaller text	Small Text
<del>	Deleted text	~~Deleted~~
<ins>	Inserted text	<ins>Inserted</ins>
<sub>	Subscript text	H₂O
<sup>	Superscript text	a² + b²
<code>	Inline code text	<code>x = 10;</code>
<pre>	Preformatted text	<pre>Line 1 Line 2</pre>

★ Other Common Tags

-
 : Line break
  Ex. Hello
World
- <hr> : Horizontal rule
  Ex. ———————
- : Paragraph
  Ex. This is a paragraph.
- : Inline container
  Ex. Red Text
- : Block level container
  Ex. Content here
- <!-- --> : Comment
  Ex. <!-- This is a comment -->

★ Example (Mix of Formatting)

```
<p>This is <b>bold</b> and <i>italic</i> text.</p>
<p>This is <u>underlined</u> and <mark>highlighted</mark>.</p>
<p>Water formula is H<sub>2</sub>O and
   E = mc<sup>2</sup>.</p>
<p>This is <del>old</del> and <ins>new</ins> information.</p>
<p>Price: <strong>₹100</strong> only!</p>
```

Quick Tips

- ✓ Use semantic tags (,) for better meaning.
- ✓ and are only for visual styling.
- ✓ Comments help in code understanding.



HTML

(HyperText Markup Language)

3. Links, Images + Multimedia

HTML allows us to link pages, add images and include multimedia content like audio and video in web pages.

★ A. Links (<a> Tag)

```
<a href="https://www.example.com">
   Visit Example Website
</a>
```

Types of Links :

- External Link : `<a href="https://google.com">Google</a>`
- Internal Link : `<a href="about.html">About Us</a>`
- Email Link : `<a href="mailto:info@example.com">Email Us</a>`
- Phone Link : `<a href="tel:+919876543210">Call Us</a>`
- Link open in new tab :

```
<a href="https://example.com" target="_blank">
        Open in New Tab</a>
```

Attributes

- href → URL
- target → _blank, _self, _parent, _top
- title → extra information
- rel → relationship (use with target="_blank")

★ B. Images (<img> Tag)

```
<img src="images/photo.jpg" alt="Nature Image"
     width="400" height="250">
```

Common Attributes :

- src : Image path / URL
- alt : Alternative text (if image not found)
- width : Sets width of image
- height : Sets height of image
- title : Shows tooltip on hover
- loading : lazy (images load when needed)

Tip:
Always use meaningful alt text for accessibility and SEO.



★ C. Multimedia



1. Audio (<audio> Tag)

```
<audio controls>
  <source src="audio/song.mp3" type="audio/mpeg">
  <source src="audio/song.ogg" type="audio/ogg">
  Your browser does not support the audio tag.
</audio>
```

Attributes :

- controls : Shows play, pause, volume controls
- autoplay : Plays audio automatically
- loop : Loops the audio
- muted : Mutes the audio by default

2. Video (<video> Tag)

```
<video width="560" height="315" controls>
  <source src="video/movie.mp4" type="video/mp4">
  <source src="video/movie.webm" type="video/webm">
  Your browser does not support the video tag.
</video>
```



Attributes :

- controls : Shows video controls
- autoplay : Plays video automatically
- loop : Loops the video
- muted : Mutes the video
- poster : Image shown before video plays

Summary

Task	Tag Used	Example
Create a link	<a>	Link
Add an image	<img>	<img src="pic.jpg" alt="Pic">
Add audio	<audio>	<audio controls>...</audio>
Add video	<video>	<video controls>...</video>

Best Practices

- ✓ Always use descriptive link text.
- ✓ Use meaningful alt text for images.
- ✓ Provide multiple formats for audio/video for better browser support.
- ✓ Use controls for better user experience.



codedsoul_05

HTML

(HyperText Markup Language)

Page No. : 4
Date : / /

4. Lists + Tables

HTML provides tags to organize content in lists and tables.

★ A. Lists

1. Unordered List (<ul>)

- Used when order does not matter.
- Default style : bullet points

```
<ul>
    <li> Apple </li>
    <li> Banana </li>
    <li> Mango </li>
</ul>
```

Output :

- Apple
- Banana
- Mango

2. Ordered List (<ol>)

- Used when order matters.
- Default style : numbers

```
<ol>
    <li> First </li>
    <li> Second </li>
    <li> Third </li>
</ol>
```

Output :

1. First
2. Second
3. Third

3. Description List (<dl>)

- Used to describe terms and their descriptions.

```
<dl>
  <dt> HTML </dt>
  <dd> HyperText Markup
       Language </dd>
  <dt> CSS </dt>
  <dd> Cascading Style
       Sheets </dd>
</dl>
```

Output :

HTML
  HyperText Markup Language
CSS
  Cascading Style Sheets

Quick Notes



- ✓ Use <ul> for items without order.
- ✓ Use <ol> for steps, rankings, sequences.
- ✓ Use <dl> for key-value style data.
- ✓ Each item in list is written using <li>.

Nested List Example

```
<ul>
   <li> Fruits
      <ul>
         <li> Apple </li>
         <li> Banana </li>
      </ul>
   </li>
   <li> Vegetables
      <ul>
         <li> Carrot </li>
         <li> Potato </li>
      </ul>
   </li>
</ul>
```

★ B. Tables

Used to display data in rows and columns.

Basic Table Structure

```
<table border="1">
 <thead>
   <tr>
      <th> Name </th>
      <th> Age </th>
      <th> City </th>
   </tr>
 </thead>
 <tbody>
   <tr>
      <td> Amit </td>
      <td> 21 </td>
      <td> Delhi </td>
   </tr>
   <tr>
      <td> Neha </td>
      <td> 22 </td>
      <td> Jaipur </td>
   </tr>
 </tbody>
</table>
```

Output :

Name	Age	City
Amit	21	Delhi
Neha	22	Jaipur

Table Tags

Tag	Description
<table>	Defines a table
<tr>	Defines a table row
<th>	Defines a header cell (bold, centered)
<td>	Defines a data cell
<thead>	Groups header content
<tbody>	Groups body content
<caption>	Adds a table caption
<colspan>	Merges columns
<rowspan>	Merges rows

Spanning Example

```
<table border="1">
 <tr>
    <th colspan="2"> Student Info </th>
 </tr>
 <tr>
    <th> Name </th>
    <th> Age </th>
 </tr>
 <tr>
    <td rowspan="2"> Rahul </td>
    <td> 20 </td>
 </tr>
 <tr>
    <td> 21 </td>
 </tr>
</table>
```

Output :

Student Info	
Name	Age
Rahul	20
	21

Note : Tables are used for tabular data, not for page layout.

★ Keep Practicing ! ☺

codedsoul_05

HTML

(HyperText Markup Language)

5. HTML Forms + Input Types

HTML forms are used to collect user input. The <form> tag is the container for all form elements.

★ A. Basic Form Structure

```
<form action="submit.html" method="post">
    <!-- form elements here -->
    <input type="submit" value="Submit">
</form>
```

Attributes of <form>

- action : Specifies where to send the form data
- method : GET (visible in URL) or POST (secure)
- enctype : Used for file upload (multipart/form-data)
- target : Specifies where to open the response

★ B. Common Input Types

Type	Description	Example Code	Example Output
text	Single line text input	<input type="text" name="username">	
password	Password field (hidden text)	<input type="password" name="pass">	•••••
email	Email input with validation	<input type="email" name="email">	user@example.com
number	Numeric input	<input type="number" name="age" min="1" max="100">	25
tel	Telephone number input	<input type="tel" name="phone">	9876543210
date	Date picker	<input type="date" name="dob">	17 / 05 / 2025
checkbox	Checkbox (multiple choice)	<input type="checkbox" name="subscribe"> Subscribe	☑ Subscribe
radio	Radio button (single choice)	<input type="radio" name="gender" value="M"> Male <input type="radio" name="gender" value="F"> Female	◉ Male ○ Female
file	File upload	<input type="file" name="file">	Choose File No file chosen
submit	Submit button	<input type="submit" value="Submit">	Submit
reset	Reset form	<input type="reset" value="Reset">	Reset
button	Clickable button	<input type="button" value="Click Me">	Click Me

★ C. Textarea & Select

- Textarea (multi-line input)

```
<textarea name="message" rows="4" cols="30">
  Type your message...
</textarea>
```

Type your message...

- Select (dropdown list)

```
<select name="course">
   <option value="html">HTML</option>
   <option value="css">CSS</option>
   <option value="js">JavaScript</option>
</select>
```

HTML

Form Submission Flow



User fills the form → Form is submitted → Data is sent to server

Server processes the data and sends a response

Best Practices

- ✓ Always use labels for inputs.
- ✓ Use proper input types for better validation.
- ✓ Provide placeholder text for guidance.
- ✓ Keep forms simple and user-friendly.



Note : POST method is recommended for sensitive data (like login, password, file upload). ☺

codedsoul_05

HTML

(HyperText Markup Language)

Page No.: 6
Date : / /

6. Semantic HTML + HTML5 Elements

HTML5 introduced semantic elements that clearly describe the meaning and structure of web content.

★ A. What is Semantic HTML ?

Semantic HTML uses meaningful tags that describe the purpose of content. It improves readability, SEO and accessibility.

Why Use Semantic HTML ?


- ✓ Makes code easier to read and understand
- ✓ Helps search engines understand your page
- ✓ Improves accessibility for screen readers
- ✓ Better structure for maintainability



★ B. Common Semantic HTML5 Elements

Element	Description	Used For	Example
<header>	Represents introductory content or navigation.	Logo, site title, navigation menu	<header> My Website <nav> ... </nav> </header>
<nav>	Defines a set of navigation links.	Menu, links, navigation bar	<nav> Home About </nav>
<main>	Specifies the main content of the page.	Unique content that is contral to the page	<main> Blog Post Post content... </main>
<section>	Defines a section in a document.	Thematic grouping of content	<section> Services We build awesome websites. </section>
<article>	Represents independent, self-contained content.	Blog posts, news, articles, comments	<article> My First Article Content of the article... </article>
<aside>	Represents content aside from the main.	Sidebar, ads, related links	<aside> Related Links - Link 1 - Link 2 </aside>
<footer>	Represents footer for its nearest section or the whole page.	Copyright, contact, footer links	<footer> © 2025 My Website. All rights reserved. </footer>

C. Page Layout Example

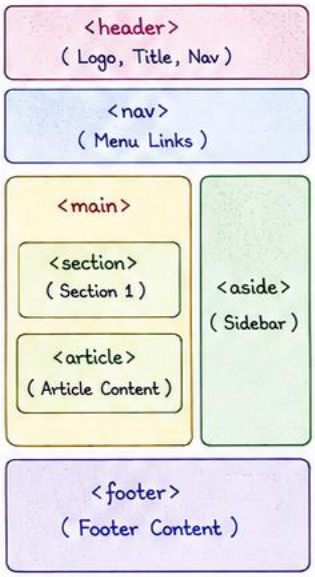

★ D. Non-Semantic vs Semantic

Non-Semantic (Old Way)	Semantic (HTML5 Way)
✗	✓ <header>
✗	✓ <nav>
✗	✓ <main> /<section>/<article>
✗	✓ <aside>
✗	✓ <footer>

E. HTML5 New Elements (Other Useful Ones)

- <figure> : Represents self-contained content (image, diagram, code etc.)
- <figcaption> : Caption for <figure> element.
- <time> : Represents date/time in machine-readable format.
- <mark> : Highlights text.
- <details> : Creates a disclosure widget.
- <summary> : Defines a visible heading for <details>.
- <progress> : Represents the progress of a task.
- <meter> : Represents a scalar measurement within a known range.



Note : Use semantic elements wisely to build meaningful and accessible web pages. ☺

codedsoul_05

HTML

(HyperText Markup Language)

Page No.: 7
Date: / /

7. HTML Attributes + Meta Tags

Attributes provide additional information about HTML elements. Meta tags provide information about the HTML document.

★ A. HTML Attributes

Attributes are always written in the opening tag.
They have name and value.

```
<tag attribute_name="value">...</tag>
```

Points to Remember

- Attributes provide extra information.
- Most attributes come in name="value" format.
- Some attributes are boolean (like disabled, checked).
- Attribute names are case-insensitive (values are case-sensitive).

Commonly Used Attributes

Attribute	Used On	Description	Example	Output / Effect
id	All elements	Unique identifier for an element	`<div id="main"></div>`	Identifies "main" uniquely
class	All elements	Specifies one or more class names	`<p class="note important"></p>`	Applies CSS to class
style	All elements	Adds inline CSS styles	`<h1 style="color:blue;">Title</h1>`	Text color will be blue
title	All elements	Shows extra info on hover	`<a href="#" title="Click here">Link</a>`	Tooltip shows "Click here"
href	<a> tag	Specifies the URL of the link	`<a href="https://example.com">Link</a>`	Link to website
src	<img>, <script>, <iframe>, etc.	Specifies the source of the file	`<img src="photo.jpg" alt="Photo">`	Loads the image
alt	<img> tag	Alternate text for an image	`<img src="photo.jpg" alt="My Photo">`	Shown if image not loaded
width	<img>, <table>	Sets width	`<img src="p.jpg" width="300">`	Image width = 300px
height	<img>, <table>	Sets height	`<img src="p.jpg" height="200">`	Image height = 200px
value	<input> tag	Specifies the value of input	`<input type="text" value="Hello">`	Default value = Hello
name	<input>, <form>	Specifies name for form element	`<input type="text" name="username">`	Used in form submission
disabled	<input>, <button>, etc.	Disables the element	`<button disabled> Submit </button>`	Button will be disabled
checked	<input type="checkbox"> <input type="radio">	Specifies checked state (by default)	`<input type="checkbox" checked>`	Checkbox will be checked

★ B. Meta Tags

Meta tags are used inside <head> to provide information about the HTML document.

```
<head>
  <meta charset="UTF-8">
  <meta name="description" content="This is my website.">
  <meta name="keywords" content="HTML, CSS, JavaScript">
  <meta name="viewport" content="width=device-width,
                                 initial-scale=1.0">
  <title>My Website</title>
</head>
```

Common Meta Tags

Meta Tag	Purpose	Example
charset	Defines character encoding	`<meta charset="UTF-8">`
description	Gives short description of the page	`<meta name="description" content="...">`
keywords	Defines keywords for search engines	`<meta name="keywords" content="HTML, CSS">`
viewport	Makes website responsive on all devices	`<meta name="viewport" content="width=device-width, initial-scale=1.0">`
author	Specifies the author of the page	`<meta name="author" content="Nikhil">`
refresh	Refreshes or redirects the page	`<meta http-equiv="refresh" content="5">`

Quick Tips

- ✓ Always use id for unique elements.
- ✓ Use class for styling multiple elements.
- ✓ Always include <meta charset="UTF-8">.
- ✓ Use viewport meta tag for mobile-friendly websites.

Example: Image with Attributes

```
<img src="images/pic.jpg" alt="Sunset" width="400" height="250"
     title="Beautiful Sunset Image" style="border:2px solid #333;">
```



Note: Meta tags do not appear on the webpage, but they provide important information to browsers and search engines. ☺

codedsoul_05

HTML

(HyperText Markup Language)

Page No.: 8
Date : / /

8. HTML5 APIs + Accessibility + Best Practices

★ A. HTML5 APIs

HTML5 provides powerful APIs to build rich and interactive web apps.

API	Purpose	Example / Use
Geolocation API	Get user's location (latitude & longitude)	Show nearby places, weather, maps
Web Storage API	Store data in browser (localStorage, sessionStorage)	Save user preference, dark mode, forms
Web Workers API	Run scripts in background thread	Improve performance for heavy tasks
Canvas API	Draw graphics on the fly	Charts, games, image editing
Web Audio API	Manipulate and generate audio	Audio visualizer, music apps
Drag and Drop API	Drag elements and drop	File upload, rearrange items
History API	Manage browser history	Single Page Apps (SPA) navigation
Intersection Observer API	Observe element visibility changes	Lazy loading images, infinite scroll

Example : Geolocation API



```
<button onclick="getLocation()">Get Location</button>
<p id="location"></p>
<script>
  function getLocation() {
    if (navigator.geolocation) {
      navigator.geolocation.getCurrentPosition(showPosition);
    } else {
      document.getElementById("location").innerHTML = "Geolocation
      is not supported by this browser.";
    }
  }
  function showPosition(position) {
    document.getElementById("location").innerHTML =
    "Latitude: " + position.coords.latitude + "<br>Longitude: " +
    position.coords.longitude;
  }
</script>
```

Tip : HTML5 APIs make web apps faster, smarter and more engaging.



★ B. Accessibility (a11y)

Make your website usable for everyone, including people with disabilities.

Practice	Why it Matters
Use semantic HTML	Screen readers understand structure
Provide alt text for images	Helps visually impaired users
Use proper heading order	Maintains logical reading flow
Add labels to form elements	Helps screen readers & usability
Ensure good color contrast	Important for low-vision users
Make site keyboard accessible	Users can navigate without mouse
Use aria-* attributes	Provide extra information to assistive technologies

Quick Example

1. Image with alt text

```
<img src="photo.jpg" alt="Sunset over mountains">
```

2. Label for input

```
<label for="email">Email Address</label>
<input type="email" id="email" name="email">
```

3. Use of aria-label

```
<button aria-label="Close menu">
  ×
</button>
```

4. Skip link (for keyboard users)

```
<a href="#main" class="skip">Skip to main content</a>
```

Accessibility Checklist



- ✓ Semantic tags used
- ✓ Images have alt text
- ✓ Form fields have labels
- ✓ Headings are in order (H1 → H2 → H3...)
- ✓ Sufficient color contrast
- ✓ Keyboard navigation works
- ✓ ARIA attributes used where needed
- ✓ Tested with screen reader


★ C. Best Practices

- ✓ Write clean, readable and well-indented code.
- ✓ Use semantic HTML elements.
- ✓ Keep IDs unique and classes meaningful.
- ✓ Separate structure (HTML), style (CSS) and behavior (JS).
- ✓ Optimize images and use proper formats (WebP, SVG).
- ✓ Use relative URLs instead of absolute paths.
- ✓ Add favicon, title and meta description.
- ✓ Validate your HTML using W3C Validator.
- ✓ Comment your code for better understanding.



★ D. Summary

HTML5 is not just about structure, it also brings powerful APIs, better accessibility and smart practices to build modern, inclusive and high-performance websites.



Note : Good HTML is the foundation of a great website. Keep learning, keep improving! ☺

HTML

(HyperText Markup Language)

9. HTML Interview Questions + Quick Answers

★ 1. What is HTML?

Ans: HTML (HyperText Markup Language) is the standard markup language used to create and structure content on the web.

★ 2. What is the purpose of <!DOCTYPE html>?

Ans: It declares the document type and version of HTML being used. It helps the browser render the page correctly.

```
<!DOCTYPE html>
```

★ 3. What is the difference between and ?

Ans: is a block-level element, takes full width and starts on a new line.

 is an inline element, takes only as much width as needed and stays in the same line.

★ 4. What are semantic HTML elements?

Ans: Semantic elements clearly describe the meaning of their content to both browser and developer.

Examples:
<header> <nav> <main> <section>
<article> <aside> <footer>

★ 5. What is the difference between and ?

Ans: is used to bold text without any extra importance.

 is used to show importance or urgency (semantic meaning).

Example:
Important vs Important

★ 6. What is the use of alt attribute in images?

Ans: The alt attribute provides alternative text for an image if it cannot be displayed. It also improves accessibility and SEO.

```
<img src="image.jpg" alt="Description of image">
```

★ 7. What is the difference between id and class?

Ans: id is unique and used for a single element in a page.

class can be used for multiple elements.

Feature	id	class
Uniqueness	Unique (one per page)	Multiple
Selector	#idname	.classname
Use	For unique elements	For group of elements

★ 8. What is the purpose of <meta> tag?

Ans: <meta> tag provides metadata about the HTML document like character set, description, keywords, viewport settings etc.

```
<meta name="description" content="This is my page">
```

★ 9. What is viewport in HTML?

Ans: The viewport is the user's visible area of a web page. The viewport meta tag helps in making websites mobile-friendly.

```
<meta name="viewport" content="width=device-width, initial-scale=1.0">
```

★ 10. What is the difference between GET and POST methods in forms?

Ans: GET is used to send data in URL (visible, less secure) and has length limit.

POST sends data in request body (not visible, more secure) and has no length limit.

Feature	GET	POST
Data Visibility	Visible in URL	Not visible
Data Length	Limited	No limit
Security	Less secure	More secure
Use Case	Search, filters	Login, submit data

Quick Tips for Interviews

- ✓ Understand the meaning of tags, not just memorise them.
- ✓ Know the difference between similar tags.
- ✓ Practice building small projects.
- ✓ Write clean, semantic and accessible HTML.
- ✓ Keep learning and stay consistent!

★ Note: Focus on concepts, practice daily and build projects. That's the key to crack any interview!