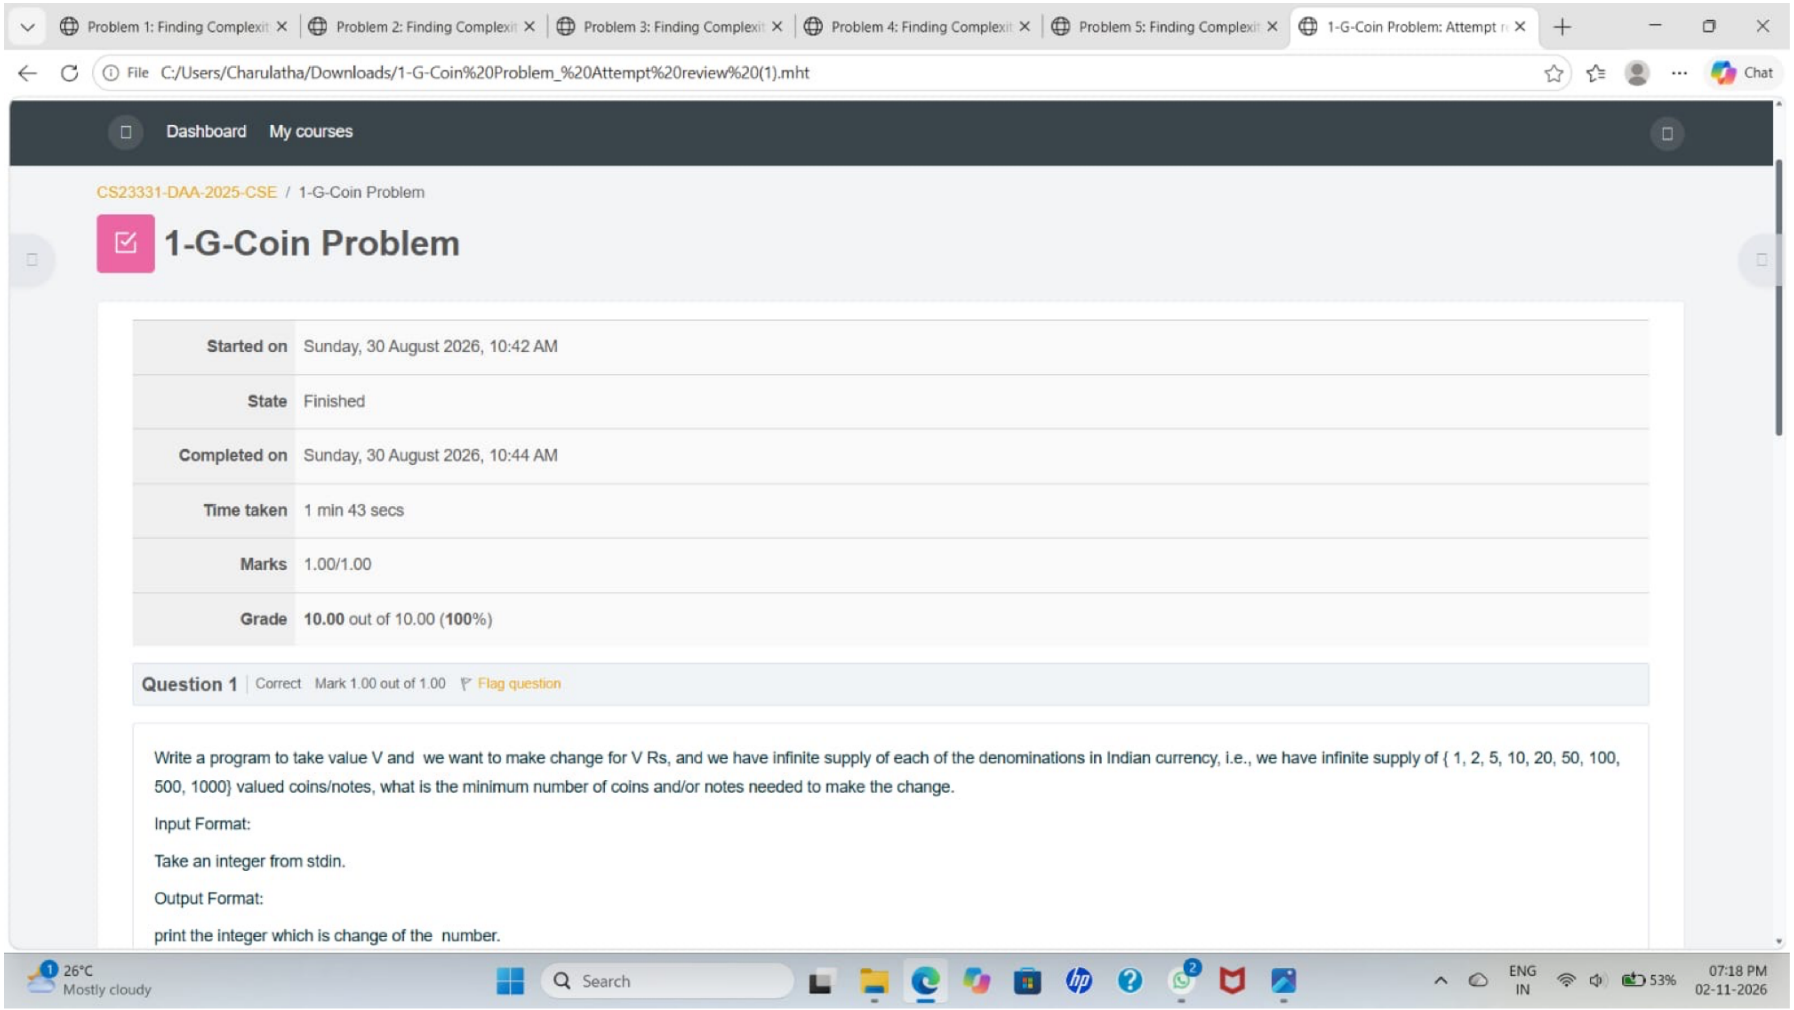
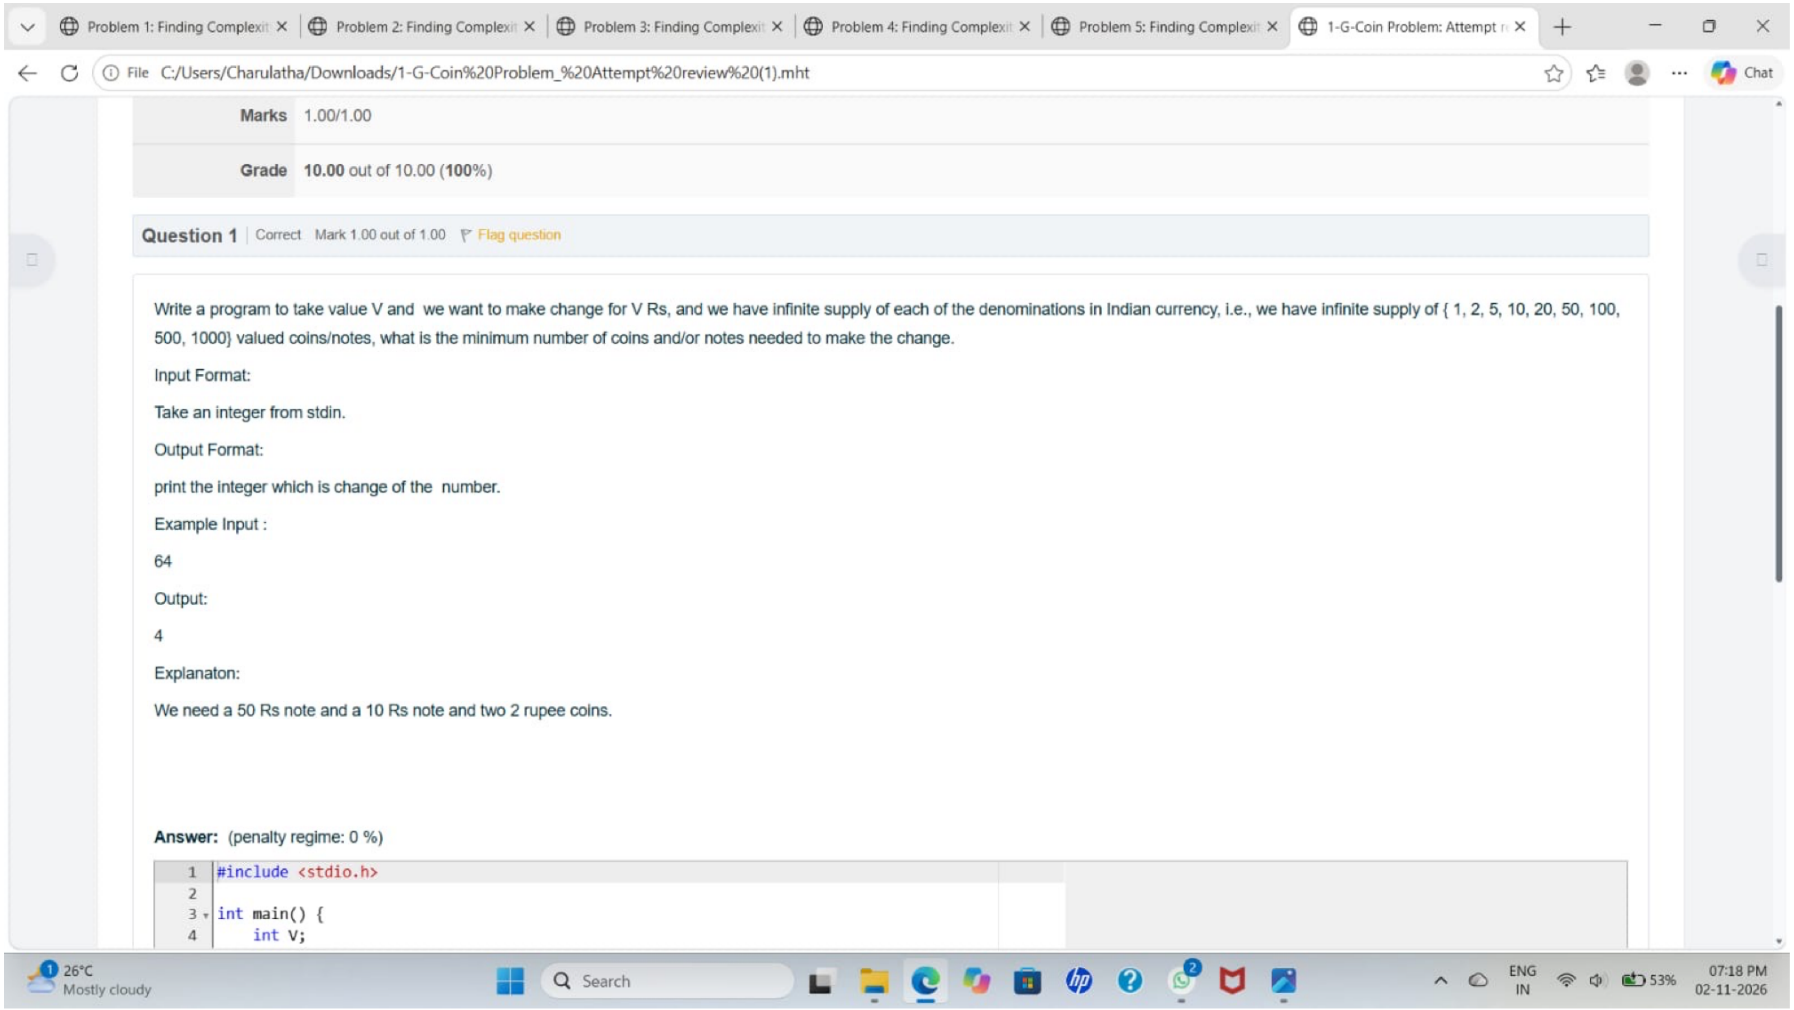
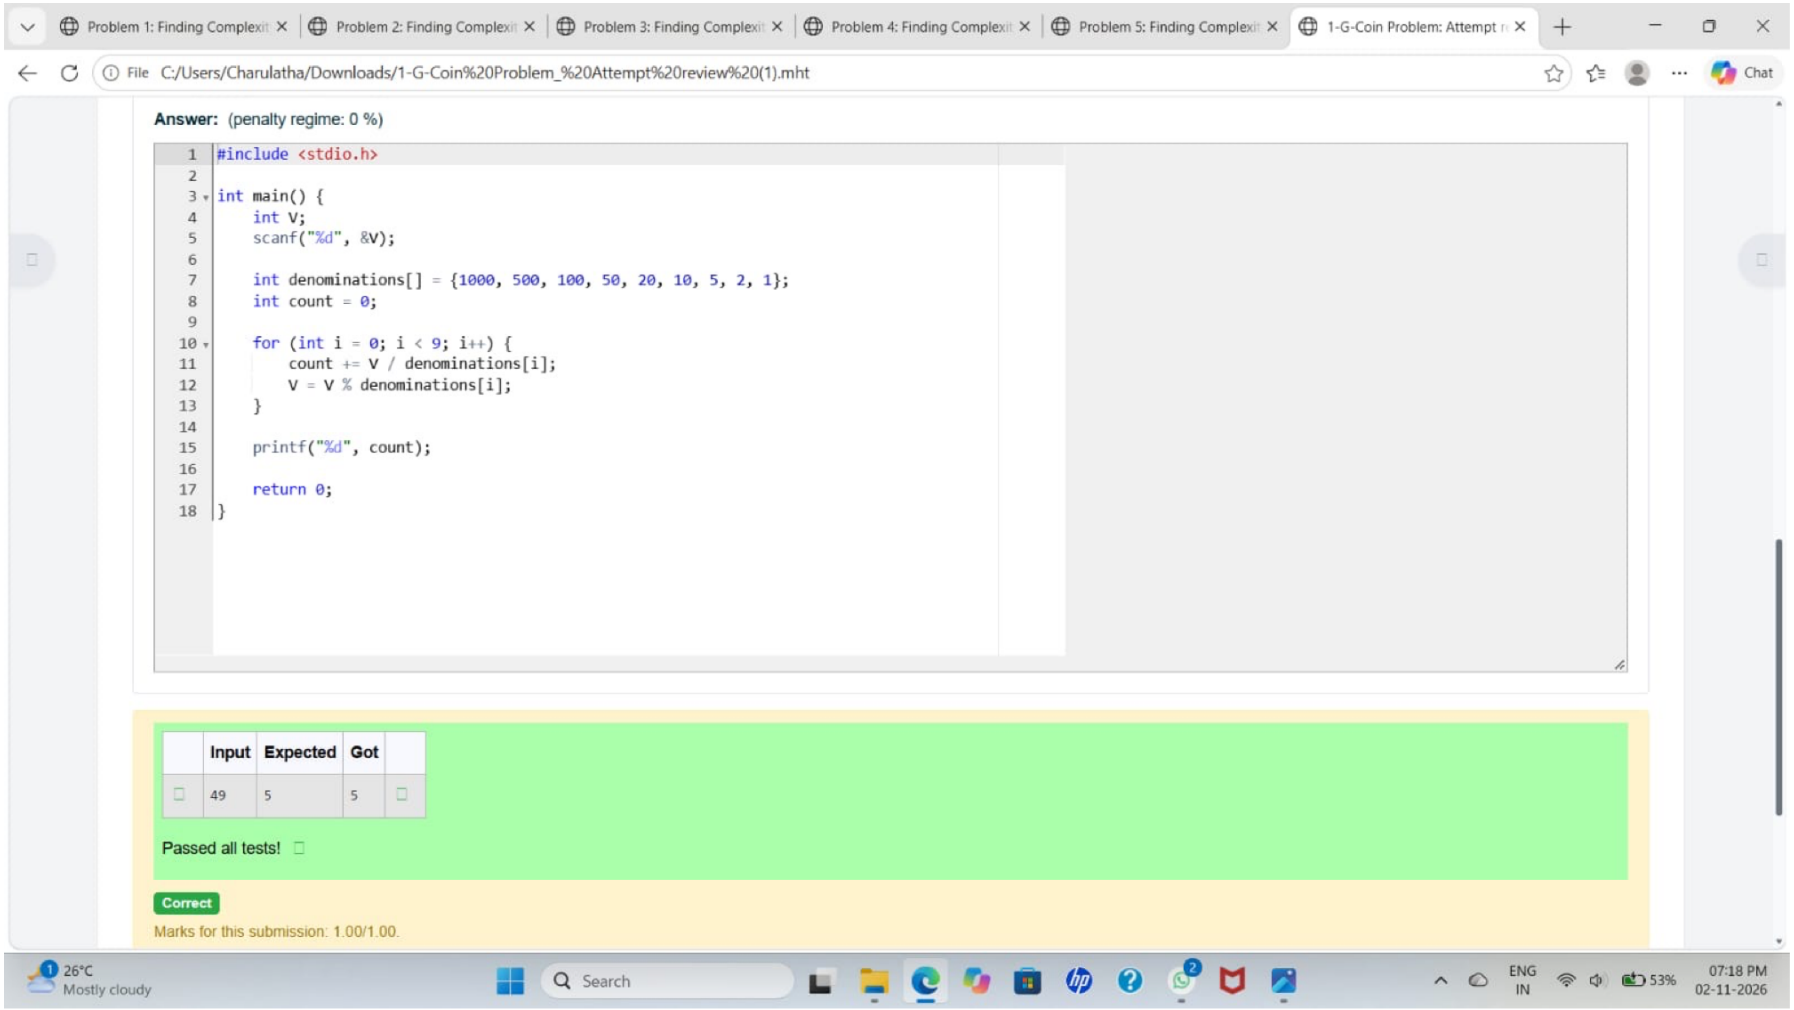
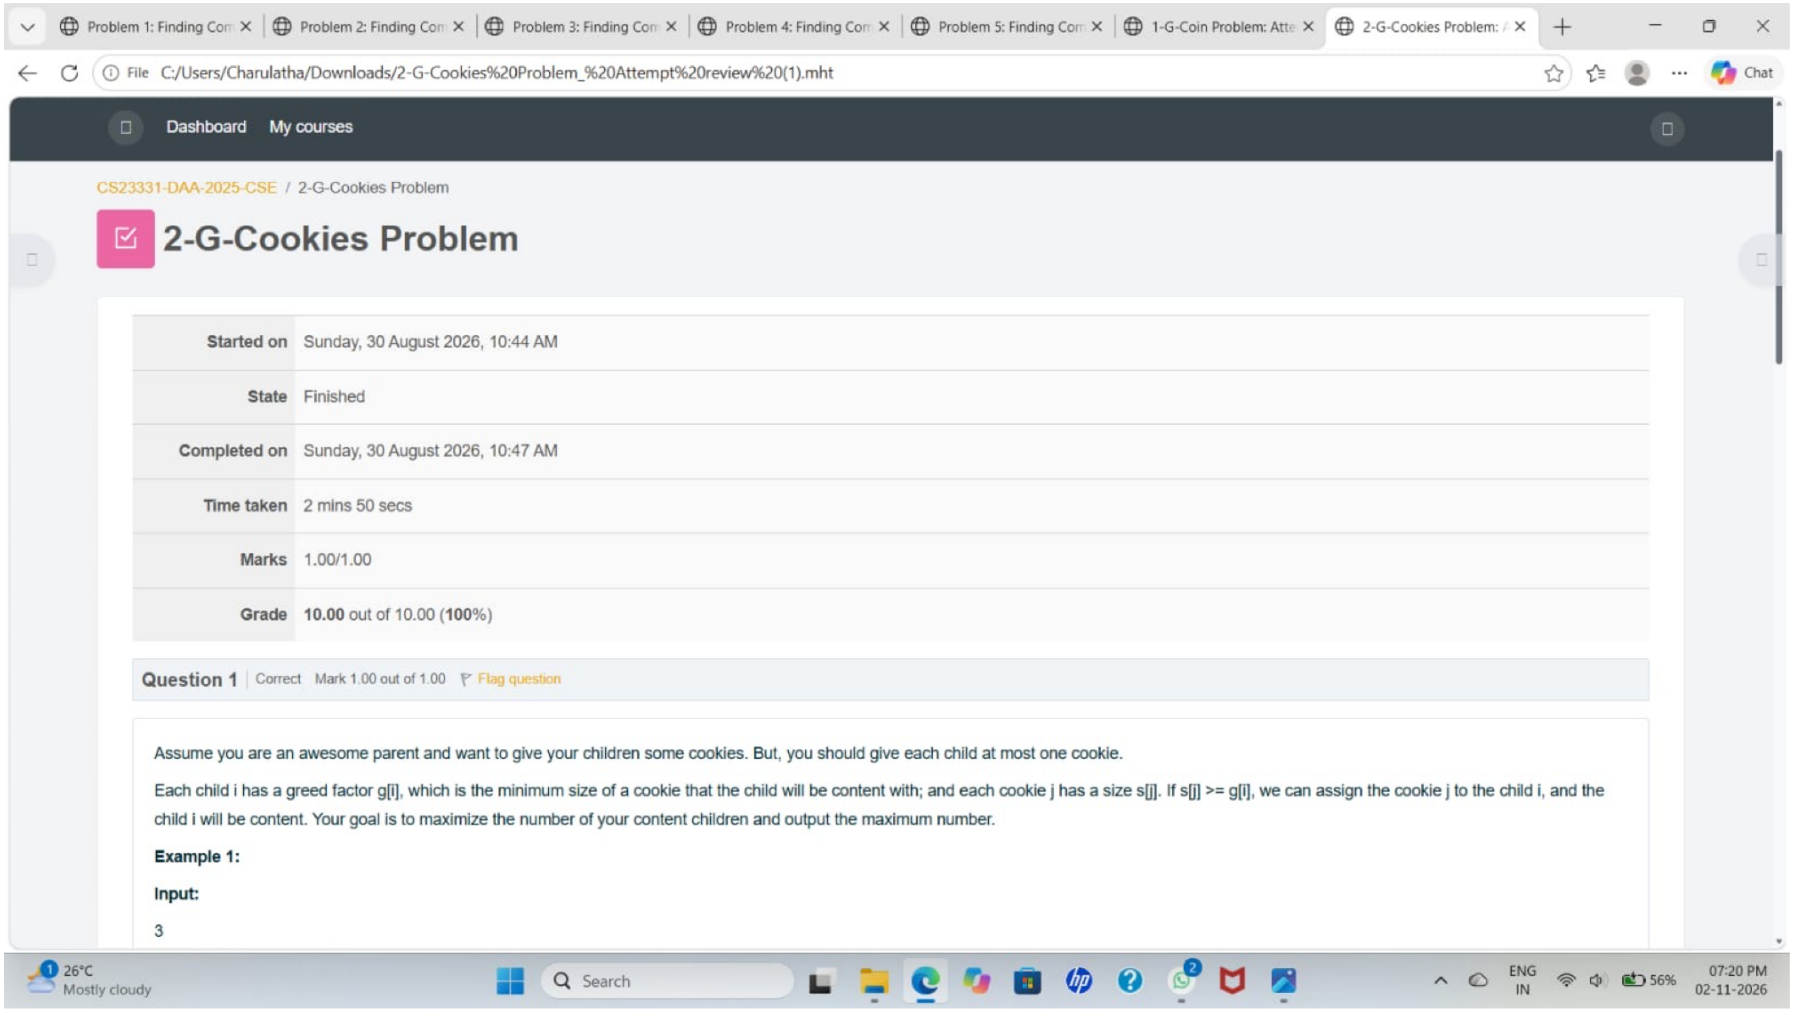
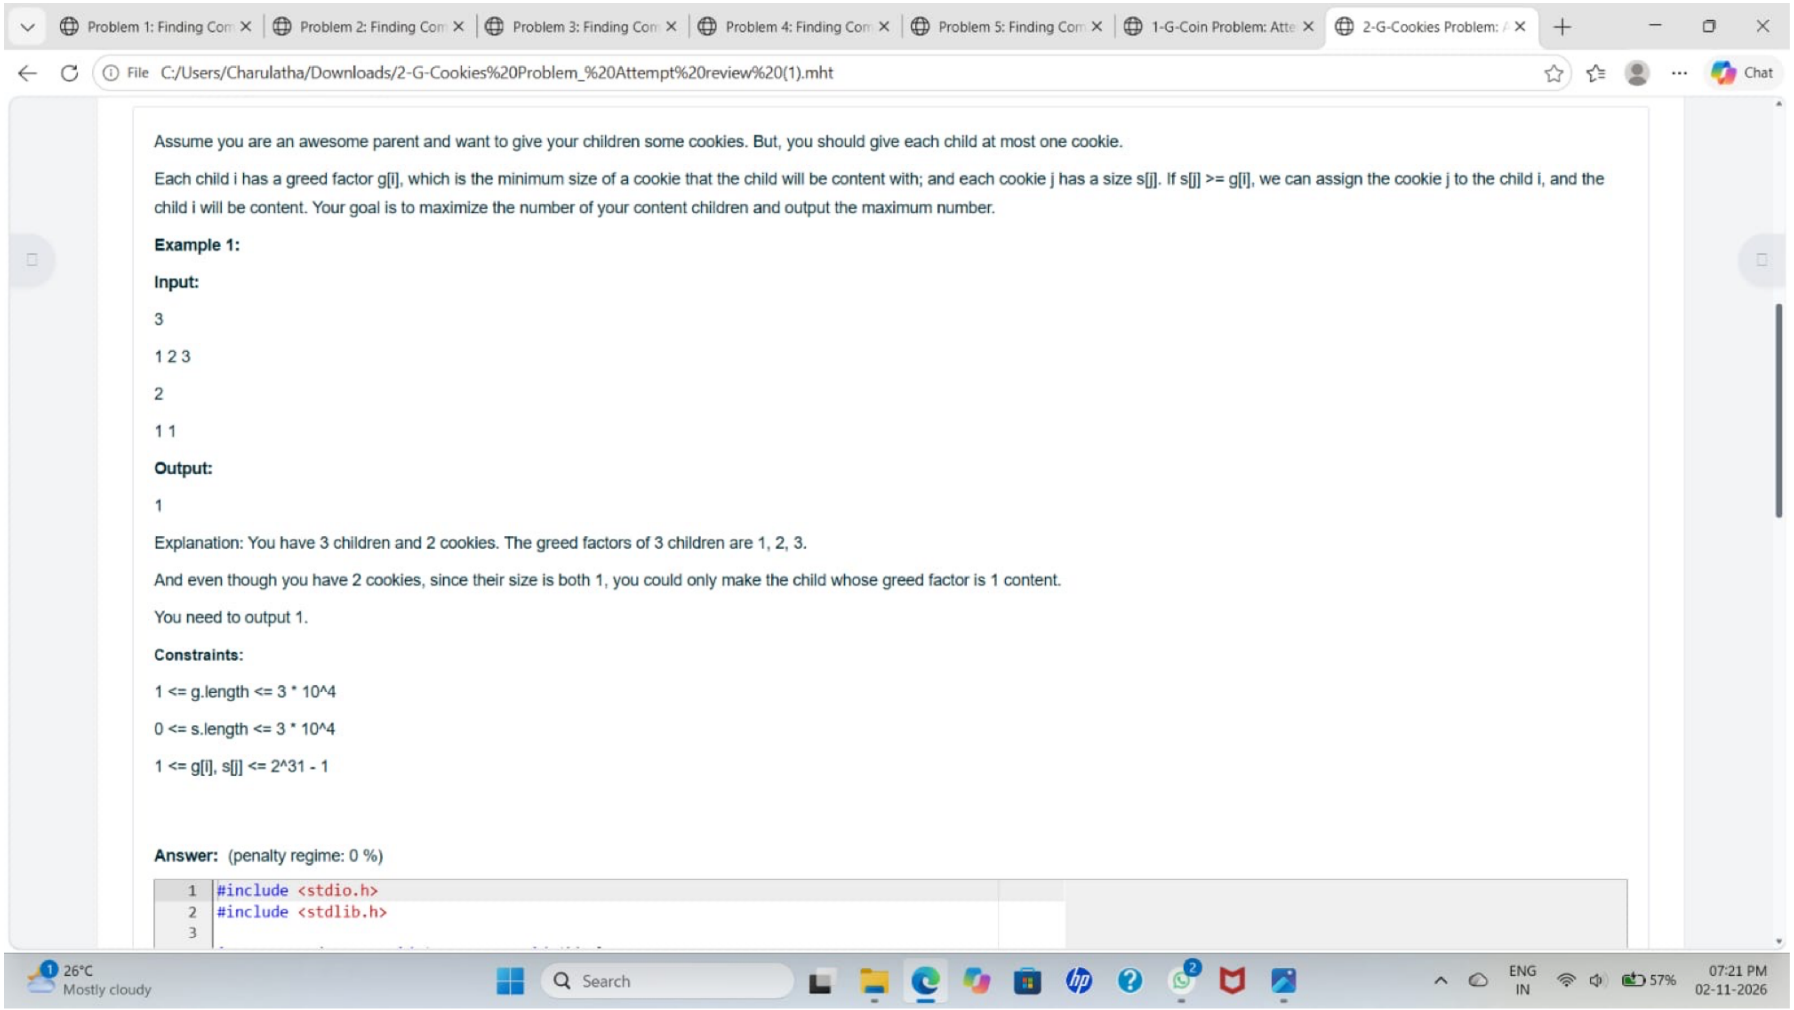

Problem 1: Finding Complexit
Problem 2: Finding Complexit
Problem 3: Finding Complexit
Problem 4: Finding Complexit
Problem 5: Finding Complexit
1-G-Coin Problem: Attempt r
File C:/Users/Charulatha/Downloads/1-G-Coin%20Problem_%20Attempt%20review%20(1).mht
Chat
Dashboard
My courses
CS23331-DAA-2025-CSE / 1-G-Coin Problem
1-G-Coin Problem
Started on Sunday, 30 August 2026, 10:42 AM
State Finished
Completed on Sunday, 30 August 2026, 10:44 AM
Time taken 1 min 43 secs
Marks 1.00/1.00
Grade 10.00 out of 10.00 (100%)
Question 1
Correct
Mark 1.00 out of 1.00
Flag question
Write a program to take value V and we want to make change for V Rs, and we have infinite supply of each of the denominations in Indian currency, i.e., we have infinite supply of { 1, 2, 5, 10, 20, 50, 100, 500, 1000} valued coins/notes, what is the minimum number of coins and/or notes needed to make the change.
Input Format:
Take an integer from stdin.
Output Format:
print the integer which is change of the number.
26°C
Mostly cloudy
Search
ENG
IN
53%
07:18 PM
02-11-2026


Problem 1: Finding Complexit
Problem 2: Finding Complexit
Problem 3: Finding Complexit
Problem 4: Finding Complexit
Problem 5: Finding Complexit
1-G-Coin Problem: Attempt
File C:/Users/Charulatha/Downloads/1-G-Coin%20Problem_%20Attempt%20review%20(1).mht
Chat
Marks 1.00/1.00
Grade 10.00 out of 10.00 (100%)
Question 1 Correct Mark 1.00 out of 1.00 Flag question
Write a program to take value V and we want to make change for V Rs, and we have infinite supply of each of the denominations in Indian currency, i.e., we have infinite supply of { 1, 2, 5, 10, 20, 50, 100, 500, 1000} valued coins/notes, what is the minimum number of coins and/or notes needed to make the change.
Input Format:
Take an integer from stdin.
Output Format:
print the integer which is change of the number.
Example Input :
64
Output:
4
Explanaton:
We need a 50 Rs note and a 10 Rs note and two 2 rupee coins.
Answer: (penalty regime: 0 %)
1 #include <stdio.h>
2
3 int main() {
4 int V;
26°C
Mostly cloudy
Search
ENG
IN
53%
07:18 PM
02-11-2026


Problem 1: Finding Complexit
Problem 2: Finding Complexit
Problem 3: Finding Complexit
Problem 4: Finding Complexit
Problem 5: Finding Complexit
1-G-Coin Problem: Attempt
File C:/Users/Charulatha/Downloads/1-G-Coin%20Problem_%20Attempt%20review%20(1).mht
Chat
Answer: (penalty regime: 0 %)
#include <stdio.h>
int main() {
int V;
scanf("%d", &V);
int denominations[] = {1000, 500, 100, 50, 20, 10, 5, 2, 1};
int count = 0;
for (int i = 0; i < 9; i++) {
count += V / denominations[i];
V = V % denominations[i];
}
printf("%d", count);
return 0;
}
Input
Expected
Got
49
5
5
Passed all tests!
Correct
Marks for this submission: 1.00/1.00.
26°C
Mostly cloudy
Search
ENG
IN
53%
07:18 PM
02-11-2026


Problem 1: Finding Con
Problem 2: Finding Con
Problem 3: Finding Con
Problem 4: Finding Con
Problem 5: Finding Con
1-G-Coin Problem: Atte
2-G-Cookies Problem:
File C:/Users/Charulatha/Downloads/2-G-Cookies%20Problem_%20Attempt%20review%20(1).mht
Chat
Dashboard
My courses
CS23331-DAA-2025-CSE / 2-G-Cookies Problem
2-G-Cookies Problem
Started on Sunday, 30 August 2026, 10:44 AM
State Finished
Completed on Sunday, 30 August 2026, 10:47 AM
Time taken 2 mins 50 secs
Marks 1.00/1.00
Grade 10.00 out of 10.00 (100%)
Question 1
Correct
Mark 1.00 out of 1.00
Flag question
Assume you are an awesome parent and want to give your children some cookies. But, you should give each child at most one cookie.
Each child i has a greed factor g[i], which is the minimum size of a cookie that the child will be content with; and each cookie j has a size s[j]. If s[j] >= g[i], we can assign the cookie j to the child i, and the child i will be content. Your goal is to maximize the number of your content children and output the maximum number.
Example 1:
Input:
3
26°C
Mostly cloudy
Search
ENG
IN
56%
07:20 PM
02-11-2026


Problem 1: Finding Con
Problem 2: Finding Con
Problem 3: Finding Con
Problem 4: Finding Con
Problem 5: Finding Con
1-G-Coin Problem: Atte
2-G-Cookies Problem:
File C:/Users/Charulatha/Downloads/2-G-Cookies%20Problem_%20Attempt%20review%20(1).mht
Chat
Assume you are an awesome parent and want to give your children some cookies. But, you should give each child at most one cookie.
Each child i has a greed factor g[i], which is the minimum size of a cookie that the child will be content with; and each cookie j has a size s[j]. If s[j] >= g[i], we can assign the cookie j to the child i, and the child i will be content. Your goal is to maximize the number of your content children and output the maximum number.
Example 1:
Input:
3
1 2 3
2
1 1
Output:
1
Explanation: You have 3 children and 2 cookies. The greed factors of 3 children are 1, 2, 3.
And even though you have 2 cookies, since their size is both 1, you could only make the child whose greed factor is 1 content.
You need to output 1.
Constraints:
1 <= g.length <= 3 * 10^4
0 <= s.length <= 3 * 10^4
1 <= g[i], s[j] <= 2^31 - 1
Answer: (penalty regime: 0 %)
1 #include <stdio.h>
2 #include <stdlib.h>
3
26°C
Mostly cloudy
Search
ENG
IN
57%
07:21 PM
02-11-2026

Problem 1: Finding Con | Problem 2: Finding Con | Problem 3: Finding Con | Problem 4: Finding Con | Problem 5: Finding Con | 1-G-Coin Problem: Atte | 2-G-Cookies Problem:

File C:/Users/Charulatha/Downloads/2-G-Cookies%20Problem_%20Attempt%20review%20(1).mht

Chat

```c
#include <stdio.h>
#include <stdlib.h>

int compare(const void *a, const void *b) {
    return (*(int *)a - *(int *)b);
}

int main() {
    int n, m;

    scanf("%d", &n);

    int g[n];
    for (int i = 0; i < n; i++) {
        scanf("%d", &g[i]);
    }

    scanf("%d", &m);

    int s[m];
    for (int i = 0; i < m; i++) {
        scanf("%d", &s[i]);
    }

    qsort(g, n, sizeof(int), compare);
    qsort(s, m, sizeof(int), compare);

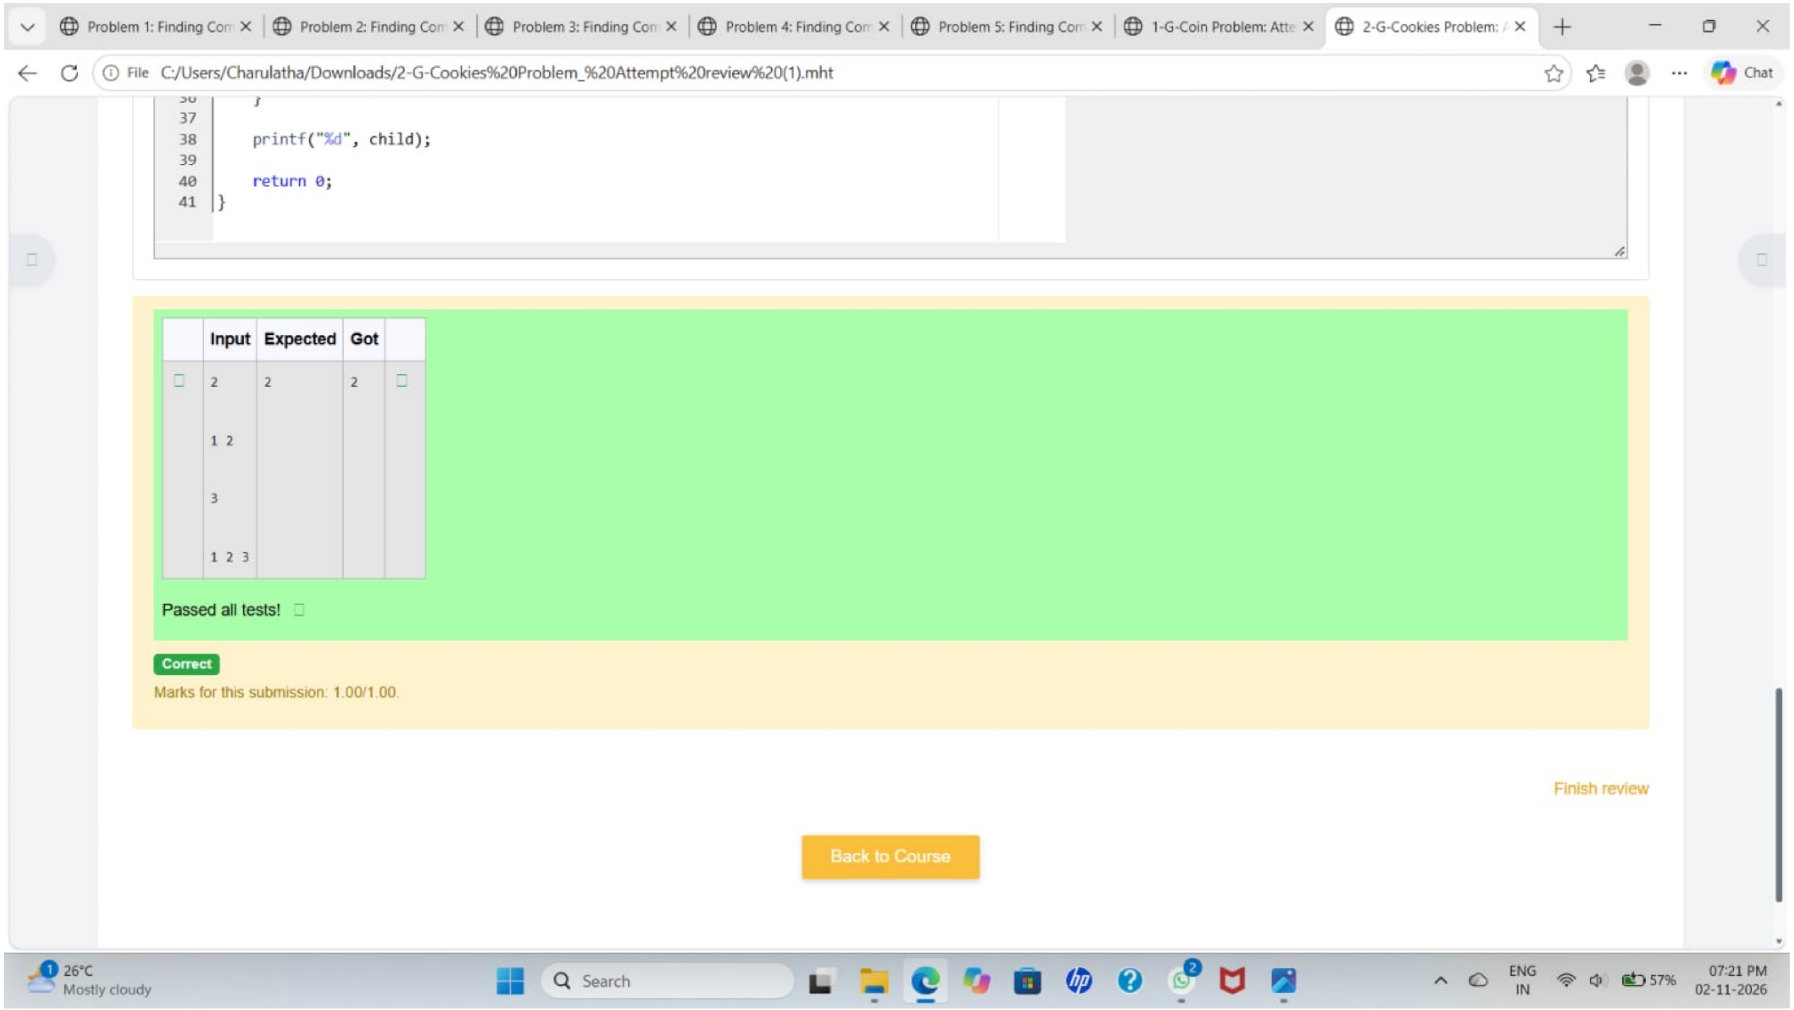
    int child = 0;
    int cookie = 0;

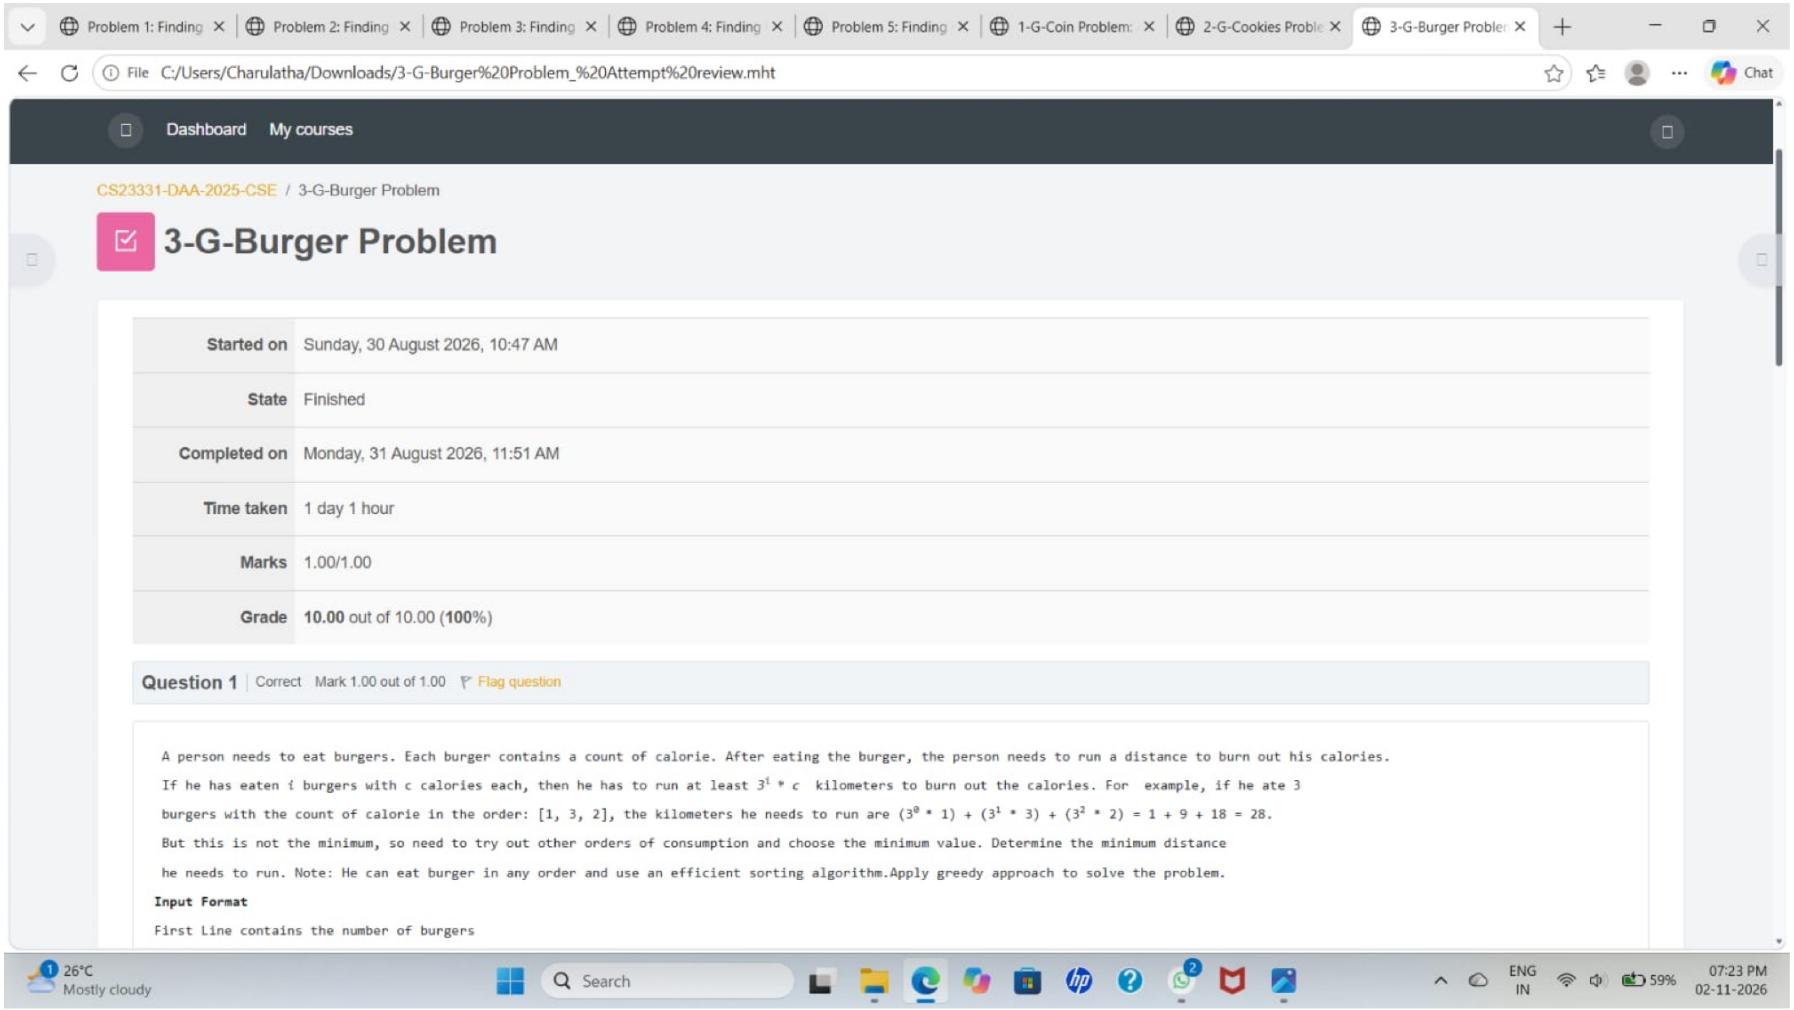
    while (child < n && cookie < m) {
        if (s[cookie] >= g[child]) {
            child++;
        }
        cookie++;
    }

    printf("%d", child);

    return 0;
}
```

26°C Mostly cloudy
Search
ENG IN
57%
07:21 PM 02-11-2026


Problem 1: Finding Con
Problem 2: Finding Con
Problem 3: Finding Con
Problem 4: Finding Con
Problem 5: Finding Con
1-G-Coin Problem: Atte
2-G-Cookies Problem:
File C:/Users/Charulatha/Downloads/2-G-Cookies%20Problem_%20Attempt%20review%20(1).mht
Chat
37 }
38 printf("%d", child);
39
40 return 0;
41 }
Input
Expected
Got
2
1 2
3
1 2 3
2
2
Passed all tests!
Correct
Marks for this submission: 1.00/1.00.
Finish review
Back to Course
26°C
Mostly cloudy
Search
ENG
IN
57%
07:21 PM
02-11-2026


Problem 1: Finding
Problem 2: Finding
Problem 3: Finding
Problem 4: Finding
Problem 5: Finding
1-G-Coin Problem:
2-G-Cookies Proble
3-G-Burger Proble
File C:/Users/Charulatha/Downloads/3-G-Burger%20Problem_%20Attempt%20review.mht
Chat
Dashboard
My courses
CS23331-DAA-2025-CSE / 3-G-Burger Problem
3-G-Burger Problem
Started on Sunday, 30 August 2026, 10:47 AM
State Finished
Completed on Monday, 31 August 2026, 11:51 AM
Time taken 1 day 1 hour
Marks 1.00/1.00
Grade 10.00 out of 10.00 (100%)
Question 1
Correct
Mark 1.00 out of 1.00
Flag question
A person needs to eat burgers. Each burger contains a count of calorie. After eating the burger, the person needs to run a distance to burn out his calories.
If he has eaten i burgers with c calories each, then he has to run at least 3^i * c kilometers to burn out the calories. For example, if he ate 3
burgers with the count of calorie in the order: [1, 3, 2], the kilometers he needs to run are (3^0 * 1) + (3^1 * 3) + (3^2 * 2) = 1 + 9 + 18 = 28.
But this is not the minimum, so need to try out other orders of consumption and choose the minimum value. Determine the minimum distance
he needs to run. Note: He can eat burger in any order and use an efficient sorting algorithm.Apply greedy approach to solve the problem.
Input Format
First Line contains the number of burgers
26°C
Mostly cloudy
Search
ENG
IN
59%
07:23 PM
02-11-2026

A person needs to eat burgers. Each burger contains a count of calorie. After eating the burger, the person needs to run a distance to burn out his calories.

If he has eaten i burgers with c calories each, then he has to run at least $3^i * c$ kilometers to burn out the calories. For example, if he ate 3 burgers with the count of calorie in the order: [1, 3, 2], the kilometers he needs to run are $(3^0 * 1) + (3^1 * 3) + (3^2 * 2) = 1 + 9 + 18 = 28$.

But this is not the minimum, so need to try out other orders of consumption and choose the minimum value. Determine the minimum distance he needs to run. Note: He can eat burger in any order and use an efficient sorting algorithm.Apply greedy approach to solve the problem.

Input Format

First Line contains the number of burgers

Second line contains calories of each burger which is n space-separate integers

Output Format

Print: Minimum number of kilometers needed to run to burn out the calories

Sample Input

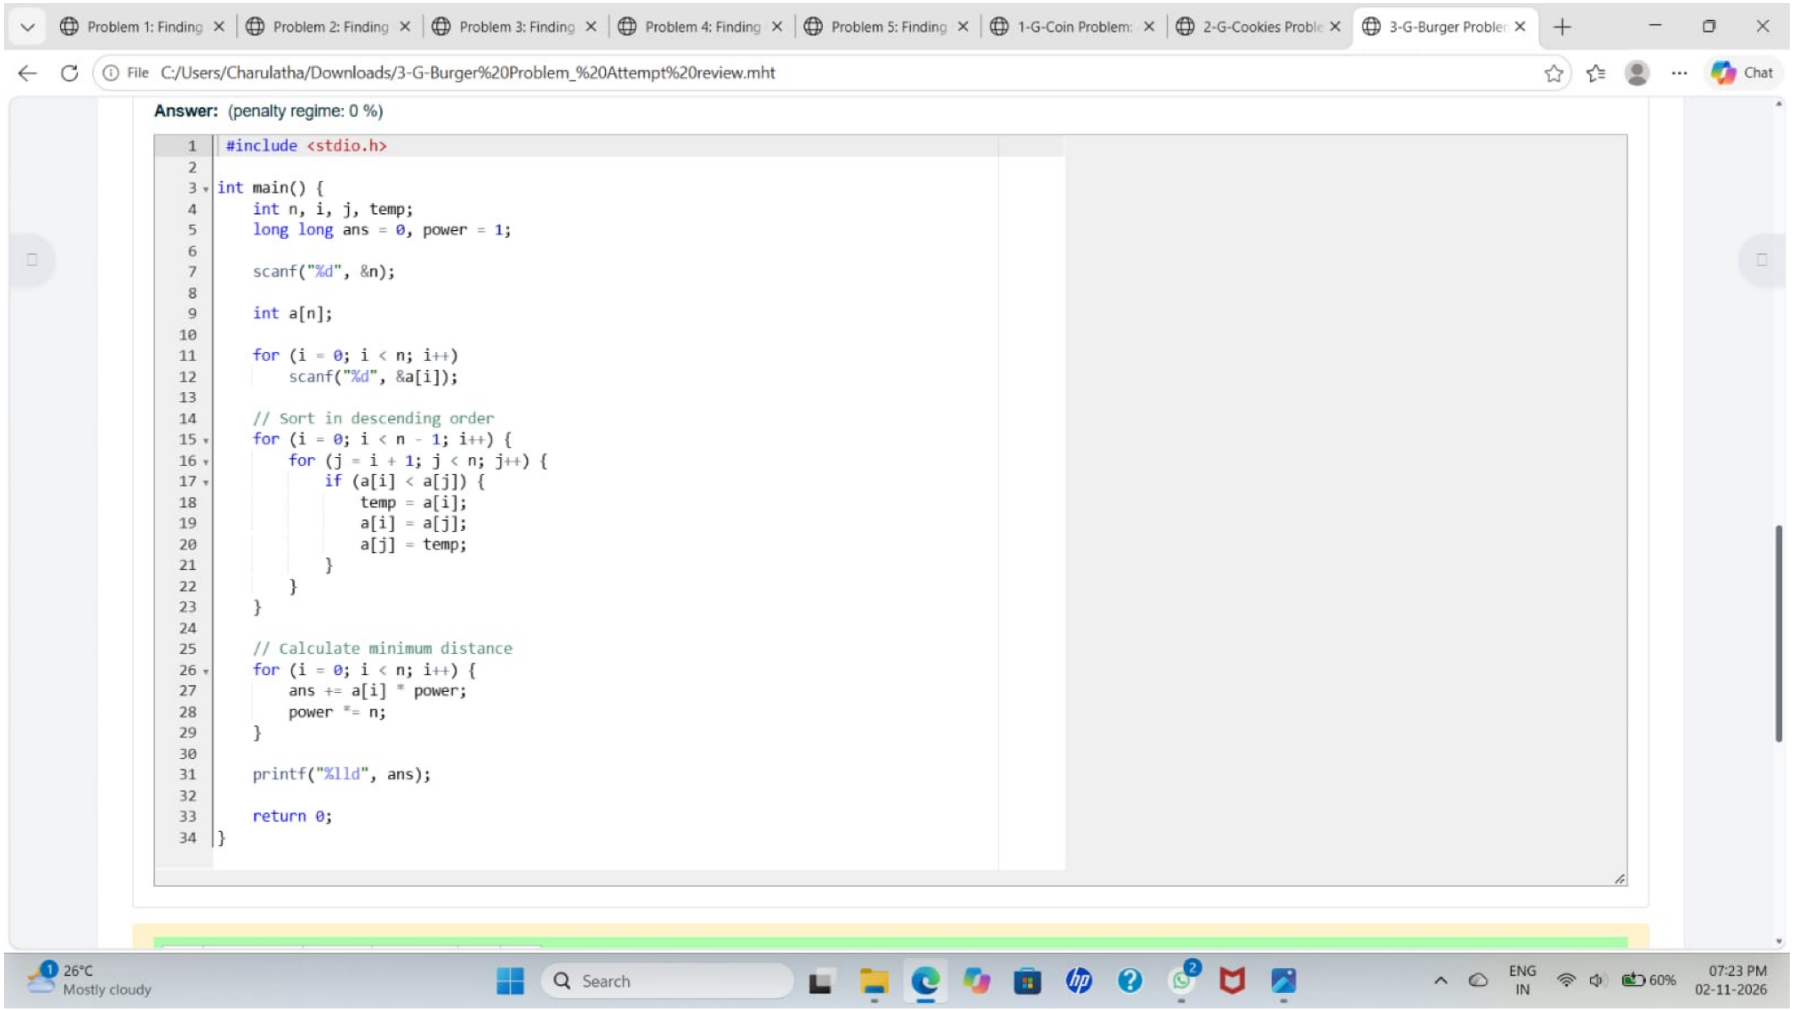
```
3
5 10 7
```

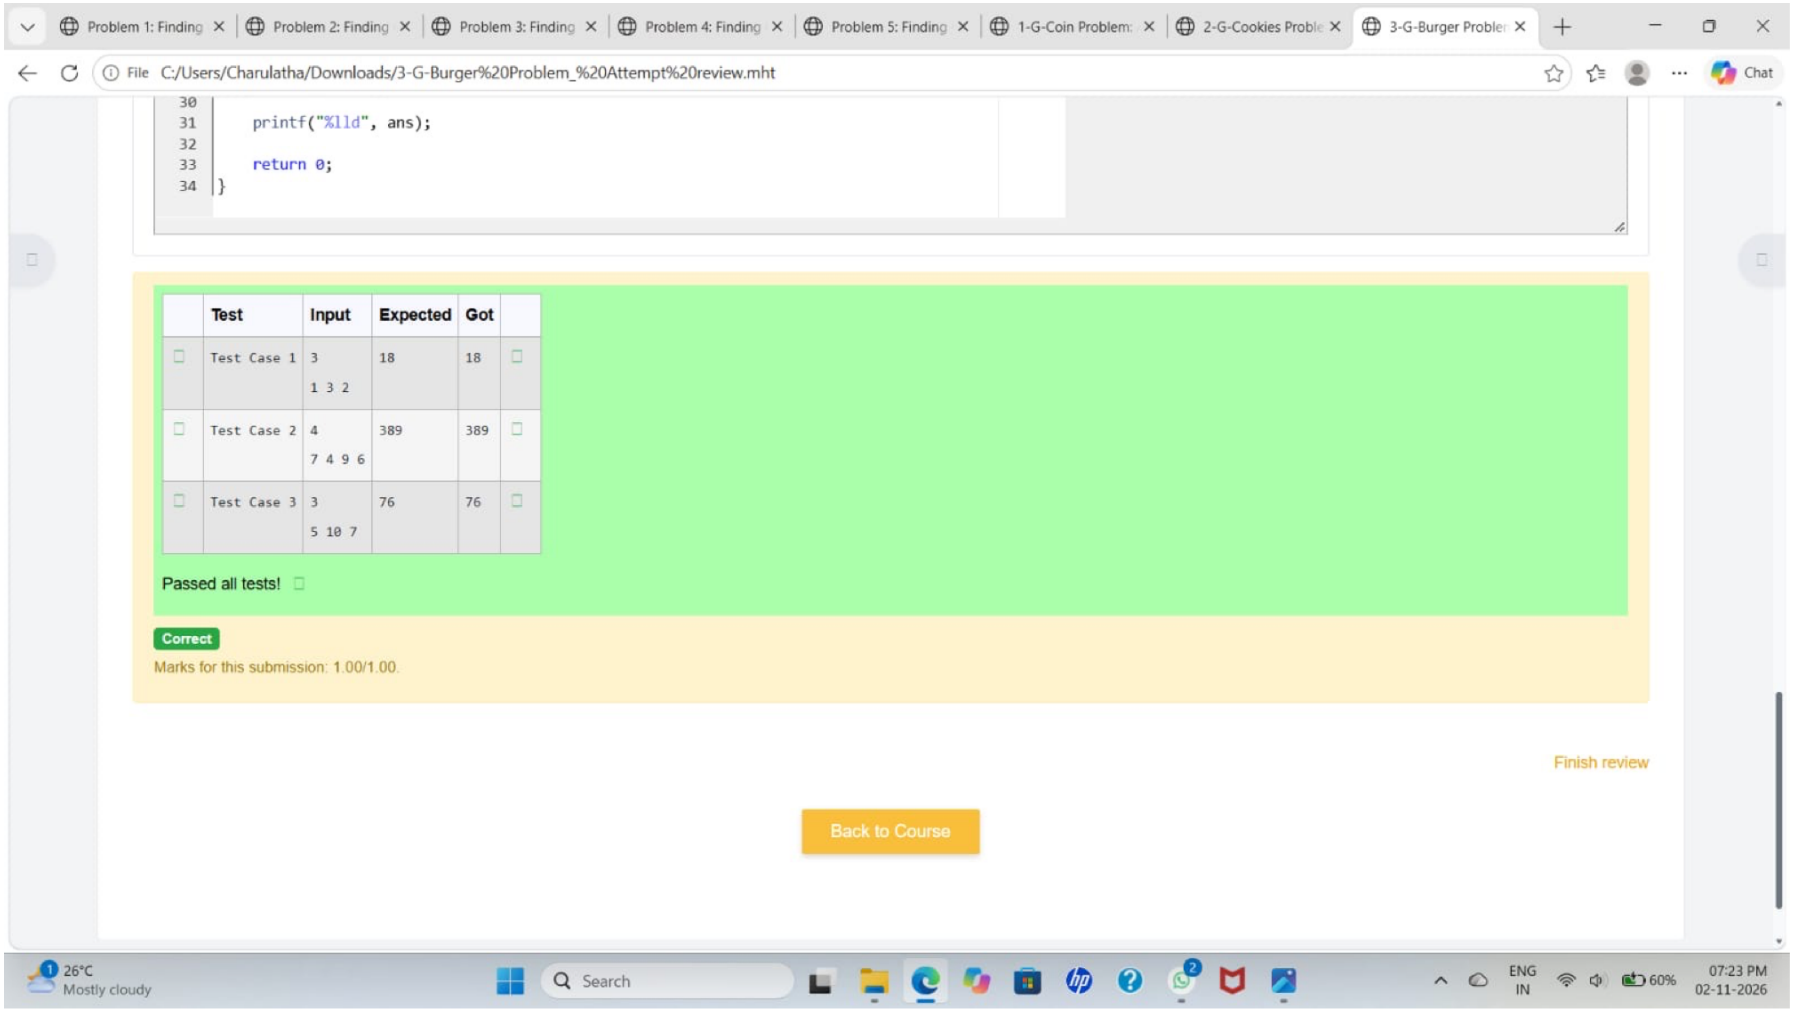
Sample Output

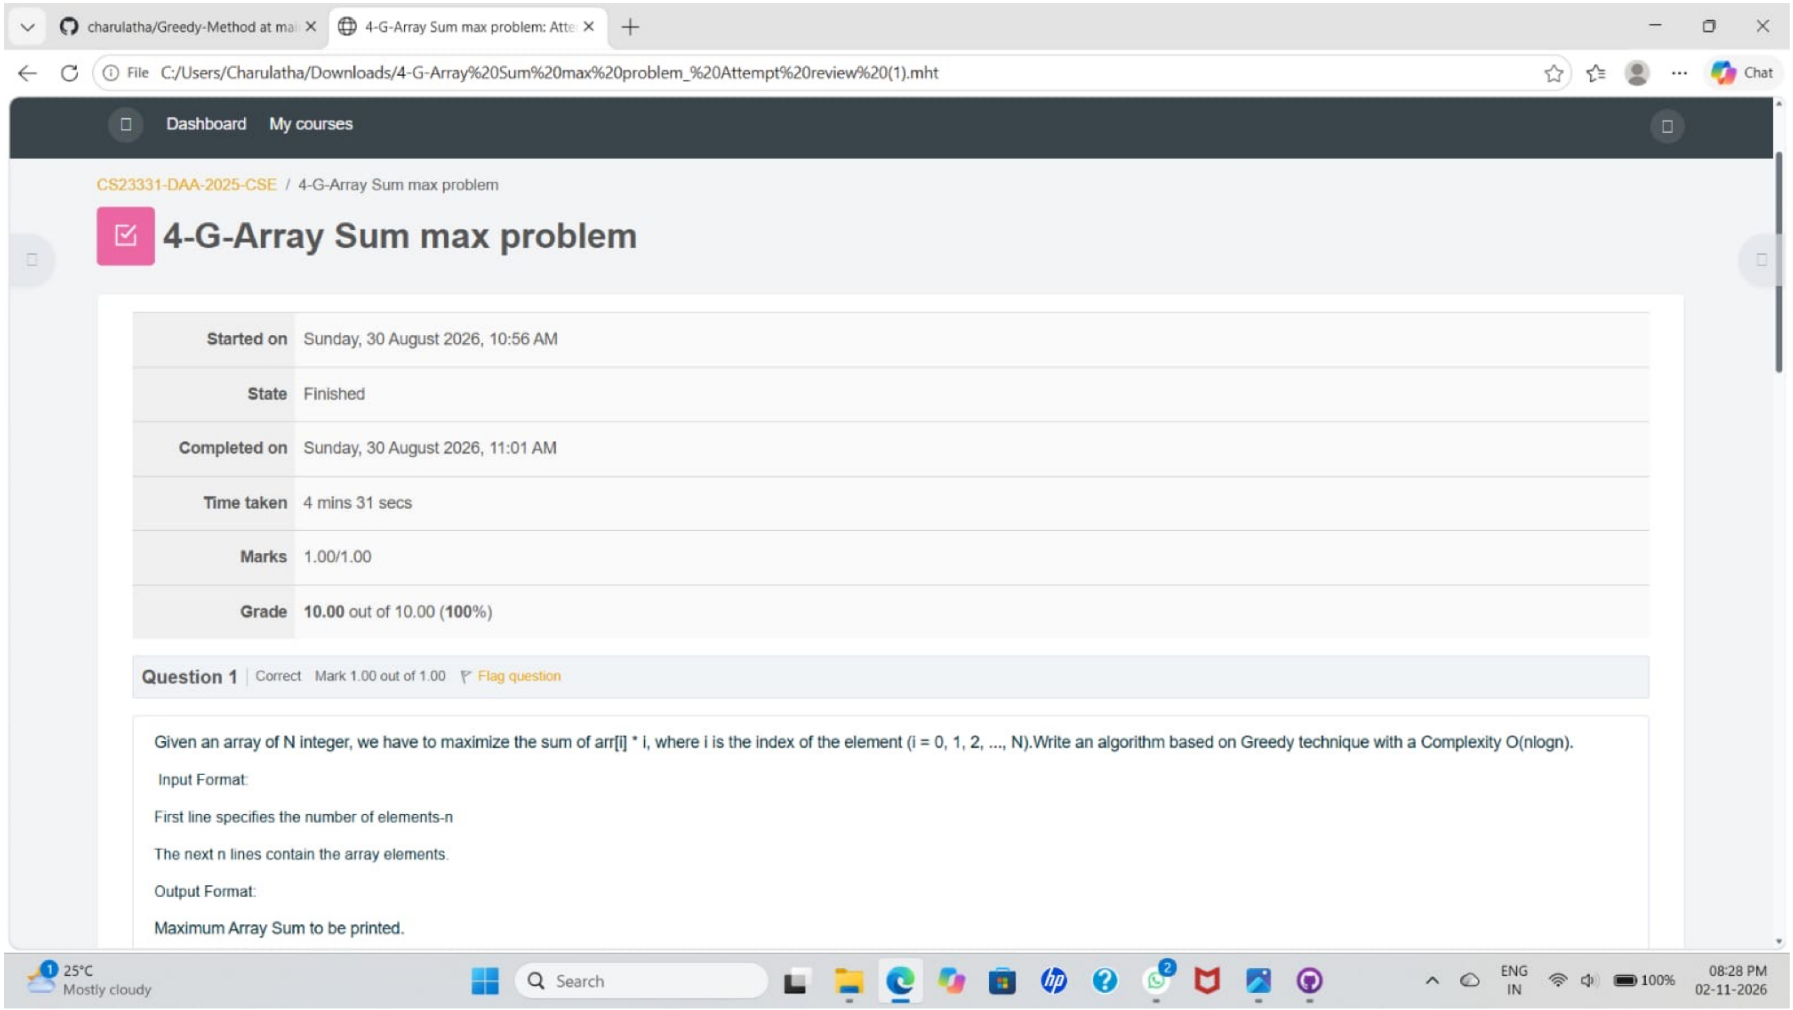
```
76
```

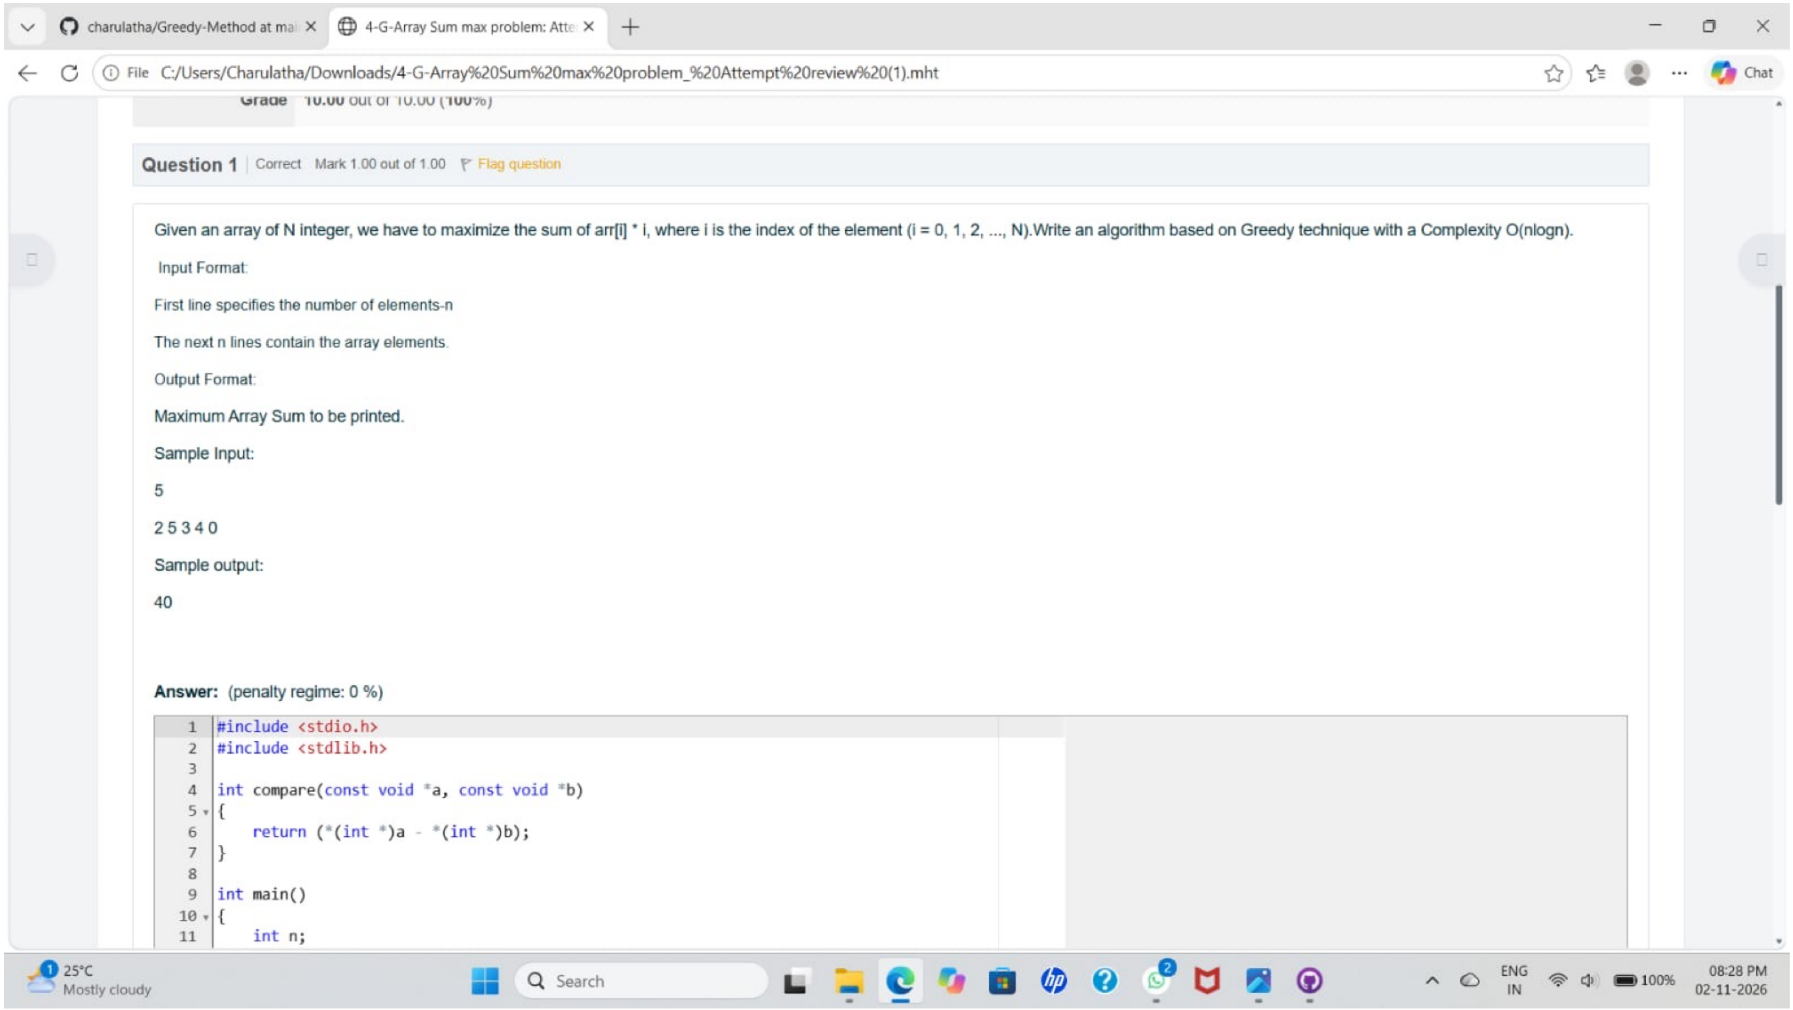
For example:

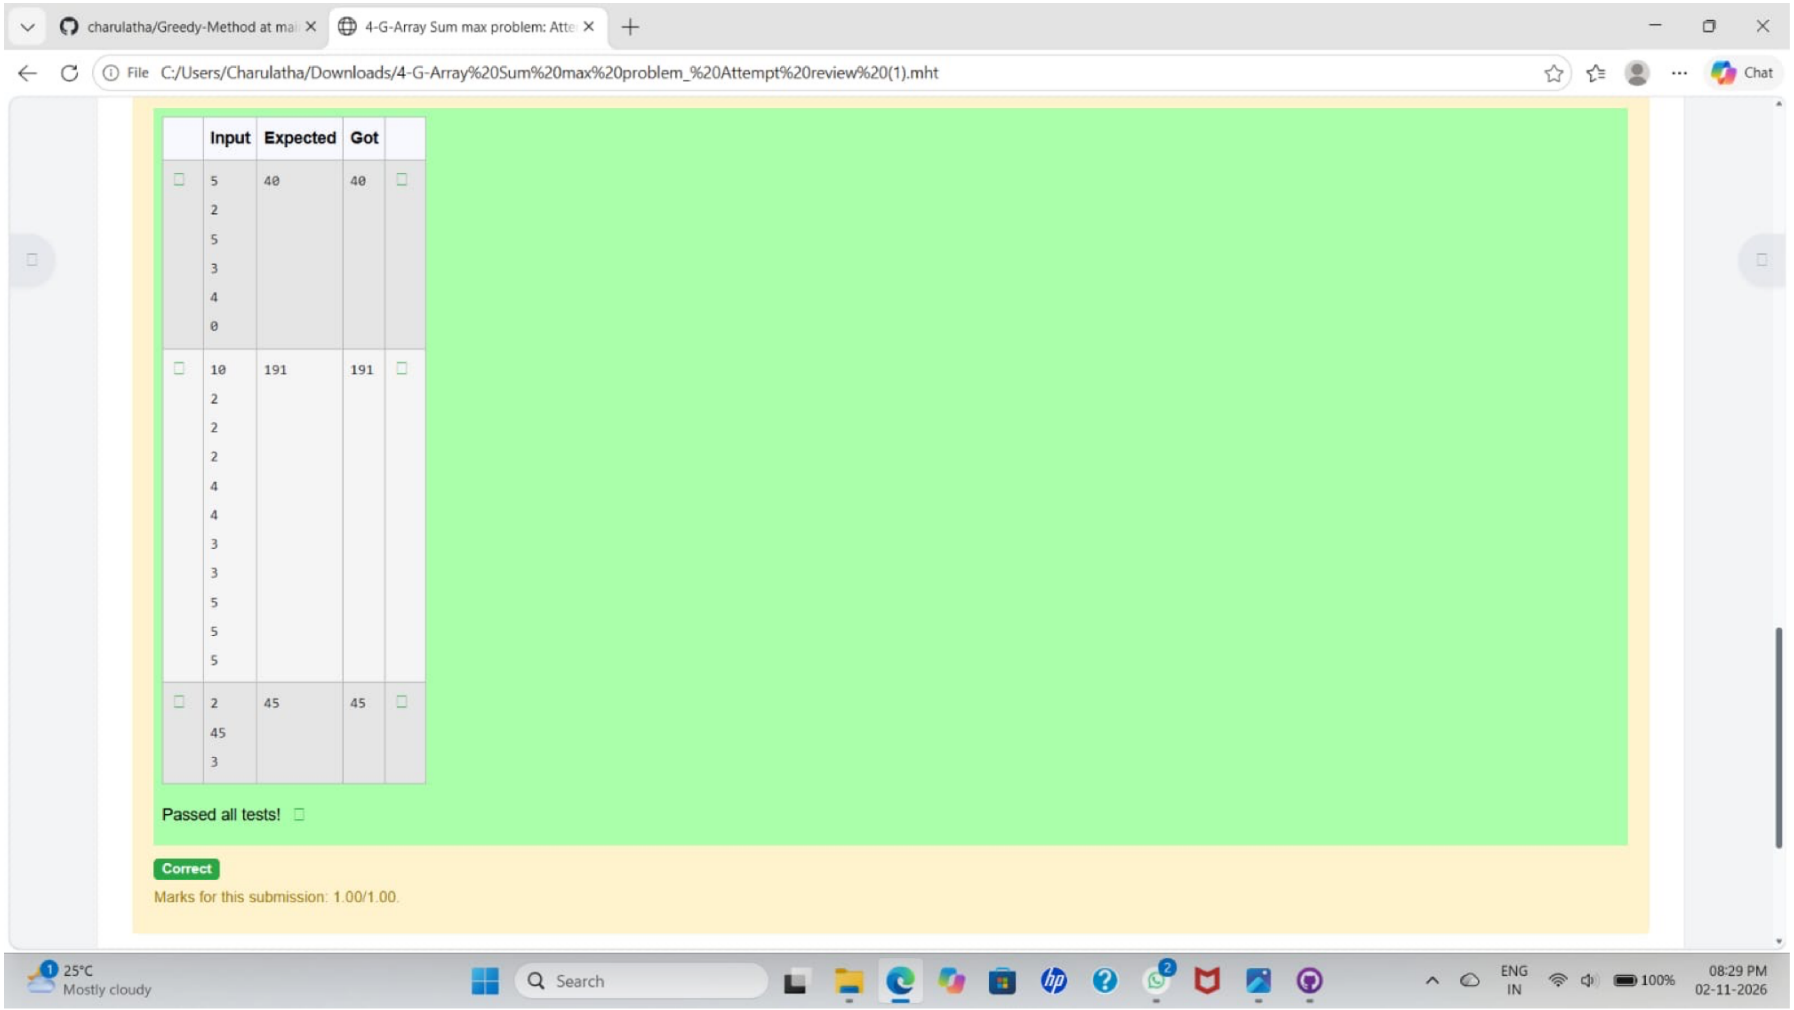
Test	Input	Result
Test Case 1	3 1 3 2	18

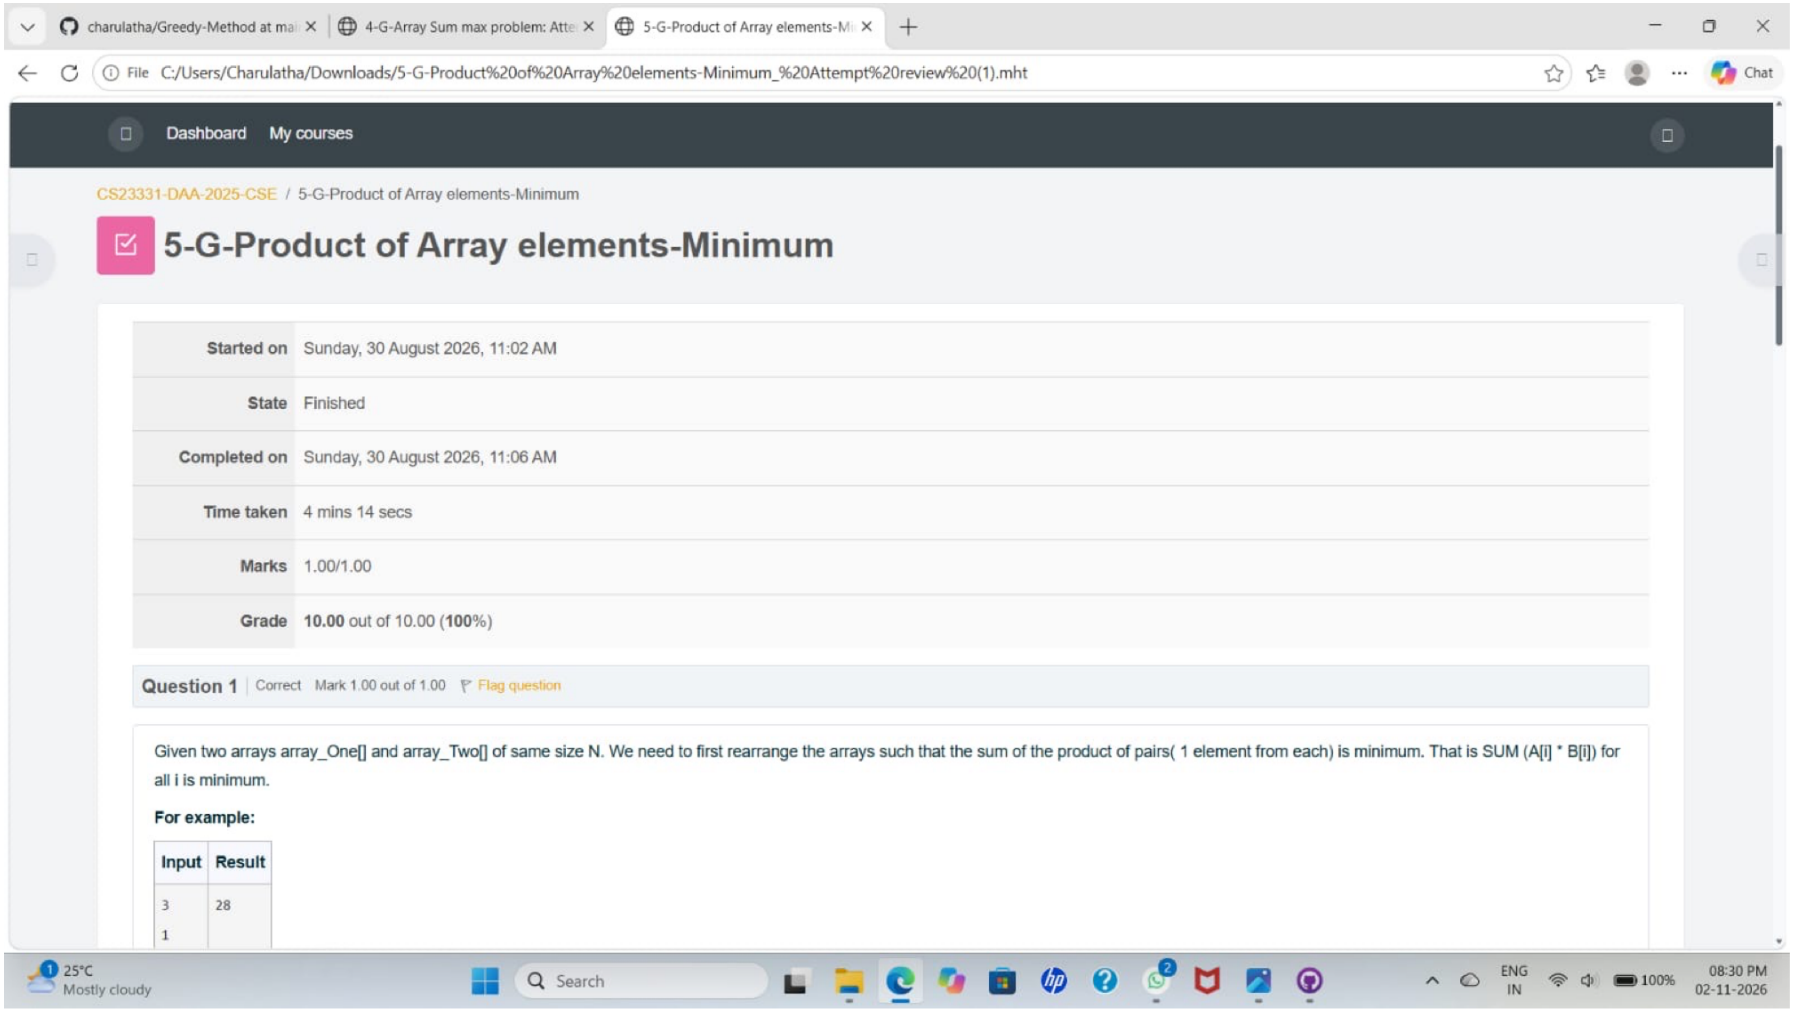

Problem 1: Finding
Problem 2: Finding
Problem 3: Finding
Problem 4: Finding
Problem 5: Finding
1-G-Coin Problem:
2-G-Cookies Proble
3-G-Burger Proble
File C:/Users/Charulatha/Downloads/3-G-Burger%20Problem_%20Attempt%20review.mht
Chat
Answer: (penalty regime: 0 %)
#include <stdio.h>
int main() {
int n, i, j, temp;
long long ans = 0, power = 1;
scanf("%d", &n);
int a[n];
for (i = 0; i < n; i++)
scanf("%d", &a[i]);
// Sort in descending order
for (i = 0; i < n - 1; i++) {
for (j = i + 1; j < n; j++) {
if (a[i] < a[j]) {
temp = a[i];
a[i] = a[j];
a[j] = temp;
}
}
}
// Calculate minimum distance
for (i = 0; i < n; i++) {
ans += a[i] * power;
power *= n;
}
printf("%lld", ans);
return 0;
}
26°C
Mostly cloudy
Search
ENG
IN
60%
07:23 PM
02-11-2026

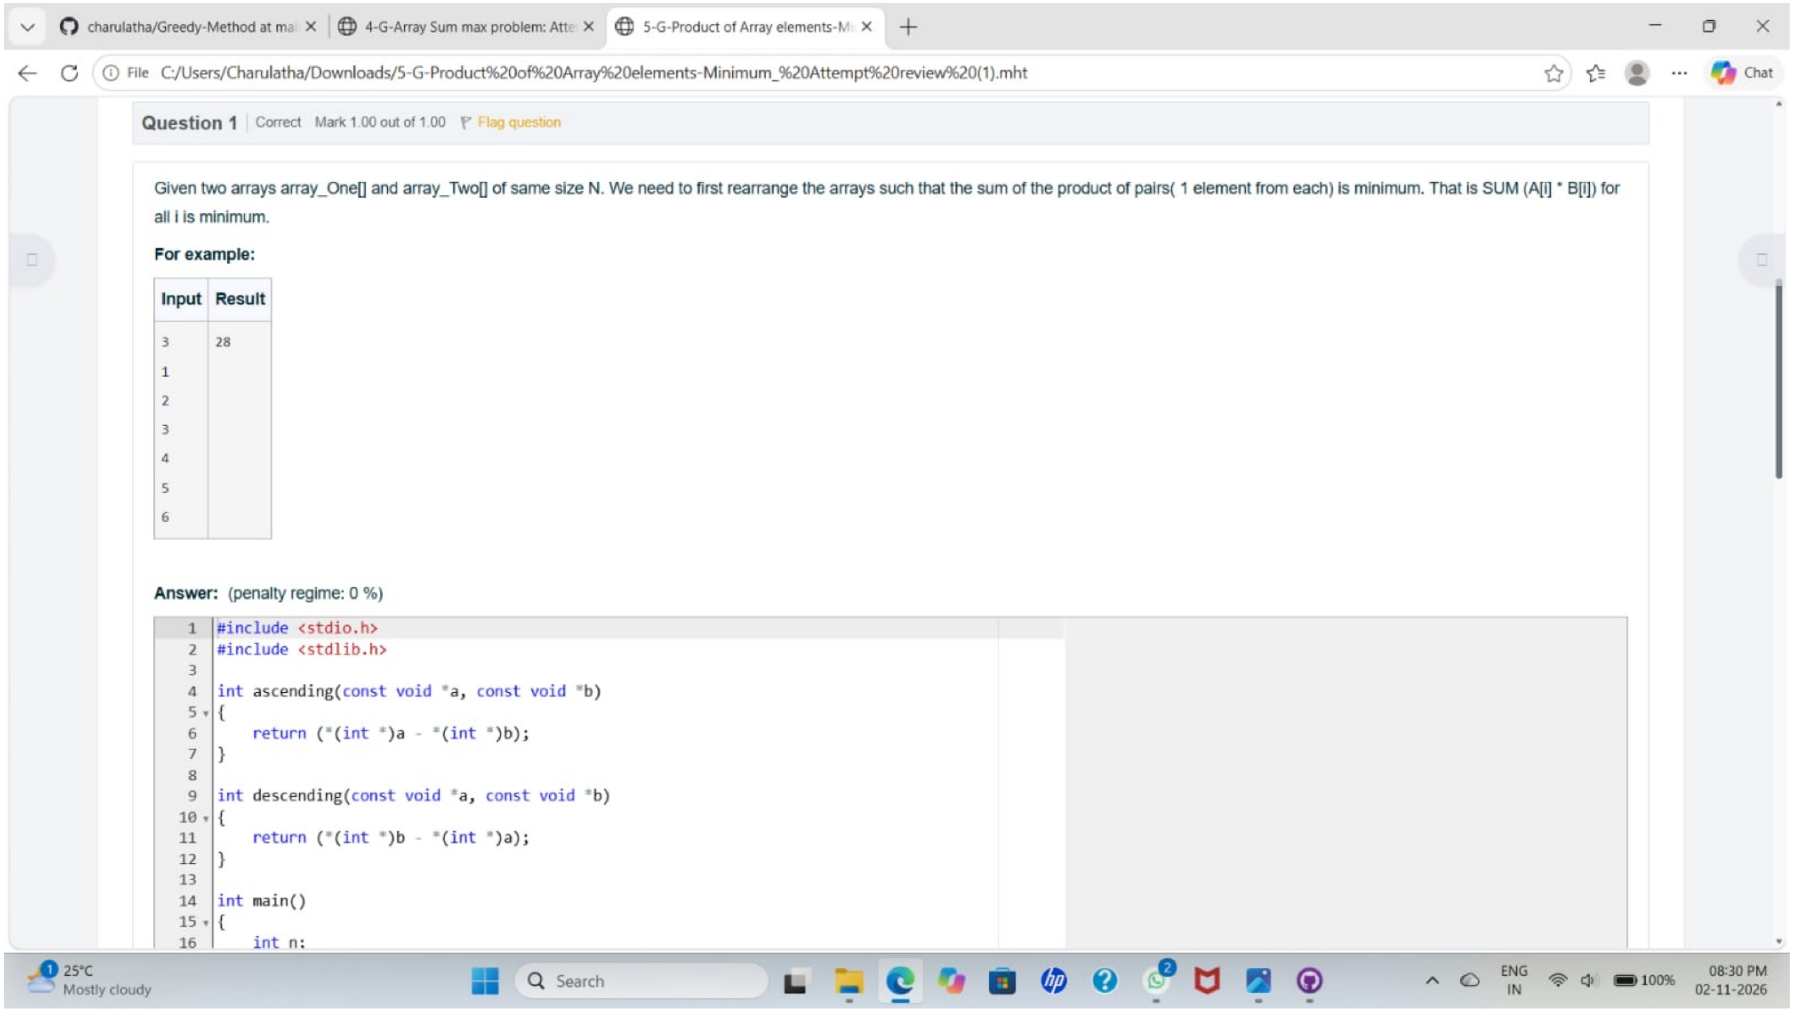

Problem 1: Finding
Problem 2: Finding
Problem 3: Finding
Problem 4: Finding
Problem 5: Finding
1-G-Coin Problem:
2-G-Cookies Proble
3-G-Burger Proble
File C:/Users/Charulatha/Downloads/3-G-Burger%20Problem_%20Attempt%20review.mht
Chat
30
31 printf("%lld", ans);
32
33 return 0;
34 }
Test
Input
Expected
Got
Test Case 1
3
1 3 2
18
18
Test Case 2
4
7 4 9 6
389
389
Test Case 3
3
5 10 7
76
76
Passed all tests!
Correct
Marks for this submission: 1.00/1.00.
Finish review
Back to Course
26°C
Mostly cloudy
Search
ENG
IN
60%
07:23 PM
02-11-2026

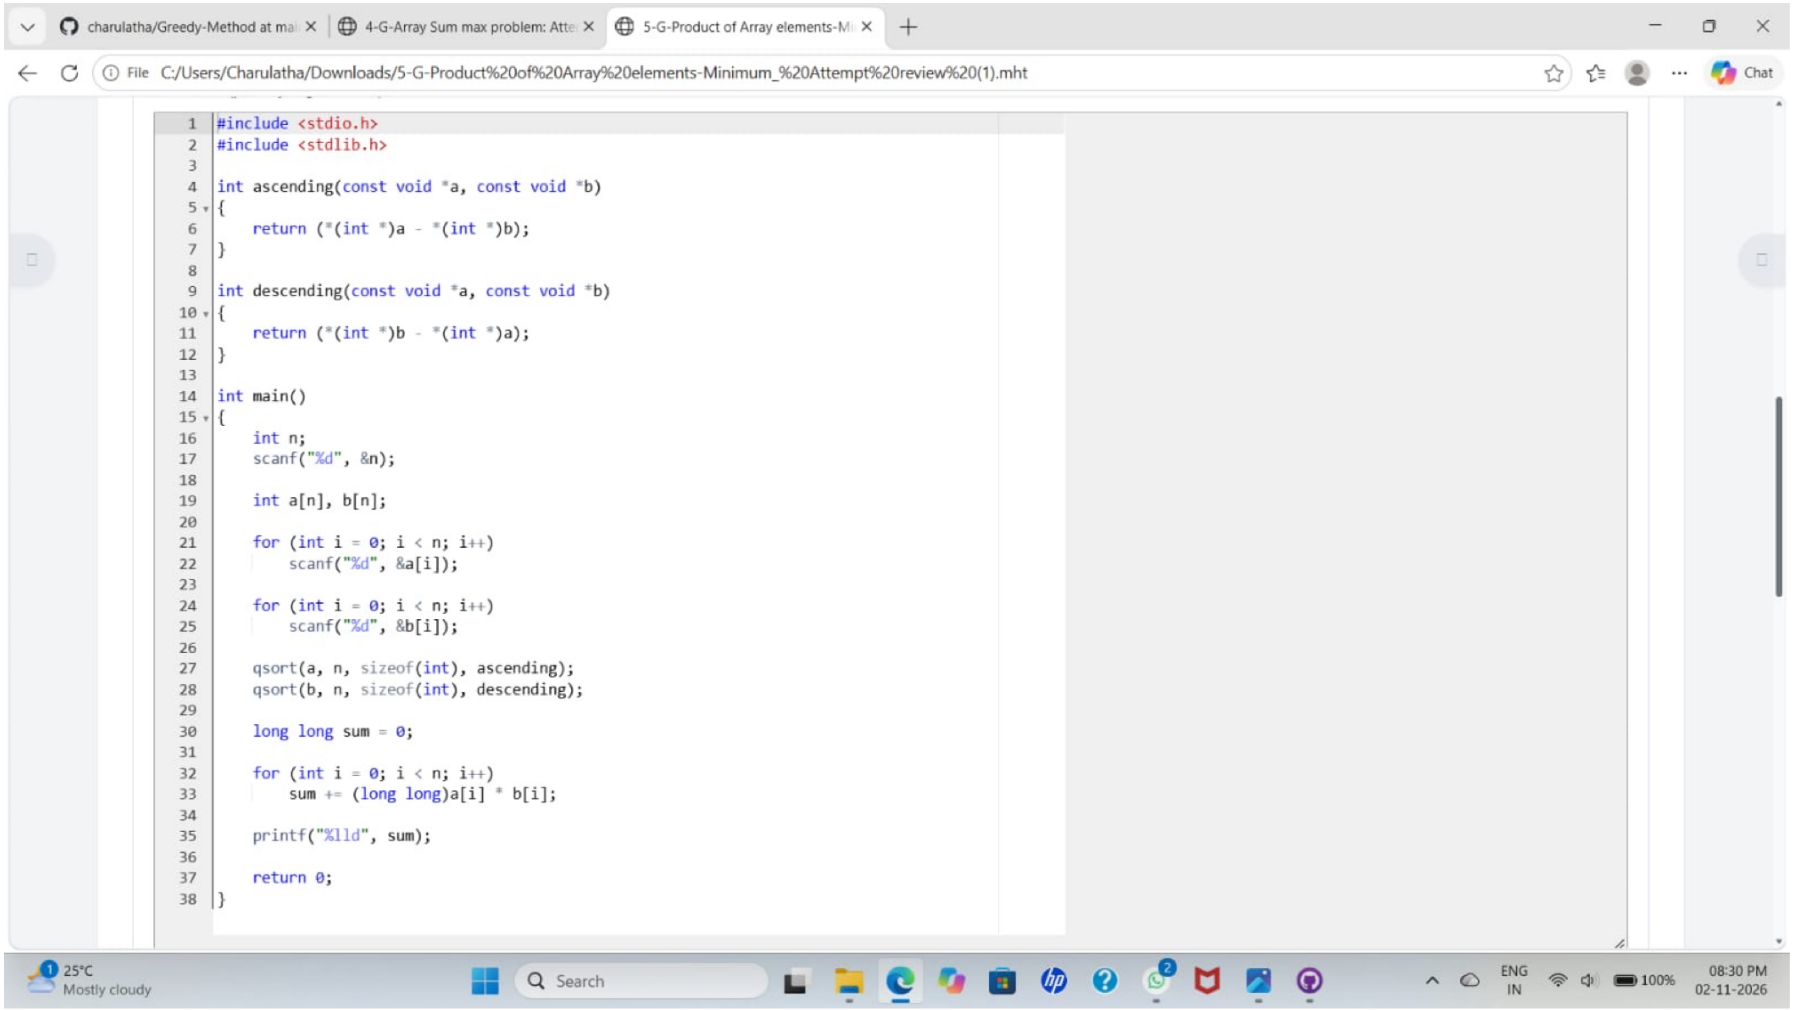

charulatha/Greedy-Method at ma
4-G-Array Sum max problem: Atte
File C:/Users/Charulatha/Downloads/4-G-Array%20Sum%20max%20problem_%20Attempt%20review%20(1).mht
Chat
Dashboard
My courses
CS23331-DAA-2025-CSE / 4-G-Array Sum max problem
4-G-Array Sum max problem
Started on Sunday, 30 August 2026, 10:56 AM
State Finished
Completed on Sunday, 30 August 2026, 11:01 AM
Time taken 4 mins 31 secs
Marks 1.00/1.00
Grade 10.00 out of 10.00 (100%)
Question 1
Correct
Mark 1.00 out of 1.00
Flag question
Given an array of N integer, we have to maximize the sum of arr[i] * i, where i is the index of the element (i = 0, 1, 2, ..., N).Write an algorithm based on Greedy technique with a Complexity O(nlogn).
Input Format:
First line specifies the number of elements-n
The next n lines contain the array elements.
Output Format:
Maximum Array Sum to be printed.
25°C
Mostly cloudy
Search
ENG
IN
100%
08:28 PM
02-11-2026

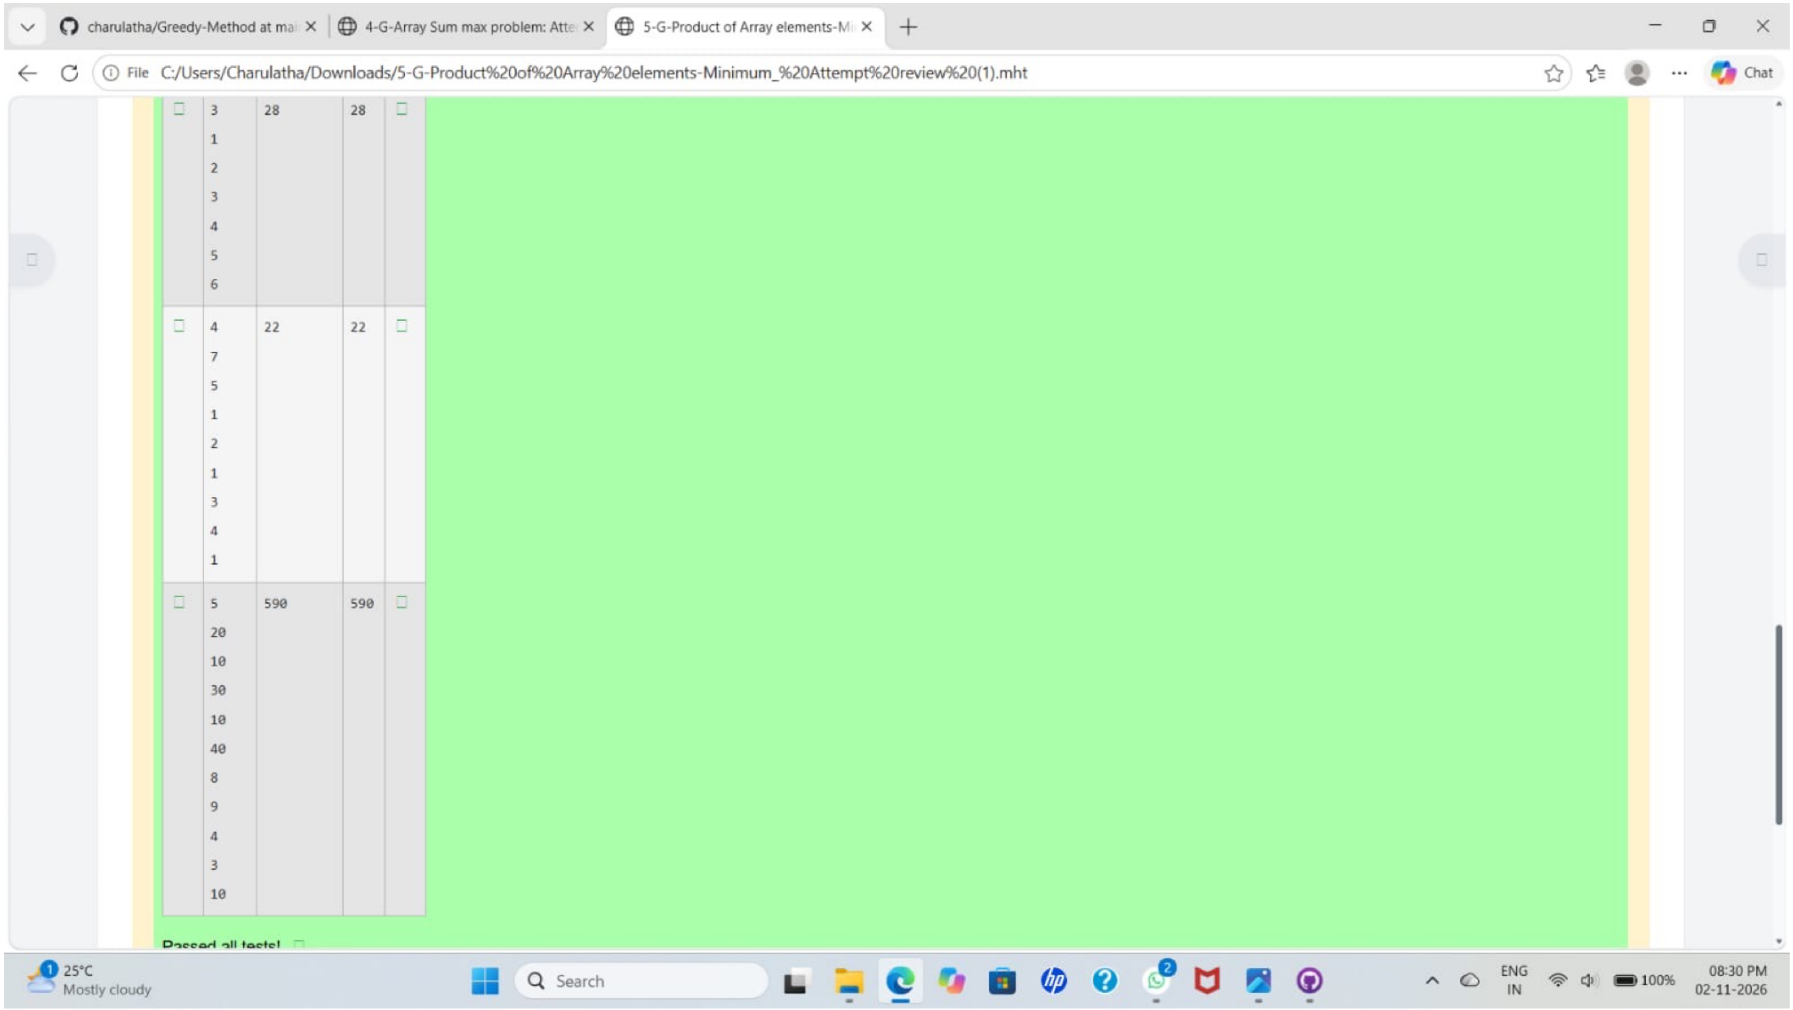

charulatha/Greedy-Method at mai
4-G-Array Sum max problem: Atte
File C:/Users/Charulatha/Downloads/4-G-Array%20Sum%20max%20problem_%20Attempt%20review%20(1).mht
Chat
Grade 10.00 out of 10.00 (100%)
Question 1 Correct Mark 1.00 out of 1.00 Flag question
Given an array of N integer, we have to maximize the sum of arr[i] * i, where i is the index of the element (i = 0, 1, 2, ..., N).Write an algorithm based on Greedy technique with a Complexity O(nlogn).
Input Format:
First line specifies the number of elements-n
The next n lines contain the array elements.
Output Format:
Maximum Array Sum to be printed.
Sample Input:
5
2 5 3 4 0
Sample output:
40
Answer: (penalty regime: 0 %)
#include <stdio.h>
#include <stdlib.h>
int compare(const void *a, const void *b)
{
return (*(int *)a - *(int *)b);
}
int main()
{
int n;
25°C
Mostly cloudy
Search
ENG
IN
100%
08:28 PM
02-11-2026


charulatha/Greedy-Method at mai
4-G-Array Sum max problem: Atte
File C:/Users/Charulatha/Downloads/4-G-Array%20Sum%20max%20problem_%20Attempt%20review%20(1).mht
Chat
Input
Expected
Got
5 2 5 3 4 0
40
40
10 2 2 2 4 4 3 3 5 5 5
191
191
2 45 3
45
45
Passed all tests!
Correct
Marks for this submission: 1.00/1.00.
25°C Mostly cloudy
Search
ENG IN
100%
08:29 PM 02-11-2026


charulatha/Greedy-Method at ma
4-G-Array Sum max problem: Atte
5-G-Product of Array elements-Mi
File C:/Users/Charulatha/Downloads/5-G-Product%20of%20Array%20elements-Minimum_%20Attempt%20review%20(1).mht
Chat
Dashboard
My courses
CS23331-DAA-2025-CSE / 5-G-Product of Array elements-Minimum
5-G-Product of Array elements-Minimum
Started on Sunday, 30 August 2026, 11:02 AM
State Finished
Completed on Sunday, 30 August 2026, 11:06 AM
Time taken 4 mins 14 secs
Marks 1.00/1.00
Grade 10.00 out of 10.00 (100%)
Question 1
Correct
Mark 1.00 out of 1.00
Flag question
Given two arrays array_One[] and array_Two[] of same size N. We need to first rearrange the arrays such that the sum of the product of pairs(1 element from each) is minimum. That is SUM (A[i] * B[i]) for all i is minimum.
For example:
Input
Result
3
1
28
25°C
Mostly cloudy
Search
ENG
IN
100%
08:30 PM
02-11-2026


charulatha/Greedy-Method at mai
4-G-Array Sum max problem: Atte
5-G-Product of Array elements-Mi
File C:/Users/Charulatha/Downloads/5-G-Product%20of%20Array%20elements-Minimum_%20Attempt%20review%20(1).mht
Chat
Question 1 | Correct | Mark 1.00 out of 1.00 | Flag question
Given two arrays array_One[] and array_Two[] of same size N. We need to first rearrange the arrays such that the sum of the product of pairs(1 element from each) is minimum. That is SUM (A[i] * B[i]) for all i is minimum.
For example:
Input
Result
3
1
2
3
4
5
6
28
Answer: (penalty regime: 0 %)
#include <stdio.h>
#include <stdlib.h>
int ascending(const void *a, const void *b)
{
return (*(int *)a - *(int *)b);
}
int descending(const void *a, const void *b)
{
return (*(int *)b - *(int *)a);
}
int main()
{
int n;
25°C
Mostly cloudy
Search
ENG
IN
100%
08:30 PM
02-11-2026


charulatha/Greedy-Method at mai
4-G-Array Sum max problem: Atte
5-G-Product of Array elements-Mi
File C:/Users/Charulatha/Downloads/5-G-Product%20of%20Array%20elements-Minimum_%20Attempt%20review%20(1).mht
Chat
#include <stdio.h>
#include <stdlib.h>
int ascending(const void *a, const void *b)
{
return (*(int *)a - *(int *)b);
}
int descending(const void *a, const void *b)
{
return (*(int *)b - *(int *)a);
}
int main()
{
int n;
scanf("%d", &n);
int a[n], b[n];
for (int i = 0; i < n; i++)
scanf("%d", &a[i]);
for (int i = 0; i < n; i++)
scanf("%d", &b[i]);
qsort(a, n, sizeof(int), ascending);
qsort(b, n, sizeof(int), descending);
long long sum = 0;
for (int i = 0; i < n; i++)
sum += (long long)a[i] * b[i];
printf("%lld", sum);
return 0;
}
25°C
Mostly cloudy
Search
ENG
IN
100%
08:30 PM
02-11-2026


charulatha/Greedy-Method at ma
4-G-Array Sum max problem: Atte
5-G-Product of Array elements-Mi
File C:/Users/Charulatha/Downloads/5-G-Product%20of%20Array%20elements-Minimum_%20Attempt%20review%20(1).mht
Chat
3 1 2 3 4 5 6 | 28 | 28
4 7 5 1 2 1 3 4 1 | 22 | 22
5 20 10 30 10 40 8 9 4 3 10 | 590 | 590
Passed all tests!
25°C Mostly cloudy
Search
ENG IN
100%
08:30 PM 02-11-2026