


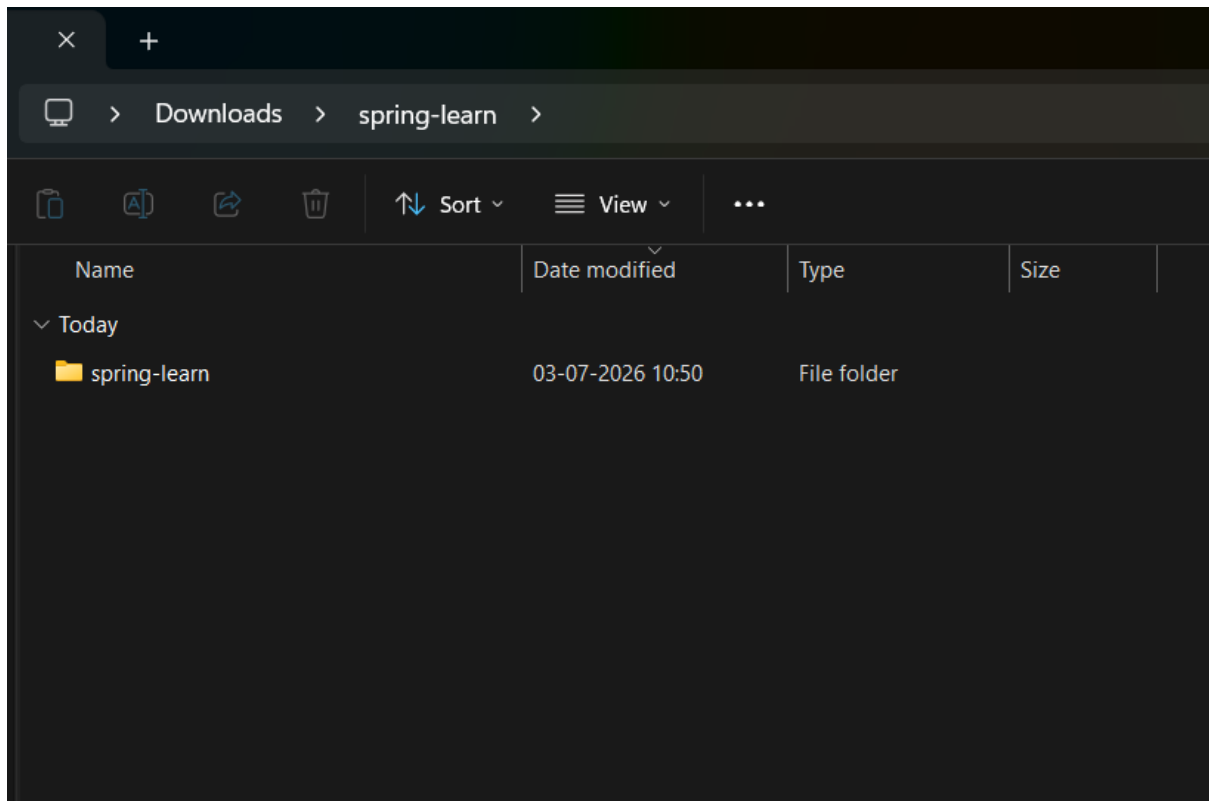
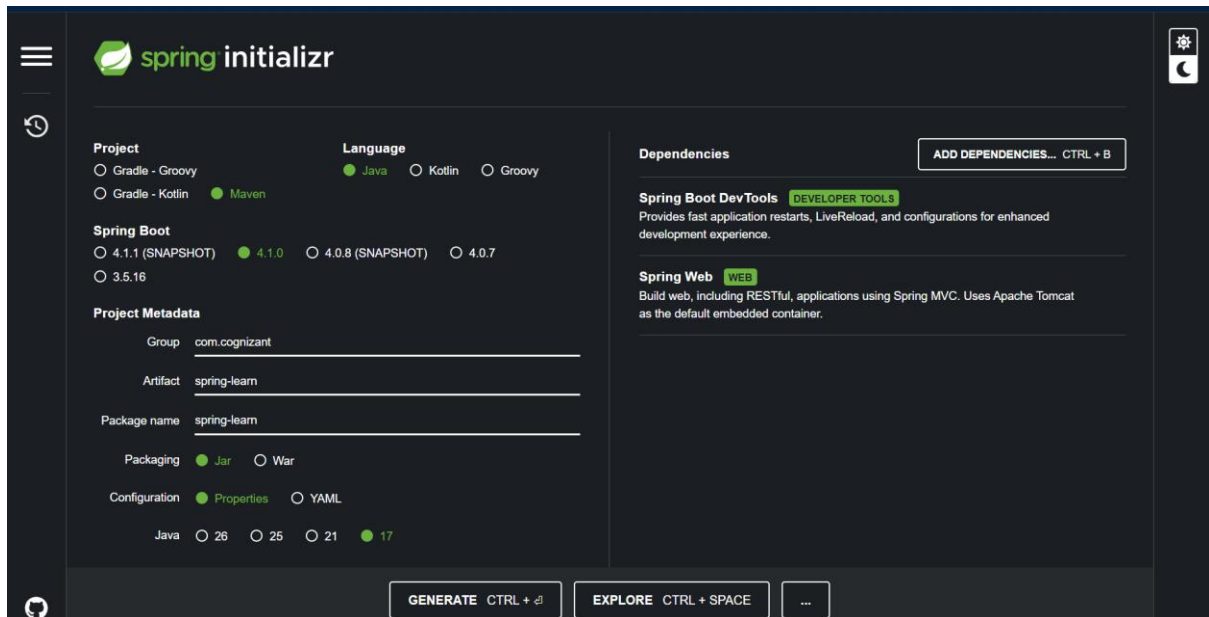




Spring Rest using Spring Boot 3

Create a Spring Web Project using Maven


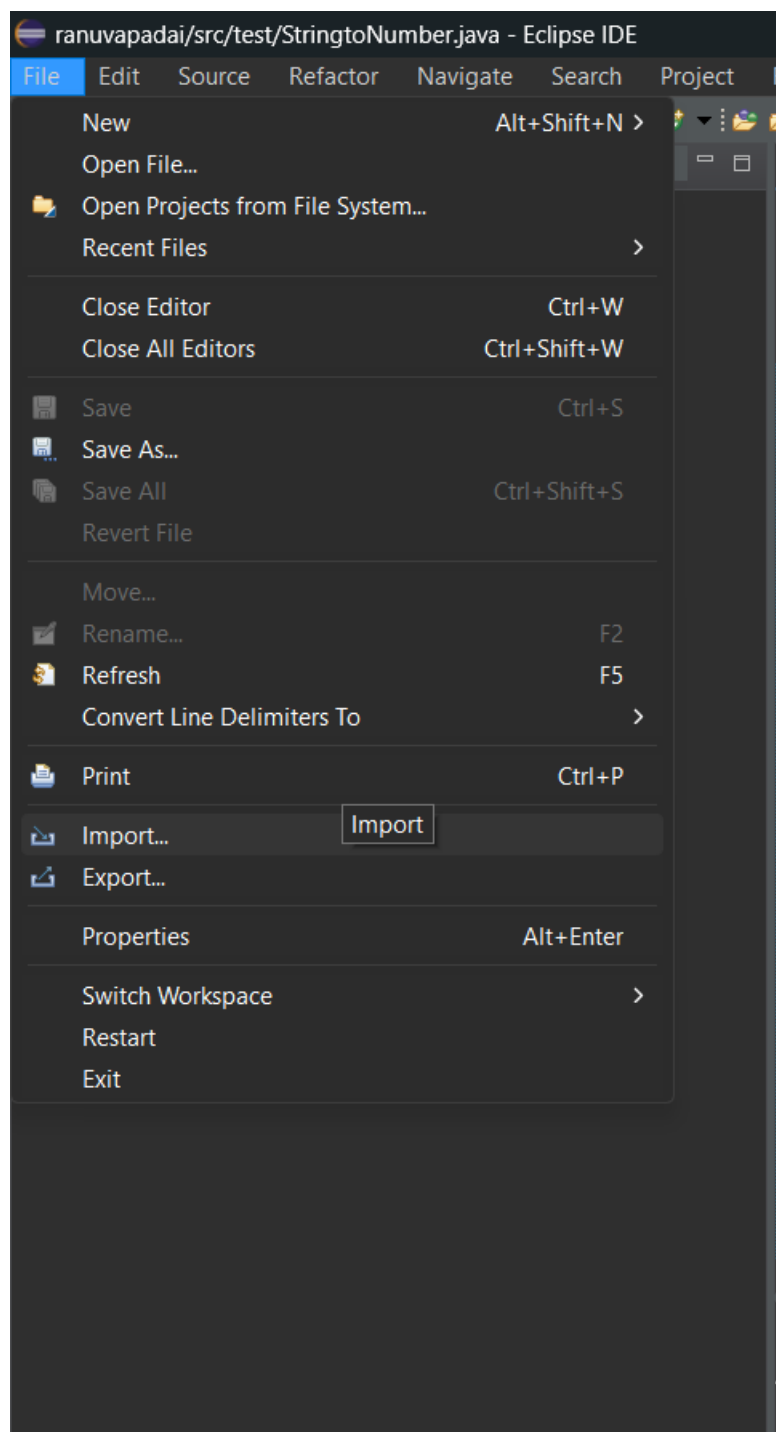


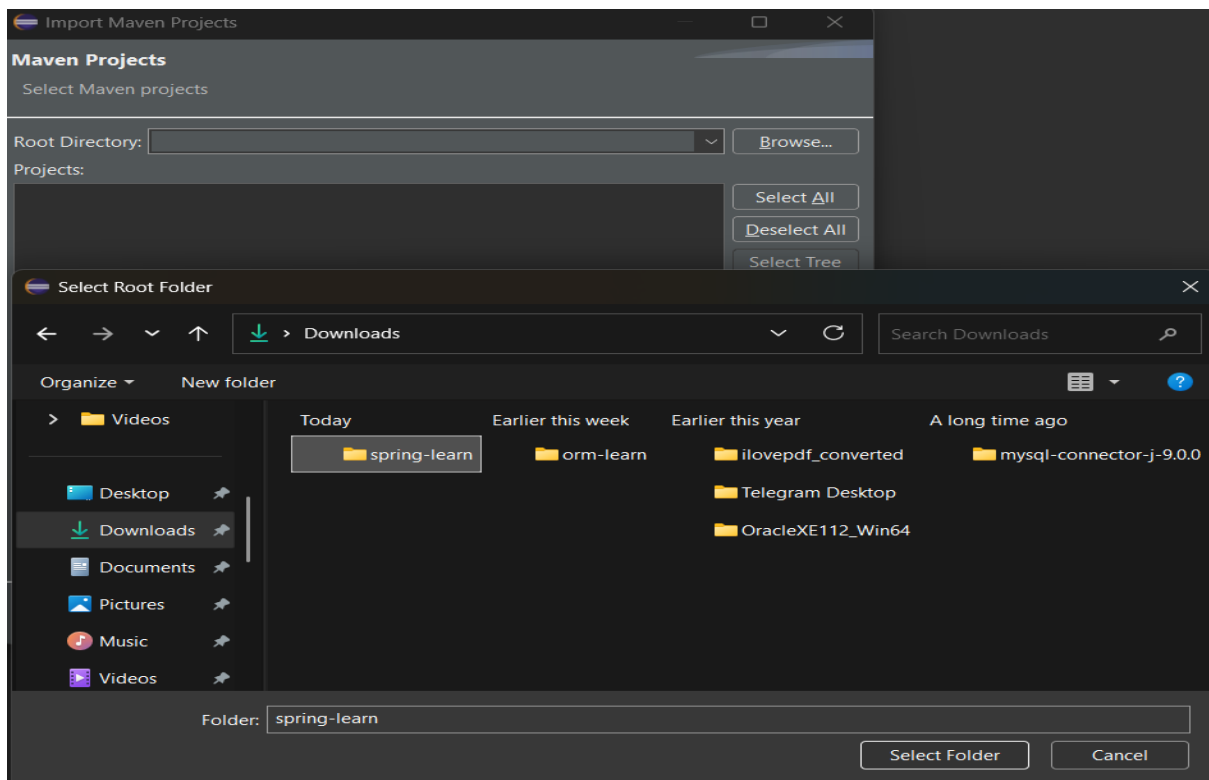

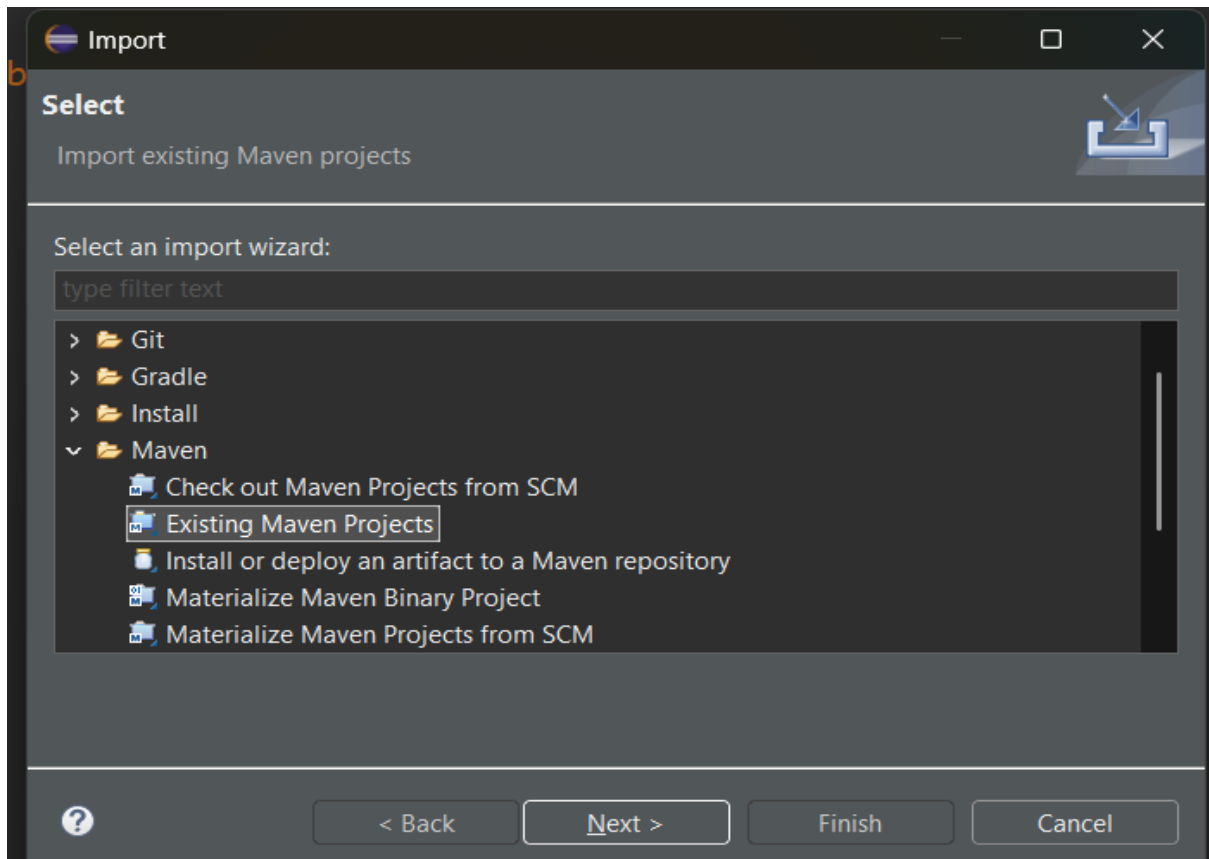

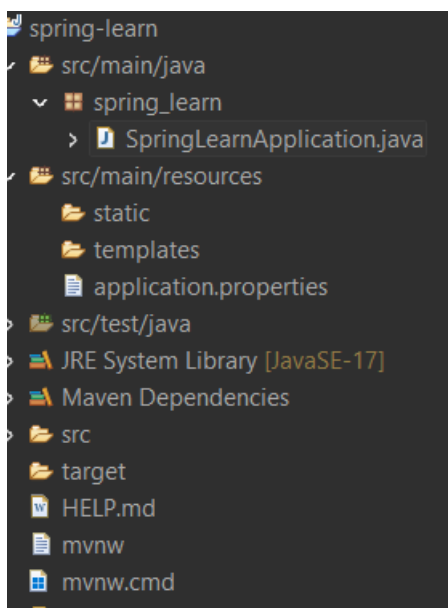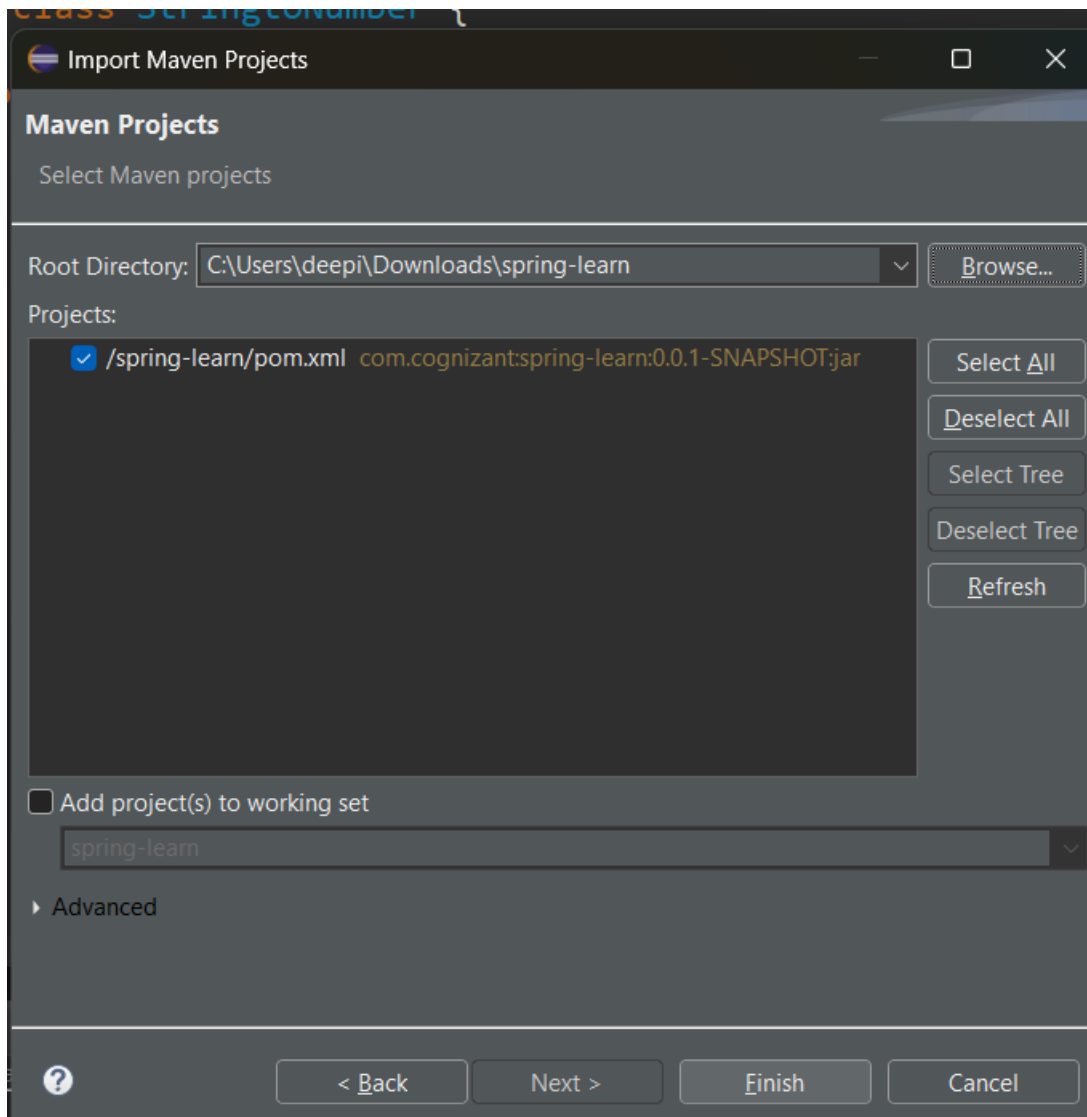

Spring Core – Load Country from Spring Configuration XML

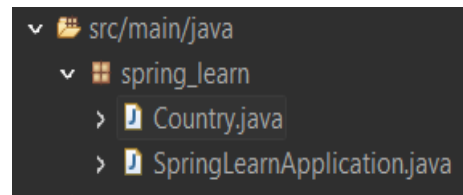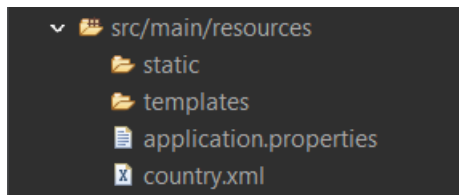

```
1 package spring_learn;
2
3 import org.slf4j.Logger;
4 import org.slf4j.LoggerFactory;
5
6 public class Country {
7
8     private static final Logger LOGGER =
9         LoggerFactory.getLogger(Country.class);
10
11     private String code;
12     private String name;
13
14     public Country() {
15         LOGGER.debug("Inside Country Constructor.");
16     }
17
18     public String getCode() {
19         LOGGER.debug("Inside getCode()");
20         return code;
21     }
22
23     public void setCode(String code) {
24         LOGGER.debug("Inside setCode()");
25         this.code = code;
26     }
27
28     public String getName() {
29         LOGGER.debug("Inside getName()");
30         return name;
31     }
32 }
```

```

32
33•   public void setName(String name) {
34       LOGGER.debug("Inside setName()");
35       this.name = name;
36   }
37
38•   @Override
39   public String toString() {
40       return "Country [code=" + code + ", name=" + name + "]";
41   }
42 }|

```

```

1 <?xml version="1.0" encoding="UTF-8"?>
2
3•<beans xmlns="http://www.springframework.org/schema/beans"
4       xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
5
6       xsi:schemaLocation="
7       http://www.springframework.org/schema/beans
8       https://www.springframework.org/schema/beans/spring-beans.xsd">
9
10•   <bean id="country"
11         class="spring_learn.Country">
12
13       <property name="code" value="IN"/>
14
15       <property name="name" value="India"/>
16 |
17   </bean>
18
19 </beans>

```

```

3•import org.springframework.context.ApplicationContext;
4import org.springframework.context.support.ClassPathXmlApplicationContext;
5
6import org.slf4j.Logger;
7import org.slf4j.LoggerFactory;
8import org.springframework.boot.SpringApplication;
9import org.springframework.boot.autoconfigure.SpringBootApplication;
10
11@SpringBootApplication
12public class SpringLearnApplication {
13
14•    private static final Logger LOGGER =
15        LoggerFactory.getLogger(SpringLearnApplication.class);
16
17•    public static void main(String[] args) {
18
19        LOGGER.info("Inside main()");
20
21        SpringApplication.run(SpringLearnApplication.class, args);
22
23        displayCountry();|
24
25        LOGGER.info("Spring Boot Application Started");
26    }
27•    public static void displayCountry() {
28
29        ApplicationContext context =
30            new ClassPathXmlApplicationContext("country.xml");
31
32        Country country = context.getBean("country", Country.class);
33
34        LOGGER.debug("Country : {}", country.toString());
35    }
36
37
38 }

```



country.xml country.java SpringLearnApplication.java application.properties

```

1spring.application.name=spring-learn
2server.port=9090
3logging.level.spring_learn=DEBUG|


```


Hello World RESTful Web Service

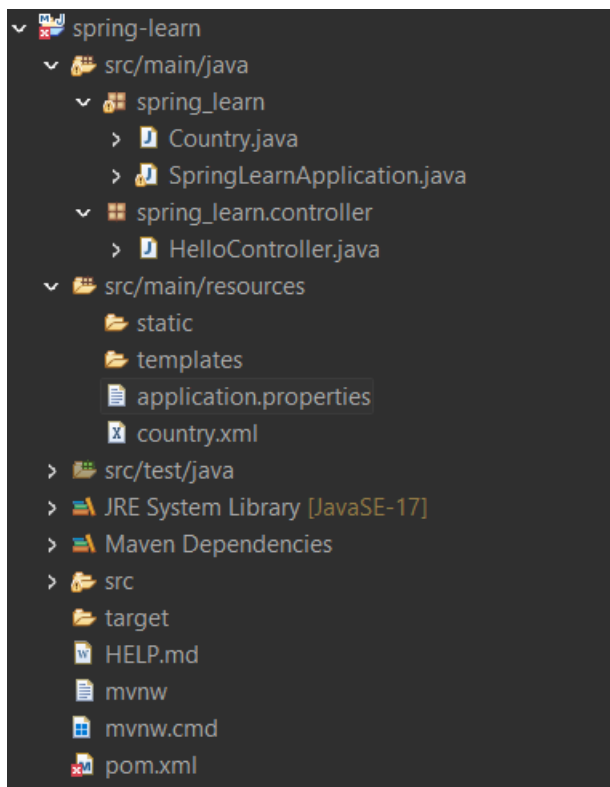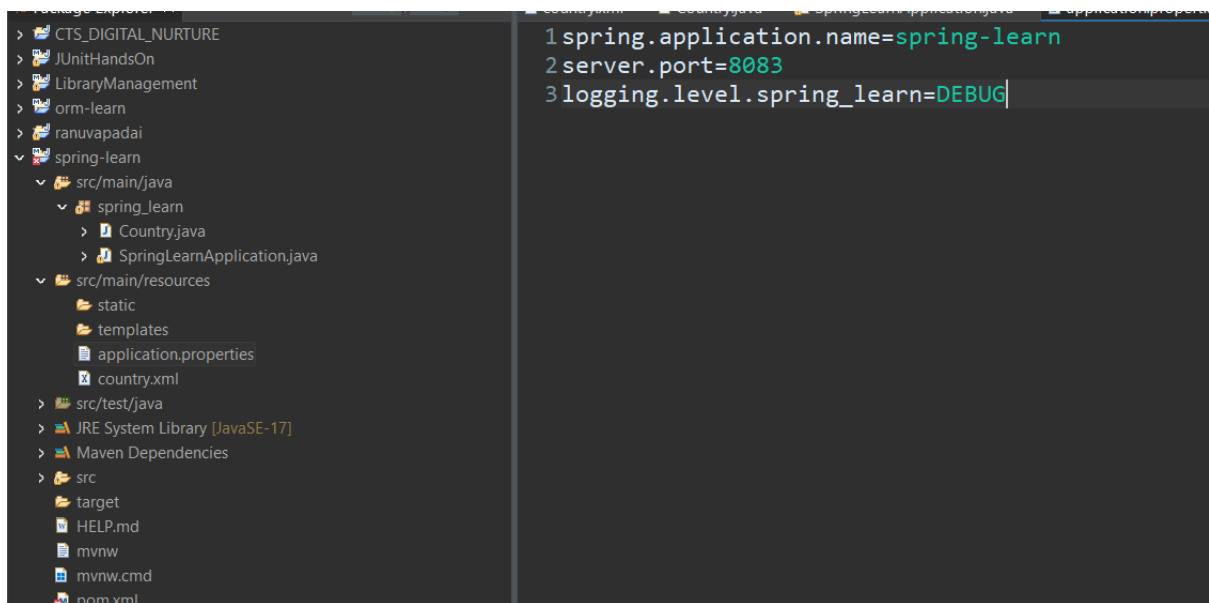



```
LearnApplication      : Starting SpringLearnApplication using Java 17.0.12 with PID 18096 (C:\Users\deep
LearnApplication      : Running with Spring Boot v4.1.0, Spring v7.0.8
LearnApplication      : No active profile set, falling back to 1 default profile: "default"
DefaultsPostProcessor : Devtools property defaults active! Set 'spring.devtools.add-properties' to 'false'
DefaultsPostProcessor : For additional web related logging consider setting the 'logging.level.web' property
catWebServer          : Tomcat initialized with port 8083 (http)
ore.StandardService    : Starting service [Tomcat]
ore.StandardEngine     : Starting Servlet engine: [Apache Tomcat/11.0.22]
ionContextInitializer  : Root WebApplicationContext: initialization completed in 1598 ms
catWebServer          : Tomcat started on port 8083 (http) with context path '/'
LearnApplication      : Started SpringLearnApplication in 3.292 seconds (process running for 4.02)
y                      : Inside Country Constructor.
y                      : Inside setCode()
y                      : Inside setName()
LearnApplication      : Country : Country [code=IN, name=India]
LearnApplication      : Spring Boot Application Started
[localhost].[/]        : Initializing Spring DispatcherServlet 'dispatcherServlet'
dispatcherServlet      : Initializing Servlet 'dispatcherServlet'
dispatcherServlet      : Completed initialization in 7 ms
ontroller              : START - sayHello()
ontroller              : END - sayHello()
```

In Browser

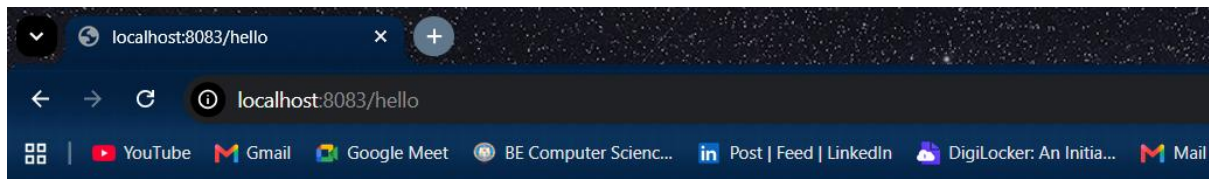


Hello World!!

In Postman

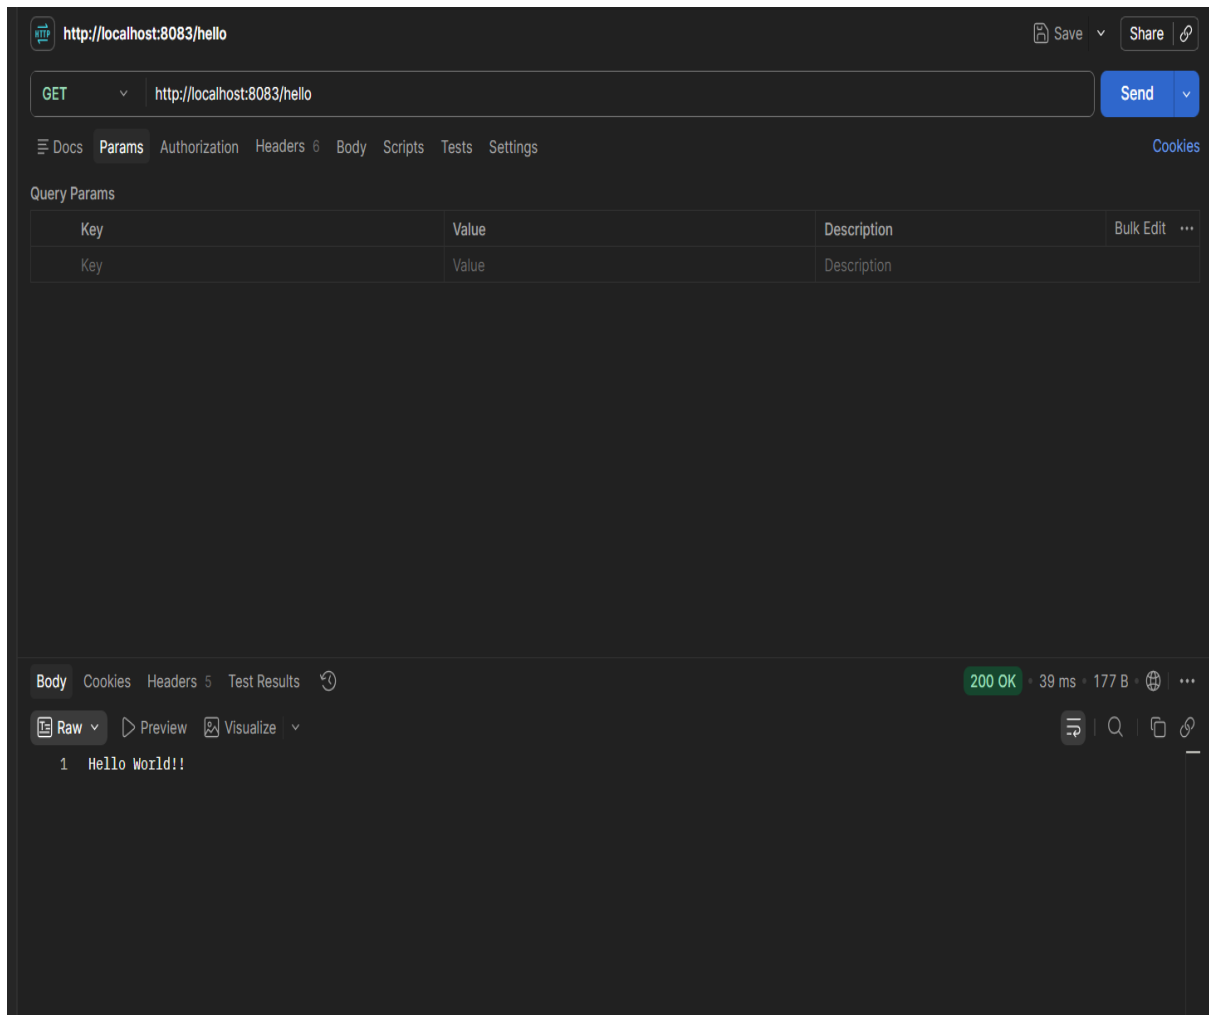


REST - Country Web Service

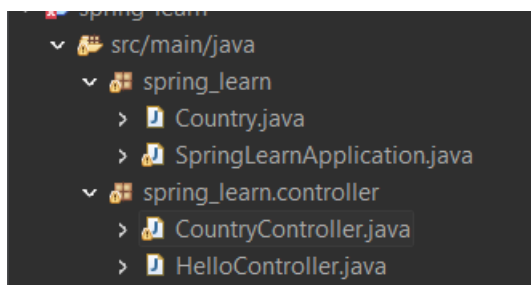

```

1 package spring_learn.controller;
2
3 import org.slf4j.Logger;
4 import org.slf4j.LoggerFactory;
5 import org.springframework.context.ApplicationContext;
6 import org.springframework.context.support.ClassPathXmlApplicationContext;
7 import org.springframework.web.bind.annotation.RequestMapping;
8 import org.springframework.web.bind.annotation.RestController;
9
10 import spring_learn.Country;
11
12 @RestController
13 public class CountryController {
14
15     private static final Logger LOGGER =
16         LoggerFactory.getLogger(CountryController.class);
17
18     @RequestMapping("/country")
19     public Country getCountryIndia() {
20
21         LOGGER.info("START - getCountryIndia()");
22
23         ApplicationContext context =
24             new ClassPathXmlApplicationContext("country.xml");
25
26         Country country = context.getBean("country", Country.class);
27
28         LOGGER.info("END - getCountryIndia()");
29
30         return country;
31     }
32 }

```

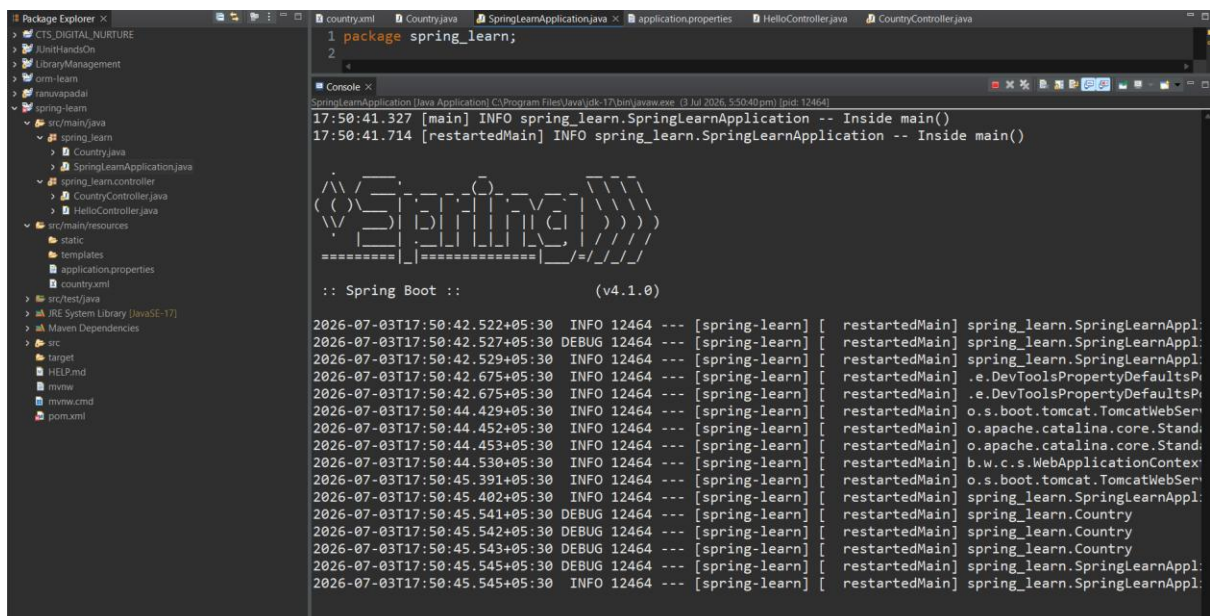

The screenshot shows an IDE with the following components:

- Package Explorer:** Displays the project structure, including packages like `spring_learn`, `spring_learn.controller`, and `spring_learn.service`, and files like `Country.xml`, `Country.java`, `SpringLearnApplication.java`, `application.properties`, `HelloController.java`, and `CountryController.java`.
- Console:** Shows the application logs, including the start of the Spring Boot application (v4.1.0) and the execution of the `getCountryIndia()` method. The logs indicate that the application is running successfully and the `Country` object is returned.

```

17:50:41.327 [main] INFO spring_learn.SpringLearnApplication -- Inside main()
17:50:41.714 [restartedMain] INFO spring_learn.SpringLearnApplication -- Inside main()


:: Spring Boot ::
(v4.1.0)

2026-07-03T17:50:42.522+05:30 INFO 12464 --- [spring-learn] [ restartedMain] spring_learn.SpringLearnAppl:
2026-07-03T17:50:42.527+05:30 DEBUG 12464 --- [spring-learn] [ restartedMain] spring_learn.SpringLearnAppl:
2026-07-03T17:50:42.529+05:30 INFO 12464 --- [spring-learn] [ restartedMain] spring_learn.SpringLearnAppl:
2026-07-03T17:50:42.675+05:30 INFO 12464 --- [spring-learn] [ restartedMain] .e.DevToolsPropertyDefaultsPi
2026-07-03T17:50:42.675+05:30 INFO 12464 --- [spring-learn] [ restartedMain] .e.DevToolsPropertyDefaultsPi
2026-07-03T17:50:44.429+05:30 INFO 12464 --- [spring-learn] [ restartedMain] o.s.boot.tomcat.TomcatWebSer
2026-07-03T17:50:44.452+05:30 INFO 12464 --- [spring-learn] [ restartedMain] o.apache.catalina.core.Standi
2026-07-03T17:50:44.453+05:30 INFO 12464 --- [spring-learn] [ restartedMain] o.apache.catalina.core.Standi
2026-07-03T17:50:44.530+05:30 INFO 12464 --- [spring-learn] [ restartedMain] b.w.c.s.WebApplicationContext
2026-07-03T17:50:45.391+05:30 INFO 12464 --- [spring-learn] [ restartedMain] o.s.boot.tomcat.TomcatWebSer
2026-07-03T17:50:45.402+05:30 INFO 12464 --- [spring-learn] [ restartedMain] spring_learn.SpringLearnAppl:
2026-07-03T17:50:45.541+05:30 DEBUG 12464 --- [spring-learn] [ restartedMain] spring_learn.Country
2026-07-03T17:50:45.542+05:30 DEBUG 12464 --- [spring-learn] [ restartedMain] spring_learn.Country
2026-07-03T17:50:45.543+05:30 DEBUG 12464 --- [spring-learn] [ restartedMain] spring_learn.Country
2026-07-03T17:50:45.545+05:30 DEBUG 12464 --- [spring-learn] [ restartedMain] spring_learn.SpringLearnAppl:
2026-07-03T17:50:45.545+05:30 INFO 12464 --- [spring-learn] [ restartedMain] spring_learn.SpringLearnAppl:


```

```
: Starting SpringLearnApplication using Java 17.0.12 with PID 12464 (C:\Users\deepi\Downloads\spring-learn\
: Running with Spring Boot v4.1.0, Spring v7.0.8
: No active profile set, falling back to 1 default profile: "default"
: Devtools property defaults active! Set 'spring.devtools.add-properties' to 'false' to disable
: For additional web related logging consider setting the 'logging.level.web' property to 'DEBUG'
: Tomcat initialized with port 8083 (http)
: Starting service [Tomcat]
: Starting Servlet engine: [Apache Tomcat/11.0.22]
: Root WebApplicationContext: initialization completed in 1852 ms
: Tomcat started on port 8083 (http) with context path '/'
: Started SpringLearnApplication in 3.679 seconds (process running for 4.36)
: Inside Country Constructor.
: Inside setCode()
: Inside setName()
: Country : Country [code=IN, name=India]
: Spring Boot Application Started
```


In Browser

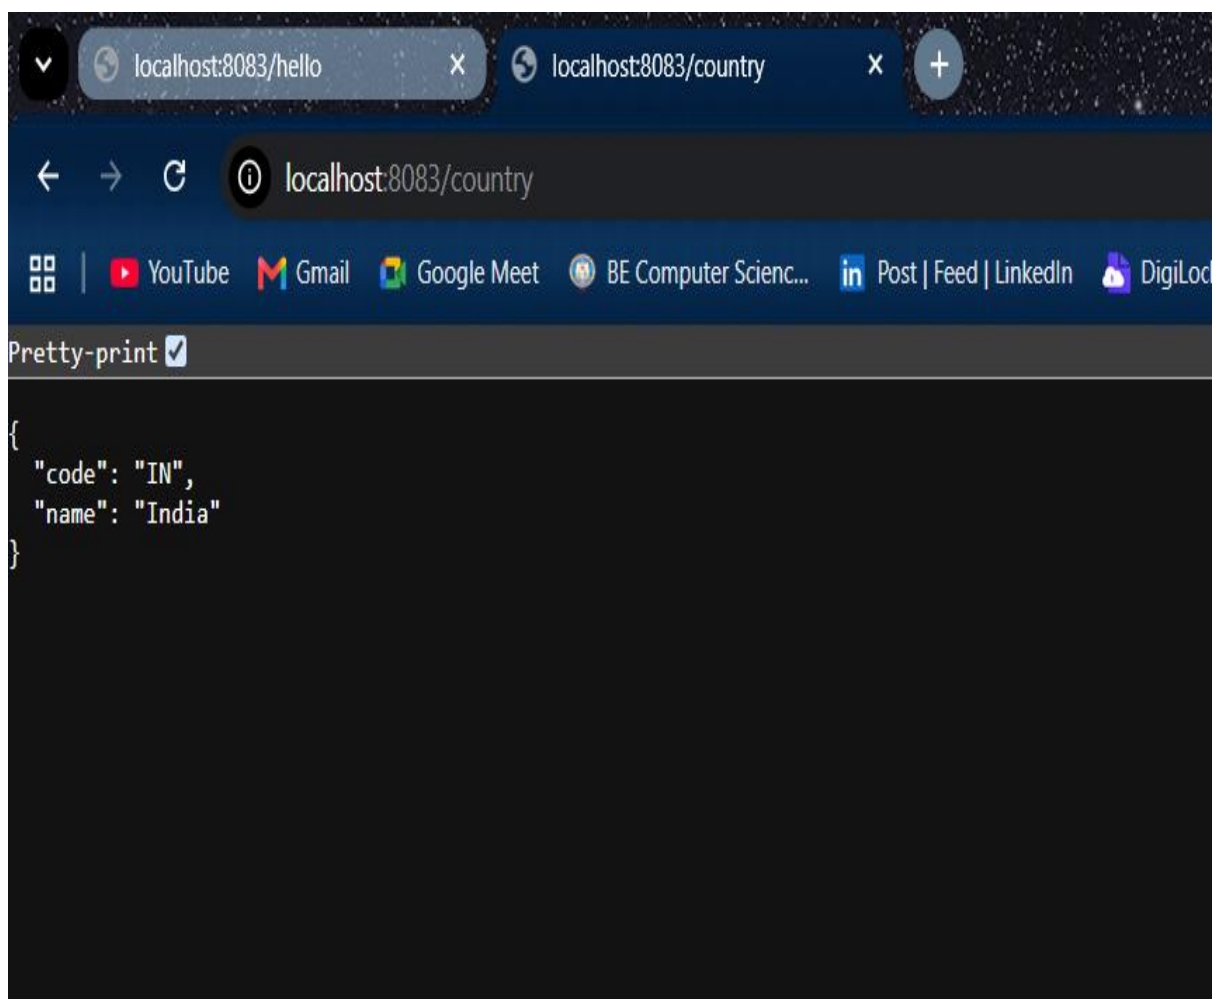

In Postman

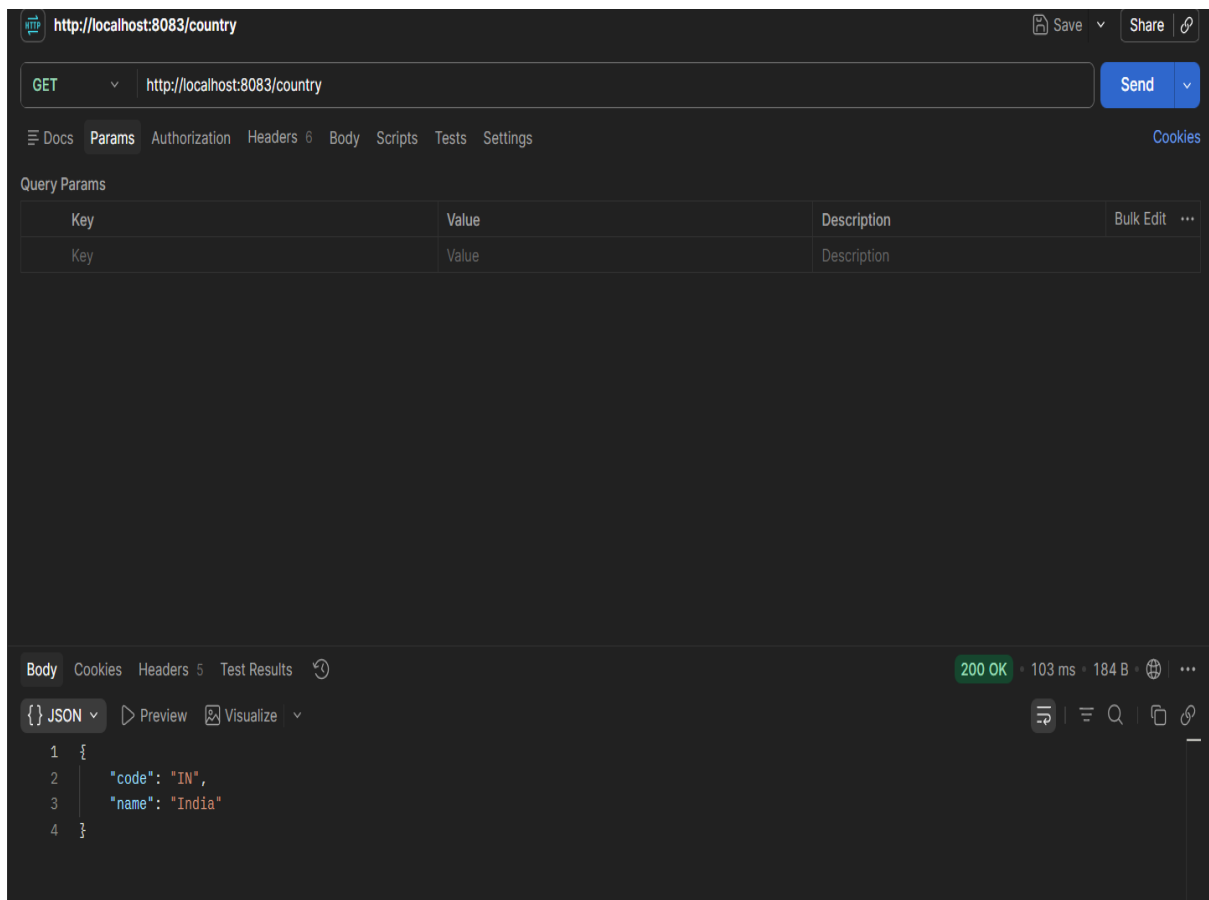

REST - Get country based on country code

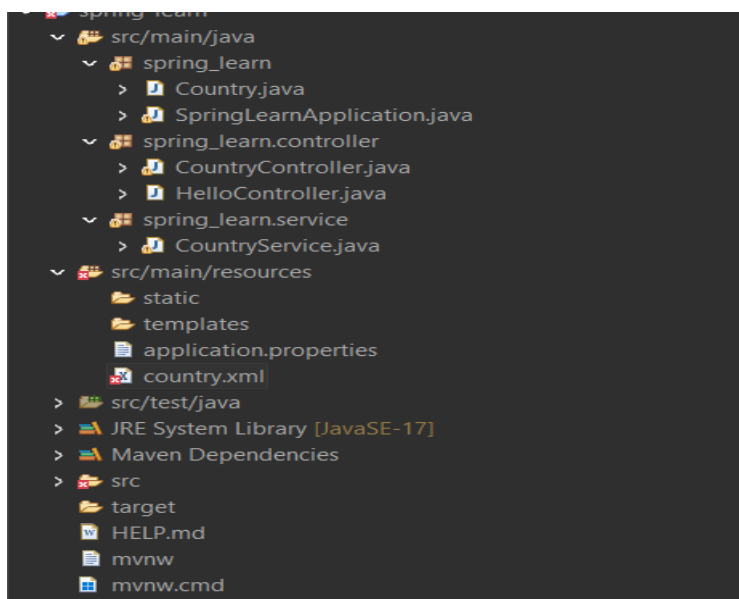


```

13◦ <bean id="india" class="spring_learn.Country">
14     <property name="code" value="IN"/>
15     <property name="name" value="India"/>
16 </bean>
17
18◦ <bean id="us" class="spring_learn.Country">
19     <property name="code" value="US"/>
20     <property name="name" value="United States"/>
21 </bean>
22
23◦ <bean id="germany" class="spring_learn.Country">
24     <property name="code" value="DE"/>
25     <property name="name" value="Germany"/>
26 </bean>
27
28◦ <bean id="japan" class="spring_learn.Country">
29     <property name="code" value="JP"/>
30     <property name="name" value="Japan"/>
31 </bean>
32
33◦ <util:list id="countryList">
34     <ref bean="india"/>
35     <ref bean="us"/>
36     <ref bean="germany"/>
37     <ref bean="japan"/>
38 </util:list>
39
40 </beans>

```

```

1 package spring_learn.service;
2
3◦ import java.util.List;
4
5 import org.springframework.context.ApplicationContext;
6 import org.springframework.context.support.ClassPathXmlApplicationContext;
7 import org.springframework.stereotype.Service;
8
9 import spring_learn.Country;
10
11 @Service
12 public class CountryService {
13
14◦     public Country getCountry(String code) {
15
16         ApplicationContext context =
17             new ClassPathXmlApplicationContext("country.xml");
18
19         List<Country> countryList =
20             (List<Country>) context.getBean("countryList");
21
22         for (Country country : countryList) {
23
24             if (country.getCode().equalsIgnoreCase(code)) {
25
26                 return country;
27
28             }
29         }
30
31         return null;
32     }
33 }

```

```

1 package spring_learn.controller;
2
3 import org.slf4j.Logger;
4 import org.slf4j.LoggerFactory;
5 import org.springframework.context.ApplicationContext;
6 import org.springframework.context.support.ClassPathXmlApplicationContext;
7 import org.springframework.web.bind.annotation.RequestMapping;
8 import org.springframework.web.bind.annotation.RestController;
9
10 import org.springframework.beans.factory.annotation.Autowired;
11 import org.springframework.web.bind.annotation.GetMapping;
12 import org.springframework.web.bind.annotation.PathVariable;
13
14 import spring_learn.service.CountryService;
15
16 import spring_learn.Country;
17
18 @RestController
19 public class CountryController {
20
21     private static final Logger LOGGER =
22         LoggerFactory.getLogger(CountryController.class);
23
24     @Autowired
25     private CountryService countryService;
26

```

```


26
27     @RequestMapping("/country")
28     public Country getCountryIndia() {
29
30         LOGGER.info("START - getCountryIndia()");
31
32         ApplicationContext context =
33             new ClassPathXmlApplicationContext("country.xml");
34
35         Country country = context.getBean("country", Country.class);
36
37         LOGGER.info("END - getCountryIndia()");
38
39         return country;
40     }
41
42     @GetMapping("/countries/{code}")
43     public Country getCountry(@PathVariable String code) {
44
45         LOGGER.info("START - getCountry()");
46
47         Country country = countryService.getCountry(code);
48
49         LOGGER.info("END - getCountry()");
50
51         return country;
52     }
53 }

```

```

1 package spring_learn;
2
3 import org.springframework.context.ApplicationContext;
4 import org.springframework.context.support.ClassPathXmlApplicationContext;
5
6 import org.slf4j.Logger;
7 import org.slf4j.LoggerFactory;
8 import org.springframework.boot.SpringApplication;
9 import org.springframework.boot.autoconfigure.SpringBootApplication;
10
11 @SpringBootApplication
12 public class SpringLearnApplication {
13
14     private static final Logger LOGGER =
15         LoggerFactory.getLogger(SpringLearnApplication.class);
16
17     public static void main(String[] args) {
18
19         LOGGER.info("Inside main()");
20
21         SpringApplication.run(SpringLearnApplication.class, args);
22
23         // displayCountry();
24
25         LOGGER.info("Spring Boot Application Started");
26     }

```

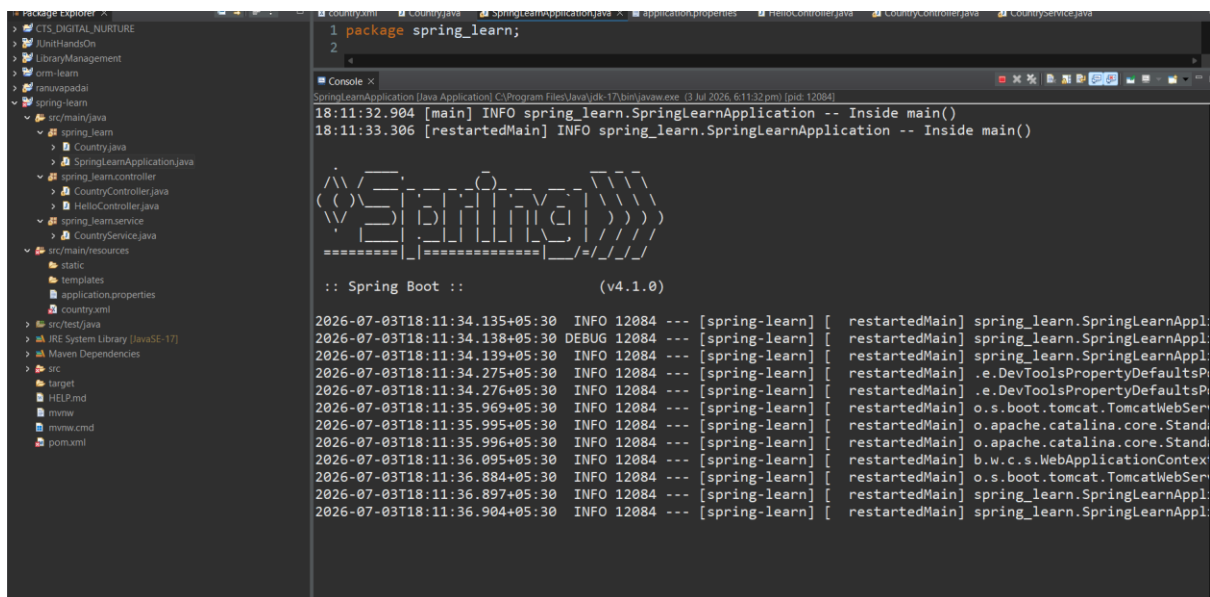

The screenshot shows an IDE with the Spring Learn project structure on the left and a console window on the right. The project structure includes:

- src/main/java
 - spring_learn
 - Country.java
 - SpringLearnApplication.java
 - spring_learn.controller
 - CountryController.java
 - HelloController.java
 - spring_learn.service
 - CountryService.java
- src/main/resources
 - static
 - templates
 - application.properties
 - country.xml
- src/test/java
 - JRE System Library (JavaSE-17)
 - Maven Dependencies
 - src
 - target
 - HELP.md
 - time
 - time.cmd
 - pot.xml

The console window shows the following logs:

```

SpringLearnApplication [Java Application] C:\Program Files\Java\jdk-17\bin\java.exe (3 Jul 2026, 6:11:32 pm) [pid: 12084]
18:11:32.904 [main] INFO spring_learn.SpringLearnApplication -- Inside main()
18:11:33.306 [restartedMain] INFO spring_learn.SpringLearnApplication -- Inside main()

:: Spring Boot ::


(v4.1.0)

2026-07-03T18:11:34.135+05:30 INFO 12084 --- [spring-learn] [ restartedMain] spring_learn.SpringLearnAppl
2026-07-03T18:11:34.138+05:30 DEBUG 12084 --- [spring-learn] [ restartedMain] spring_learn.SpringLearnAppl
2026-07-03T18:11:34.139+05:30 INFO 12084 --- [spring-learn] [ restartedMain] spring_learn.SpringLearnAppl
2026-07-03T18:11:34.275+05:30 INFO 12084 --- [spring-learn] [ restartedMain] .e.DevToolsPropertyDefaultsP
2026-07-03T18:11:34.276+05:30 INFO 12084 --- [spring-learn] [ restartedMain] .e.DevToolsPropertyDefaultsP
2026-07-03T18:11:35.969+05:30 INFO 12084 --- [spring-learn] [ restartedMain] o.s.boot.tomcat.TomcatWebSer
2026-07-03T18:11:35.995+05:30 INFO 12084 --- [spring-learn] [ restartedMain] o.s.boot.tomcat.TomcatWebSer
2026-07-03T18:11:35.996+05:30 INFO 12084 --- [spring-learn] [ restartedMain] o.apache.catalina.core.Stand
2026-07-03T18:11:36.095+05:30 INFO 12084 --- [spring-learn] [ restartedMain] b.w.c.s.WebApplicationContext
2026-07-03T18:11:36.884+05:30 INFO 12084 --- [spring-learn] [ restartedMain] o.s.boot.tomcat.TomcatWebSer
2026-07-03T18:11:36.897+05:30 INFO 12084 --- [spring-learn] [ restartedMain] spring_learn.SpringLearnAppl
2026-07-03T18:11:36.904+05:30 INFO 12084 --- [spring-learn] [ restartedMain] spring_learn.SpringLearnAppl


```

```
 : Starting SpringLearnApplication using Java 17.0.12 with PID 12084 (C:\Users\dee
 : Running with Spring Boot v4.1.0, Spring v7.0.8
 : No active profile set, falling back to 1 default profile: "default"
or : Devtools property defaults active! Set 'spring.devtools.add-properties' to 'fal
or : For additional web related logging consider setting the 'logging.level.web' pro
 : Tomcat initialized with port 8083 (http)
 : Starting service [Tomcat]
 : Starting Servlet engine: [Apache Tomcat/11.0.22]
er : Root WebApplicationContext: initialization completed in 1815 ms
 : Tomcat started on port 8083 (http) with context path '/'
 : Started SpringLearnApplication in 3.58 seconds (process running for 4.268)
 : Spring Boot Application Started
```


In Browser

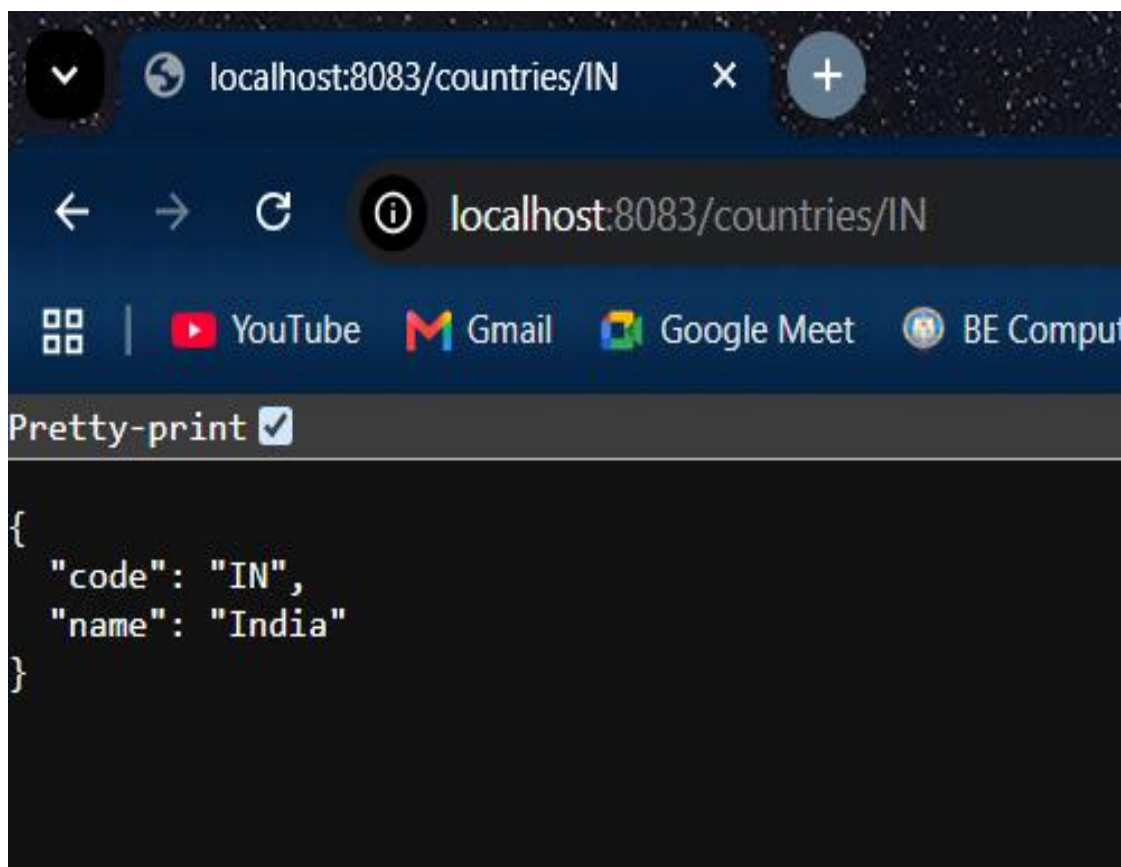

In postman

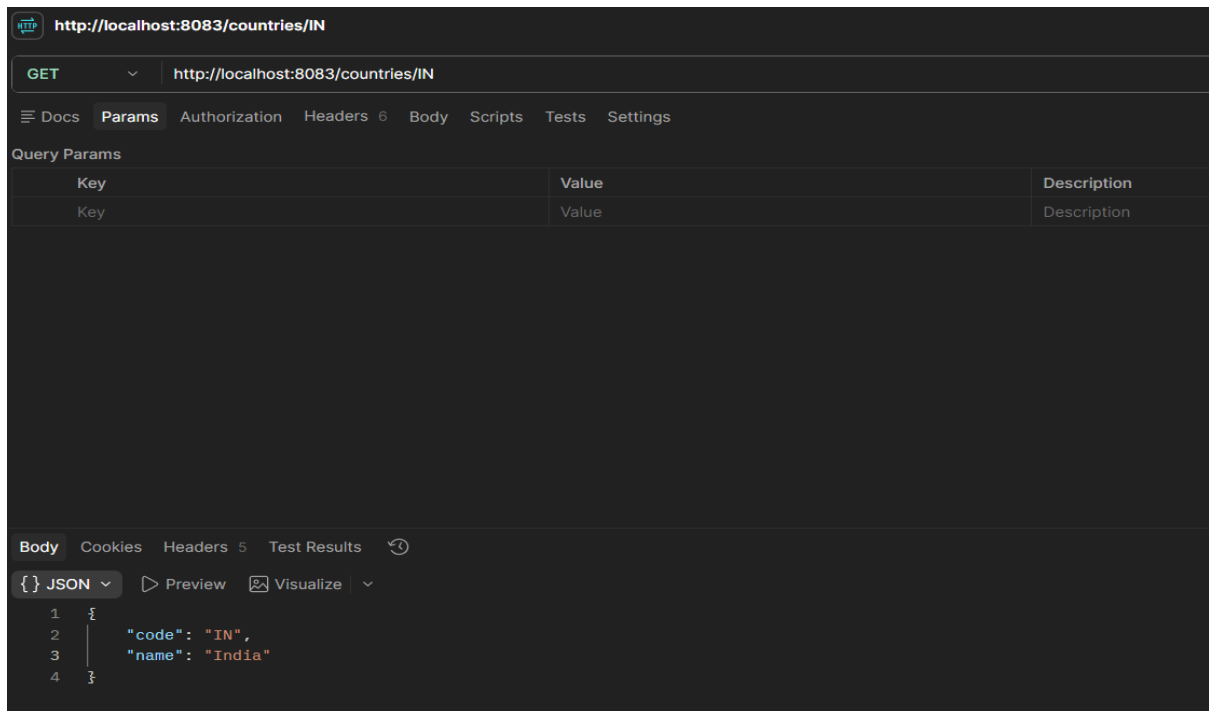

Create authentication service that returns JWT

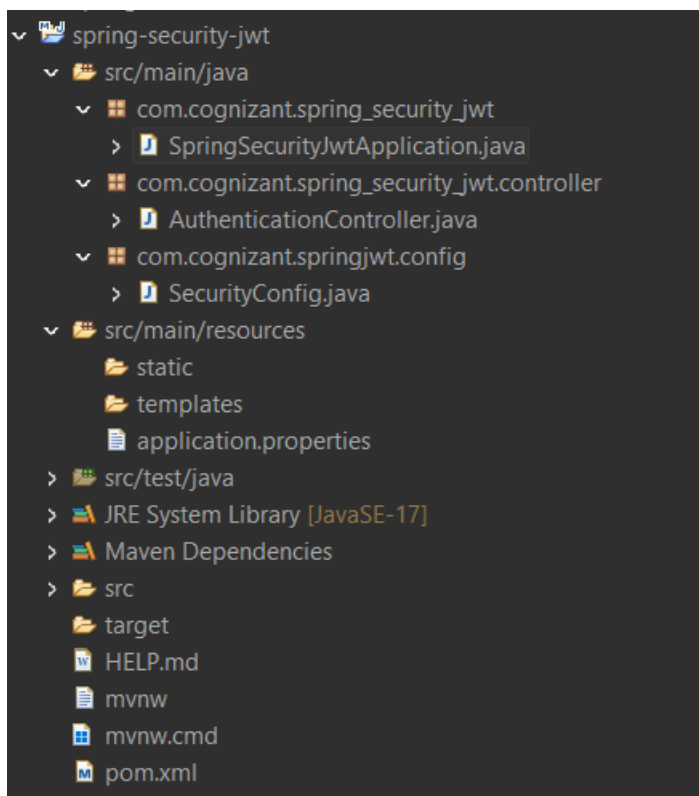

```
Maximize package com.cognizant.spring_security_jwt;
2
3 import org.springframework.boot.SpringApplication;
4
5
6 @SpringBootApplication
7 public class SpringSecurityJwtApplication {
8
9     public static void main(String[] args) {
10         SpringApplication.run(SpringSecurityJwtApplication.class, args);
11     }
12
13 }
14
```

```
country.xml SpringLearnA... application... spring-lear... spring-secu... SecurityConf...
1 package com.cognizant.spring_security_jwt.controller;
2
3 import org.springframework.web.bind.annotation.GetMapping;
4 import org.springframework.web.bind.annotation.RestController;
5
6 @RestController
7 public class AuthenticationController {
8
9     @GetMapping("/authenticate")
10     public String authenticate() {
11
12         return "Authentication Successful";
13
14     }
15
16 }
```

```

1 package com.cognizant.springjwt.config;
2
3 import org.springframework.context.annotation.Bean;
4 import org.springframework.context.annotation.Configuration;
5 import org.springframework.security.config.Customizer;
6 import org.springframework.security.config.annotation.web.builders.HttpSecurity;
7 import org.springframework.security.web.SecurityFilterChain;
8
9 @Configuration
10 public class SecurityConfig {
11
12     @Bean
13     public SecurityFilterChain securityFilterChain(HttpSecurity http) throws Exception {
14
15         http
16             .csrf(csrf -> csrf.disable())
17
18             .authorizeHttpRequests(auth -> auth
19                 .requestMatchers("/authenticate").permitAll()
20                 .anyRequest().authenticated()
21             )
22
23             .httpBasic(Customizer.withDefaults());
24
25         return http.build();
26     }
27 }

```

```

1 spring.application.name=spring-security-jwt
2 server.port = 9090

```

```

https://maven.apache.org/xsd/maven-4.0.0.xsd (xsi:schemaLocation)
1 <?xml version="1.0" encoding="UTF-8"?>
2 <project xmlns="http://maven.apache.org/POM/4.0.0" xmlns:xsi="http://www.w3.org/2001/XMLSchema-inst
3   xsi:schemaLocation="http://maven.apache.org/POM/4.0.0 https://maven.apache.org/xsd/maven-4.0.0.
4   <modelVersion>4.0.0</modelVersion>
5   <parent>
6     <groupId>org.springframework.boot</groupId>
7     <artifactId>spring-boot-starter-parent</artifactId>
8     <version>3.5.16</version>
9     <relativePath/> <!-- lookup parent from repository -->
10  </parent>
11  <groupId>com.cognizant</groupId>
12  <artifactId>spring-security-jwt</artifactId>
13  <version>0.0.1-SNAPSHOT</version>
14  <name/>
15  <description/>
16  <url/>
17  <licenses>
18    <license/>
19  </licenses>
20  <developers>
21    <developer/>
22  </developers>
23  <scm>
24    <connection/>
25    <developerConnection/>
26    <tag/>
27    <url/>
28  </scm>
29  <properties>
30    <java.version>17</java.version>
31  </properties>
32  <dependencies>
33    <dependency>
34      <groupId>org.springframework.boot</groupId>

```

```

33    <dependency>
34      <groupId>org.springframework.boot</groupId>
35      <artifactId>spring-boot-starter-security</artifactId>
36    </dependency>
37    <dependency>
38      <groupId>org.springframework.boot</groupId>
39      <artifactId>spring-boot-starter-web</artifactId>
40    </dependency>
41
42    <dependency>
43      <groupId>org.springframework.boot</groupId>
44      <artifactId>spring-boot-devtools</artifactId>
45      <scope>runtime</scope>
46      <optional>true</optional>
47    </dependency>
48    <dependency>
49      <groupId>org.springframework.boot</groupId>
50      <artifactId>spring-boot-starter-test</artifactId>
51      <scope>test</scope>
52    </dependency>
53    <dependency>
54      <groupId>org.springframework.security</groupId>
55      <artifactId>spring-security-test</artifactId>
56      <scope>test</scope>
57    </dependency>
58    <dependency>
59      <groupId>io.jsonwebtoken</groupId>
60      <artifactId>jjwt-api</artifactId>
61      <version>0.12.7</version>
62    </dependency>
63
64    <dependency>
65      <groupId>io.jsonwebtoken</groupId>
66      <artifactId>jjwt-impl</artifactId>
67      <version>0.12.7</version>

```



```

67         <version>0.12.7</version>
68         <scope>runtime</scope>
69     </dependency>
70
71     <dependency>
72         <groupId>io.jsonwebtoken</groupId>
73         <artifactId>jjwt-jackson</artifactId>
74         <version>0.12.7</version>
75         <scope>runtime</scope>
76     </dependency>
77 </dependencies>
78
79 <build>
80     <plugins>
81     <plugin>
82         <groupId>org.springframework.boot</groupId>
83         <artifactId>spring-boot-maven-plugin</artifactId>
84     </plugin>
85     </plugins>
86 </build>
87
88 </project>
89

```

```

1 package com.cognizant.spring_security_jwt;
2

```

Console ×
SpringSecurityJwtApplication [Java Application] C:\Program Files\Java\jdk-17\bin\javaw.exe (3 Jul 2026, 7:08:45 pm) [pid: 2700]



```

:: Spring Boot ::                (v3.5.16)




2026-07-03T19:08:47.333+05:30 INFO 2700 --- [spring-security-jwt] [ restartedMain] c.c.s.SpringSecurityJwt
2026-07-03T19:08:47.340+05:30 INFO 2700 --- [spring-security-jwt] [ restartedMain] c.c.s.SpringSecurityJwt
2026-07-03T19:08:47.485+05:30 INFO 2700 --- [spring-security-jwt] [ restartedMain] .e.DevToolsPropertyDefi
2026-07-03T19:08:47.485+05:30 INFO 2700 --- [spring-security-jwt] [ restartedMain] .e.DevToolsPropertyDefi
2026-07-03T19:08:49.421+05:30 INFO 2700 --- [spring-security-jwt] [ restartedMain] o.s.b.w.embedded.tomcat
2026-07-03T19:08:49.440+05:30 INFO 2700 --- [spring-security-jwt] [ restartedMain] o.apache.catalina.core
2026-07-03T19:08:49.440+05:30 INFO 2700 --- [spring-security-jwt] [ restartedMain] o.apache.catalina.core
2026-07-03T19:08:49.491+05:30 INFO 2700 --- [spring-security-jwt] [ restartedMain] o.a.c.c.C.[Tomcat].[lo
2026-07-03T19:08:49.492+05:30 INFO 2700 --- [spring-security-jwt] [ restartedMain] w.s.c.ServletWebServer
2026-07-03T19:08:50.116+05:30 WARN 2700 --- [spring-security-jwt] [ restartedMain] .s.s.UserDetailsService

Using generated security password: c397cb46-bf64-4859-8594-06d7302ad3b6

This generated password is for development use only. Your security configuration must be updated before runi

2026-07-03T19:08:50.133+05:30 INFO 2700 --- [spring-security-jwt] [ restartedMain] r$InitializeUserDetail:
2026-07-03T19:08:50.396+05:30 INFO 2700 --- [spring-security-jwt] [ restartedMain] o.s.b.d.a.OptionalLive
2026-07-03T19:08:50.459+05:30 INFO 2700 --- [spring-security-jwt] [ restartedMain] o.s.b.w.embedded.tomcat
2026-07-03T19:08:50.478+05:30 INFO 2700 --- [spring-security-jwt] [ restartedMain] c.c.s.SpringSecurityJwt

```

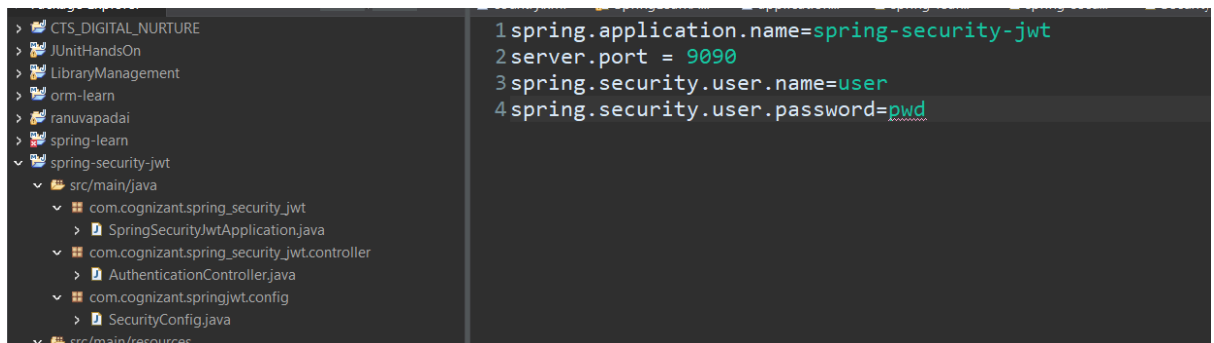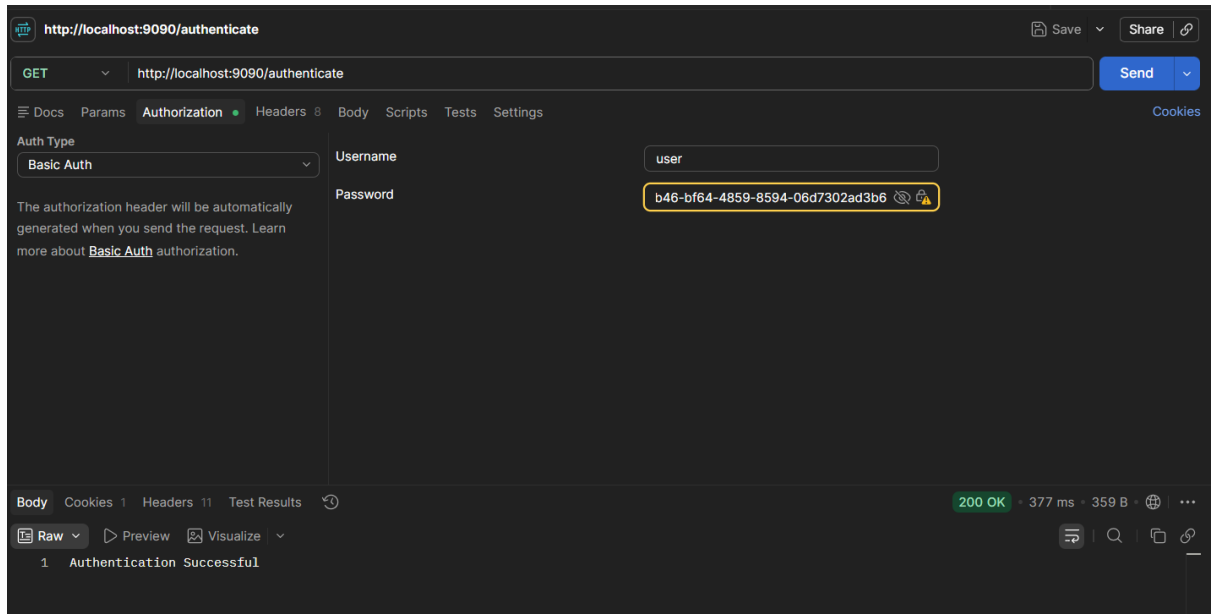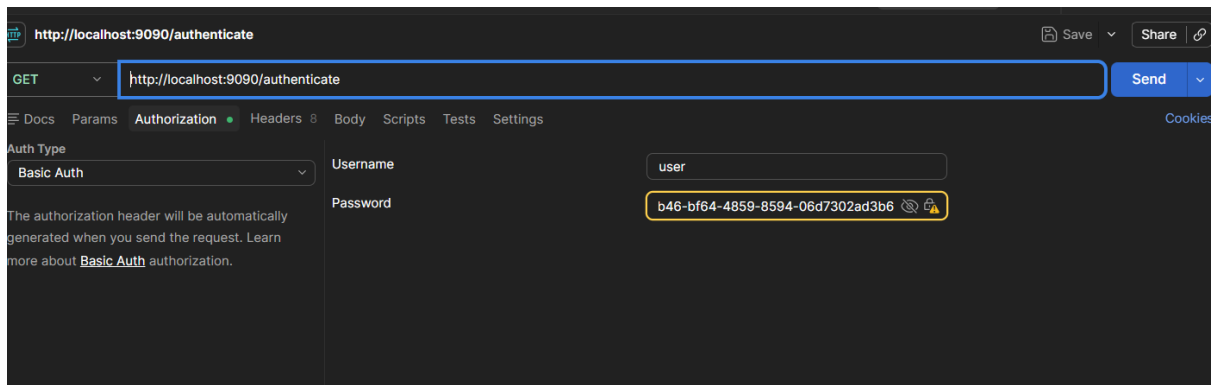

GET ▼ http://localhost:9090/authenticate

Docs Params **Authorization** Headers 8 Body Scripts Tests Settings

Auth Type
Basic Auth ▼

The authorization header will be automatically generated when you send the request. Learn more about [Basic Auth](#) authorization.

Username

Password  

Body Cookies 1 Headers 11 Test Results  200 OK

Raw ▼ Preview  Visualize ▼

1 Authentication Successful

```
1 package com.cognizant.spring_security_jwt.util;
2
3 import java.nio.charset.StandardCharsets;
4 import java.security.Key;
5 import java.util.Date;
6
7 import javax.crypto.SecretKey;
8
9 import io.jsonwebtoken.Jwts;
10 import io.jsonwebtoken.SignatureAlgorithm;
11 import io.jsonwebtoken.security.Keys;
12
13 public class JwtUtil {
14
15     // Secret Key (must be at least 32 characters)
16     private static final String SECRET =
17         "ThisIsMySecretKeyForJwtAuthentication12345";
18
19     private static final SecretKey KEY =
20         Keys.hmacShaKeyFor(SECRET.getBytes(StandardCharsets.UTF_8));
21
22     public static String generateToken(String username) {
23
24         return Jwts.builder()
25             .subject(username)
26             .issuedAt(new Date())
27             .expiration(new Date(System.currentTimeMillis() + 600000))
28             .signWith(KEY, SignatureAlgorithm.HS256)
29             .compact();
30     }
31 }
```

```

1 package com.cognizant.spring_security_jwt.controller;
2
3 import org.springframework.web.bind.annotation.GetMapping;
4 import org.springframework.web.bind.annotation.RestController;
5
6 import com.cognizant.spring_security_jwt.util.JwtUtil;
7
8 @RestController
9 public class AuthenticationController {}
10
11 @GetMapping("/authenticate")
12 public String authenticate() {
13
14     String token = JwtUtil.generateToken("user");
15
16     return token;
17
18 }
19
20 }

```

