
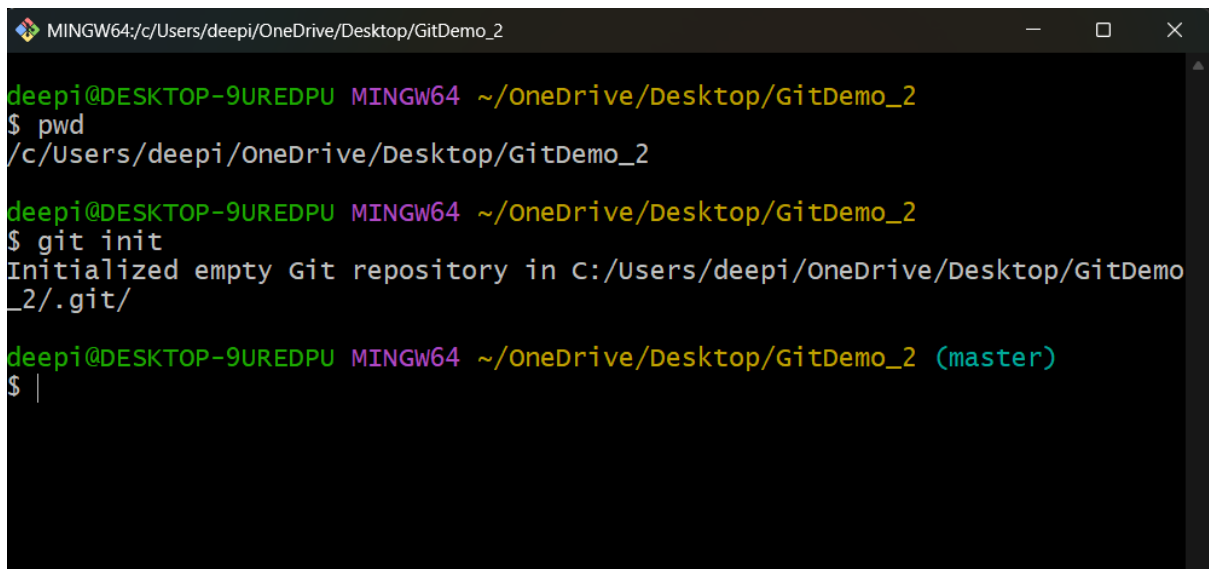
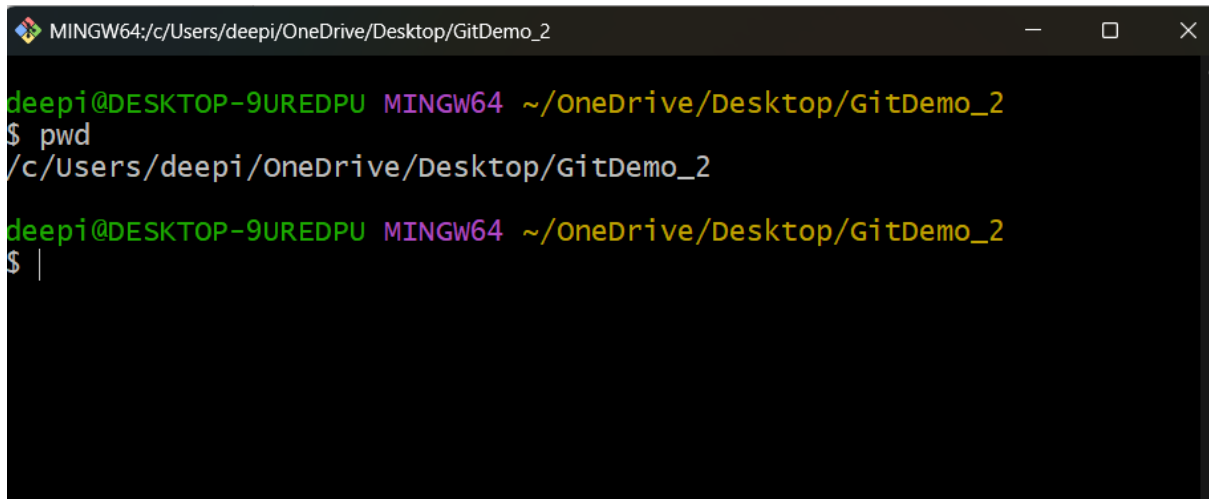


GIT

2.GIT-HOL

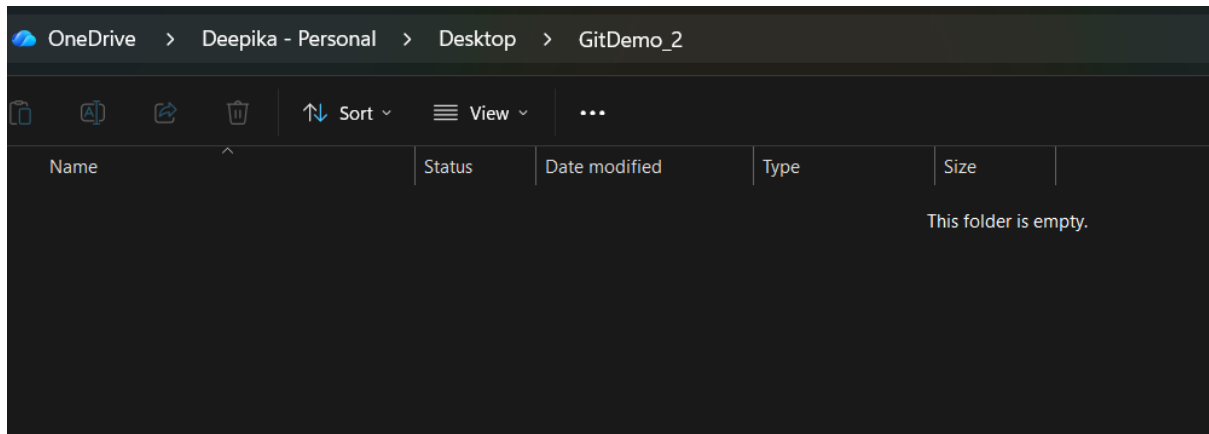

```
deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo_2 (master)
$ git status
On branch master


No commits yet

nothing to commit (create/copy files and use "git add" to track)

deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo_2 (master)
$ |
```

```
deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo_2 (master)
$ touch README.md

deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo_2 (master)
$
```

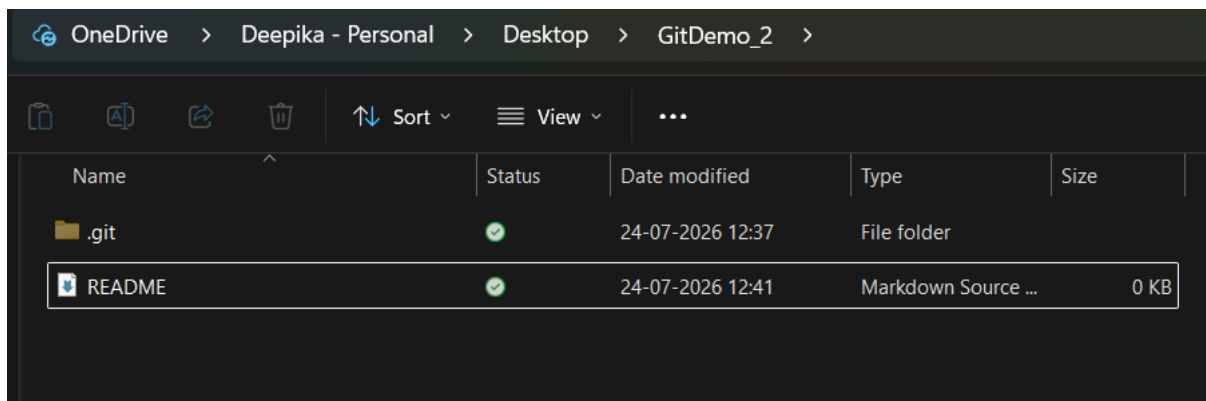

Name	Status	Date modified	Type	Size
.git	✓	24-07-2026 12:37	File folder	
README	✓	24-07-2026 12:41	Markdown Source ...	0 KB

```
deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo_2 (master)
$ ls
README.md

deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo_2 (master)
$ git status
On branch master

No commits yet

Untracked files:
  (use "git add <file>..." to include in what will be committed)
    README.md

nothing added to commit but untracked files present (use "git add" to track)

deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo_2 (master)
$ |
```

```
deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo_2 (master)
$ git add README.md

deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo_2 (master)
$ git status
On branch master

No commits yet

Changes to be committed:
  (use "git rm --cached <file>..." to unstage)
        new file:   README.md

deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo_2 (master)
$
```

```
deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo_2 (master)
$ git commit
[master (root-commit) a6ee82c] Initial Commit
1 file changed, 0 insertions(+), 0 deletions(-)
create mode 100644 README.md

deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo_2 (master)
$
```

```
deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo_2 (master)
$ touch sample.log

deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo_2 (master)
$ ls
README.md  sample.log

deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo_2 (master)
$
```

```
deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo_2 (master)
$ mkdir logs

deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo_2 (master)
$ cd logs

deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo_2/logs (master)
$ touch error.log

deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo_2/logs (master)
$ cd ..

deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo_2 (master)
$
```

```
deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo_2 (master)
$ git status
On branch master
Untracked files:
  (use "git add <file>..." to include in what will be committed)
    logs/
    sample.log

nothing added to commit but untracked files present (use "git add" to track)


deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo_2 (master)
$
```


```
deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo_2 (master)
$ git status
On branch master
Untracked files:
  (use "git add <file>..." to include in what will be committed)
    logs/
    sample.log

nothing added to commit but untracked files present (use "git add" to track)

deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo_2 (master)
$ touch .gitignore

deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo_2 (master)
$ notepad++ .gitignore
```

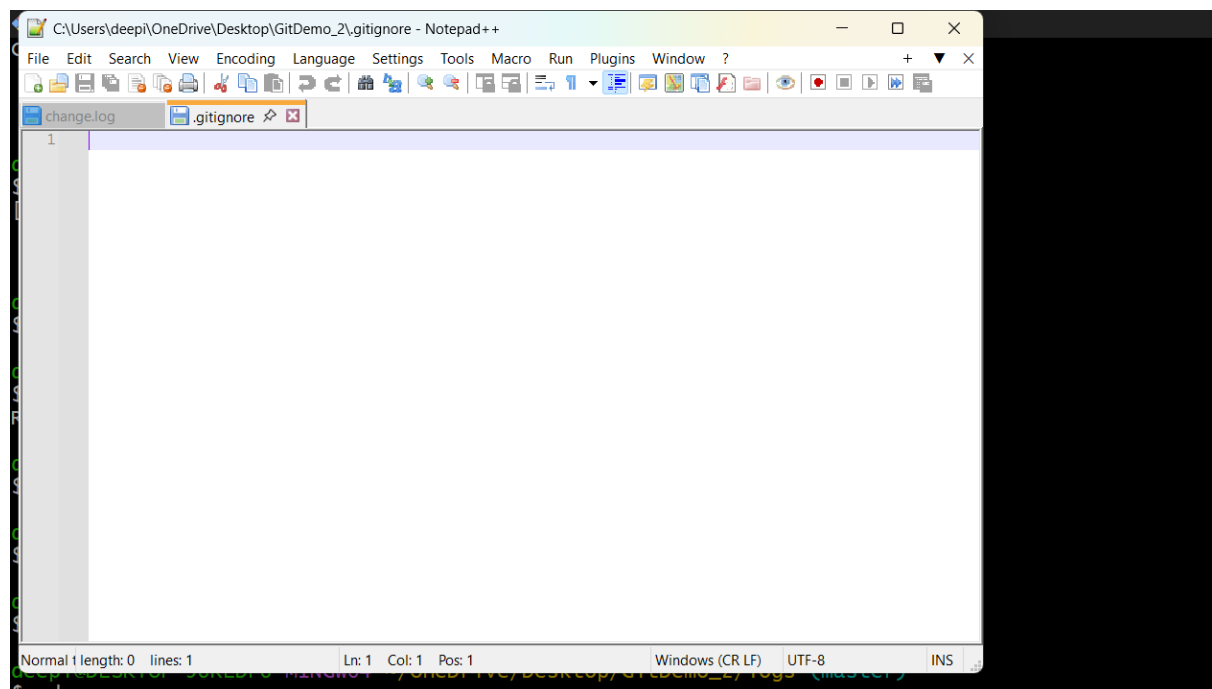

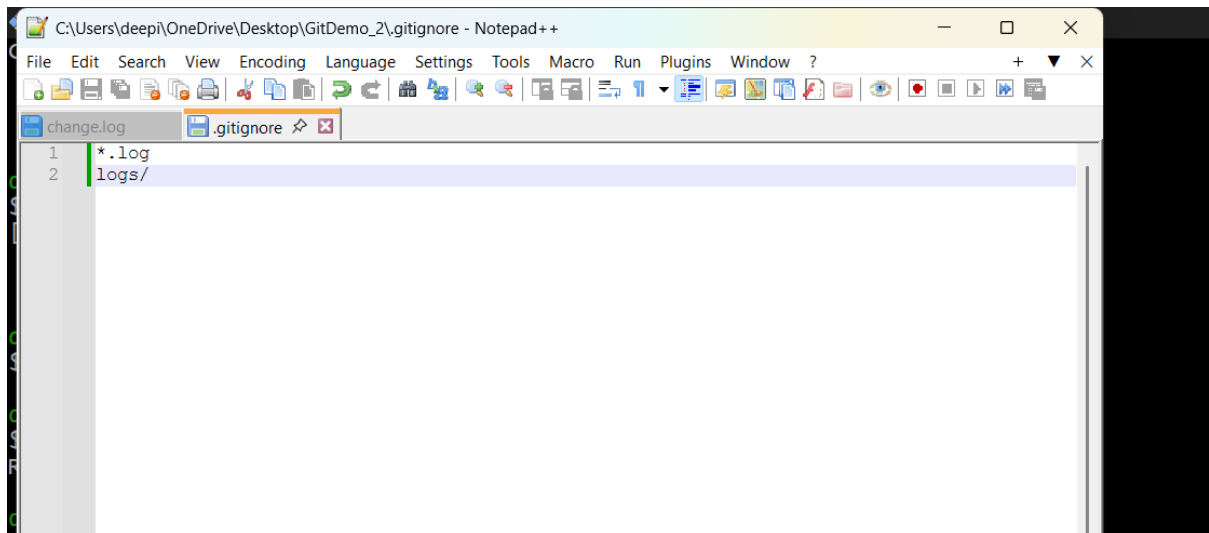

```
deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo_2 (master)
$ git status
On branch master
Untracked files:
  (use "git add <file>..." to include in what will be committed)
        .gitignore



nothing added to commit but untracked files present (use "git add" to track)


deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo_2 (master)
$
```

```
deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo_2 (master)
$ git add .gitignore

deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo_2 (master)
$ git commit -m "Added GitIgnore"
[master 58de164] Added GitIgnore
1 file changed, 2 insertions(+)
create mode 100644 .gitignore

deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo_2 (master)
$
```

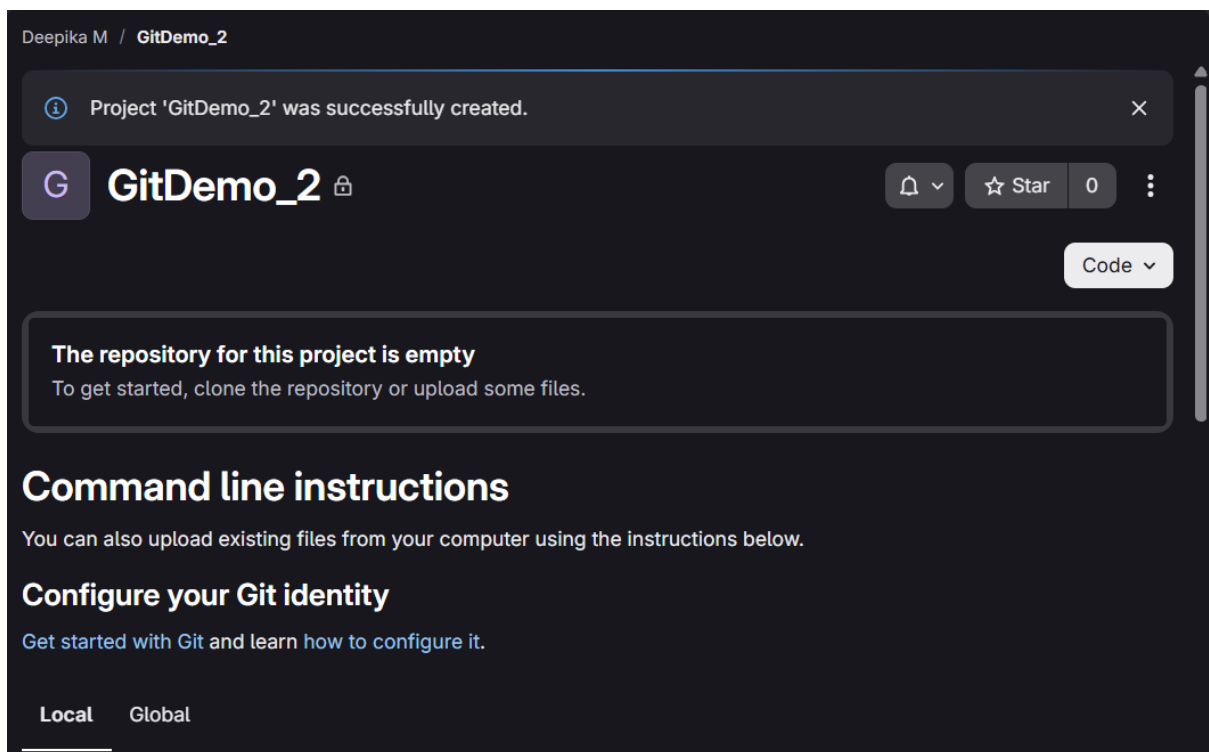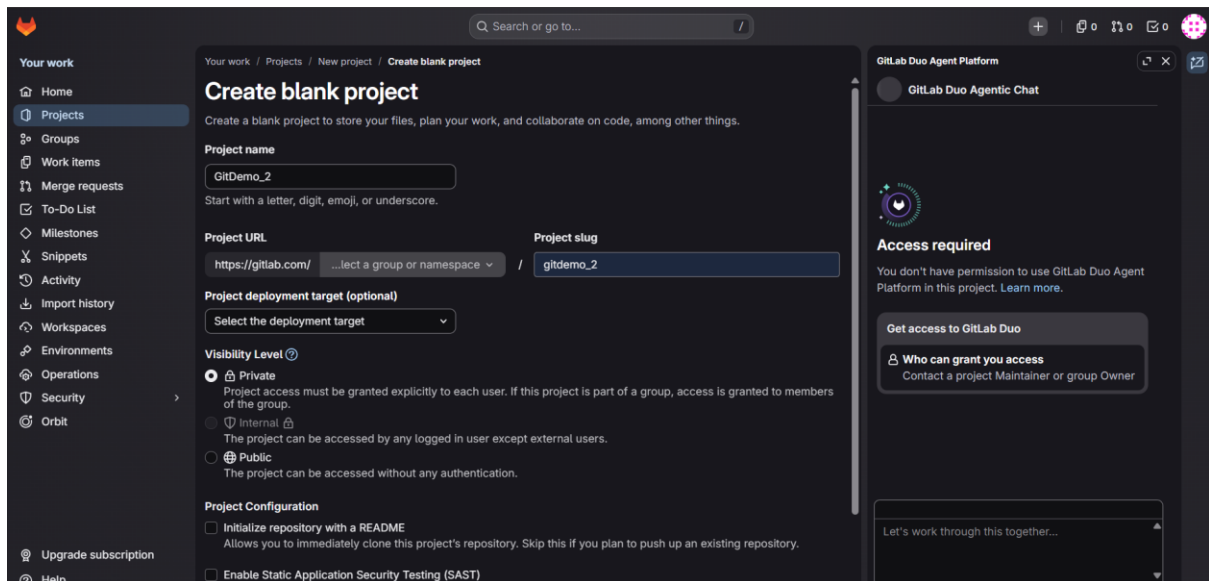

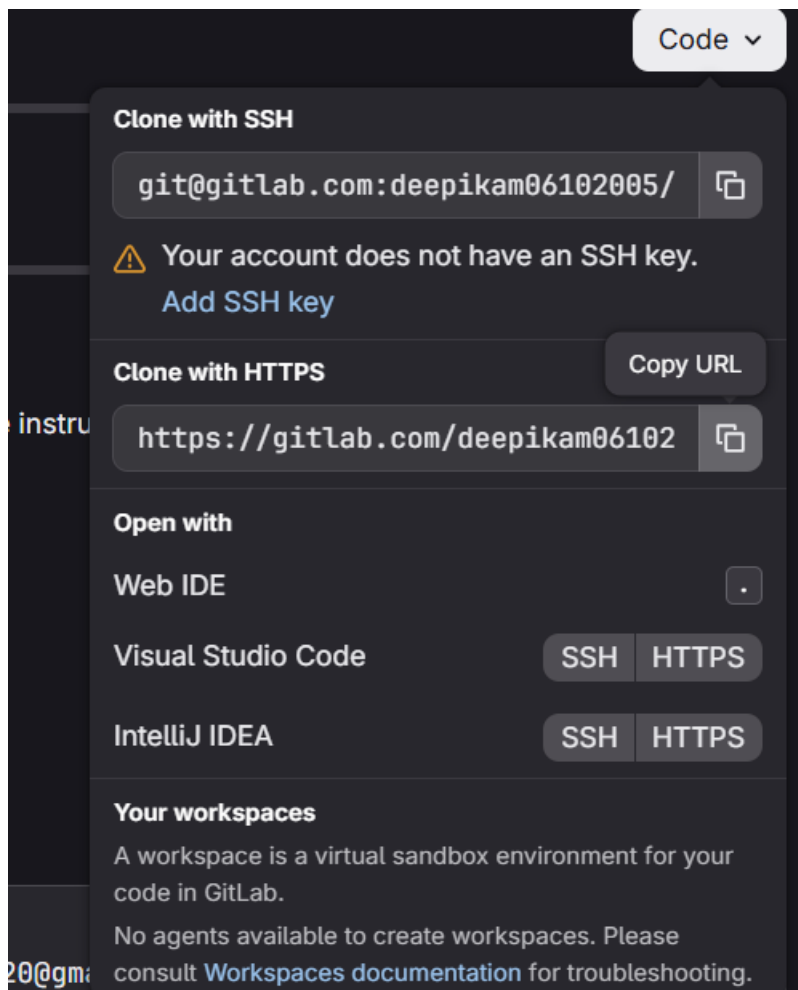

```
deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo_2 (master)
$ git remote add origin https://gitlab.com/deepikam06102005/gitdemo_2.git

deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo_2 (master)
$ git remote -v
origin https://gitlab.com/deepikam06102005/gitdemo_2.git (fetch)
origin https://gitlab.com/deepikam06102005/gitdemo_2.git (push)

deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo_2 (master)
$ git push
fatal: The current branch master has no upstream branch.
To push the current branch and set the remote as upstream, use

    git push --set-upstream origin master

To have this happen automatically for branches without a tracking
upstream, see 'push.autoSetupRemote' in 'git help config'.
```

```
deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo_2 (master)
$ git branch -M main
```

```
deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo_2 (main)
$ git push -u origin main
Enumerating objects: 6, done.
Counting objects: 100% (6/6), done.
Delta compression using up to 12 threads
Compressing objects: 100% (3/3), done.
Writing objects: 100% (6/6), 484 bytes | 242.00 KiB/s, done.
Total 6 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://gitlab.com/deepikam06102005/gitdemo_2.git
 * [new branch]      main -> main
branch 'main' set up to track 'origin/main'.
```

```
deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo_2 (main)
$
```