

GIT

1.GIT-HOL

```
MINGW64:/c/Users/deepi

deepi@DESKTOP-9UREDPU MINGW64 ~
$ git --version
git version 2.55.0.windows.3

deepi@DESKTOP-9UREDPU MINGW64 ~
$ ^C

deepi@DESKTOP-9UREDPU MINGW64 ~
$
```

```
deepi@DESKTOP-9UREDPU MINGW64 ~
$ git config --global user.name "Deepika M"


deepi@DESKTOP-9UREDPU MINGW64 ~
$
```

```
deepi@DESKTOP-9UREDPU MINGW64 ~
$ git config --global user.email "deepikamaharaja2020@gmail.com"

deepi@DESKTOP-9UREDPU MINGW64 ~
$
```


```
deepi@DESKTOP-9UREDPU MINGW64 ~
$ git config --global --list
user.name=Deepika M
user.email=deepikamaharaja2020@gmail.com

deepi@DESKTOP-9UREDPU MINGW64 ~
$
```

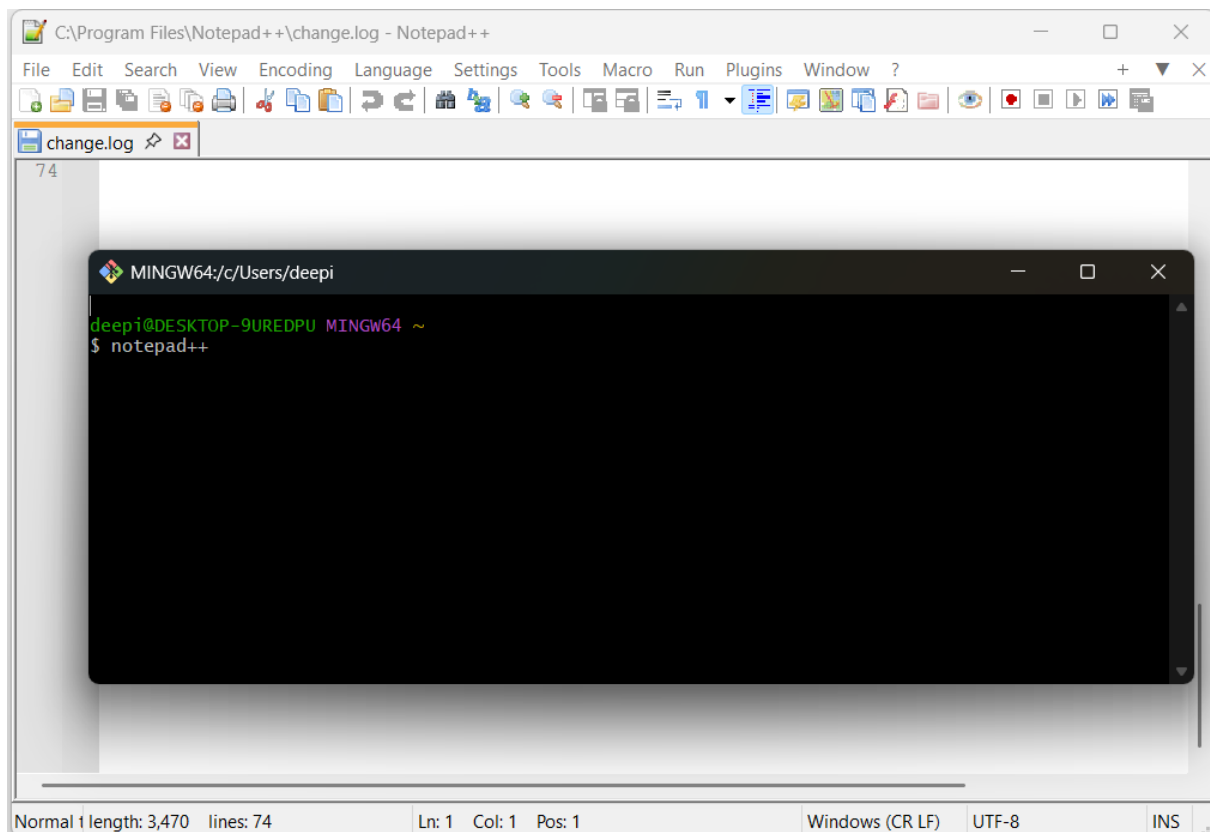

```
deepi@DESKTOP-9UREDPU MINGW64 ~  
$ git config --global alias.np '!notepad++'
```

```
deepi@DESKTOP-9UREDPU MINGW64 ~  
$ git config --global --list  
user.name=Deepika M  
user.email=deepikamaharaja2020@gmail.com  
core.editor=notepad++  
alias.np=!notepad++  
  
deepi@DESKTOP-9UREDPU MINGW64 ~  
$
```

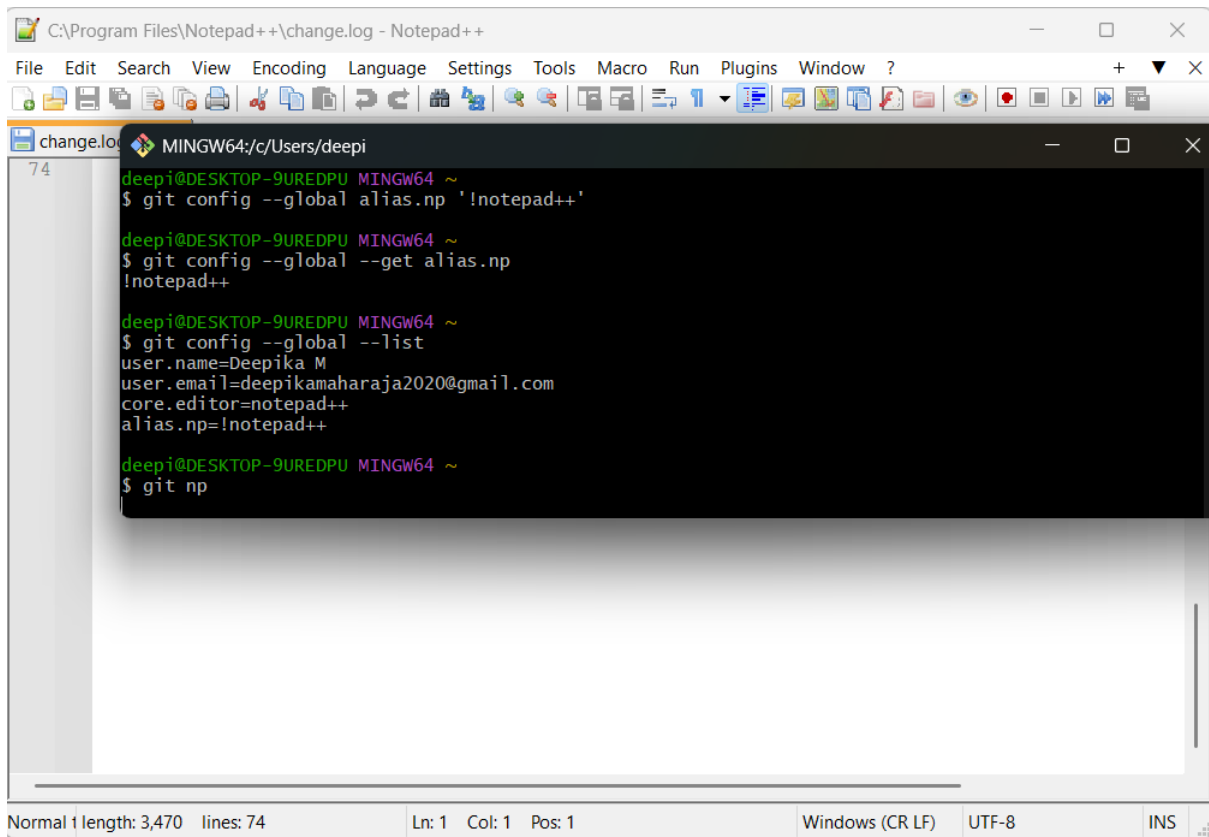

A screenshot of a Notepad++ window titled 'C:\Program Files\Notepad++\change.log - Notepad++'. The window contains a terminal window titled 'MINGW64:/c/Users/deepi'. The terminal shows the following commands and output:

```
deepi@DESKTOP-9UREDPU MINGW64 ~
$ git config --global alias.np '!notepad++'

deepi@DESKTOP-9UREDPU MINGW64 ~
$ git config --global --get alias.np
!notepad++

deepi@DESKTOP-9UREDPU MINGW64 ~
$ git config --global --list
user.name=Deepika M
user.email=deepikamaharaja2020@gmail.com
core.editor=notepad++
alias.np=!notepad++


deepi@DESKTOP-9UREDPU MINGW64 ~
$ git np
```

The status bar at the bottom of Notepad++ shows: 'Normal t length: 3,470 lines: 74', 'Ln: 1 Col: 1 Pos: 1', 'Windows (CR LF)', 'UTF-8', and 'INS'.

```
deepi@DESKTOP-9UREDPU MINGW64 ~
$ git config --global core.editor "notepad++.exe -multiInst -nosession"


deepi@DESKTOP-9UREDPU MINGW64 ~
$
```

```
deepi@DESKTOP-9UREDPU MINGW64 ~
$ git config --global --list
user.name=Deepika M
user.email=deepikamaharaja2020@gmail.com
core.editor=notepad++.exe -multiInst -nosession
alias.np=!notepad++
```

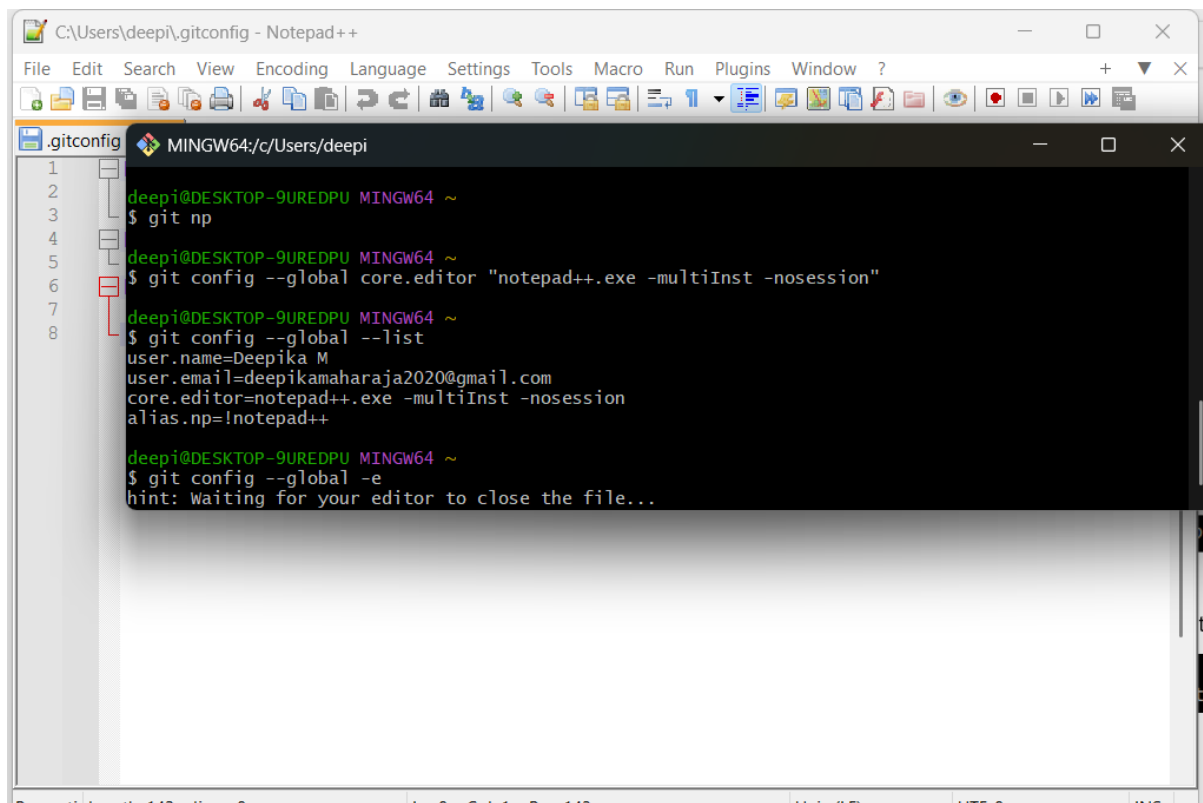



The screenshot shows a Notepad++ window titled "C:\Users\deepi\.gitconfig - Notepad++". The main content is a terminal window titled "MINGW64/c/Users/deepi" with the following commands and output:

```
1 deepi@DESKTOP-9UREDPU MINGW64 ~  
2 $ git np  
3  
4  
5 deepi@DESKTOP-9UREDPU MINGW64 ~  
6 $ git config --global core.editor "notepad++.exe -multiInst -nosession"  
7  
8 deepi@DESKTOP-9UREDPU MINGW64 ~  
$ git config --global --list  
user.name=Deepika M  
user.email=deepikamaharaja2020@gmail.com  
core.editor=notepad++.exe -multiInst -nosession  
alias.np=!notepad++  
  
deepi@DESKTOP-9UREDPU MINGW64 ~  
$ git config --global -e  
hint: Waiting for your editor to close the file...
```

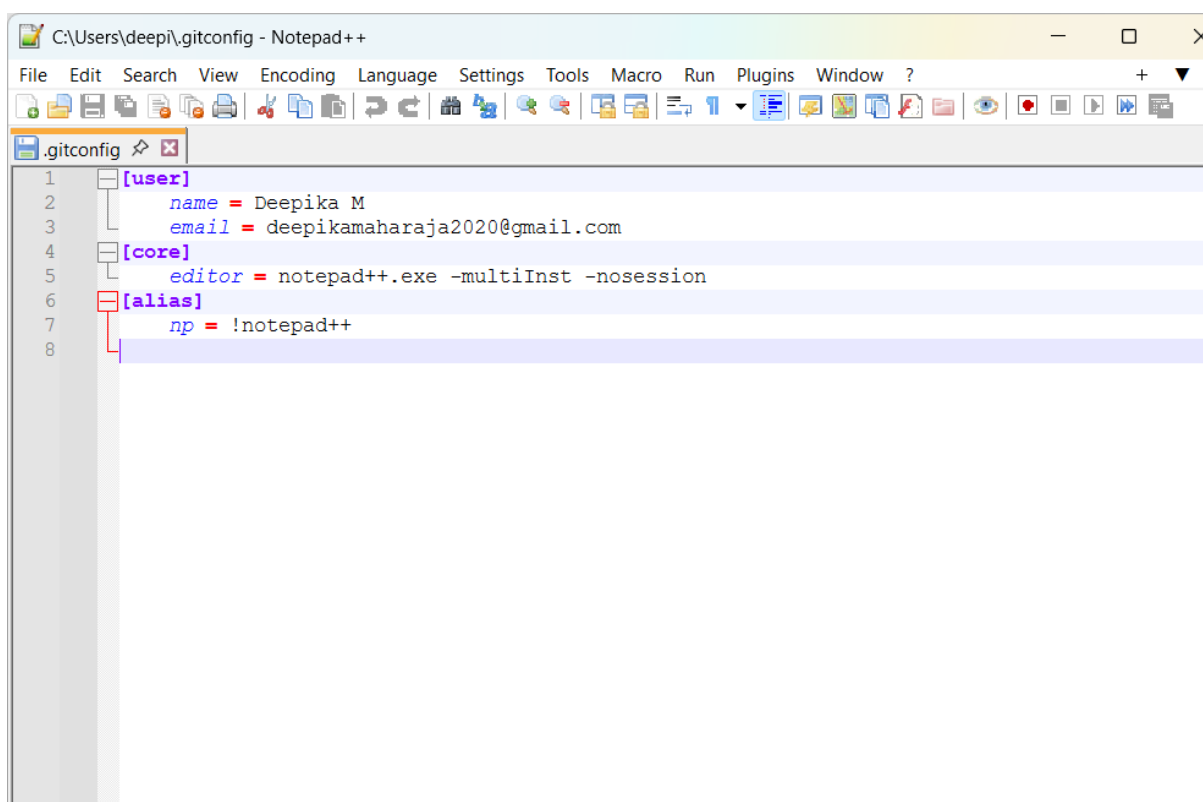

The screenshot shows the same Notepad++ window, but now displaying the content of the .gitconfig file. The file is structured as follows:

```
1 [user]  
2   name = Deepika M  
3   email = deepikamaharaja2020@gmail.com  
4 [core]  
5   editor = notepad++.exe -multiInst -nosession  
6 [alias]  
7   np = !notepad++  
8
```

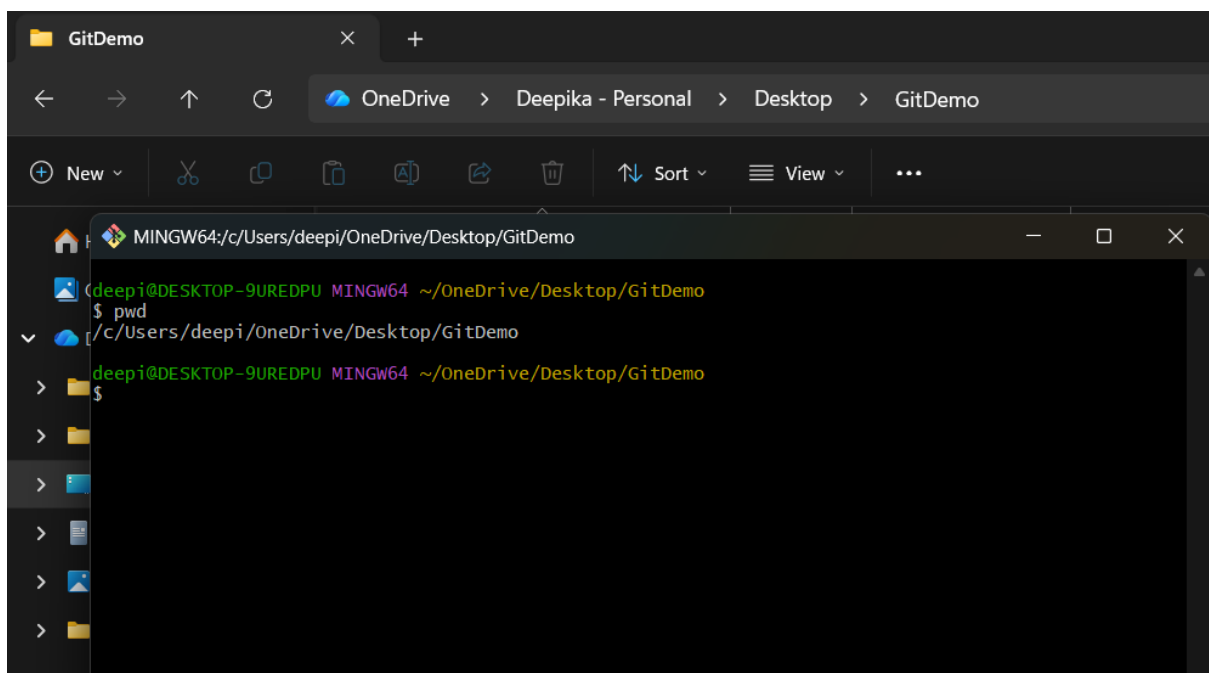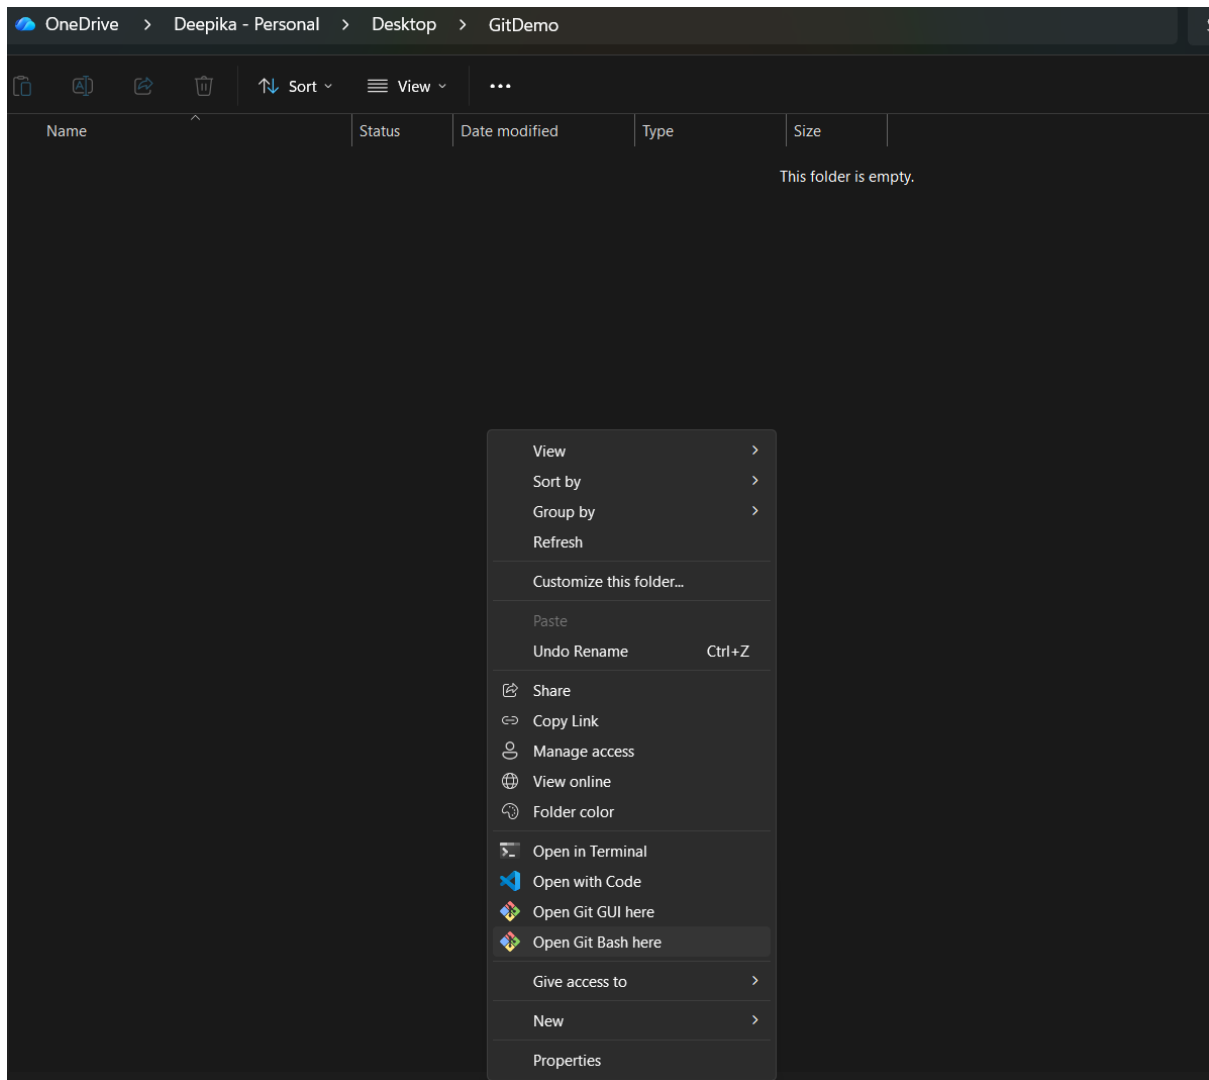

```
deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo
$ git init
Initialized empty Git repository in C:/Users/deepi/OneDrive/Desktop/GitDemo/.git/

deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo (master)
$ |
```

```
deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo (master)
$ git status
On branch master

No commits yet

nothing to commit (create/copy files and use "git add" to track)

deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo (master)
$ AC

deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo (master)
$ |
```

OneDrive > Deepika - Personal > Desktop > GitDemo >

Name	Status	Date modified	Type	Size
.git	✓	22-07-2026 19:26	File folder	
Welcome	✓	22-07-2026 20:03	Text Document	1 KB

Welcome.txt

File Edit View H1

Welcome to Git|

```
deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo (master)
$ git status
On branch master


No commits yet

Untracked files:
  (use "git add <file>..." to include in what will be committed)
        Welcome.txt

nothing added to commit but untracked files present (use "git add" to track)
deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo (master)
$
```

```
deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo (master)
$ git add Welcome.txt

deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo (master)
$
```

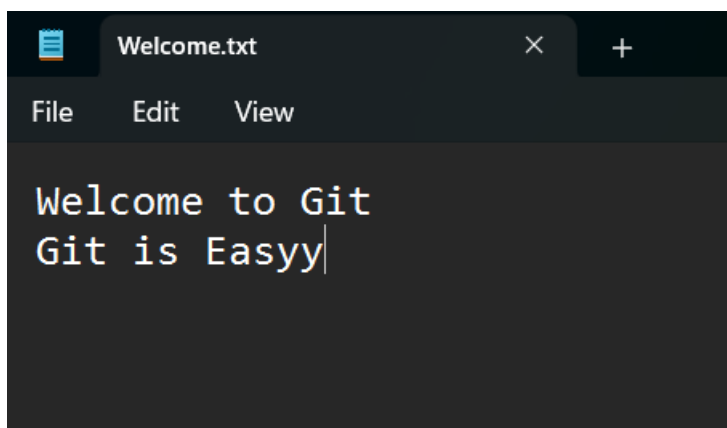

```
deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo (master)
$ ls -al
total 17
drwxr-xr-x 1 deepi 197609  0 Jul 22 20:03 ./
drwxr-xr-x 1 deepi 197609  0 Jul 22 20:33 ../
drwxr-xr-x 1 deepi 197609  0 Jul 22 20:33 .git/
-rw-r--r-- 1 deepi 197609 28 Jul 22 20:33 Welcome.txt
```

```
deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo (master)
$ echo "Welcome to the version control" >>Welcome_Version

deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo (master)
$
```

OneDrive > Deepika - Personal > Desktop > GitDemo >

Sort View ...

Name	Status	Date modified	Type	Size
.git	✓	22-07-2026 20:33	File folder	
Welcome	✓	22-07-2026 20:33	Text Document	1 KB
Welcome_Version	✓	22-07-2026 20:37	File	1 KB

```
deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo (master)
$ cat Welcome_Version
Welcome to the version control

deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo (master)
$
```

```
deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo (master)
$ git commit
hint: Waiting for your editor to close the file... |
```

```
deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo (master)
$ git commit
[master (root-commit) 44de42a] initial Commit
1 file changed, 2 insertions(+)
create mode 100644 Welcome.txt


deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo (master)
$
```

```
deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo (master)
$ git status
On branch master
Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
        modified:   Welcome.txt

Untracked files:
  (use "git add <file>..." to include in what will be committed)
        Welcome_Version

no changes added to commit (use "git add" and/or "git commit -a")

deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo (master)
$ |
```

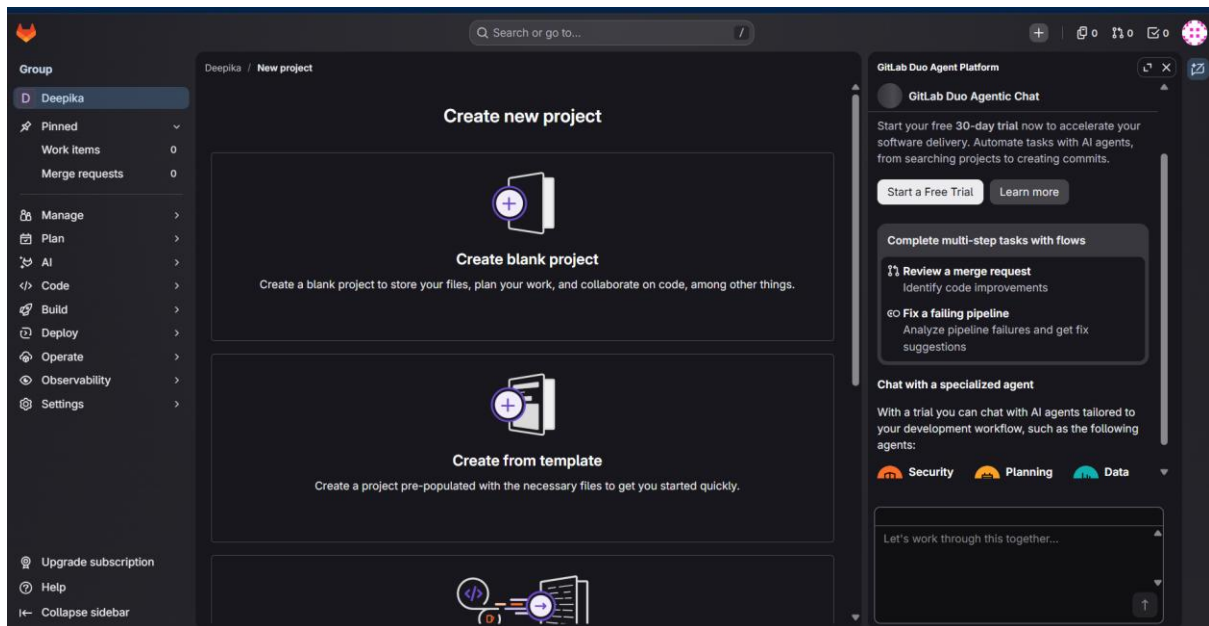Deepika / New project / Create blank project

Create a blank project to store your files, plan your work, and collaborate on code, among other things.

Project name

GitDemo

Start with a letter, digit, emoji, or underscore.

Project URL

https://gitlab.com/

deepika8452830

/

Project slug

gitdemo

Project deployment target (optional)

Select the deployment target

Visibility Level ?

☒ Private

Project access must be granted explicitly to each user. If this project is part of a group, access is granted to members of the group.

☐ Internal

The project can be accessed by any logged in user except external users.

☐ Public

The project can be accessed without any authentication.

Project Configuration

☐ Initialize repository with a README

Allows you to immediately clone this project's repository. Skip this if you plan to push up an existing repository.

☐ Enable Static Application Security Testing (SAST)

Analyze your source code for known security vulnerabilities. [Learn more.](#)

☐ Enable Secret Detection

Scan your code for secrets and credentials to prevent unauthorized access. [Learn more.](#)

Deepika / GitDemo1

Project 'GitDemo1' was successfully created.

 **GitDemo1**  

  Star 0 

Code ▾

The repository for this project is empty
To get started, clone the repository or upload some files.

Command line instructions

You can also upload existing files from your computer using the instructions below.

Configure your Git identity

Get started with Git and learn how to configure it.

Local Global

Git local setup

Configure your Git identity locally to use it only for this project:

```
git config --local user.name "Deepika M"
git config --local user.email "deepikamaharaja2020@gmail.com"
```

```
deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo (master)
$ git remote add origin https://gitlab.com/deepika8452830/gitdemo1.git

deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo (master)
$ git remote -v
origin https://gitlab.com/deepika8452830/gitdemo1.git (fetch)
origin https://gitlab.com/deepika8452830/gitdemo1.git (push)

deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo (master)
$ ^C

deepi@DESKTOP-9UREDPU MINGW64 ~/OneDrive/Desktop/GitDemo (master)
$ git push -u origin master
info: please complete authentication in your browser...
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Writing objects: 100% (3/3), 245 bytes | 81.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://gitlab.com/deepika8452830/gitdemo1.git
 * [new branch]      master -> master
branch 'master' set up to track 'origin/master'.
```