

Prathmesh Yedage

20102A0042

CMPN DIV A

```
//Cohen Sutherland's Line Clipping Algorithm

#include<stdio.h>

#include<math.h>

#include<graphics.h>

typedef struct coordinate

{

int x,y;

char code[4];

}PT;

drawwindow()

{

line(150,100,450,100);

line(450,100,450,350);

line(450,350,150,350);

line(150,350,150,100);

}

drawline(PT p1,PT p2)

{

line(p1.x,p1.y,p2.x,p2.y);

}

PT setcode(PT p)//for setting the 4 bit code

{

PT ptemp;
```

```

if(p.y<100)
ptemp.code[0]='1';//Top area of window
else
ptemp.code[0]='0';
if(p.y>350)
ptemp.code[1]='1';//Bottom area of window
else
ptemp.code[1]='0';
if(p.x>450)
ptemp.code[2]='1';//Right area of window
else
ptemp.code[2]='0';
if(p.x<150)
ptemp.code[3]='1';//Left area of window
else
ptemp.code[3]='0';
ptemp.x=p.x;
ptemp.y=p.y;
return(ptemp);
}

int visibility(PT p1,PT p2)
{
int i,flag=0;
for(i=0;i<4;i++)
{
if((p1.code[i]!='0') || (p2.code[i]!='0'))
flag=1;
}
if(flag==0)
return(0);
for(i=0;i<4;i++)

```

```

{
if((p1.code[i]==p2.code[i]) && (p1.code[i]!='1'))
flag='0';
}
if(flag==0)
return(1);
return(2);
}
PT resetendpt(PT p1,PT p2)
{
PT temp;
int x,y,i;
float m,k;
if(p1.code[3]=='1')
x=150;
if(p1.code[2]=='1')
x=450;
if((p1.code[3]=='1') || (p1.code[2]=='1'))
{
m=(float)(p2.y-p1.y)/(p2.x-p1.x);
k=(p1.y+(m*(x-p1.x)));
temp.y=k;
temp.x=x;
for(i=0;i<4;i++)
temp.code[i]=p1.code[i];
if(temp.y<=350 && temp.y>=100)
return (temp);
}
if(p1.code[0]=='1')
y=100;
if(p1.code[1]=='1')


```

```

y=350;
if((p1.code[0]!='1') || (p1.code[1]!='1'))
{
m=(float)(p2.y-p1.y)/(p2.x-p1.x);
k=(float)p1.x+(float)(y-p1.y)/m;
temp.x=k;
temp.y=y;
for(i=0;i<4;i++)
temp.code[i]=p1.code[i];
return(temp);
}
else
return(p1);
}
main()
{
int gd=DETECT,v,gm;
PT p1,p2,p3,p4,ptemp;
printf("\nEnter x1 and y1\n");
scanf("%d %d",&p1.x,&p1.y);
printf("\nEnter x2 and y2\n");
scanf("%d %d",&p2.x,&p2.y);
initgraph(&gd,&gm,(char*)"");
drawwindow();
delay(500);
drawline(p1,p2);
delay(5000);
cleardevice();
delay(500);
p1=setcode(p1);
p2=setcode(p2);

```

```
v=visibility(p1,p2);  
delay(500);  
switch(v)  
{  
case 0: drawwindow();  
delay(500);  
drawline(p1,p2);  
break;  
case 1:drawwindow();  
delay(500);  
break;  
case 2:p3=resetendpt(p1,p2);  
p4=resetendpt(p2,p1);  
drawwindow();  
delay(500);  
drawline(p3,p4);  
break;  
}  
delay(5000);  
closegraph();  
}
```

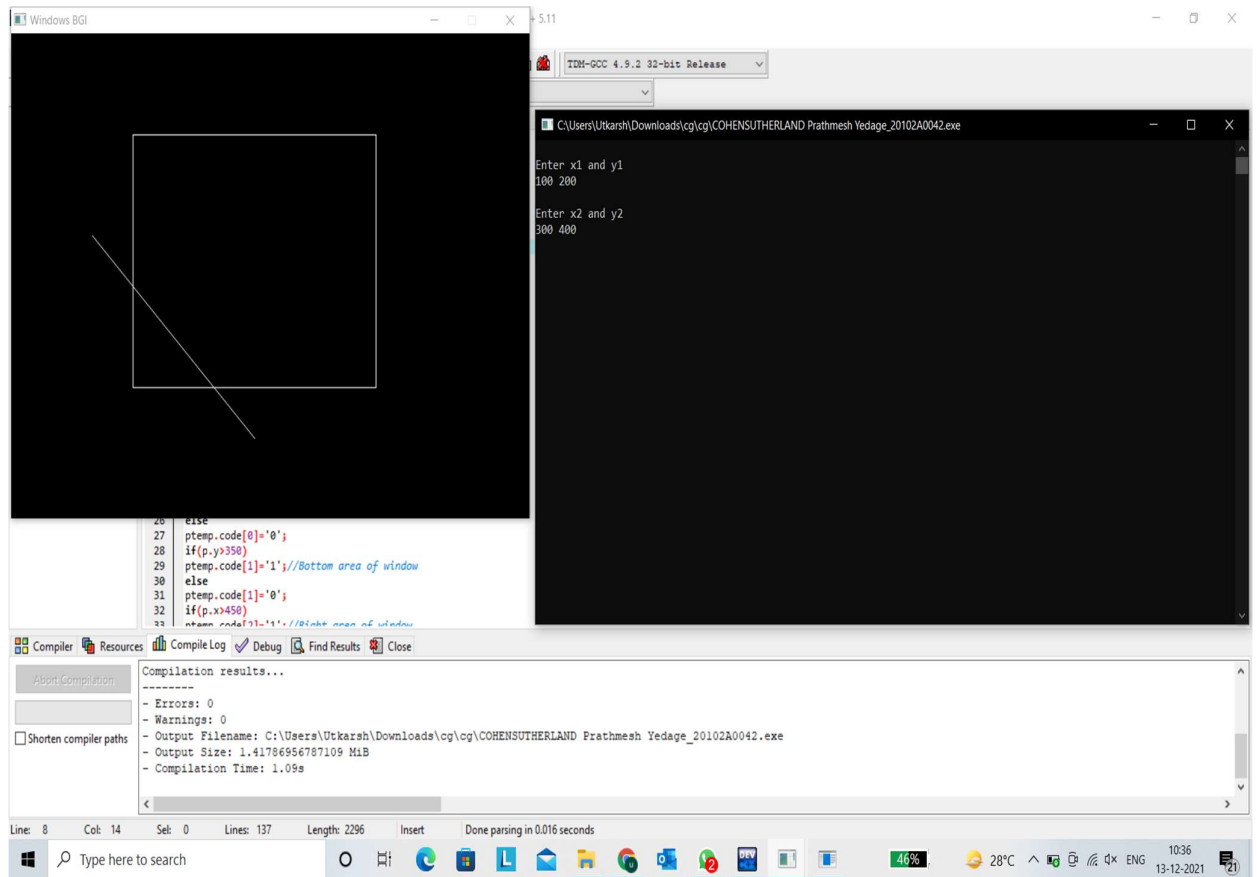


COHENSUTHERLAND
Prathmesh Yedage_20