

boston_housing

May 19, 2016

1 Machine Learning Engineer Nanodegree

1.1 Model Evaluation & Validation

1.2 Project 1: Predicting Boston Housing Prices

Welcome to the first project of the Machine Learning Engineer Nanodegree! In this notebook, some template code has already been written. You will need to implement additional functionality to successfully answer all of the questions for this project. Unless it is requested, do not modify any of the code that has already been included. In this template code, there are four sections which you must complete to successfully produce a prediction with your model. Each section where you will write code is preceded by a **STEP X** header with comments describing what must be done. Please read the instructions carefully!

In addition to implementing code, there will be questions that you must answer that relate to the project and your implementation. Each section where you will answer a question is preceded by a **QUESTION X** header. Be sure that you have carefully read each question and provide thorough answers in the text boxes that begin with “**Answer:**”. Your project submission will be evaluated based on your answers to each of the questions.

A description of the dataset can be found [here](#), which is provided by the **UCI Machine Learning Repository**.

2 Getting Started

To familiarize yourself with an iPython Notebook, **try double clicking on this cell**. You will notice that the text changes so that all the formatting is removed. This allows you to make edits to the block of text you see here. This block of text (and mostly anything that’s not code) is written using [Markdown](#), which is a way to format text using headers, links, italics, and many other options! Whether you’re editing a Markdown text block or a code block (like the one below), you can use the keyboard shortcut **Shift + Enter** or **Shift + Return** to execute the code or text block. In this case, it will show the formatted text.

Let’s start by setting up some code we will need to get the rest of the project up and running. Use the keyboard shortcut mentioned above on the following code block to execute it. Alternatively, depending on your iPython Notebook program, you can press the **Play** button in the hotbar. You’ll know the code block executes successfully if the message “Boston Housing dataset loaded successfully!” is printed.

```
In [15]: # Importing a few necessary libraries
import numpy as np
import matplotlib.pyplot as plt
from sklearn import datasets
from sklearn.tree import DecisionTreeRegressor

# Make matplotlib show our plots inline (nicely formatted in the notebook)
%matplotlib inline

# Create our client's feature set for which we will be predicting a selling price
```

```

CLIENT_FEATURES = [[11.95, 0.00, 18.100, 0, 0.6590, 5.6090, 90.00, 1.385, 24, 680.0, 20.20, 33.

# Load the Boston Housing dataset into the city_data variable
city_data = datasets.load_boston()

# Initialize the housing prices and housing features
housing_prices = city_data.target
housing_features = city_data.data

print "Boston Housing dataset loaded successfully!"

```

Boston Housing dataset loaded successfully!

3 Statistical Analysis and Data Exploration

In this first section of the project, you will quickly investigate a few basic statistics about the dataset you are working with. In addition, you'll look at the client's feature set in `CLIENT_FEATURES` and see how this particular sample relates to the features of the dataset. Familiarizing yourself with the data through an explorative process is a fundamental practice to help you better understand your results.

3.1 Step 1

In the code block below, use the imported `numpy` library to calculate the requested statistics. You will need to replace each `None` you find with the appropriate `numpy` coding for the proper statistic to be printed. Be sure to execute the code block each time to test if your implementation is working successfully. The print statements will show the statistics you calculate!

```

In [3]: # Number of houses in the dataset
total_houses = np.matrix(city_data.data).shape[0]

# Number of features in the dataset
total_features = np.matrix(city_data.data).shape[1]

# Minimum housing value in the dataset
minimum_price = np.min(housing_prices)

# Maximum housing value in the dataset
maximum_price = np.max(housing_prices)

# Mean house value of the dataset
mean_price = np.mean(housing_prices)

# Median house value of the dataset
median_price = np.median(housing_prices)

# Standard deviation of housing values of the dataset
std_dev = np.std(housing_prices)

# Show the calculated statistics
print "Boston Housing dataset statistics (in $1000's):\n"
print "Total number of houses:", total_houses
print "Total number of features:", total_features
print "Minimum house price:", minimum_price
print "Maximum house price:", maximum_price

```

```
print "Mean house price: {0:.3f}".format(mean_price)
print "Median house price:", median_price
print "Standard deviation of house price: {0:.3f}".format(std_dev)
```

Boston Housing dataset statistics (in \$1000's):

```
Total number of houses: 506
Total number of features: 13
Minimum house price: 5.0
Maximum house price: 50.0
Mean house price: 22.533
Median house price: 21.2
Standard deviation of house price: 9.188
```

3.2 Question 1

As a reminder, you can view a description of the Boston Housing dataset [here](#), where you can find the different features under **Attribute Information**. The MEDV attribute relates to the values stored in our `housing_prices` variable, so we do not consider that a feature of the data.

Of the features available for each data point, choose three that you feel are significant and give a brief description for each of what they measure.

Remember, you can **double click the text box below** to add your answer!

Answer: First attribute can be CRIM because people usually don't want to live in harsh and dangerous environments and thus pay less for areas with high crime rate. CRIM measure per capital crime rate by town. Second, LSTAT can have correlations with the prices of houses in the town because they cannot afford to live in a town where house prices are expensive. LSTAT shows the percentage of lower status of the population. Lastly, RM can influence house prices substantially since RM is the average number of rooms per dwelling. The bigger the RM, the more expensive that house is.

3.3 Question 2

Using your client's feature set CLIENT_FEATURES, which values correspond with the features you've chosen above?

Hint: Run the code block below to see the client's data.

```
In [16]: print CLIENT_FEATURES
```

```
[[11.95, 0.0, 18.1, 0, 0.659, 5.609, 90.0, 1.385, 24, 680.0, 20.2, 332.09, 12.13]]
```

Answer: 11.95 - CRIM 5.609 - RM 12.13 - LSTAT

4 Evaluating Model Performance

In this second section of the project, you will begin to develop the tools necessary for a model to make a prediction. Being able to accurately evaluate each model's performance through the use of these tools helps to greatly reinforce the confidence in your predictions.

4.1 Step 2

In the code block below, you will need to implement code so that the `shuffle_split_data` function does the following: - Randomly shuffle the input data X and target labels (housing values) y. - Split the data into training and testing subsets, holding 30% of the data for testing.

If you use any functions not already accessible from the imported libraries above, remember to include your import statement below as well!

Ensure that you have executed the code block once you are done. You'll know the `shuffle_split_data` function is working if the statement "Successfully shuffled and split the data!" is printed.

In [4]: *# Put any import statements you need for this code block here*

```
from sklearn import cross_validation

def shuffle_split_data(X, y):
    """ Shuffles and splits data into 70% training and 30% testing subsets,
        then returns the training and testing subsets. """

    # Shuffle and split the data
    X_train, X_test, y_train, y_test = cross_validation.train_test_split(housing_features, housing_prices)

    # Return the training and testing data subsets
    return X_train, y_train, X_test, y_test

# Test shuffle_split_data
try:
    X_train, y_train, X_test, y_test = shuffle_split_data(housing_features, housing_prices)
    print "Successfully shuffled and split the data!"
except:
    print "Something went wrong with shuffling and splitting the data."
```

Successfully shuffled and split the data!

4.2 Question 3

Why do we split the data into training and testing subsets for our model?

Answer: Because if we don't split them we would have test sets that were already seen when training our model. It can have biased results to only that data sets and not work properly with new data sets. The result can be justified when testing with unseen data. It can result in overfitting the training data that way.

4.3 Step 3

In the code block below, you will need to implement code so that the `performance_metric` function does the following: - Perform a total error calculation between the true values of the `y` labels `y_true` and the predicted values of the `y` labels `y_predict`.

You will need to first choose an appropriate performance metric for this problem. See [the sklearn metrics documentation](#) to view a list of available metric functions. **Hint:** Look at the question below to see a list of the metrics that were covered in the supporting course for this project.

Once you have determined which metric you will use, remember to include the necessary import statement as well!

Ensure that you have executed the code block once you are done. You'll know the `performance_metric` function is working if the statement "Successfully performed a metric calculation!" is printed.

In [5]: *# Put any import statements you need for this code block here*

```
from sklearn import metrics

def performance_metric(y_true, y_predict):
    """ Calculates and returns the total error between true and predicted values
        based on a performance metric chosen by the student. """

    error = metrics.mean_squared_error(y_true, y_predict)
    return error
```

```

# Test performance_metric
try:
    total_error = performance_metric(y_train, y_train)
    print "Successfully performed a metric calculation!"
except:
    print "Something went wrong with performing a metric calculation."

```

Successfully performed a metric calculation!

4.4 Question 4

Which performance metric below did you find was most appropriate for predicting housing prices and analyzing the total error. Why? - Accuracy - Precision - Recall - F1 Score - Mean Squared Error (MSE) - Mean Absolute Error (MAE)

Answer: First remove classification metrics since this is a continuous form of data. Among regression metrics MSE is better than MAE because it makes error huge thus stricter.

4.5 Step 4 (Final Step)

In the code block below, you will need to implement code so that the `fit_model` function does the following:

- Create a scoring function using the same performance metric as in **Step 2**. See the [sklearn make_scorer documentation](#).
- Build a GridSearchCV object using `regressor`, `parameters`, and `scoring_function`. See the [sklearn documentation on GridSearchCV](#).

When building the scoring function and GridSearchCV object, be sure that you read the [parameters documentation](#) thoroughly. It is not always the case that a default parameter for a function is the appropriate setting for the problem you are working on.

Since you are using `sklearn` functions, remember to include the necessary import statements below as well!

Ensure that you have executed the code block once you are done. You'll know the `fit_model` function is working if the statement "Successfully fit a model to the data!" is printed.

```

In [6]: # Put any import statements you need for this code block
from sklearn import grid_search
from sklearn import metrics

def fit_model(X, y):
    """ Tunes a decision tree regressor model using GridSearchCV on the input data X
        and target labels y and returns this optimal model. """

    # Create a decision tree regressor object
    regressor = DecisionTreeRegressor()

    # Set up the parameters we wish to tune
    parameters = {'max_depth': (1,2,3,4,5,6,7,8,9,10)}

    # Make an appropriate scoring function
    scoring_function = metrics.make_scorer(performance_metric, greater_is_better=False)

    # Make the GridSearchCV object
    reg = grid_search.GridSearchCV(regressor, parameters, scoring_function)

    # Fit the learner to the data to obtain the optimal model with tuned parameters
    reg.fit(X, y)

```

```

    # Return the optimal model
    return reg.best_estimator_

# Test fit_model on entire dataset
try:
    reg = fit_model(housing_features, housing_prices)
    print "Successfully fit a model!"
except:
    print "Something went wrong with fitting a model."

```

Successfully fit a model!

4.6 Question 5

What is the grid search algorithm and when is it applicable?

Answer: It is an exhaustive searching through a manually specified subset of the hyperparameter space of a learning algorithm. It is applicable when we want a fine tuning a learning algorithm for a successful performance.

4.7 Question 6

What is cross-validation, and how is it performed on a model? Why would cross-validation be helpful when using grid search?

Answer: Cross-validation is a method of splitting the data into subsets for testing and training and average the performance from each case. It uses each subset as a testing set and rest of them as training sets and calculates the accuracy for each case(that means if K-fold CV, it iterates k times) Then it averages those accuracies. CV can be well rounded because it gets less influence on how the data gets divided. This can prevent the error of overfitting the data because without CV the grid search will test only one testing set. CV makes testing set balanced and thus the parameters will be optimized on the entire data set and avoid random anomalies.

5 Checkpoint!

You have now successfully completed your last code implementation section. Pat yourself on the back! All of your functions written above will be executed in the remaining sections below, and questions will be asked about various results for you to analyze. To prepare the **Analysis** and **Prediction** sections, you will need to initialize the two functions below. Remember, there's no need to implement any more code, so sit back and execute the code blocks! Some code comments are provided if you find yourself interested in the functionality.

```

In [9]: def learning_curves(X_train, y_train, X_test, y_test):
        """ Calculates the performance of several models with varying sizes of training data.
            The learning and testing error rates for each model are then plotted. """

        print "Creating learning curve graphs for max_depths of 1, 3, 6, and 10. . ."

        # Create the figure window
        fig = plt.figure(figsize=(10,8))

        # We will vary the training set size so that we have 50 different sizes
        sizes = np.rint(np.linspace(1, len(X_train), 50)).astype(int)
        train_err = np.zeros(len(sizes))
        test_err = np.zeros(len(sizes))

```

```

# Create four different models based on max_depth
for k, depth in enumerate([1,3,6,10]):

    for i, s in enumerate(sizes):

        # Setup a decision tree regressor so that it learns a tree with max_depth = depth
        regressor = DecisionTreeRegressor(max_depth = depth)

        # Fit the learner to the training data
        regressor.fit(X_train[:s], y_train[:s])

        # Find the performance on the training set
        train_err[i] = performance_metric(y_train[:s], regressor.predict(X_train[:s]))

        # Find the performance on the testing set
        test_err[i] = performance_metric(y_test, regressor.predict(X_test))

    # Subplot the learning curve graph
    ax = fig.add_subplot(2, 2, k+1)
    ax.plot(sizes, test_err, lw = 2, label = 'Testing Error')
    ax.plot(sizes, train_err, lw = 2, label = 'Training Error')
    ax.legend()
    ax.set_title('max_depth = %s'%(depth))
    ax.set_xlabel('Number of Data Points in Training Set')
    ax.set_ylabel('Total Error')
    ax.set_xlim([0, len(X_train)])

# Visual aesthetics
fig.suptitle('Decision Tree Regressor Learning Performances', fontsize=18, y=1.03)
fig.tight_layout()
fig.show()

```

```

In [14]: def model_complexity(X_train, y_train, X_test, y_test):
    """ Calculates the performance of the model as model complexity increases.
        The learning and testing errors rates are then plotted. """

    print "Creating a model complexity graph. . . "

    # We will vary the max_depth of a decision tree model from 1 to 14
    max_depth = np.arange(1, 14)
    train_err = np.zeros(len(max_depth))
    test_err = np.zeros(len(max_depth))

    for i, d in enumerate(max_depth):
        # Setup a Decision Tree Regressor so that it learns a tree with depth d
        regressor = DecisionTreeRegressor(max_depth = d)

        # Fit the learner to the training data
        regressor.fit(X_train, y_train)

        # Find the performance on the training set
        train_err[i] = performance_metric(y_train, regressor.predict(X_train))

```

```

        # Find the performance on the testing set
        test_err[i] = performance_metric(y_test, regressor.predict(X_test))

    # Plot the model complexity graph
    pl.figure(figsize=(7, 5))
    pl.plot(max_depth, test_err, lw=2, label = 'Testing Error')
    pl.plot(max_depth, train_err, lw=2, label = 'Training Error')
    pl.legend()
    pl.xlabel('Maximum Depth')
    pl.ylabel('Total Error')
    pl.show()

```

6 Analyzing Model Performance


In this third section of the project, you'll take a look at several models' learning and testing error rates on various subsets of training data. Additionally, you'll investigate one particular algorithm with an increasing `max_depth` parameter on the full training set to observe how model complexity affects learning and testing errors. Graphing your model's performance based on varying criteria can be beneficial in the analysis process, such as visualizing behavior that may not have been apparent from the results alone.

```
In [11]: learning_curves(X_train, y_train, X_test, y_test)
```

Creating learning curve graphs for max_depths of 1, 3, 6, and 10. . .

```
/Users/apple/anaconda/lib/python2.7/site-packages/matplotlib/figure.py:397: UserWarning: matplotlib is
"matplotlib is currently using a non-GUI backend, "
```


Decision Tree Regressor Learning Performances

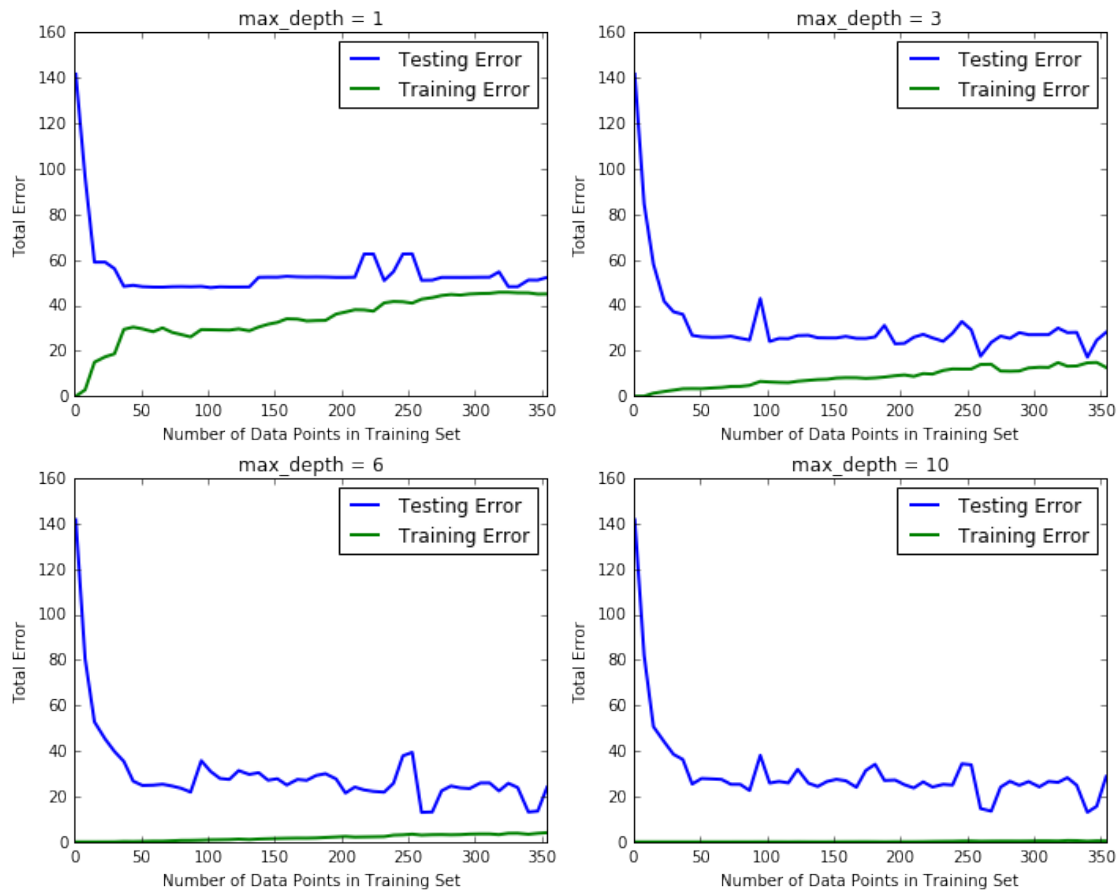

6.1 Question 7

Choose one of the learning curve graphs that are created above. What is the max depth for the chosen model? As the size of the training set increases, what happens to the training error? What happens to the testing error?

Answer: max depth is 10. training error increases a little bit and testing error first drops significantly until it reaches a point where it starts to plateau with small amount of fluctuations. As the max_depth increases, this the degree of fluctuation frequently.


6.2 Question 8

Look at the learning curve graphs for the model with a max depth of 1 and a max depth of 10. When the model is using the full training set, does it suffer from high bias or high variance when the max depth is 1? What about when the max depth is 10?

Answer: when the max depth is 1, yes it suffers from high bias because the model is underfitted. That is why as number of data increases the training error increases and converges toward testing error. When the max depth is 10, it suffers high variance because the model is more complex and overfitted. You can see that in the graph although training error is almost 0 it has big gap with the testing error.

In [16]: `model_complexity(X_train, y_train, X_test, y_test)`

Creating a model complexity graph. . .

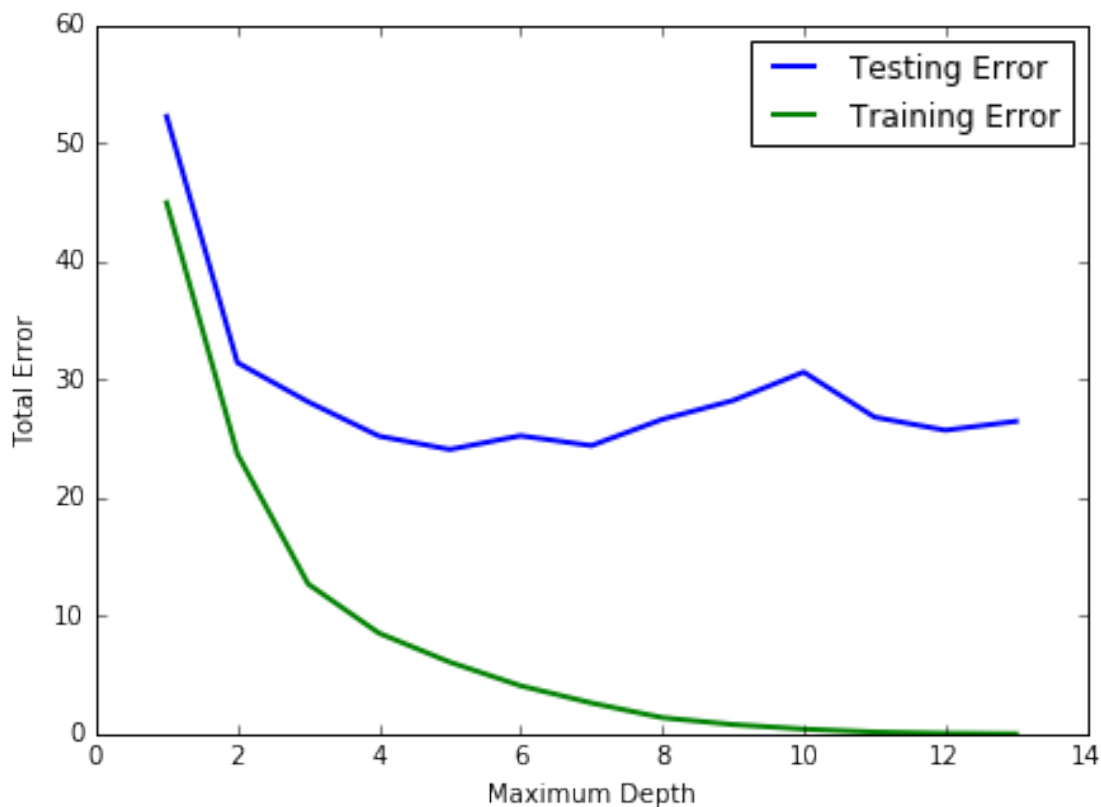

6.3 Question 9

From the model complexity graph above, describe the training and testing errors as the max depth increases. Based on your interpretation of the graph, which max depth results in a model that best generalizes the dataset? Why?

Answer: Higher maximum depth, the higher the model complexity becomes and as it becomes higher, the model goes from underfitting to overfitting. When it's underfitted, the training error is very high. when it's overfitted the testing error does not decrease but more or less increases. This results in bigger gap between the testing error and training error. The best max depth would be somewhere 6~8 where the training error plus the testing error is the lowest.

7 Model Prediction

In this final section of the project, you will make a prediction on the client's feature set using an optimized model from `fit_model`. When applying grid search along with cross-validation to optimize your model, it would typically be performed and validated on a training set and subsequently evaluated on a **dedicated test set**. In this project, the optimization below is performed on the entire dataset (as opposed to the training set you made above) due to the many outliers in the data. Using the entire dataset for training provides for a less volatile prediction at the expense of not testing your model's performance.

To answer the following questions, it is recommended that you run the code blocks several times and use the median or mean value of the results.

7.1 Question 10

Using grid search on the entire dataset, what is the optimal `max_depth` parameter for your model? How does this result compare to your initial intuition?

Hint: Run the code block below to see the max depth produced by your optimized model.

```
In [21]: print "Final model has an optimal max_depth parameter of", reg.get_params()['max_depth']
```

```
Final model has an optimal max_depth parameter of 6
```

Answer: the optimal max_depth parameter is 6. it's same with my initial intuition because after 6 the testing error increases.

7.2 Question 11

With your parameter-tuned model, what is the best selling price for your client's home? How does this selling price compare to the basic statistics you calculated on the dataset?

Hint: Run the code block below to have your parameter-tuned model make a prediction on the client's home.

```
In [22]: sale_price = reg.predict(CLIENT_FEATURES)
         print "Predicted value of client's home: {0:.3f}".format(sale_price[0])
```

```
Predicted value of client's home: 20.766
```

Answer: it's 20766 dollars and it's little bit lower than the mean and the median.

7.3 Question 12 (Final Question):

In a few sentences, discuss whether you would use this model or not to predict the selling price of future clients' homes in the Greater Boston area.

Answer: No I would not use this model to predict the selling price of future clients' homes in the Greater Boston area because it takes some unnecessary attributes like B. So if we let that attribute out then I think it will be more accurate.

```
In [ ]:
```

```
In [ ]:
```