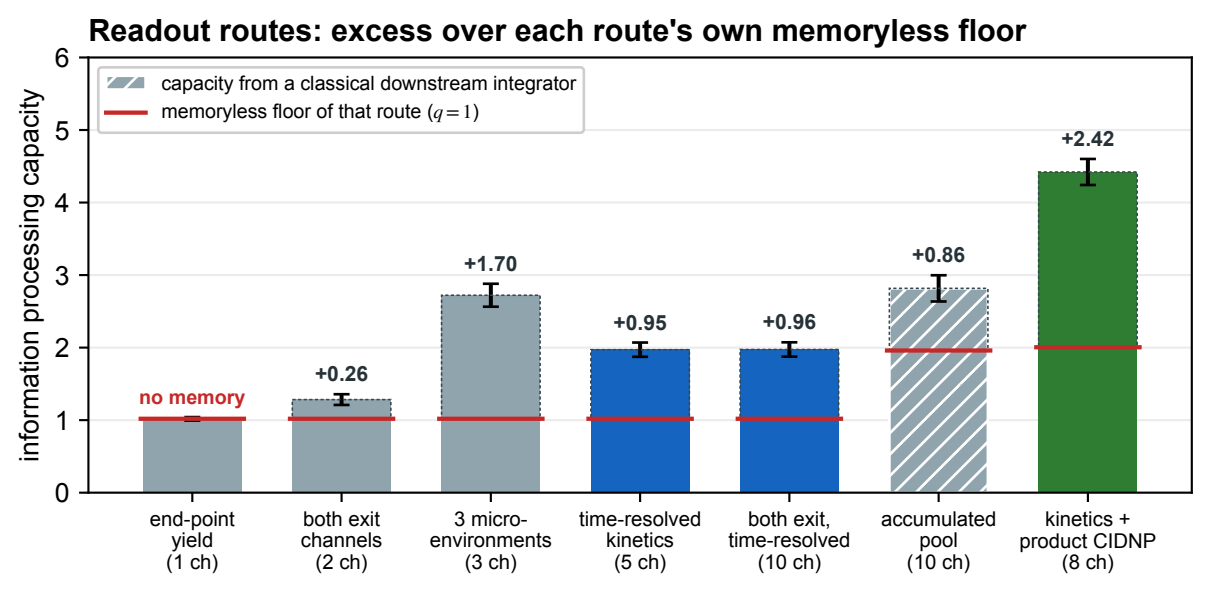
Readout routes: excess over each route's own memoryless floor
capacity from a classical downstream integrator
memoryless floor of that route ($q = 1$)
information processing capacity
0
1
2
3
4
5
6
no memory
+0.26
+1.70
+0.95
+0.96
+0.86
+2.42
end-point yield (1 ch)
both exit channels (2 ch)
3 micro-environments (3 ch)
time-resolved kinetics (5 ch)
both exit, time-resolved (10 ch)
accumulated pool (10 ch)
kinetics + product CIDNP (8 ch)