


One-shot encoding, $n = 8$, 8 circuit realizations per cell (cell std ≤ 0.50)

(a) information present: F_Q^A/F_Q



(b) best-Pauli sensitivity proxy: $\log_{10} \eta_{\text{needle}}$

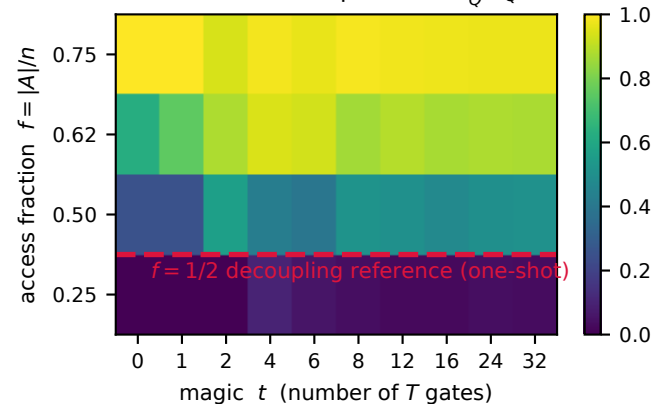