


sar_trial_ctrl: implicit state and comparator acceptance

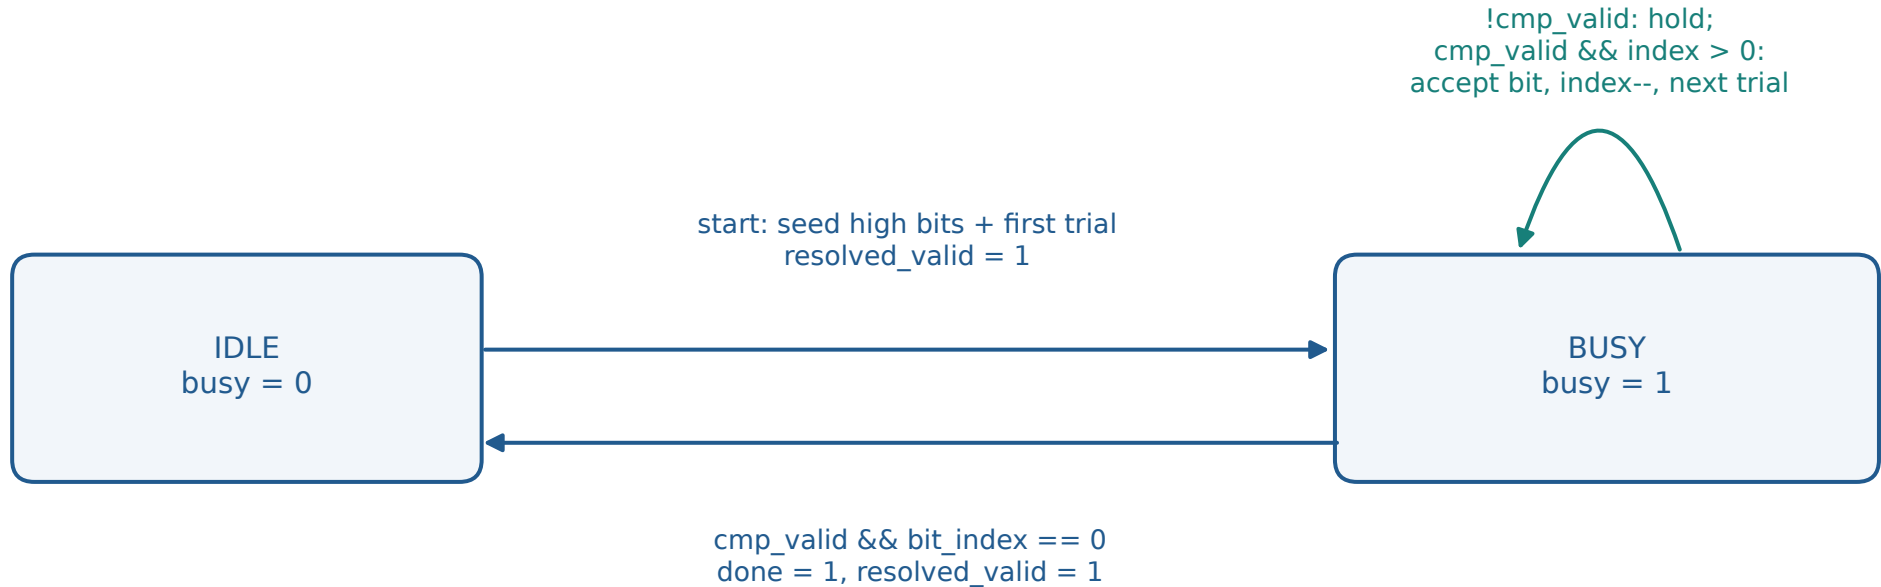

Priority on every posedge: reset/!enable > cancel > idle start > busy comparator.

cancel clears busy/done/valid but retains data/index. Reset/!enable clears all.

While busy, start is ignored; a valid comparison can still advance. `compare_enable = enable && busy && !cancel`.

Coarse: BITS=9, SEED=3 => six decisions. Fine: BITS=12, SEED=0 => twelve decisions.