

Note to bidders: addendum will be issued shortly after tender to revise cladding material, patterning and steel stairs & ramp structure (A300s, A600s and S4.0 will be updated)

JEJE ZHO TH MEN'S SHELTER

Dawson City, YT

Issued For Tender - July 2021

PROJECT NO. 20-040

Sheet List:

Architectural

- A001 - Building Assemblies
- A101 - Site Plan & Drainage Plan
- A102 - Site Details
- A103 - Fence Details
- A201 - Main Floor Plan & Second Floor Plan
- A210 - Reflected Ceiling Plan
- A220 - Furniture Plan
- A301 - Building Elevations
- A302 - Deck Elevations
- A401 - Building Sections
- A501 - Interior Details
- A601 - Envelope Details
- A602 - Envelope Details
- A603 - Envelope Details
- A720 - Interior Stair Details
- A801 - Interior Elevations
- A802 - Interior Elevations
- A803 - Interior Elevations
- A820 - Washroom Details
- A851 - Millwork Details
- A852 - Millwork Details
- A853 - Millwork Details
- A854 - Millwork Details
- A855 - Millwork Details
- A856 - Millwork Details
- A901 - Room Finish Schedule & Window Schedule
- A902 - Hardware Schedule & Door Schedule

Structural

- S1.0 - Foundation Plan
- S1.1 - Main Floor Framing Plan
- S1.2 - Second Floor Framing Plan
- S1.3 - Roof Framing Plan
- S2.0 - Foundation and Main Floor Framing Sections
- S2.1 - Foundation and Main Floor Framing Sections
- S3.0 - Framing Sections 2nd Floor
- S3.1 - Framing Section - Roof, Roof Truss Loading Diagram, Notes
- S4.0 - Exterior Ramp, Stairs, Details
- S4.1 - Exterior Deck Plans, Sections, Details
- S4.2 - Exterior Deck Steel Framing Elevations
- S4.3 - Wood Panel Shear Walls and Diaphragms
- S5.0 - Structural Notes and Specifications

Mechanical

- M100 - Mechanical Site Plan and Symbol Legend
M200 - Mechanical Plumbing Main Floor
M201 - Mechanical Plumbing 2nd Floor
M300 - Mechanical Heating Plans
M400 - Mechanical Ventilation Plans
M500 - Mechanical Fire Protection Plans
M600 - Mechanical Schematics and Details 1
M601 - Mechanical Schematics and Details 2
M602 - Mechanical Room Layouts
M700 - Mechanical Equipment Schedule 1
M701 - Mechanical Equipment Schedule 2

Electrical

- E100 - Electrical Site Layout & Symbol Legend
- E101 - Lighting Layout & Luminaire Schedule
- E102 - Power & Telecommunications Layout
- E103 - Emergency Lighting & Fire Alarm System Layout
- E600 - Single Line Diagram & Power Demand Calculations
- E601 - Fire Alarm Riser Diagram & Zone Schedule

Code Analysis:

Project Phase	Date Updated March 24, 2021									
Line No.	National Building Code of Canada 2015 Assessment								NBC 2015 Reference	
1	Summary									
2	Project Type:		New Construction							
3	Primary Occupancy Classification:		Group B3 Care							3.1.2.1
4	Primary Occupancy:		Assisted/Supportive Living Facilities							
5	Other Major Occupancy Classification:									
6	Other Major Occupancy:									
7	Number of Storeys:		2 Above Grade						Below Grade	3.2.1.1
8	Building Height (m):		9.4							3.2.1.1
9	High Building:		No							3.2.6.1
10	Building Area (m2):		282.9							1.4.1.2
11	Gross Area (m2):		542.9							
12	Number of Streets Facing:		1							3.2.2.10, 3.2.5.4-6
13	Construction Type Proposed:		Combustible							
14	Sprinkler System Proposed:		Entire Building							
15	Occupant Load:		34							
16	Building Classification									
17	Building Classification:		Group B, Division 3, up to 2 Storeys, Sprinklered							3.2.2.45
18	Permitted Construction:		Combustible or Non-Combustible Construction (Singly or Combination)							
19	Maximum Area (m2):		1600							
20	Sprinklers:		Required							3.2.1.5, 3.2.2.15, 3.2.2.18
21	Fire Resistance Ratings									
22	Floors:		45							
23	Loadbearing Walls/Columns:		45							
24	Mezzanines:		45							
25	Roof:									
26	Mezzanines									
27	Area (m2)		NA							3.2.8
28	Spatial Separation									
29	Wall	Area of EBP (m2)	Limiting Distance (m)	L/H or H/L	Permitted Max. % of Openings	FRR Ext. Wall	Type of Construction Required	Type of Cladding Required	Listed Design or Description	
30	North	150	1.2	Less than 3:1	14% 1 hr		Comb. or Non-Comb.	Non-Comb.		
31	South	150	2	Less than 3:1	16% 1 hr		Comb. or Non-Comb.	Non-Comb.		
32	East	100	7	Less than 3:1	88% 45 min		Comb. or Non-Comb.	Comb. or Non-Comb.		
33	West	100	8	Less than 3:1	100% 45 min		Comb. or Non-Comb.	Comb. or Non-Comb.		
34	Component Fire Separations									
35	Exits:		45 minutes		Closures:		45 minutes		3.4.4.1, 3.1.8.4, 3.1.8.12	
36	Service Rooms (fuel fired):		1h		Closures:		45 minutes		3.6.2.1, 3.1.8.4, 3.1.8.12	
37	Service Rooms (non-fuel fired):		NA		Closures:		NA		3.6.2.1, 3.1.8.4, 3.1.8.12	
38	Electrical Rooms:		1h		Closures:		45 minutes		3.6.2.1, 3.1.8.4, 3.1.8.12	
39	Janitor Rooms:		NA		Closures:		NA		3.1.1.21, 3.1.8.4, 3.1.8.12	
40	Common Laundry Rooms:		NA		Closures:		NA		3.1.1.22, 3.1.8.4, 3.1.8.12	
41	Combustible Refuse Storage:		NA		Closures:		NA		3.6.2.5, 3.1.8.4, 3.1.8.12	
42	Generator Rooms:		NA		Closures:		NA		3.6.2.8, 3.1.8.4, 3.1.8.12	
43	Protection Zones for Disabled Persons:		NA		Closures:		NA		3.1.1.7, 3.1.8.4, 3.1.8.12	
44	Vertical Service Spaces:		NA						3.6.3	
45	Horizontal Service Spaces:		NA						3.6.4	
46	Firefighting									
47	Fire Alarm:		Required						3.2.4.1	
48	Standpipe:		Not Required						3.2.5.8-11	
49	Fire Department Connections:		max 45m from an automatic sprinkler system to a hydrant							3.2.5.15
50	Extinguishers:		Required						3.2.5.16	
51	Access to Above-Grade Storeys:		Not Required						3.2.5.1	
52	Access to Basements:		NA						3.2.5.2	
53	Roof Access:		Not Required						3.2.5.3	
54	Access Routes:		Not Required						3.2.5.4-6	
55	Occupant Load									3.1.17
56	Based On:		Area Per Person							
57	Basement:		18							
58	1st Floor:		176.7		10					
59	2nd Floor:		17		167.8		10			
60	3rd Floor:									
61	Total Occupant Load:		34							
62	Exit Requirements									
63	Number of Required Exits:		Min. 2						3.4.2.1	
64	Distance Between Exits:									3.4.2.3
65	Travel Distance:		45m							3.4.2.4-5
66	Minimum Exit Width (mm):									3.4.3.2.1-8
67	Exit Corridors and Passageways:		625.6		Aggregate		1100 Individual			
68	Ramps:				Aggregate		1100 Individual			
69	Stairs:				Aggregate		900 Individual			
70	Doorways:				Aggregate		850 Individual			
71	Plumbing Facilities									
72	Water Closets:		Female		2 Male		2		3.7.2.2	
73	Urinals:		Female		n/a		Male		3.7.2.2.5	
74	Lavatories:		Female		1 Male		1		3.7.2.3	
75	Barrier-Free Access									
76	Required? If no, provide explanation:		Required						3.8.2.1	
77	Entrances:		1						3.8.2.2	
78	Floor Areas with BF Path of Travel:		Main floor except service room, upper floor							3.8.2.3-4
79	BF Access from Exterior:		Required						3.8.2.5	
80	Power Door Operator:		Not Required						3.8.2.7	
81	Signage:		Required						3.8.2.10	
82	Interior Finishes									
83	Flame Spread Rating									3.1.13.2, 3.1.13.6
84	Walls and Ceilings:		150							
85	Exits:		25							
86	Lobbies:		25							
87	Corridors:		150							
88	Non-Combustible Construction									
89	Combustible Flooring Elements: Allowed									3.1.5.10
90	Combustible Interior Finishes:		yes if less than 25mm thick							3.1.5.12
91										
92	Combustible Construction									
93	Insulation:		max. 500 flame spread							3.1.4.1.2, 3.1.5.14.15
94	Heavy Timber Construction:		NA							3.1.4.6.7

ARCHITECT

Taylor Architecture Group
Suite 100 - 2237 Second Avenue
Whitehorse, YT
867-920-2728

STRUCTURAL ENGINEER

Bradley Engineering
23 Aishihik Road
Whitehorse, YT
Y1A 3R6

MECHANICAL ENGINEER

TAG Engineering
Suite 100 - 2237 Second Avenue
Whitehorse, YT
867-920-2728

ELECTRICAL ENGINEER


TAG Engineering
Suite 100 - 2237 Second Avenue
Whitehorse, YT
867-920-2728

CLIENT

Tr'ondek Hwech'in First Nation
P.O Box 599
Dawson City, YT

CLIENT REPRESENTATIVE

Artemis Consulting
P.O. Box 21269
Whitehorse, YT

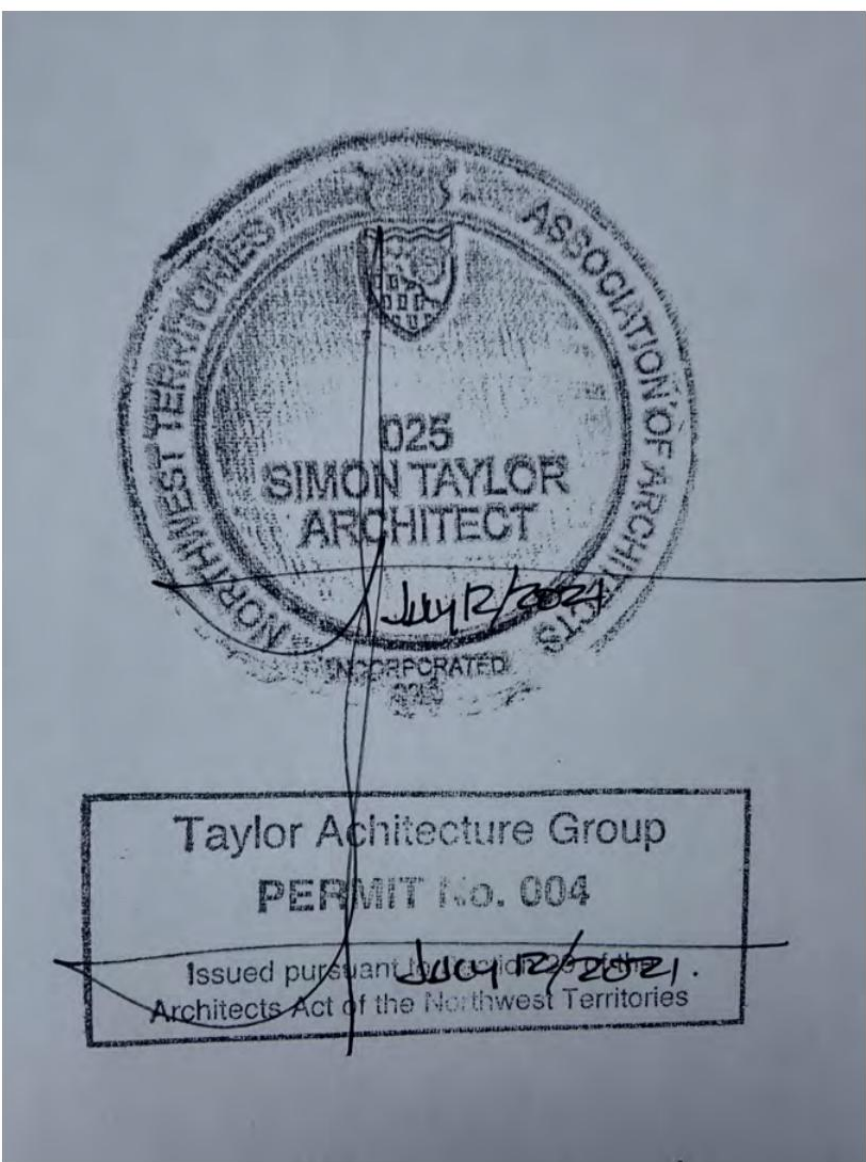

List of Abbreviations

#	NUMBER
&	AND
@	AT
AFF	ABOVE FINISH FLOOR
AHJ	AUTHORITIES HAVING JURISDICTION
ANOZ	ANNODIZED
AUM	ALUMINUM
AVB	AIR VAPOUR BARRIER
BF	BARRIER FREE
B.O.	BOTTOM OF
C.L.	CENTRE LINE
CLG	CEILING
CONC	CONCRETE
DIM	DIMENSION
DR	DOOR
DV	DISPLACEMENT VENT
DWG	DRAWING
EA	EACH
ELEC	ELECTRICAL
ELEV	ELEVATION
EQ	EQUAL
EXIST	EXISTING
EXT	EXTERIOR
FE	FIRE EXTINGUISHER
F.O.	FACE OF
FLR	FLOOR
GA	GAUGE
GALV	GALVANIZED
SWB	GYPSUM WALL BOARD
HC	HOLLOW CORE
HM	HOLLOW METAL
HPDL	HIGH PRESSURE DECORATIVE LAMINATE
HR	HOOR
INSUL	INSULATION OR INSULATED
INT	INTERIOR
MAX	MAXIMUM
MECH	MECHANICAL
MIN	MINIMUM
MTL	METAL
NIC	NOT IN CONTRACT
NO	NUMBER
NRC	NOISE REDUCTION COEFFICIENT
O.C.	ON CENTRE
OFM	OFFICE OF THE FIRE MARSHAL
PLY	PLYWOOD
PT	PRESSURE TREATED
PTD	PAINTED
QTY	QUANTITY
RCP	REFLECTED CEILING PLAN
REQD	REQUIRED
SC	SOLID CORE
SIM	SIMILAR
SPEC	SPECIFICATION
SPF	SPRUCE-PINE-FIR WOOD
SS	STAINLESS STEEL
STC	SOUND TRANSMISSION COEFFICIENT
STL	STEEL
STRUCT	STRUCTURAL
T&G	TONGUE AND GROOVE
T.O.	TOP OF
TOC	TOP OF CONCRETE
TOS	TOP OF STEEL
TYP	TYPICAL
U/S	UNDERSIDE
UNO	UNLESS NOTED OTHERWISE
W/	WITH



COMMUNITY PLAN & PARCEL INFORMATION

ADDRESS: 1217 2nd Ave
LOT: 19
BLOCK: D, Ladue
ZONING: Core Commercial

NOT FOR CONSTRUCTION

COPYRIGHT AND USE OF

COPYRIGHT FOR THE ARCHITECT'S INSTRUMENTS OF SERVICE OF SERVICE SHALL REMAIN THE PROPERTY OF THE ARCHITECT, EXECUTED OR NOT, AND WHETHER OR NOT THE ARCHITECT HAS A CLIENT IS PROHIBITED.

SUBMISSIONS OR DISTRIBUTION OF THE ARCHITECT'S INSTRUMENTS OF SERVICE OR ELECTRONIC MEDIA, TO MEET OFFICIAL REGULATORY REQUIREMENTS FOR THE PROJECT IS NOT TO BE CONSTRUED AS PUBLICATION IN DEROGATION OF THE CLIENT MAY RETAIN COPIES, INCLUDING ELECTRONIC OR PRINTED, OF THE ARCHITECT'S INSTRUMENTS OF SERVICE FOR INFORMATION AND RECORD OF OCCUPANCY OF THE PROJECT. COPIES MAY ONLY BE USED FOR THE SAME SITE, AND FOR THE SAME PROJECT, BY THIS CLIENT ON THE PROJECT WITHOUT THE EXPRESS WRITTEN CONSENT OF THE ARCHITECT.