

Scrutinize

v0.3.0 October 12, 2024

<https://github.com/SillyFreak/typst-scrutinize>

Clemens Koza

ABSTRACT

Scrutinize is a library for building exams, tests, etc. with Typst. It provides utilities for common task types and supports creating grading keys and sample solutions.

CONTENTS

| | |
|--|---|
| I Introduction | 2 |
| II Tasks and task metadata | 2 |
| III Grading | 4 |
| IV Task templates and sample solutions | 6 |
| V Module reference | 9 |

I INTRODUCTION

Scrutinize has three general areas of focus:

- It helps with grading information: record the points that can be reached for each task and make them available for creating grading keys.
- It provides a selection of task authoring tools, such as multiple choice or true/false questions.
- It supports the creation of sample solutions by allowing to switch between the normal and “pre-filled” exam.

Right now, providing a styled template is not part of this package’s scope.

II TASKS AND TASK METADATA

Let’s start with a really basic example that doesn’t really show any of the benefits of this library yet:

```
1 #import "@preview/scrutinize:0.3.0": grading, task, solution, task-kinds typ
2 // you usually want to alias this, as you'll need it often
3 #import task: t
4
5 = Task
6 #t(points: 2)
7 #lorem(20)
```

TASK

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua.

After importing the library’s modules and aliasing an important function, we simply get the same output as if we didn’t do anything. The one peculiar thing here is `t(points: 2)`: this adds some metadata to the task. Any metadata can be specified, but `points` is special insofar as it is used by the grading module by default.

A lot of *scrutinize*’s features revolve around using that metadata, and we’ll soon see how. A task’s metadata is a dictionary with the following fields:

- `data`: the explicitly given metadata of the task, such as `(points: 2)`.
- `heading`: the heading that identifies the task, such as `= Task`.
- `subtasks`: an array of nested tasks, identified by nested headings. When getting task metadata, you can limit the depth; this is only present as long as the depth is not exceeded.

Let’s now look at how to retrieve metadata. Let’s say we want to show the points in each task’s header:

```
1 #show heading: it => { typ
2 // here, we need to access the current task's metadata
3 block[#it.body #h(1fr) / #task.current().data.points P.]
4 }
```

Task

/ 2 P.

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua queraat.

Here we're using the `task.current()` function to access the metadata of the current task. This function requires `context` to know where in the document it is called, which a show rule already provides. The function documentation contains more details on how task metadata can be retrieved.

II.a Subtasks

Often, exams have not just multiple tasks, but those tasks are made up of several subtasks. Scrutinize supports this, and reuses Typst's heading hierarchy for subtask hierarchy.

Let's say some task's points come from its subtasks' points. This could be achieved like this:

```
1 #show heading.where(level: 1): it => {  
2   let t = task.current(level: 1, depth: 2)  
3   block[#it.body #h(1fr) / #grading.total-points(t.subtasks) P.]  
4 }  
5 #show heading.where(level: 2): it => {  
6   let t = task.current(level: 2)  
7   block[#it.body #h(1fr) / #t.data.points P.]  
8 }  
9  
10 == Task  
11 #lorem(20)  
12  
13 == Subtask A  
14 #t(points: 2)  
15 #lorem(20)  
16  
17 == Subtask B  
18 #t(points: 1)  
19 #lorem(20)
```

Task

/ 3 P.

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua queraat.

Subtask A

/ 2 P.

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua queraat.

Subtask B

/ 1 P.

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua queraat.

In this example, `task.current()` is used in conjunction with `grading.total-points()`, which recursively adds all points of a list of tasks and its subtasks. More about this function will be said in the next section, and of course in the function's reference.

III GRADING

The next puzzle piece is grading. There are many different possibilities to grade an exam; Scrutinize tries not to be tied to specific grading strategies, but it does assume that each task gets assigned points and that the grade results from looking at some kinds of sums of these points. If your test does not fit that schema, you can simply ignore the related features.

The first step in creating a typical grading scheme is determining how many points can be achieved in total, using `grading.total-points()`. We also need to use `task.all()` (with the `flatten` parameter) to get access to the task metadata distributed throughout the document:

```
1 #context [typ
2   #let ts = task.all(flatten: true)
3   #let total = grading.total-points(ts)
4   #let hard = grading.total-points(ts.filter(t => t.data.points >= 5))
5   Total points: #total \ Points from hard tasks: #hard
6 ]
7
8 = Hard Task
9 #t(points: 6)
10 #lorem(20)
11
12 = Task
13 #t(points: 2)
14 #lorem(20)
```

Total points: 8
Points from hard tasks: 6

Hard Task / 6

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua.

Task / 2

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua.

Once we have the total points of the exam figured out, we need to define the grading key. Let's say the grades are in a three-grade system of "bad", "okay", and "good". We could define these grades like this:

```
1 #context [typ
2   #let total = grading.total-points(task.all(flatten: true))
3   #grading.grades(
4     [bad],
5     total * 2/4, [okay],
6     total * 3/4, [good],
7   )
8 ]
```

```
(
  (body: [bad], lower-limit: none, upper-limit: 4.0),
  (body: [okay], lower-limit: 4.0, upper-limit: 6.0),
  (body: [good], lower-limit: 6.0, upper-limit: none),
)
```

Hard Task

/ 6

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua.

Task

/ 2

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua.

Obviously we would not want to render this representation as-is, but `grading.grades()` gives us a convenient way to have all the necessary information, without assuming things like inclusive or exclusive point ranges. The example in the gallery has a more complete demonstration of a grading key.

One thing to note is that `grading.grades()` does not process the limits of the grade ranges; they're simply passed through. If you prefer to ignore total points and instead show percentages, or want to use both, that is also possible:

```
1 #grading.grades(
2   [bad],
3   (points: total * 2/4, percent: 50%), [okay],
4   (points: total * 3/4, percent: 75%), [good],
5 )
```

```
(
  (
    body: [bad],
    lower-limit: none,
    upper-limit: (points: 4.0, percent: 50%),
  ),
  (
    body: [okay],
    lower-limit: (points: 4.0, percent: 50%),
    upper-limit: (points: 6.0, percent: 75%),
  ),
  (
    body: [good],
    lower-limit: (points: 6.0, percent: 75%),
    upper-limit: none,
  ),
)
```

IV TASK TEMPLATES AND SAMPLE SOLUTIONS

With the test structure out of the way, the next step is to actually define tasks. There are endless ways of posing tasks, but some recurring formats come up regularly.

Note: customizing the styles is currently very limited/not possible. I would be interested in changing this, so if you have ideas on how to achieve this, contact me and/or open a pull request. Until then, feel free to “customize using copy/paste”. The MIT license allows you to do this.

Tasks have a desired response, and producing sample solutions can be made very convenient if they are stored with the task right away. To facilitate this, this package provides

- `solution._state`: this boolean state controls whether solutions are currently shown in the document. Some methods have convenience functions on the module level to make accessing them easier: `solution.get()`, `solution.update()`.
- `solution.answer()`: this function uses the solution state to conditionally hide the provided answer.
- `solution.with()`: this function sets the solution state temporarily, before switching back to the original state.

Additionally, the solution state can be set using the Typst CLI using `--input solution=true` (or `false`, which is already the default). Within context expressions, a task can use `#solution.get()` or `#solution.answer()` to find out whether solutions are shown. This is also used by Scrutinize’s task templates.

Let’s look at a free form question as a simple example:

IV.a Free form questions

In free form questions, the student simply has some free space in which to put their answer:

```
1  #import "@preview/scrutinize:0.3.0": grading, task, solution, task-kinds typ
2  #import task-kinds: free-form
3
4  // toggle the following comment or pass `--input solution=true`
5  // to produce a sample solution
6  // #solution.update(true)
7
8  Write an answer.
9  #free-form.plain[An answer]
10 Next question
```

| | |
|------------------|------------------|
| Write an answer. | Write an answer. |
| | An answer |
| Next question | Next question |


Left is the unanswered version, right the answered one. Note that the answer occupies the same space regardless of whether it is displayed or not, and that the height can also be overridden - see `free-form.plain()`.

The content of the answer is of course not limited to text; for example, the task could be to complete a diagram. The placeholder parameter is particularly useful for that, and the `stretch` parameter can be used to give students more space to write their solution than a printed version would take:

```

1 Connect the nodes.
2 #free-form.plain(stretch: 200%, {
3   stack(dir: ltr, spacing: 1cm, circle(radius: 3mm), circle(radius: 3mm))
4   place(horizon, dx: 6mm, line(length: 1cm))
5 }, placeholder: {
6   stack(dir: ltr, spacing: 1cm, circle(radius: 3mm), circle(radius: 3mm))
7 })
8 Next question

```

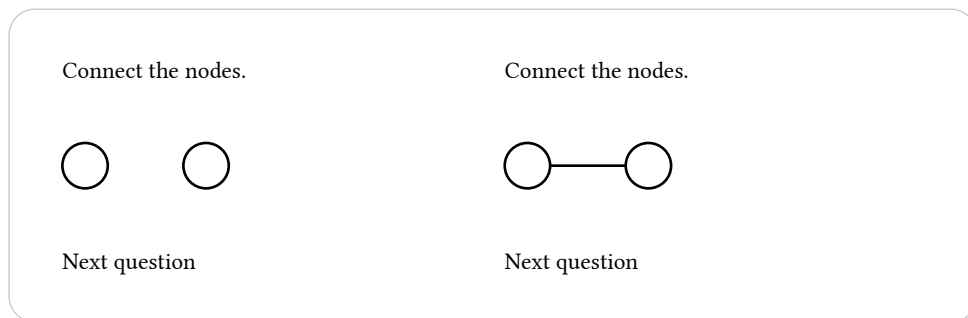


There are also variations of the free-form question that use pre-printed lines or grids:

```

1 Do something here.
2 #grid(
3   columns: (1fr, 1fr),
4   column-gutter: 0.5em,
5   // 180% line height, 200% line count
6   free-form.lines(stretch: 180%, count: 200%, lorem(5)),
7   // solution needs four grid lines, six are printed
8   free-form.grid(stretch: 133%, pad(5mm, line(end: (10mm, 10mm)))),
9 )
10 Next question

```

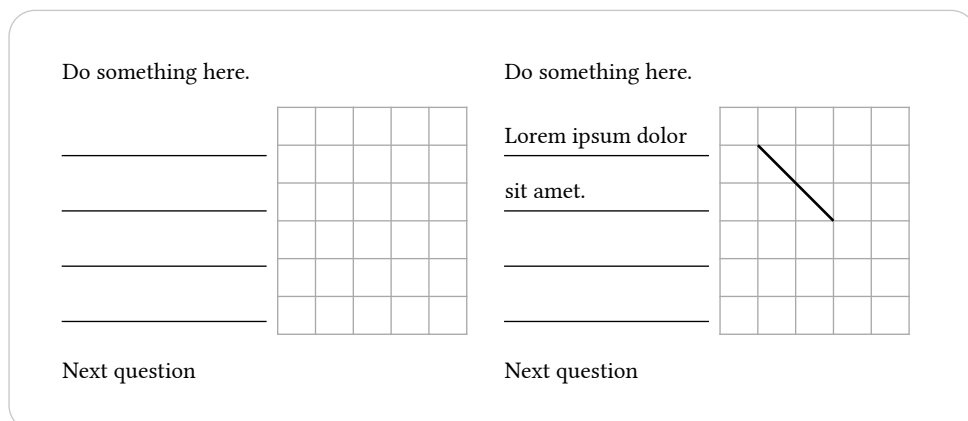

IV.b fill-in-the-gap questions

Related to free form questions are questions where the answer goes into a gap in the text. See [gap-gap\(.\)](#) for details.

```

1 #import "@preview/scrutinize:0.3.0": grading, task, solution, task-kinds typ
2 #import task-kinds.gap: gap
3
4 This question is #gap(stretch: 180%)[easy].
5
6 $ sin(0) = #gap(stroke: "box")[$0$] $

```

This question is _____ .
sin(0) =

This question is _____ easy _____ .
sin(0) =

IV.c single and multiple choice questions

These task types allow making a mark next to one or multiple choices. See [choice.single\(\)](#) and [choice.multiple\(\)](#) for details.

```

1 #import "@preview/scrutinize:0.3.0": grading, task, solution, task-kinds typ
2 #import task-kinds: choice
3
4 Which of these is the fourth answer?
5 #choice.single(
6   range(1, 6).map(i => [Answer #i]),
7   // 0-based indexing
8   3,
9 )
10
11 Which of these answers are even?
12 #choice.multiple(
13   range(1, 6).map(i => ([Answer #i], calc.even(i))),
14 )

```

Which of these is the fourth answer?

| | |
|----------|--------------------------|
| Answer 1 | <input type="checkbox"/> |
| Answer 2 | <input type="checkbox"/> |
| Answer 3 | <input type="checkbox"/> |
| Answer 4 | <input type="checkbox"/> |
| Answer 5 | <input type="checkbox"/> |

Which of these answers are even?

| | |
|----------|--------------------------|
| Answer 1 | <input type="checkbox"/> |
| Answer 2 | <input type="checkbox"/> |
| Answer 3 | <input type="checkbox"/> |
| Answer 4 | <input type="checkbox"/> |
| Answer 5 | <input type="checkbox"/> |

Which of these is the fourth answer?

| | |
|----------|-------------------------------------|
| Answer 1 | <input type="checkbox"/> |
| Answer 2 | <input type="checkbox"/> |
| Answer 3 | <input type="checkbox"/> |
| Answer 4 | <input checked="" type="checkbox"/> |
| Answer 5 | <input type="checkbox"/> |

Which of these answers are even?

| | |
|----------|-------------------------------------|
| Answer 1 | <input type="checkbox"/> |
| Answer 2 | <input checked="" type="checkbox"/> |
| Answer 3 | <input type="checkbox"/> |
| Answer 4 | <input checked="" type="checkbox"/> |
| Answer 5 | <input type="checkbox"/> |

V MODULE REFERENCE

V.a scrutinize.task

- [scope\(\)](#)
- [t\(\)](#)
- [current\(\)](#)
- [all\(\)](#)

```
scope(body: content) -> content
```

Encloses the provided body with labels that can be used to limit what tasks are considered during lookup. This is helpful if there are independent exams/sections in the same document, or for this documentation (separate examples).

The lookup functions in this package properly handle nested scopes.

Example:

| | |
|---|---|
| <pre>1 #task.scope[2 Number of tasks: #context task.all().len() 3 #task.scope[4 = A (counts) #t(). 5] 6 = B (counts too) #t(). 7] 8 = C (doesn't) #t().</pre> | <p>Number of tasks: 2</p> <p>A (COUNTS)</p> <p>B (COUNTS TOO)</p> <p>C (DOESN'T)</p> |
|---|---|

Parameters:

`body (content)` – the scope's body

```
t(..args: arguments) -> content
```

Sets the task data for the most recent heading. This must be called only once per heading; subsequent calls won't do anything. The task metadata can later be accessed using the other functions in this module.

Parameters:

`..args (arguments)` – only named parameters: values to be added to the task's metadata

```
current(
  level: int,
  depth: int auto,
  from: location auto none,
  to: location auto none,
  loc: location auto
) -> dictionary
```

Looks up the most recently defined heading of a certain level and retrieves the task data, in a dictionary of the following form:

- heading is the heading that starts the task; through this location information can also be retrieved.
- data contains any data passed to `t()`.
- subtasks recursively contains more such dictionaries.

subtasks only exists down to the specified depth: if the depth is 1, no subtasks are retrieved, auto means an unlimited depth.

Only tasks within the specified range are considered. For example, if this is called within a `scope()` but the enclosing level 1 heading is *outside* the scope, this function will not find anything and fail. To still succeed, you need to either increase the range via `from` and `to`, or provide a location via `loc` that is outside the problematic scope.

This function is contextual and must appear within a context expression.

Examples:

| | |
|--|---|
| <pre> 1 = Example_task 2 #t(points: 2) 3 #context [4 #let name = task.current().heading.body 5 #let points = task.current().data.points 6 "#name" is worth #points points, 7 or up to #(points + 1) points for great answers! 8] </pre> | <p>EXAMPLE TASK</p> <p>“Example task” is worth 2 points, or up to 3 points for great answers!</p> |
| <pre> 1 = Example_task 2 #context [3 #let subtasks = task.current(depth: 2).subtasks 4 #let total = subtasks.map(t => t.data.points).sum() 5 This task gives #total points total. 6] 7 == Subtask 1 #t(points: 2). 8 == Subtask 2 #t(points: 2). </pre> | <p>EXAMPLE TASK</p> <p>This task gives 4 points total.</p> <p>Subtask 1</p> <p>Subtask 2</p> |

Parameters:

`level` (`int` = 1) – the level of heading to look up

`depth` (`int` or `auto` = 1) – the depth to which to also fetch subtasks

`from` (`location` or `auto` or `none` = `auto`) – the location at which to start looking; `auto` means start of the enclosing `scope()`, `none` means start of the document

`to` (`location` or `auto` or `none` = `auto`) – the location at which to stop looking; `auto` means end of the enclosing `scope()`, `none` means end of the document

`loc` (`location` or `auto` = `auto`) – the location at which to look; `auto` means `here()`

```
all(
  level: int,
  depth: int auto,
  from: location auto none,
  to: location auto none,
  loc: location auto,
  flatten: boolean
) -> array
```

Locates all tasks in the document (or scope, or region of the document), which can then be used to create grading keys etc. The return value is an array with elements as described in [current\(\)](#), except: if flatten is true, there will never be subtasks and instead subtasks down to the specified depth will follow their parent. Note that even then, nesting information is present through `heading.level`.

Headings of the specified `level` are treated as top-level tasks; any higher level headings, even if they have an associated [t\(\)](#), are ignored.

This function is contextual and must appear within a context expression.

Examples:

| | |
|---|---|
| <pre>1 #context [2 #let tasks = task.all(level: 2) 3 Number of tasks: #tasks.len() \ 4 Total points: #tasks.map(t => t.data.points).sum() 5] 6 == A #t(points: 2). 7 == B #t(points: 3). 8 === B1 #t(points: 1).</pre> | <p>Number of tasks: 2 Total points: 5</p> <p>A</p> <p>B</p> <p>B1</p> |
| <pre>1 #context [2 #let tasks = task.all(level: 3) 3 Number of tasks: #tasks.len() \ 4 Total points: #tasks.map(t => t.data.points).sum() 5] 6 == Part 1 7 === A #t(points: 2). 8 == Part 2 9 === B #t(points: 3).</pre> | <p>Number of tasks: 2 Total points: 5</p> <p>Part 1</p> <p>A</p> <p>Part 2</p> <p>B</p> |
| <pre>1 #context [2 #let tasks = task.all(level: 2, depth: auto, 3 flatten: true) 4 Number of tasks & subtasks: #tasks.len() 5] 6 == A 7 === A1 #t(points: 2). 8 === A1 #t(points: 3). 9 == B 10 === B1 #t(points: 1).</pre> | <p>Number of tasks & subtasks: 5</p> <p>A</p> <p>A1</p> <p>A1</p> <p>B</p> <p>B1</p> |

Parameters:

`level (int = 1)` – the level of heading to look up

`depth (int or auto = 1)` – the depth to which to also fetch subtasks

`from (location or auto or none = auto)` – the location at which to start looking; `auto` means start of the enclosing `scope()`, `none` means start of the document

`to (location or auto or none = auto)` – the location at which to stop looking; `auto` means end of the enclosing `scope()`, `none` means end of the document

`loc (location or auto = auto)` – the location at which to look; `auto` means `here()`

`flatten (boolean = true)` – whether to flatten subtasks

V.b scrutinize.grading

- [total-points\(\)](#)
- [grades\(\)](#)

```
total-points(tasks: array, field: string) -> integer float
```

Takes an array of *flattened* task metadata and returns the sum of their points. Tasks without points count as zero points.

Parameters:

`tasks (array)` – a flat array of task metadata dictionaries

`field (string = "points")` – the field in the metadata over which to calculate the sum

```
grades(..args: any) -> array
```

A utility function for generating grades with upper and lower point limits. The parameters must alternate between grade names and threshold scores, with grades in ascending order. These will be combined into dictionaries for each grade with keys `body`, `lower-limit`, and `upper-limit`. The first (lowest) grade will have a `lower-limit` of `none`; the last (highest) grade will have an `upper-limit` of `none`.

Example:

```
1 #let total = 8
2 #let (bad, okay, good) = grading.grades(
3   [bad], total * 2/4, [okay], total * 3/4, [good]
4 )
5 You will need #okay.lower-limit points to pass,
6 everything below is a _#(bad.body)_ grade.
```

You will need 4 points to pass, everything below is a *bad* grade.

Parameters:

`..args (any)` – only positional: any number of grade names interspersed with scores

V.c scrutinize.solution

- [get\(\)](#)
- [answer\(\)](#)

- [update\(\)](#)
- [with\(\)](#)

Variables:

- [_state](#)

```
get() -> boolean
```

A direct wrapper around [state.get\(\)](#) for the solution state [_state](#).

```
answer(answer: content, placeholder: auto content, place-args: none arguments) -> content
```

Puts an answer into the document if [get\(\)](#) returns true, otherwise the answer is concealed by using [hide\(\)](#). Optionally, a placeholder is displayed in the hidden answer's place. The placeholder should normally take less space than the actual answer and will not influence the layout.

```
1 practice cursive writing:
2
3 #let letter = text(2em, $cal(L)$)
4 #letter #context solution.answer(
5   ((letter,) * 5).join[ ],
6   placeholder: [
7     #text(gray, letter) #text(gray.lighten(50%), letter) \
8     oops, the placeholder is \ bigger than the answer!
9   ],
10 )
11
12 Next exercise
```

practice cursive writing:

ℒ ℒ ℒ

Next exercise
oops, the placeholder is
bigger than the answer!

practice cursive writing:

ℒ ℒ ℒ ℒ ℒ ℒ

Next exercise

Parameters:

[answer](#) (content) – the answer to maybe hide

[placeholder](#) (auto or content = auto) – the placeholder to display in place of the hidden answer

[place-args](#) (none or arguments = none) – additional arguments to [place\(\)](#), given as an arguments value, e.g. [arguments](#)(horizon, dx: 10pt)

```
update(value: boolean) -> content
```

A direct wrapper around [state.update\(\)](#) for the solution state [_state](#).

Parameters:

`value (boolean)` – the new solution state

```
with(value: boolean, body: content) -> content
```

Sets whether solutions are shown for a particular part of the document.

Example:

| | |
|---|---|
| <pre>1 Before: #context solution.get() \ 2 #solution.with(true)[3 Inside: #context solution.get() \ 4] 5 After: #context solution.get()</pre> | <p>Before: false Inside: true After: false</p> |
|---|---|

Parameters:

`value (boolean)` – the solution state to apply for the body

`body (content)` – the content to show

```
_state state
```

The boolean state storing whether solutions should currently be shown in the document. This can be set using the Typst CLI using `--input solution=true` (or `false`, which is already the default) and accessed by the regular methods of the [state type](#) or by the convenience functions of this module: [get\(\)](#), [update\(\)](#). Additionally, [with\(\)](#) can be used to change the solution state temporarily.

V.d scrutinize.task-kinds.choice

- [checkbox\(\)](#)
- [multiple\(\)](#)
- [single\(\)](#)

```
checkbox(correct: boolean) -> content
```

A checkbox which can be ticked by the student. If the checkbox is a correct answer and the document is in solution mode, it will be ticked.

Example:

```
1 #import task-kinds.choice: checkbox
2 Correct: #checkbox(true) -- Incorrect: #checkbox(false)
```

Correct: ☐ – Incorrect: ☐

Correct: ☒ – Incorrect: ☐

Parameters:

`correct (boolean)` – whether the checkbox is of a correct answer

```
multiple(options: array, boxes: alignment, direction: direction) -> content
```

A table with multiple options that can each be true or false. Each option is a tuple consisting of content and a boolean for whether the option is correct or not.

Example:

```
1 #import task-kinds: choice
2 #choice.multiple(
3   range(1, 6).map(i => ([Answer #i], calc.even(i))),
4 )
5 #set table(stroke: none, inset: (x, y) => (
6   right: if calc.even(x) { 0pt } else { 0.8em },
7   rest: 5pt,
8 ))
9 #choice.multiple(
10  boxes: left,
11  direction: ltr,
12  range(1, 6).map(i => ([#i], calc.even(i))),
13 )
```

| | |
|----------|--------------------------|
| Answer 1 | <input type="checkbox"/> |
| Answer 2 | <input type="checkbox"/> |
| Answer 3 | <input type="checkbox"/> |
| Answer 4 | <input type="checkbox"/> |
| Answer 5 | <input type="checkbox"/> |

| | |
|----------|-------------------------------------|
| Answer 1 | <input type="checkbox"/> |
| Answer 2 | <input checked="" type="checkbox"/> |
| Answer 3 | <input type="checkbox"/> |
| Answer 4 | <input checked="" type="checkbox"/> |
| Answer 5 | <input type="checkbox"/> |

☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5 ☐ 1 ☒ 2 ☐ 3 ☒ 4 ☐ 5

Parameters:

`options (array)` – an array of (option, correct) pairs

`boxes (alignment = right)` – left or right, specifying on which side of the option the checkbox should appear

`direction (direction = ttb)` – ttb or ltr, specifying how options should be arranged

```
single(options: array, answer: integer, boxes: alignment, direction: direction) -> content
```

A table with multiple options of which one can be true or false. Each option is a content, and a second parameter specifies which option is correct.

Example:

```

1  #import task-kinds: choice
2  #choice.single(
3    range(1, 6).map(i => [Answer #i]),
4    // 0-based indexing
5    3,
6  )
7  #set table(stroke: none, inset: (x, y) => (
8    right: if calc.even(x) { 0pt } else { 0.8em },
9    rest: 5pt,
10 ))
11 #choice.single(
12   boxes: left,
13   direction: ltr,
14   range(1, 6).map(i => [#i]),
15   3,
16 )

```

| | |
|----------|--------------------------|
| Answer 1 | <input type="checkbox"/> |
| Answer 2 | <input type="checkbox"/> |
| Answer 3 | <input type="checkbox"/> |
| Answer 4 | <input type="checkbox"/> |
| Answer 5 | <input type="checkbox"/> |

| | |
|----------|-------------------------------------|
| Answer 1 | <input type="checkbox"/> |
| Answer 2 | <input type="checkbox"/> |
| Answer 3 | <input type="checkbox"/> |
| Answer 4 | <input checked="" type="checkbox"/> |
| Answer 5 | <input type="checkbox"/> |

☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5
 ☐ 1 ☐ 2 ☐ 3 ☒ 4 ☐ 5

Parameters:

`options (array)` – an array of contents

`answer (integer)` – the index of the correct answer, zero-based

`boxes (alignment = right)` – left or right, specifying on which side of the option the checkbox should appear

`direction (direction = ttb)` – ttb or ltr, specifying how options should be arranged

V.e scrutinize.task-kinds.free-form

- [plain\(\)](#)
- [lines\(\)](#)
- [grid\(\)](#)

```

plain(
  answer: content,
  placeholder: auto content,
  height: auto relative,
  stretch: ratio,
  stroke: none stroke
) -> content

```


An answer to a free form question. If the document is not in solution mode, the answer is hidden but the height of the element is preserved.

Example:

```
1 #import task-kinds: free-form typ
2 Write an answer.
3 #free-form.plain(placeholder: [...], stroke: 0.5pt, stretch: 200%)[
4   an answer
5 ]
6 Next question
```

| | |
|---|--|
| <p>Write an answer.</p> <div style="border: 1px solid black; height: 30px; margin: 5px 0;"></div> <p>...</p> <p>Next question</p> | <p>Write an answer.</p> <div style="border: 1px solid black; height: 30px; margin: 5px 0; display: flex; align-items: center; justify-content: center;">an answer</div> <p>Next question</p> |
|---|--|

Parameters:

`answer (content)` – the answer to (maybe) display

`placeholder (auto or content = auto)` – the placeholder to display instead of hiding the answer.

For the layout of exam and solution to match, this needs to have the same height as the answer.

`height (auto or relative = auto)` – the height of the region where an answer can be written

`stretch (ratio = 100%)` – the amount by which the height of the answer region should be stretched relative to the required height of the provided solution. Can only be set to a value other than 100% if `height == auto`.

`stroke (none or stroke = none)` – the stroke of the box to draw around the answer area

```
lines(
  answer: content,
  placeholder: auto content,
  count: auto int ratio,
  line-height: auto relative,
  stretch: ratio,
  stroke: none stroke
) -> content
```

An answer to a free form question. If the document is not in solution mode, the answer is hidden but the height of the element is preserved.

This answer type is meant for text questions and shows a lines to write on. By default, the lines are spaced to match a regular paragraph (assuming the text styles are not changed within the answer) and the number of lines depends on what is needed for the sample solution. If a `line-height` is explicitly set, the `par.leading` is adjusted to make the sample solution fit the lines. Paragraph spacing is currently not adjusted, so for the answer to look nice, it should only be a single paragraph.

Example:

```
1 #import task-kinds: free-form typ
2 Write an answer.
3 #free-form.lines(placeholder: [...\ ...], count: 150%, stretch: 200%)[
4   this answer takes \ more than one line
5 ]
6 Next question
```

| | |
|--|---|
| Write an answer. ... <hr/> ... <hr/> <hr/> Next question | Write an answer. this answer takes <hr/> more than one line <hr/> <hr/> Next question |
|--|---|

Parameters:

`answer (content)` – the answer to (maybe) display

`placeholder (auto or content = auto)` – the placeholder to display instead of hiding the answer.

For the layout of exam and solution to match, this needs to have the same height as the answer.

`count (auto or int or ratio = auto)` – the number of lines to show; defaults to however many are needed for the answer. If given as a ratio, the auto line number is multiplied by that and rounded up.

`line-height (auto or relative = auto)` – the line height; defaults to what printed lines naturally take

`stretch (ratio = 100%)` – the amount by which the line height should be stretched relative to the regular line height. Can only be set to a value other than 100% if `line-height == auto`.

`stroke (none or stroke = 0.5pt)` – the stroke of the lines to draw

```
grid(
  answer: content,
  placeholder: auto content,
  height: auto relative,
  stretch: ratio,
  size: relative dictionary,
  stroke: none stroke
) -> content
```


An answer to a free form question. If the document is not in solution mode, the answer is hidden but the height of the element is preserved.

This answer type is meant for math and graphing tasks and shows a grid of lines. By default, the grid has a 5mm raster, and occupies enough vertical space to contain the answer. The grid fits the available width; use padding or similar to make it more narrow.

```

1 #import task-kinds: free-form
2 Draw a circle with the given center.
3 #free-form.grid(stretch: 125%, {
4   place(dx: 19.7mm, dy: 9.7mm, circle(radius: 0.3mm))
5   pad(left: 15mm, y: 5mm, circle(radius: 5mm))
6 }, placeholder: {
7   place(dx: 19.7mm, dy: 9.7mm, circle(radius: 0.3mm))
8 })
9 Next question

```

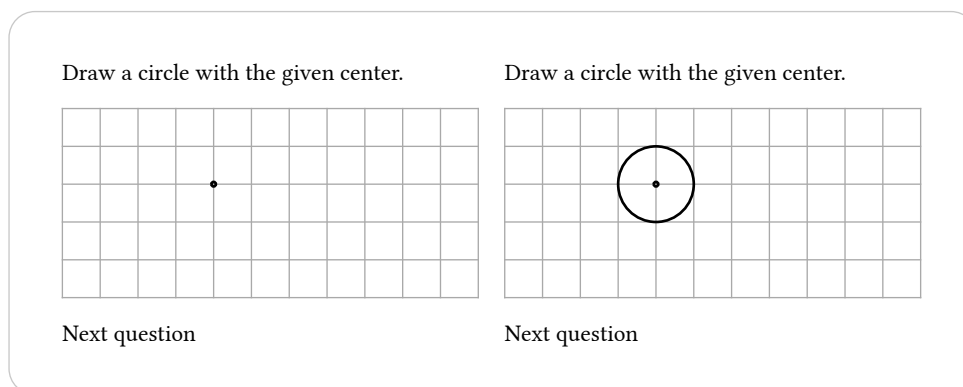

Parameters:

`answer (content)` – the answer to (maybe) display

`placeholder (auto or content = auto)` – the placeholder to display instead of hiding the answer.

For the layout of exam and solution to match, this needs to have the same height as the answer.

`height (auto or relative = auto)` – the height of the grid region

`stretch (ratio = 100%)` – the amount by which the height of the answer region should be stretched relative to the required height of the provided solution. Can only be set to a value other than 100% if `height == auto`.

`size (relative or dictionary = 5mm)` – grid size, or a dictionary containing width and height

`stroke (none or stroke = 0.5pt+gray)` – the stroke of the grid to draw

V.f scrutinize.task-kinds.gap

- `gap()`

```

gap(
  answer: content,
  placeholder: auto content,
  width: auto relative,
  stretch: ratio,
  stroke: none string stroke
) -> content

```

An answer filled in a gap in a text. If the document is not in solution mode, the answer is hidden but the width of the element is preserved.

Example:

```
1 #import task-kinds.gap: gap
2 #set par(leading: 1em)
3 This is a #gap(stretch: 200%)[difficult] question \
4 and it has #gap(placeholder: [...], width: 1cm, stroke: "box")[two] lines.
```

This is a _____ question
and it has lines.

This is a difficult question
and it has lines.

Parameters:

`answer (content)` – the answer to (maybe) display

`placeholder (auto or content = auto)` – the placeholder to display instead of hiding the answer.

For the layout of exam and solution to match, this needs to have the same width as the answer.

`width (auto or relative = auto)` – the width of the region where an answer can be written

`stretch (ratio = 100%)` – the amount by which the width of the answer region should be stretched relative to the required width of the provided solution. Can only be set to a value other than 100% if `width == auto`.

`stroke (none or string or stroke = "underline")` – the stroke with which to mark the answer area. The special values "underline" or "box" may be given to draw one or four border lines with a default stroke.