

Rapport

```
docker build -t youssefbenlahouel/sip-backend:1.0.0 -f .infra/dockerfiles/api.dockerfile src/backend.sip.com
```

```
docker build `
  --no-cache `
  --target production `
  -t youssefbenlahouel/sip-backend:1.0.0 `
  -f .infra/dockerfiles/api.dockerfile `
  src/backend.sip.com
```

```
docker build -t youssefbenlahouel/sip-frontend:1.0.0 -f .infra/dockerfiles/client.dockerfile src/frontend.sip-internal.com
```

```
18.35 chunk-chunks.js 1.03 MB
18.35 Application bundle generation failed. [16.595 seconds] - 2026-04-12T19:00:15.736Z
18.35
18.35 ▲ [WARNING] bundle initial exceeded maximum budget. Budget 500.00 kB was not met by 530.60 kB with a total of 1.03 MB.
18.35
18.35 ▲ [WARNING] src/app/shared/components/01-atoms/button/button.component.scss exceeded maximum budget. Budget 4.00 kB was not met by 2.63 kB with a total of 6.63 kB.
18.35
18.35 X [ERROR] bundle initial exceeded maximum budget. Budget 1.00 MB was not met by 30.60 kB with a total of 1.03 MB.
18.36
18.36 -----
client.dockerfile:37
-----
35 | COPY --chown=node:node . .
36 |
37 | >>> RUN npm run build
38 |
39 | USER node
-----
ERROR: failed to build: failed to solve: process "/bin/sh -c npm run build" did not complete successfully: exit code: 1
View build details: docker-desktop://dashboard/build/desktop-linux/desktop-linux/tzbxinds3k4iyfz79wiwe2tl
```

```
    "node_modules/leaflet/dist/leaflet.css"
  ],
  "scripts": [],
},
"configurations": {
  "production": {
    "budgets": [
      {
        "type": "initial",
        "maximumWarning": "500kB",
        "maximumError": "1MB",
        "maximumWarning": "1.1MB",
        "maximumError": "1.25MB"
      },
    ],
  },
}
```

```

=> [internal] load build context                                0.1s
=> > transferring context: 38.38kB                             0.1s
=> CACHED [build 2/6] WORKDIR /usr/src/client                 0.0s
=> CACHED [build 3/6] COPY --chown=node:node package*.json ./ 0.0s
=> CACHED [build 4/6] RUN npm ci                               0.0s
=> [build 5/6] COPY --chown=node:node . .                     0.2s
=> [build 6/6] RUN npm run build                               10.9s
=> ERROR [production 2/3] COPY --from=build /usr/src/client/dist/frontend.sip-internal.com/browser /usr/share/nginx/html 0.0s
-----
> [production 2/3] COPY --from=build /usr/src/client/dist/frontend.sip-internal.com/browser /usr/share/nginx/html:
client.dockerfile:45
-----
45 |
46 | # Updated to use proper Angular output path for frontend.sip-internal.com
47 | >>> COPY --from=build /usr/src/client/dist/frontend.sip-internal.com/browser /usr/share/nginx/html
48 |
49 | RUN chmod -R 755 /usr/share/nginx/html
-----
ERROR: failed to build: failed to solve: failed to compute cache key: failed to calculate checksum of ref v42118hzy2qcx9472v5gdy0::m8yxpduh4if2pk0eqseq1: "/usr/src/client/dist/frontend.sip-internal.com/browser": not found
View build details: docker-desktop://dashboard/build/desktop-linux/desktop-linux/x6ahju30trjdk4ptor9lhyin7

```

```

FROM nginx:stable AS production

# Updated to use proper Angular output path for frontend.sip-internal.com
COPY --from=build /usr/src/client/dist/frontend.sip-internal.com/browser /usr/share/nginx/html
COPY --from=build /usr/src/client/dist/www.sip-internal.com/browser /usr/share/nginx/html

RUN chmod -R 755 /usr/share/nginx/html

```

jetni l erreur hedhi fl docker compose

```

ip@sip:~/sip$ docker compose up -d
[+] up 4/4
Network stepinproperty_stepinproperty Created
Container sip-frontend Started
Container sip-db Healthy
Container sip-backend Started
ip@sip:~/sip$ docker compose logs -f api
sip-backend | 2026/04/12 20:44:34 Waiting for: tcp://db:5432
sip-backend | 2026/04/12 20:44:34 Connected to tcp://db:5432
sip-backend |
sip-backend | > backend.sip.com@0.0.1 start:prod
sip-backend | > node dist/main
sip-backend |
sip-backend | node:internal/modules/cjs/loader:1386
sip-backend |   throw err;
sip-backend |   ^
sip-backend |
sip-backend | Error: Cannot find module '/usr/src/api/dist/main'
sip-backend |     at Function._resolveFilename (node:internal/modules/cjs/loader:1383:15)
sip-backend |     at defaultResolveImpl (node:internal/modules/cjs/loader:1025:19)
sip-backend |     at resolveForCJSWithHooks (node:internal/modules/cjs/loader:1030:22)
sip-backend |     at Function._load (node:internal/modules/cjs/loader:1192:37)
sip-backend |     at TracingChannel.traceSync (node:diagnostics_channel:328:14)
sip-backend |     at wrapModuleLoad (node:internal/modules/cjs/loader:237:24)
sip-backend |     at Function.executeUserEntryPoint [as runMain] (node:internal/modules/run_main:171:5)
sip-backend |     at node:internal/main/run_main_module:36:49 {
sip-backend |       code: 'MODULE_NOT_FOUND',
sip-backend |       requireStack: []
sip-backend |     }
sip-backend |
sip-backend | Node.js v22.22.2
sip-backend | 2026/04/12 20:44:34 Command exited with error: exit status 1
sip-backend | 2026/04/12 20:44:34 Waiting for: tcp://db:5432
sip-backend | 2026/04/12 20:44:34 Connected to tcp://db:5432
sip-backend |
sip-backend | > backend.sip.com@0.0.1 start:prod
sip-backend | > node dist/main
sip-backend |
sip-backend | node:internal/modules/cjs/loader:1386
sip-backend |   throw err;
sip-backend |   ^
sip-backend |
sip-backend | Error: Cannot find module '/usr/src/api/dist/main'
sip-backend |     at Function._resolveFilename (node:internal/modules/cjs/loader:1383:15)
sip-backend |     at defaultResolveImpl (node:internal/modules/cjs/loader:1025:19)
sip-backend |     at resolveForCJSWithHooks (node:internal/modules/cjs/loader:1030:22)
sip-backend |     at Function._load (node:internal/modules/cjs/loader:1192:37)


```

Solution :

fl tsconfigjson ajout de w fl tsconfig.build zeda bch tajouti haja

```
rootDir": "./src",
```

```
{
  "compilerOptions": {
    "module": "nodenext",
    "moduleResolution": "nodenext",
    "resolvePackageJsonExports": true,
    "esModuleInterop": true,
    "isolatedModules": true,
    "declaration": true,
    "removeComments": true,
    "emitDecoratorMetadata": true,
    "experimentalDecorators": true,
    "allowSyntheticDefaultImports": true,
    "target": "ES2023",
    "sourceMap": true,
    "outDir": "./dist",
    "rootDir": "./src",
    "baseUrl": "./",
    "incremental": true,
    "skipLibCheck": true,
    "strictNullChecks": true,
    "forceConsistentCasingInFileNames": true,
    "noImplicitAny": false,
    "strictBindCallApply": false,
    "noFallthroughCasesInSwitch": false
  }
}
```

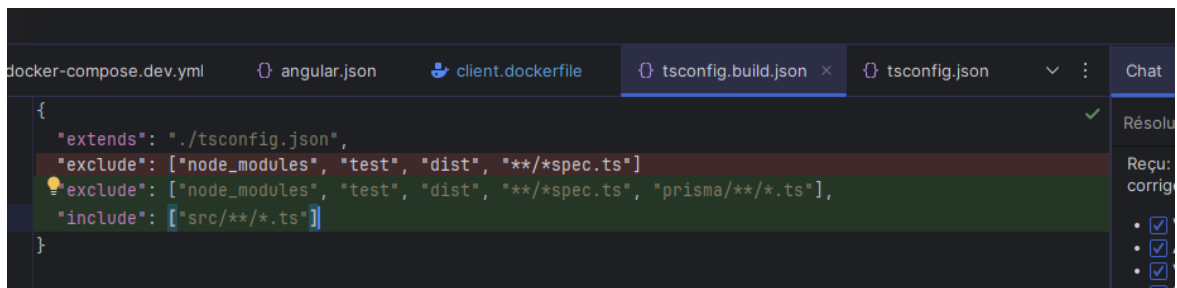

The screenshot shows a code editor with several tabs: 'docker-compose.dev.yml', 'angular.json', 'client.dockerfile', 'tsconfig.build.json' (active), and 'tsconfig.json'. The active tab displays the following JSON configuration:

```
{
  "extends": "./tsconfig.json",
  "exclude": ["node_modules", "test", "dist", "**/*spec.ts"],
  "exclude": ["node_modules", "test", "dist", "**/*spec.ts", "prisma/**/*.ts"],
  "include": ["src/**/*.ts"]
}
```

A yellow error icon is visible next to the second 'exclude' line. On the right side of the editor, a sidebar shows a 'Chat' window and a list of items with checkboxes, some of which are checked.

```
{
  "extends": "./tsconfig.json",
  "exclude": ["node_modules", "test", "dist", "**/*spec.ts",
"prisma/**/*.ts"],
  "include": ["src/**/*.ts"]
}
```