

Before we begin...

- If you haven't already, go to https://github.com/sushobhansen/aci-python-workshop for course materials
- Download and install Anaconda: https://www.anaconda.com/distribution/
- Or use an online IDE: https://repl.it/languages/python3


Who am 1?



- Sushobhan Sen
- Doctoral candidate in Civil Engineering (Transportation) – I study stratified urban boundary layer flows
- Languages I know: FORTARN, C/C++/C#, Python,
 Visual Basic, HTML, CSS, JavaScript, Latex, Bash
 - (I also speak a few human languages)
- More at: https://sushobhansen.github.io/
- E-mail: sen6@illinois.edu

Workshop Website:

https://github.com/sushobhansen/aci-python-workshop

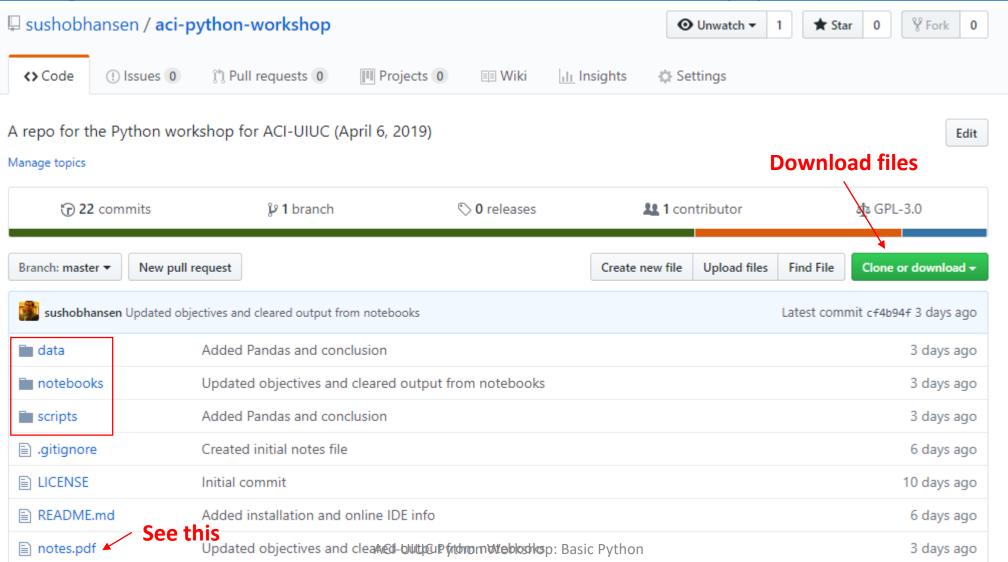

Learning Objectives: Basic Python

- At the end of this workshop, participants will be able to:
 - List the types of Python variables and define them
 - Add control statements and loops to their programs
 - Define and use functions
 - Define and use object oriented programming (if we have time)
- We'll also solve a problem using all these skills

Why Python?

- According to IEEE, it's the most popular programming language today
- Simple, extensible, powerful
- Latest version: Python 3.7 (Python 3.x is not backwards compatible with Python 2.x, so stick to 3.x)

Variables

| Data | Syntax | Description | Comments |
|------------|------------|-----------------------|------------------------|
| Type | | | |
| Integer | x = 5 | Signed integer | Use int to typecast, |
| | | | if valid |
| Float | x = 5. | IEEE floating point | Use float to type- |
| | | number | cast, if valid |
| Complex | x = | Complex number | Use complex to type- |
| | 3.1+4.6j | | cast, if valid |
| String | x = 'Hello | Strings are always | Use str to typecast, |
| | World!' | enclosed within quo- | slicing operator valid |
| | | tation marks | |
| List | x = [1, | Mutable list of vari- | Use list() to type- |
| | 2.2, | ables of any type | cast, if valid |
| | 'otter'] | | |
| Tuple | x = (1, | Immutable tuple of | |
| | 2.2, | variables of any tupe | cast, if valid |
| | 'otter') | | |
| Dictionary | x = | Key-value pairs | Use get() to get |
| | {'one':1, | | value from key, use |
| | 'two':2} | | dict() to typecast, |
| | | | if valid |
| Bool | x = True | Boolean value | Python uses key- |
| | | | words True and |
| | | | False, not 1 and 0 |

Variable Names

- 1. The name **cannot** contain spaces consider using an underscore character or camelCase instead for readability
- 2. The name cannot start with a number, but can contain a number anywhere
- 3. The name is case-sensitive, so temp and Temp are different variables
- 4. Python has a number of reserved keywords (see documentation, of just follow along and you'll get the hang of it), which cannot be used as names



Mutability

- Immutable: Most objects (int, float, complex, str, bool, tuple)
- Mutable: Lists and dictionaries



Operators

- Arithmetic: +, -, *, /, %, **, //
- Comparison: >, <, ==, !=, >=, <=
- Logical: and, or, not
- Bitwise: &, |, ~, ^, <<, >>
- Assignment: =, any combination of arithmetic or bitwise with =
- Special: is, is not, in, not in



Control Statements

- 1. Conditional statements: Better known as if-else blocks, these test a condition before executing a line
- 2. **Loops**: These repeatedly execute a line for a certain number of times or till a break condition is met

A simple if statement

```
1 x = 6
2 if x<5:
3    print('x is less than 5')
4    print('Finished evaluating if block')
5 print('Finished this code block')</pre>
```

Notice the indentation: very important!



Loops

- While loop: Repeat till a condition is met
- For loop: Repeat over a fixed number of iterations

```
1 x = 3
2 while(x<6):
3    print('The value of x is ',x)
4    x+=1</pre>
```

For loops

- Loop over an iterator
 - An iterator is an object that contains a fixed number of values (any values)
 - Iterate through the values in the iterator, not just a fixed number of times (unlike C++)

```
1 x = range(3)
2 print(list(x))
3 for i in x:
4 print('The value of i is ',i)
```

Break, continue, pass

- Break: When executed, break out of loop entirely without any more iterations
- Continue: When executed, skip everything after that line and then proceed to next iteration
- Pass: When executed, continue to next line (as if nothing happened)



Functions

• Functions are bits of code that are separated from the main function (they have their own scope), but can be called at any point by the main function to perform a specific task.

```
function def statement
def statement
k = 'Hello'
print_input(k)

function def statement
k = 'Hello'
print_input(k)
```

Example: System of Linear Equations

• Solve:
$$\begin{cases} ax + by = e \\ cx + dy = f \end{cases} \Rightarrow \begin{cases} x = (de - bf)/(ad - bc) \\ y = (af - ce)/(ad - bc) \end{cases}$$

• Unique solution exists only if $ad - bc \neq 0$

Default Args

Classes and Objects

- Class: Set of related variables and functions that are grouped together
- Object: An instance of a class

```
class Person:
                          def __init__(self,name,age,height_cm): ← Constructor
                   Dot
                               self.name = name
                               self.age = age
                operator
                               self.height_cm = height_cm #in centimeters
                          def print_name(self):
                               print(self.name)
Defining a
                          def print_age(self):
                   10
  class
                               print(self.age)
                   11
                                                      Always pass self as first arg
                   12
                   13
                          def print_height_cm(self):
                   14
                               print(self.height/cm)
                   15
                   16
                          def height_ftin(self):
                   17
                               inches = self.height_cm/2.54
                   18
                               feet = inches//12
                   19
                               inches = inches%12
                   20
                               return feet, inches
```

Inheritance

 A class can inherit all the functions and variables from a base class, and then add or modify them

Person class class Student(Person): def __init__(self,name,age,height_cm,GPA,level): Person.__init__(self,name,age,height_cm) self.GPA = GPAself.level = level def print_name(self,status='regular'): print(self.name,' STUDENT: ',status) 9 **Polymorphism** def print_GPA(self): **ABCs** print(self.GPA) def print_level(self): print(self.level) 15

Student class inherits from

Challenge

- Use Python to write a prime_check() function, which takes in an integer and returns the following:
 - Negative integers or zero: "Invalid input"
 - If 1 or 2: "Prime number"
 - Any other integer: "This is a prime number" or "This is not a prime number"
- Algorithm for prime numbers:
 - Sequentially divide the integer n by integers between 2 and n/2
 - If at any point, the remainder is zero, it is a prime number, otherwise it isn't

Further Resources

- Python Documentation: https://docs.python.org/3/
- Free Python course on EdX: https://www.edx.org/professional-certificate/introduction-to-computing-in-python
- Free e-Book: https://www.cs.uky.edu/~keen/115/Haltermanpythonbook.pdf
- Stick around the Advanced Python session in the afternoon