



pytermor

Release 2.71.0.dev0

Alexandr Shavykin

May 21, 2023

CONTENTS

| | | |
|----------|-------------------------------|------------|
| 1 | Guide | 2 |
| 1.1 | Getting started | 2 |
| 1.2 | High-level core API | 6 |
| 1.3 | Renderers | 8 |
| 1.4 | String filters | 9 |
| 1.5 | Number formatters | 9 |
| 1.6 | ColorRGB collection | 10 |
| 1.7 | Low-level core API | 11 |
| 1.8 | ANSI preset list | 14 |
| 1.9 | Color spaces | 22 |
| 1.10 | Color256 palette | 22 |
| 1.11 | Configuration | 24 |
| 1.12 | Docs guidelines | 24 |
| 2 | API reference | 27 |
| 2.1 | pytermor.ansi | 29 |
| 2.2 | pytermor.color | 43 |
| 2.3 | pytermor.config | 54 |
| 2.4 | pytermor.conv | 55 |
| 2.5 | pytermor.cval | 59 |
| 2.6 | pytermor.exception | 59 |
| 2.7 | pytermor.filter | 60 |
| 2.8 | pytermor.numfmt | 71 |
| 2.9 | pytermor.log | 83 |
| 2.10 | pytermor.parser | 84 |
| 2.11 | pytermor.renderer | 86 |
| 2.12 | pytermor.style | 93 |
| 2.13 | pytermor.template | 100 |
| 2.14 | pytermor.term | 100 |
| 2.15 | pytermor.text | 103 |
| 3 | Changelog | 110 |
| 4 | License | 118 |
| | Python Module Index | 121 |
| | Index | 122 |

(yet another) Python library initially designed for formatting terminal output using ANSI escape codes.

Provides *high-level* methods for working with text sections, colors, formats, alignment and wrapping, as well as *low-level* *ansi* module which allows operating with SGR (Select Graphic Rendition) *sequences* and also implements automatic “soft” format termination. Depending on the context and technical requirements either approach can be used. Also includes a set of additional number/string/date formatters for pretty output.

Key feature of this library is extendability and a variety of formatters (called *renderers*), which determine the output syntax:


- *SgrRenderer* (global default)
- *TmuxRenderer*
- *HtmlRenderer*
- *SgrDebugger* (mostly for development)
- etc.

No dependencies required, only Python Standard Library (there are some for testing and docs building, though).

Todo: This is how you **should** format examples:

We put these pieces together to create a SGR command. Thus, `ESC[3m` specifies bold (or bright) text, and `ESC[31m` specifies red foreground text. We can chain together parameters; for example, `ESC[32;47m` specifies green foreground text on a white background.

The following diagram shows a complete example for rendering the word “text” in red with a single underline.



Notes

- For terminals that support bright foreground colors, `ESC[1;3Xm` is usually equivalent to `ESC[9Xm` (where `X` is a digit in 0-7). However, the reverse does not seem to hold, at least anecdotally: `ESC[2;9Xm` usually does not render the same as `ESC[3Xm`.
- Not all terminals support every effect.

Fig. 1: <https://chrisyeh96.github.io/2020/03/28/terminal-colors.html#color-schemes>

1

GUIDE

1.1 Getting started

1.1.1 Installation

Python 3.8 or later should be installed and available in `$PATH`; that's basically it if intended usage of the package is as a library.

Listing 1: Installing into a project

```
$ python -m pip install pytermor
```

Listing 2: Standalone installation (for developing or experimenting)

```
$ git clone git@github.com:delameter/pytermor.git .
$ python -m venv venv
$ PYTHONPATH=. venv/bin/python -m pytermor
v2.41.1-dev1:Feb-23
```

1.1.2 Library structure

| A L | Module | Class(es) | Purpose |
|--------|--------------------|--|---|
| Hi | <code>text</code> | <code>Text</code> | Container consisting of text pieces each with attached <code>Style</code> . Renders into specified format keeping all the formatting. |
| | | <code>Style</code> <code>Styles</code> | Reusable abstractions defining colors and text attributes (text color, bg color, <i>bold</i> attribute, <i>underlined</i> attribute etc). |
| | | <code>SgrRenderer</code> <code>HtmlRenderer</code> <code>TmuxRenderer</code> etc. | <code>SgrRenderer</code> transforms <code>Style</code> instances into <code>Color</code> , <code>Span</code> and <code>SequenceSGR</code> instances and assembles it all up. There are several other implementations depending on what output format is required. |
| | <code>color</code> | <code>Color16</code> <code>Color256</code> <code>ColorRGB</code> | Abstractions for color operations in different color modes (default 16-color, 256-color, RGB). Tools for color approximation and transformations. |
| | | <code>pytermor</code> | Color registry. |
| Lo | <code>ansi</code> | <code>Span</code> | Abstraction consisting of “opening” SGR sequence defined by the developer (or taken from preset list) and complementary “closing” SGR sequence that is built automatically. |
| | | <code>Spans</code> | Registry of predefined instances in case the developer doesn’t need dynamic output formatting and just wants to colorize an error message. |
| | | <code>SequenceSGR</code> <code>SeqIndex</code> | Abstractions for manipulating ANSI control sequences and classes-factories, plus a registry of preset SGRs. |
| | | <code>IntCodes</code> | Registry of escape control sequence parameters. |
| | <code>util</code> | <code>*</code> | Additional formatters and common methods for manipulating strings with SGRs inside. |

1.1.3 Features

One of the core concepts of the library is `Span` class. `Span` is a combination of two control sequences; it wraps specified string with pre-defined leading and trailing SGR definitions.

Example code:

```
1 from pytermor import Spans
2
3 print(Spans.RED('Feat') + Spans.BOLD('ures'))
```


Content-aware format nesting

Compose text spans with automatic content-aware span termination. Preset spans can safely overlap with each other (as long as they require different *breaker* sequences to reset).

```

1 from pytermor import Span
2
3 span1 = Span('blue', 'bold')
4 span2 = Span('cyan', 'inversed', 'underlined', 'italic')
5
6 msg = span1(f'Content{span2("-aware format")} nesting')
7 print(msg)

```

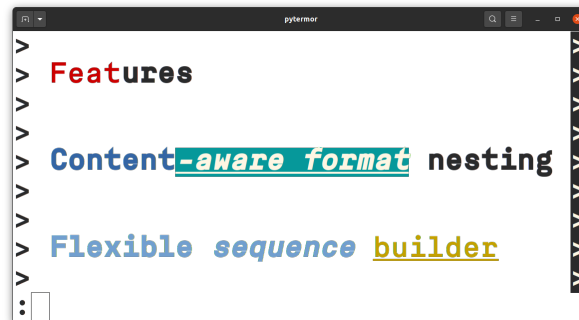

Flexible sequence builder

Create your own *SGR sequences* using default constructor, which accepts color/attribute keys, integer codes and even existing *SGRs*, in any amount and in any order. Key resolving is case-insensitive.

```

1 from pytermor import SeqIndex, SequenceSGR
2
3 seq1 = SequenceSGR('hi_blue', 1) # keys or integer codes
4 seq2 = SequenceSGR(seq1, SeqIndex.ITALIC) # existing SGRs
5 seq3 = SequenceSGR('underlined', 'YELLOW') # case-insensitive
6
7 msg = f'{seq1}Flexible{SeqIndex.RESET} ' + \
8       f'{seq2}sequence{SeqIndex.RESET} ' + \
9       str(seq3) + 'builder' + str(SeqIndex.RESET)
10 print(msg)

```

256 colors / True Color support

The library supports extended color modes:

- XTerm 256 colors indexed mode (see *ANSI preset list*);
- True Color RGB mode (16M colors).

```

1 from pytermor import SequenceSGR, SeqIndex
2
3 start_color = 41
4 boxchr = "\u2588"
5 for idx, c in enumerate(range(start_color, start_color+(36*6), 36)):
6     print(f'{SequenceSGR.new_color_256(c)}{boxchr*3}{SeqIndex.COLOR_OFF}', end='')
7
8 print('\n')

```

(continues on next page)

(continued from previous page)

```

9 for idx, c in enumerate(range(0, 256, 256//17)):
10     r = max(0, 255-c)
11     g = max(0, min(255, 127-(c*2)))
12     b = c
13     print(f'{SequenceSGR.new_color_rgb(r, g, b)}{boxchr}{SeqIndex.COLOR_OFF}', end='')

```



Customizable output formats

Todo: @TODOTODO

String and number formatters

Todo: @TODOTODO

1.1.4 CLI usage

Commands like the ones below can be used for quick experimenting without loading the IDE:

- One-liner for system-wide installation (which is not recommended):

```
$ python -c "import pytermor as pt; pt.echo('RED', 'red')"
```

Todo: Find a solution for embedding colored text into PDF (as SVG -> PNG maybe?)

- One-liner for virtual environment (venv) with `pytermor` pre-installed (see [Installation](#)) (note that the library source code root folder should be used as current working directory):

```
$ PYTHONPATH=. venv/bin/python -c "import pytermor as pt; pt.echo('GREEN', 'green
↪ ')"
```

- Interactive mode for virtual environment with `pytermor` pre-installed (again, current working directory should be sources root dir):

```
$ PYTHONSTARTUP=.run-startup.py PYTHONPATH=. venv/bin/python -qi
```

```
python 3.8.10
pytermor 2.41.1-dev1
>>> pt.echo("This is warning, be warned", pt.Styles.WARNING)
```

1.2 High-level core API

Glossary

rendering

A process of transforming text-describing instances into specified output format, e.g. instance of *Fragment* class with content and *Style* class containing colors and other text formatting can be rendered into terminal-compatible string with *SgrRenderer*, or into HTML markup with *HtmlRenderer*, etc.

style

Class describing text format options: text color, background color, boldness, underlining, etc. Styles can be inherited and merged with each other. See *Style* constructor description for the details.

color

Three different classes describing the color options: *Color16*, *Color256* and *ColorRGB*. The first one corresponds to 16-color terminal mode, the second – to 256-color mode, and the last one represents full RGB color space rather than color index palette. The first two also contain terminal *SGR* bindings.

1.2.1 Core methods

text.render([string, fmt, renderer, no_log])

.

text.echo([string, fmt, renderer, nl, file, ...])

.

color.resolve_color(subject[, color_type, ...])

Suggested usage is to transform the user input in a free form in an attempt to find any matching color.

style.make_style([fmt])

General *Style* constructor.

style.merge_styles([base, fallbacks, overwrites])

Bulk style merging method.

1.2.2 Colors

1.2.3 Styles

1.2.4 Output format control

1.2.5 Color mode fallbacks

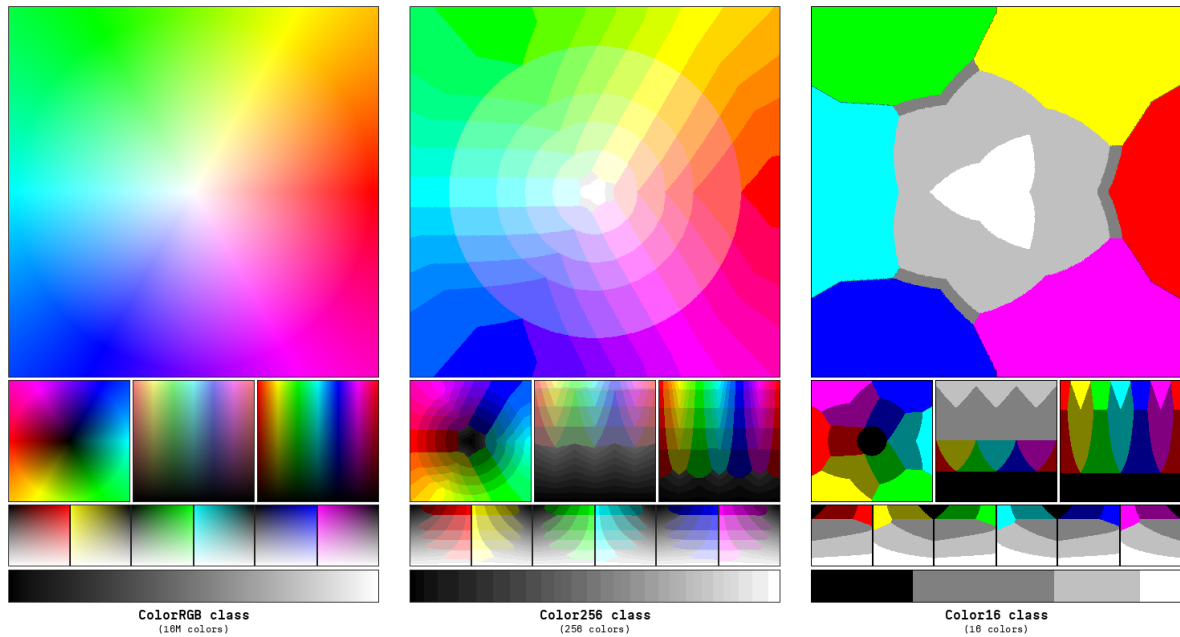


Fig. 1: Color approximations for indexed modes

1.2.6 Class hierarchy

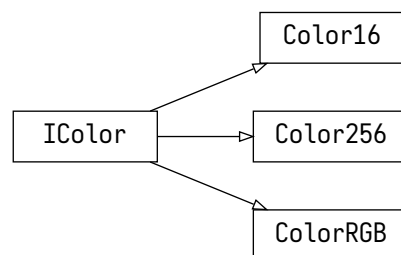
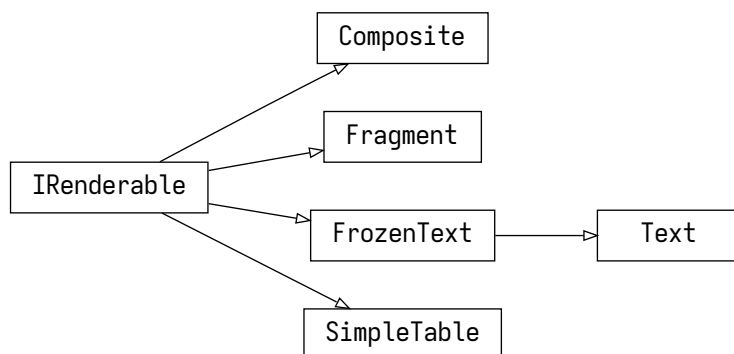
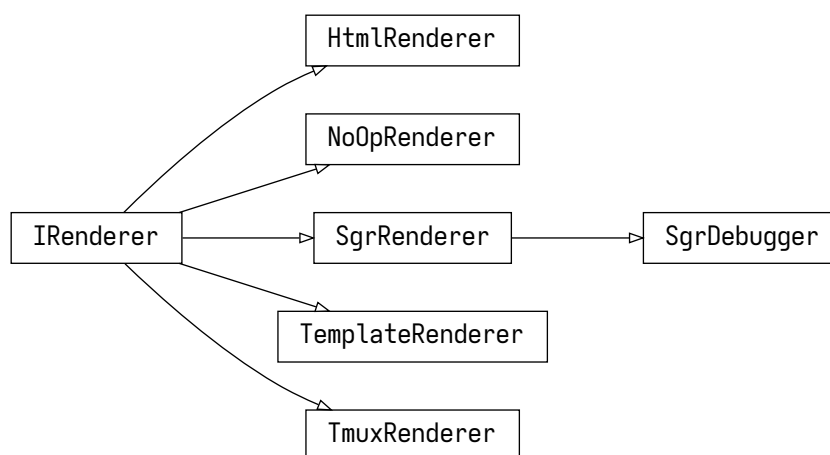


Fig. 2: IColor inheritance diagram

Fig. 3: *IRenderable* inheritance diagram

1.3 Renderers

Fig. 4: *IRenderer* inheritance tree

Todo: Win32Renderer ?

1.4 String filters

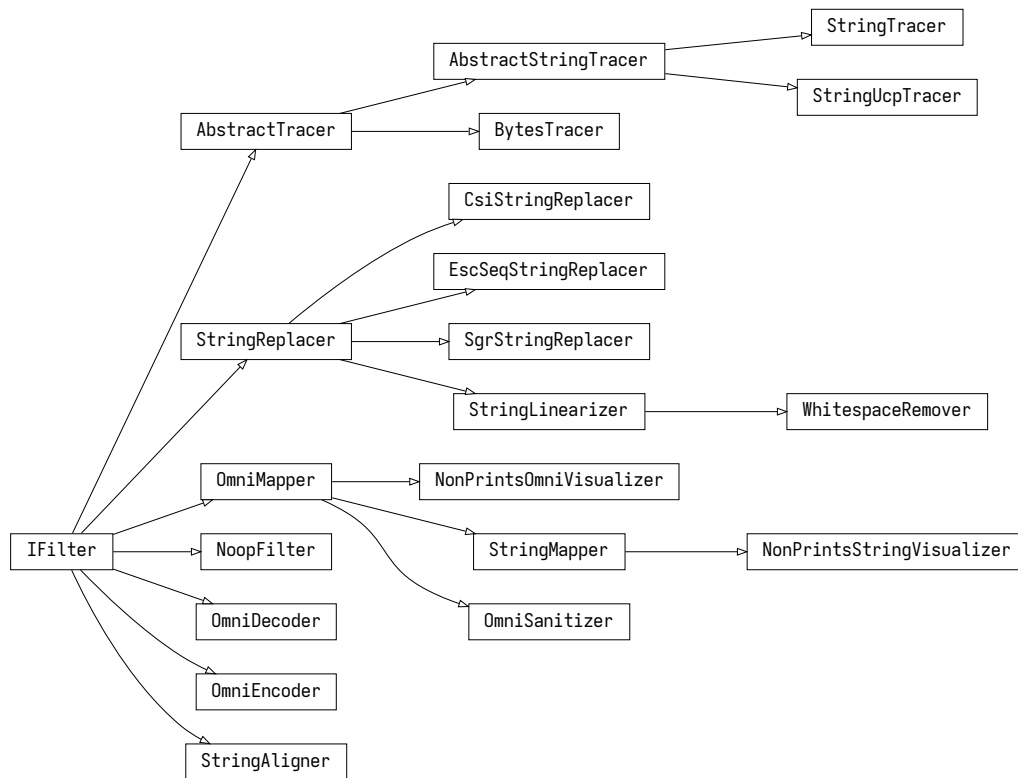


Fig. 5: *IFilter* inheritance tree

1.5 Number formatters

Todo: The library contains @TODO

1.5.1 Auto-float formatter

1.5.2 Prefixed-unit formatter

1.5.3 Time delta formatter

```

1 import pytermor.numfmt
2 from pytermor import RendererManager, SgrRenderer
3 from pytermor.numfmt import time_delta
4
5 seconds_list = [2, 10, 60, 2700, 32340, 273600, 4752000, 864000000]
6 max_len_list = [3, 6, 10]

```

(continues on next page)

(continued from previous page)

```

7
8 for max_len in max_len_list:
9     formatter = pytermor.numfmt.dual_registry.find_matching(max_len)
10
11 RendererManager.set_default(SgrRenderer)
12 for seconds in seconds_list:
13     for max_len in max_len_list:
14         formatter = pytermor.numfmt.dual_registry.get_by_max_len(max_len)
15         print(formatter.format(seconds), end=' ')
16     print()

```

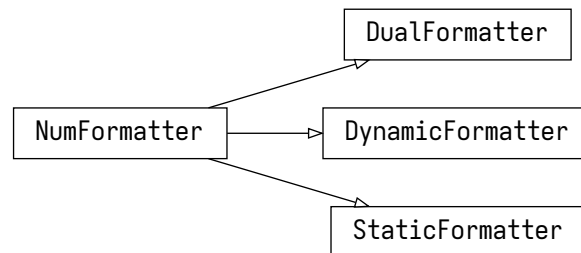
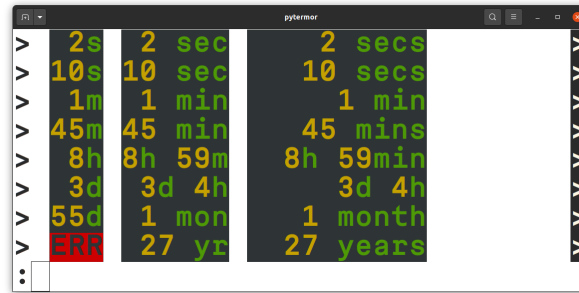


Fig. 6: NumFormatter inheritance tree

1.6 ColorRGB collection

Todo: @TODO

1.7 Low-level core API

So, what's happening under the hood?

1.7.1 Glossary

ANSI escape sequence

is a standard for in-band signaling to control cursor location, color, font styling, and other options on video text terminals and terminal emulators. Certain sequences of bytes, most starting with an ASCII escape character and a bracket character, are embedded into text. The terminal interprets these sequences as commands, rather than text to display verbatim.¹

SGR

ANSI escape sequence with varying amount of parameters. SGR sequences allow to change the color of text or/and terminal background (in 3 different color spaces) as well as decorate text with italic style, underlining, overlining, cross-lining, making it bold or blinking etc. Represented by *SequenceSGR* class.

1.7.2 Core methods

| | |
|---|--|
| <code>ansi.SequenceSGR(*params)</code> | Class representing SGR-type escape sequence with varying amount of parameters. |
| <code>ansi.make_color_256(code[, target])</code> | Wrapper for creation of <i>SequenceSGR</i> that sets foreground (or background) to one of 256-color palette value.: |
| <code>ansi.make_color_rgb(r, g, b[, target])</code> | Wrapper for creation of <i>SequenceSGR</i> operating in True Color mode (16M). Valid values for <i>r</i> , <i>g</i> and <i>b</i> are in range of [0; 255]. This range linearly translates into [0x00; 0xFF] for each channel. The result value is composed as "#RRGGBB". For example, a sequence with color of #ff3300 can be created with:. |

1.7.3 Format soft reset

There are two ways to manage color and attribute termination:

- hard reset (SGR-0 or ESC [0m)
- soft reset (SGR-22, 23, 24 etc.)

The main difference between them is that *hard* reset disables all formatting after itself, while *soft* reset disables only actually necessary attributes (i.e. used as opening sequence in *Span* instance's context) and keeps the other.

That's what *Span* class is designed for: to simplify creation of soft-resetting text spans, so that developer doesn't have to restore all previously applied formats after every closing sequence.

¹ https://en.wikipedia.org/wiki/ANSI_escape_code

Example


We are given a text span which is initially *bold* and *underlined*. We want to recolor a few words inside of this span. By default this will result in losing all the formatting to the right of updated text span (because [RESET](#), or ESC [0m, clears all text attributes).

However, there is an option to specify what attributes should be disabled or let the library do that for you:

```

1 from pytermor import Span, Spans, SeqIndex
2
3 # implicitly:
4 span_warn = Span(93, 4)
5 # or explicitly:
6 span_warn = Span.init_explicit(
7     SeqIndex.HI_YELLOW + SeqIndex.UNDERLINED, # sequences can be summed up, remember?
8     SeqIndex.COLOR_OFF + SeqIndex.UNDERLINED_OFF, # "counteractive" sequences
9     hard_reset_after=False
10 )
11
12 orig_text = Spans.BOLD(f'this is {SeqIndex.BG_GRAY}the original{SeqIndex.RESET} string
13 ↪')
14 updated_text = orig_text.replace('original', span_warn('updated'), 1)
15 print(orig_text, '\n', updated_text)

```

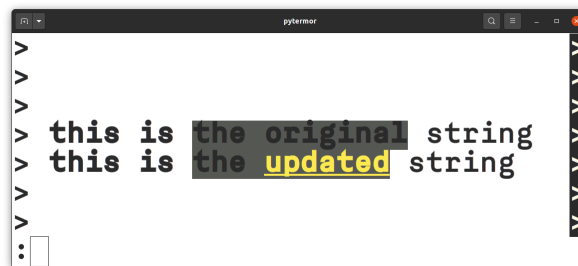

As you can see, the update went well – we kept all the previously applied formatting. Of course, this method cannot be 100% applicable; for example, imagine that original text was colored blue. After the update “string” word won’t be blue anymore, as we used `SeqIndex.COLOR_OFF` escape sequence to neutralize our own yellow color. But it still can be helpful for a majority of cases (especially when text is generated and formatted by the same program and in one go).

1.7.4 Working with Spans

Use `Span` constructor to create new instance with specified control sequence(s) as a opening/starter sequence and **automatically composed** closing sequence that will terminate attributes defined in opening sequence while keeping the others (soft reset).

Resulting sequence params’ order is the same as argument’s order.

Each sequence param can be specified as:

- string key (see [ANSI preset list](#));
- integer param value;
- existing [SequenceSGR](#) instance (params will be extracted).

It’s also possible to avoid auto-composing mechanism and create `Span` with explicitly set parameters using `Span.init_explicit()`.

1.7.5 Creating and applying SGRs

You can use any of predefined sequences from [SeqIndex](#) registry or create your own via standard constructor. Valid argument values as well as preset constants are described in [ANSI preset list](#) page.

Important: SequenceSGR with zero params was specifically implemented to translate into an empty string and not into ESC [m, which would make sense, but also could be very entangling, as terminal emulators interpret that sequence as ESC [0m, which is *hard* reset sequence.

There is also a set of methods for dynamic SequenceSGR creation:


- `make_color_256()` will produce sequence operating in 256-colors mode (for a complete list see [ANSI preset list](#));
- `make_color_rgb()` will create a sequence capable of setting the colors in True Color 16M mode (however, some terminal emulators doesn't support it).

To get the resulting sequence chars use `assemble()` method or cast instance to `str`.

```

1 from pytermor import SequenceSGR
2
3 seq = SequenceSGR(4, 7)
4 msg = f'({seq})'
5
6 print(msg + f'{SequenceSGR(0).assemble()}')
7 print(str(msg.assemble()))
8 print(msg.assemble().hex(':'))

```

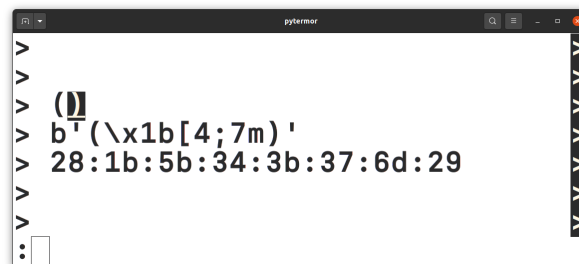

- First line is the string with encoded escape sequence;
- Second line shows up the string in raw mode, as if sequences were ignored by the terminal;
- Third line is hexadecimal string representation.

1.7.6 SGR sequence structure

1. ESC is escape *control character*, which opens a control sequence (can also be written as `\x1b`, `\033` or `\e`).
2. `[` is sequence *introducer*; it determines the type of control sequence (in this case it's CSI (Control Sequence Introducer)).
3. 4 and 7 are *parameters* of the escape sequence; they mean “underlined” and “inversed” attributes respectively. Those parameters must be separated by `;`.
4. `m` is sequence *terminator*; it also determines the sub-type of sequence, in our case SGR. Sequences of this kind are most commonly encountered.

1.7.7 Combining SGRs

One instance of *SequenceSGR* can be added to another. This will result in a new *SequenceSGR* with combined params.

```

1 from pytermor import SequenceSGR, SeqIndex
2
3 combined = SequenceSGR(1, 31) + SequenceSGR(4)
4 print(f'{combined}combined{SeqIndex.RESET}', str(combined).assemble())

```

1.7.8 Class hierarchy

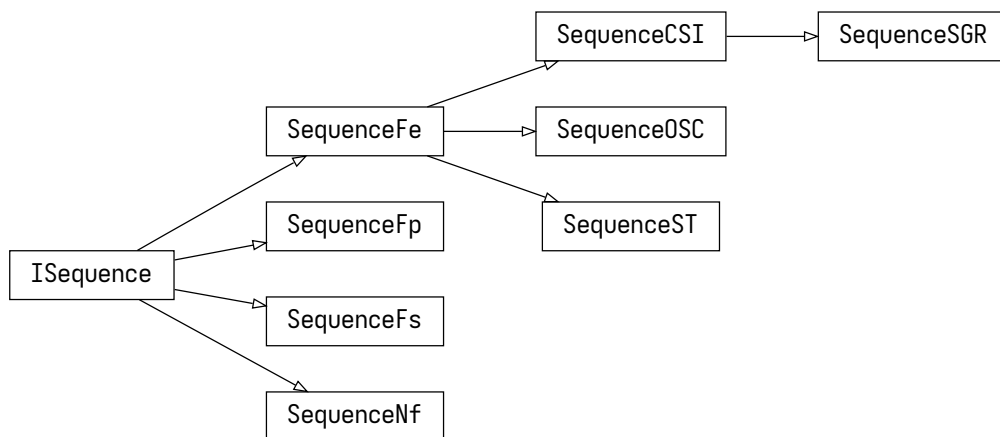


Fig. 7: *ISequence* inheritance tree

Sources

2. XTerm Control Sequences
3. ECMA-48 specification

1.8 ANSI preset list

Preset lists are omitted from API docs to avoid unnecessary duplication; summary list of all presets defined in the library (excluding *util**) is displayed here.

Todo: USAGE - list all memthods that accept string keys of those presets.

There are two types of color palettes used in modern terminals – first one containing 16 colors (*Color16*), and second one consisting of 256 colors (*Color256*). There is also True Color mode (referenced as *RGB* mode), but it is not palette-based.

Legend

- INT (intcode module -- 1st or 3rd SGR param value)
- STY (style module)

















1.8.1 Meta, attributes, resetters

| | Name | INT | STY | Description |
|-------------------|-------------------|----------|-----------------------|--|
| Meta | | | | |
| | NOOP | | V | No-operation; always assembled as empty string |
| | RESET | 0 | | Reset all attributes and colors |
| Attributes | | | | |
| | BOLD | 1 | V ¹ | Bold or increased intensity |
| | DIM | 2 | V | Faint, decreased intensity |
| | ITALIC | 3 | V | Italic; <i>not widely supported</i> |
| | UNDERLINED | 4 | V | Underline |
| | BLINK_SLOW | 5 | V ² | Set blinking to < 150 cpm |
| | BLINK_FAST | 6 | | Set blinking to 150+ cpm; <i>not widely supported</i> |
| | INVERSED | 7 | V | Swap foreground and background colors |
| | HIDDEN | 8 | | Conceal characters; <i>not widely supported</i> |
| | CROSSLINED | 9 | V | Strikethrough |
| | DOUBLE_UNDERLINED | 21 | | Double-underline; <i>on several terminals disables BOLD instead</i> |
| | COLOR_EXTENDED | 38 | | Set foreground color [<i>indexed/RGB</i> mode]; use <i>make_color_256</i> and <i>make_color_rgb</i> instead |
| | BG_COLOR_EXTENDED | 48 | | Set background color [<i>indexed/RGB</i> mode]; use <i>make_color_256</i> and <i>make_color_rgb</i> instead |
| | OVERLINED | 53 | V | Overline; <i>not widely supported</i> |
| Resetters | | | | |
| | BOLD_DIM_OFF | 22 | | Disable BOLD and DIM attributes. <i>Special aspects... It's impossible to reliably disable them on a separate basis.</i> |
| | ITALIC_OFF | 23 | | Disable italic |
| | UNDERLINED_OFF | 24 | | Disable underlining |
| | BLINK_OFF | 25 | | Disable blinking |
| | INVERSED_OFF | 27 | | Disable inversing |
| | HIDDEN_OFF | 28 | | Disable concealing |
| | CROSSLINED_OFF | 29 | | Disable strikethrough |
| | COLOR_OFF | 39 | | Reset foreground color |
| | BG_COLOR_OFF | 49 | | Reset background color |
| | OVERLINED_OFF | 55 | | Disable overlining |

¹ for this and subsequent items in “Attributes” section: as boolean flags.

² as blink.

1.8.2 Color16 presets

| | Name | INT | STY | RGB code | XTerm name |
|---|---------------|-----|-----|----------|------------|
| Foreground default colors | | | | | |
|  | BLACK | 30 | | #000000 | Black |
|  | RED | 31 | | #800000 | Maroon |
|  | GREEN | 32 | | #008000 | Green |
|  | YELLOW | 33 | | #808000 | Olive |
|  | BLUE | 34 | | #000080 | Navy |
|  | MAGENTA | 35 | | #800080 | Purple |
|  | CYAN | 36 | | #008080 | Teal |
|  | WHITE | 37 | | #c0c0c0 | Silver |
| Background default colors | | | | | |
|  | BG_BLACK | 40 | | #000000 | Black |
|  | BG_RED | 41 | | #800000 | Maroon |
|  | BG_GREEN | 42 | | #008000 | Green |
|  | BG_YELLOW | 43 | | #808000 | Olive |
|  | BG_BLUE | 44 | | #000080 | Navy |
|  | BG_MAGENTA | 45 | | #800080 | Purple |
|  | BG_CYAN | 46 | | #008080 | Teal |
|  | BG_WHITE | 47 | | #c0c0c0 | Silver |
| High-intensity foreground default colors | | | | | |
|  | GRAY | 90 | | #808080 | Grey |
|  | HI_RED | 91 | | #ff0000 | Red |
|  | HI_GREEN | 92 | | #00ff00 | Lime |
|  | HI_YELLOW | 93 | | #ffff00 | Yellow |
|  | HI_BLUE | 94 | | #0000ff | Blue |
|  | HI_MAGENTA | 95 | | #ff00ff | Fuchsia |
|  | HI_CYAN | 96 | | #00ffff | Aqua |
|  | HI_WHITE | 97 | | #ffffff | White |
| High-intensity background default colors | | | | | |
|  | BG_GRAY | 100 | | #808080 | Grey |
|  | BG_HI_RED | 101 | | #ff0000 | Red |
|  | BG_HI_GREEN | 102 | | #00ff00 | Lime |
|  | BG_HI_YELLOW | 103 | | #ffff00 | Yellow |
|  | BG_HI_BLUE | 104 | | #0000ff | Blue |
|  | BG_HI_MAGENTA | 105 | | #ff00ff | Fuchsia |
|  | BG_HI_CYAN | 106 | | #00ffff | Aqua |
|  | BG_HI_WHITE | 107 | | #ffffff | White |

1.8.3 Color256 presets

| | Name | INT | STY | RGB code | XTerm name |
|--|---------------------------|-----|-----|----------|---------------------|
| | XTERM_BLACK ³ | 0 | | #000000 | |
| | XTERM_MAROON | 1 | | #800000 | |
| | XTERM_GREEN | 2 | | #008000 | |
| | XTERM_OLIVE | 3 | | #808000 | |
| | XTERM_NAVY | 4 | | #000080 | |
| | XTERM_PURPLE_5 | 5 | | #800080 | Purple ⁴ |
| | XTERM_TEAL | 6 | | #008080 | |
| | XTERM_SILVER | 7 | | #c0c0c0 | |
| | XTERM_GREY | 8 | | #808080 | |
| | XTERM_RED | 9 | | #ff0000 | |
| | XTERM_LIME | 10 | | #00ff00 | |
| | XTERM_YELLOW | 11 | | #ffff00 | |
| | XTERM_BLUE | 12 | | #0000ff | |
| | XTERM_FUCHSIA | 13 | | #ff00ff | |
| | XTERM_AQUA | 14 | | #00ffff | |
| | XTERM_WHITE | 15 | | #ffffff | |
| | XTERM_GREY_0 | 16 | | #000000 | |
| | XTERM_NAVY_BLUE | 17 | | #00005f | |
| | XTERM_DARK_BLUE | 18 | | #000087 | |
| | XTERM_BLUE_3 | 19 | | #0000af | |
| | XTERM_BLUE_2 | 20 | | #0000d7 | Blue3 |
| | XTERM_BLUE_1 | 21 | | #0000ff | |
| | XTERM_DARK_GREEN | 22 | | #005f00 | |
| | XTERM_DEEP_SKY_BLUE_7 | 23 | | #005f5f | DeepSkyBlue4 |
| | XTERM_DEEP_SKY_BLUE_6 | 24 | | #005f87 | DeepSkyBlue4 |
| | XTERM_DEEP_SKY_BLUE_5 | 25 | | #005faf | DeepSkyBlue4 |
| | XTERM_DODGER_BLUE_3 | 26 | | #005fd7 | |
| | XTERM_DODGER_BLUE_2 | 27 | | #005fff | |
| | XTERM_GREEN_5 | 28 | | #008700 | Green4 |
| | XTERM_SPRING_GREEN_4 | 29 | | #00875f | |
| | XTERM_TURQUOISE_4 | 30 | | #008787 | |
| | XTERM_DEEP_SKY_BLUE_4 | 31 | | #0087af | DeepSkyBlue3 |
| | XTERM_DEEP_SKY_BLUE_3 | 32 | | #0087d7 | |
| | XTERM_DODGER_BLUE_1 | 33 | | #0087ff | |
| | XTERM_GREEN_4 | 34 | | #00af00 | Green3 |
| | XTERM_SPRING_GREEN_5 | 35 | | #00af5f | SpringGreen3 |
| | XTERM_DARK_CYAN | 36 | | #00af87 | |
| | XTERM_LIGHT_SEA_GREEN | 37 | | #00afaf | |
| | XTERM_DEEP_SKY_BLUE_2 | 38 | | #00afd7 | |
| | XTERM_DEEP_SKY_BLUE_1 | 39 | | #00afff | |
| | XTERM_GREEN_3 | 40 | | #00d700 | |
| | XTERM_SPRING_GREEN_3 | 41 | | #00d75f | |
| | XTERM_SPRING_GREEN_6 | 42 | | #00d787 | SpringGreen2 |
| | XTERM_CYAN_3 | 43 | | #00d7af | |
| | XTERM_DARK_TURQUOISE | 44 | | #00d7d7 | |
| | XTERM_TURQUOISE_2 | 45 | | #00d7ff | |
| | XTERM_GREEN_2 | 46 | | #00ff00 | Green1 |
| | XTERM_SPRING_GREEN_2 | 47 | | #00ff5f | |
| | XTERM_SPRING_GREEN_1 | 48 | | #00ff87 | |
| | XTERM_MEDIUM_SPRING_GREEN | 49 | | #00ffaf | |
| | XTERM_CYAN_2 | 50 | | #00ffd7 | |

continues on next page

Table 2 – continued from previous page

| | Name | INT | STY | RGB code | XTerm name |
|--|-------------------------|------------|------------|-----------------|----------------------|
| | XTERM_CYAN_1 | 51 | | #00ffff | |
| | XTERM_DARK_RED_2 | 52 | | #5f0000 | DarkRed |
| | XTERM_DEEP_PINK_8 | 53 | | #5f005f | DeepPink4 |
| | XTERM_PURPLE_6 | 54 | | #5f0087 | Purple4 |
| | XTERM_PURPLE_4 | 55 | | #5f00af | |
| | XTERM_PURPLE_3 | 56 | | #5f00d7 | |
| | XTERM_BLUE_VIOLET | 57 | | #5f00ff | |
| | XTERM_ORANGE_4 | 58 | | #5f5f00 | |
| | XTERM_GREY_37 | 59 | | #5f5f5f | |
| | XTERM_MEDIUM_PURPLE_7 | 60 | | #5f5f87 | MediumPurple4 |
| | XTERM_SLATE_BLUE_3 | 61 | | #5f5faf | |
| | XTERM_SLATE_BLUE_2 | 62 | | #5f5fd7 | SlateBlue3 |
| | XTERM_ROYAL_BLUE_1 | 63 | | #5f5fff | |
| | XTERM_CHARTREUSE_6 | 64 | | #5f8700 | Chartreuse4 |
| | XTERM_DARK_SEA_GREEN_9 | 65 | | #5f875f | DarkSeaGreen4 |
| | XTERM_PALE_TURQUOISE_4 | 66 | | #5f8787 | |
| | XTERM_STEEL_BLUE | 67 | | #5f87af | |
| | XTERM_STEEL_BLUE_3 | 68 | | #5f87d7 | |
| | XTERM_CORNFLOWER_BLUE | 69 | | #5f87ff | |
| | XTERM_CHARTREUSE_5 | 70 | | #5faf00 | Chartreuse3 |
| | XTERM_DARK_SEA_GREEN_8 | 71 | | #5faf5f | DarkSeaGreen4 |
| | XTERM_CADET_BLUE_2 | 72 | | #5faf87 | CadetBlue |
| | XTERM_CADET_BLUE | 73 | | #5fafaf | |
| | XTERM_SKY_BLUE_3 | 74 | | #5fafd7 | |
| | XTERM_STEEL_BLUE_2 | 75 | | #5fafff | SteelBlue1 |
| | XTERM_CHARTREUSE_4 | 76 | | #5fd700 | Chartreuse3 |
| | XTERM_PALE_GREEN_4 | 77 | | #5fd75f | PaleGreen3 |
| | XTERM_SEA_GREEN_3 | 78 | | #5fd787 | |
| | XTERM_AQUAMARINE_3 | 79 | | #5fd7af | |
| | XTERM_MEDIUM_TURQUOISE | 80 | | #5fd7d7 | |
| | XTERM_STEEL_BLUE_1 | 81 | | #5fd7ff | |
| | XTERM_CHARTREUSE_2 | 82 | | #5fff00 | |
| | XTERM_SEA_GREEN_4 | 83 | | #5fff5f | SeaGreen2 |
| | XTERM_SEA_GREEN_2 | 84 | | #5fff87 | SeaGreen1 |
| | XTERM_SEA_GREEN_1 | 85 | | #5fffaf | |
| | XTERM_AQUAMARINE_2 | 86 | | #5fffd7 | Aquamarine1 |
| | XTERM_DARK_SLATE_GRAY_2 | 87 | | #5ffffff | |
| | XTERM_DARK_RED | 88 | | #870000 | |
| | XTERM_DEEP_PINK_7 | 89 | | #87005f | DeepPink4 |
| | XTERM_DARK_MAGENTA_2 | 90 | | #870087 | DarkMagenta |
| | XTERM_DARK_MAGENTA | 91 | | #8700af | |
| | XTERM_DARK_VIOLET_2 | 92 | | #8700d7 | DarkViolet |
| | XTERM_PURPLE_2 | 93 | | #8700ff | Purple |
| | XTERM_ORANGE_3 | 94 | | #875f00 | Orange4 |
| | XTERM_LIGHT_PINK_3 | 95 | | #875f5f | LightPink4 |
| | XTERM_PLUM_4 | 96 | | #875f87 | |
| | XTERM_MEDIUM_PURPLE_6 | 97 | | #875faf | MediumPurple3 |
| | XTERM_MEDIUM_PURPLE_5 | 98 | | #875fd7 | MediumPurple3 |
| | XTERM_SLATE_BLUE_1 | 99 | | #875fff | |
| | XTERM_YELLOW_6 | 100 | | #878700 | Yellow4 |
| | XTERM_WHEAT_4 | 101 | | #87875f | |
| | XTERM_GREY_53 | 102 | | #878787 | |
| | XTERM_LIGHT_SLATE_GREY | 103 | | #8787af | |

continues on next page

Table 2 – continued from previous page

| | Name | INT | STY | RGB code | XTerm name |
|--|--------------------------|------------|------------|-----------------|-------------------|
| | XTERM_MEDIUM_PURPLE_4 | 104 | | #8787d7 | MediumPurple |
| | XTERM_LIGHT_SLATE_BLUE | 105 | | #8787ff | |
| | XTERM_YELLOW_4 | 106 | | #87af00 | |
| | XTERM_DARK_OLIVE_GREEN_6 | 107 | | #87af5f | DarkOliveGreen3 |
| | XTERM_DARK_SEA_GREEN_7 | 108 | | #87af87 | DarkSeaGreen |
| | XTERM_LIGHT_SKY_BLUE_3 | 109 | | #87afaf | |
| | XTERM_LIGHT_SKY_BLUE_2 | 110 | | #87afd7 | LightSkyBlue3 |
| | XTERM_SKY_BLUE_2 | 111 | | #87afff | |
| | XTERM_CHARTREUSE_3 | 112 | | #87d700 | Chartreuse2 |
| | XTERM_DARK_OLIVE_GREEN_4 | 113 | | #87d75f | DarkOliveGreen3 |
| | XTERM_PALE_GREEN_3 | 114 | | #87d787 | |
| | XTERM_DARK_SEA_GREEN_5 | 115 | | #87d7af | DarkSeaGreen3 |
| | XTERM_DARK_SLATE_GRAY_3 | 116 | | #87d7d7 | |
| | XTERM_SKY_BLUE_1 | 117 | | #87d7ff | |
| | XTERM_CHARTREUSE_1 | 118 | | #87ff00 | |
| | XTERM_LIGHT_GREEN_2 | 119 | | #87ff5f | LightGreen |
| | XTERM_LIGHT_GREEN | 120 | | #87ff87 | |
| | XTERM_PALE_GREEN_1 | 121 | | #87ffaf | |
| | XTERM_AQUAMARINE_1 | 122 | | #87ffd7 | |
| | XTERM_DARK_SLATE_GRAY_1 | 123 | | #87ffff | |
| | XTERM_RED_4 | 124 | | #af0000 | Red3 |
| | XTERM_DEEP_PINK_6 | 125 | | #af005f | DeepPink4 |
| | XTERM_MEDIUM_VIOLET_RED | 126 | | #af0087 | |
| | XTERM_MAGENTA_6 | 127 | | #af00af | Magenta3 |
| | XTERM_DARK_VIOLET | 128 | | #af00d7 | |
| | XTERM_PURPLE | 129 | | #af00ff | |
| | XTERM_DARK_ORANGE_3 | 130 | | #af5f00 | |
| | XTERM_INDIAN_RED_4 | 131 | | #af5f5f | IndianRed |
| | XTERM_HOT_PINK_5 | 132 | | #af5f87 | HotPink3 |
| | XTERM_MEDIUM_ORCHID_4 | 133 | | #af5faf | MediumOrchid3 |
| | XTERM_MEDIUM_ORCHID_3 | 134 | | #af5fd7 | MediumOrchid |
| | XTERM_MEDIUM_PURPLE_2 | 135 | | #af5fff | |
| | XTERM_DARK_GOLDENROD | 136 | | #af8700 | |
| | XTERM_LIGHT_SALMON_3 | 137 | | #af875f | |
| | XTERM_ROSY_BROWN | 138 | | #af8787 | |
| | XTERM_GREY_63 | 139 | | #af87af | |
| | XTERM_MEDIUM_PURPLE_3 | 140 | | #af87d7 | MediumPurple2 |
| | XTERM_MEDIUM_PURPLE_1 | 141 | | #af87ff | |
| | XTERM_GOLD_3 | 142 | | #afaf00 | |
| | XTERM_DARK_KHAKI | 143 | | #afaf5f | |
| | XTERM_NAVAJO_WHITE_3 | 144 | | #afaf87 | |
| | XTERM_GREY_69 | 145 | | #afafaf | |
| | XTERM_LIGHT_STEEL_BLUE_3 | 146 | | #afafd7 | |
| | XTERM_LIGHT_STEEL_BLUE_2 | 147 | | #afafff | LightSteelBlue |
| | XTERM_YELLOW_5 | 148 | | #afd700 | Yellow3 |
| | XTERM_DARK_OLIVE_GREEN_5 | 149 | | #afd75f | DarkOliveGreen3 |
| | XTERM_DARK_SEA_GREEN_6 | 150 | | #afd787 | DarkSeaGreen3 |
| | XTERM_DARK_SEA_GREEN_4 | 151 | | #afd7af | DarkSeaGreen2 |
| | XTERM_LIGHT_CYAN_3 | 152 | | #afd7d7 | |
| | XTERM_LIGHT_SKY_BLUE_1 | 153 | | #afd7ff | |
| | XTERM_GREEN_YELLOW | 154 | | #afff00 | |
| | XTERM_DARK_OLIVE_GREEN_3 | 155 | | #afff5f | DarkOliveGreen2 |
| | XTERM_PALE_GREEN_2 | 156 | | #afff87 | PaleGreen1 |

continues on next page

Table 2 – continued from previous page

| | Name | INT | STY | RGB code | XTerm name |
|--|--------------------------|------------|------------|-----------------|-------------------|
| | XTERM_DARK_SEA_GREEN_3 | 157 | | #afffaf | DarkSeaGreen2 |
| | XTERM_DARK_SEA_GREEN_1 | 158 | | #afffd7 | |
| | XTERM_PALE_TURQUOISE_1 | 159 | | #afffff | |
| | XTERM_RED_3 | 160 | | #d70000 | |
| | XTERM_DEEP_PINK_5 | 161 | | #d7005f | DeepPink3 |
| | XTERM_DEEP_PINK_3 | 162 | | #d70087 | |
| | XTERM_MAGENTA_3 | 163 | | #d700af | |
| | XTERM_MAGENTA_5 | 164 | | #d700d7 | Magenta3 |
| | XTERM_MAGENTA_4 | 165 | | #d700ff | Magenta2 |
| | XTERM_DARK_ORANGE_2 | 166 | | #d75f00 | DarkOrange3 |
| | XTERM_INDIAN_RED_3 | 167 | | #d75f5f | IndianRed |
| | XTERM_HOT_PINK_4 | 168 | | #d75f87 | HotPink3 |
| | XTERM_HOT_PINK_3 | 169 | | #d75faf | HotPink2 |
| | XTERM_ORCHID_3 | 170 | | #d75fd7 | Orchid |
| | XTERM_MEDIUM_ORCHID_2 | 171 | | #d75fff | MediumOrchid1 |
| | XTERM_ORANGE_2 | 172 | | #d78700 | Orange3 |
| | XTERM_LIGHT_SALMON_2 | 173 | | #d7875f | LightSalmon3 |
| | XTERM_LIGHT_PINK_2 | 174 | | #d78787 | LightPink3 |
| | XTERM_PINK_3 | 175 | | #d787af | |
| | XTERM_PLUM_3 | 176 | | #d787d7 | |
| | XTERM_VIOLET | 177 | | #d787ff | |
| | XTERM_GOLD_2 | 178 | | #d7af00 | Gold3 |
| | XTERM_LIGHT_GOLDENROD_5 | 179 | | #d7af5f | LightGoldenrod3 |
| | XTERM_TAN | 180 | | #d7af87 | |
| | XTERM_MISTY_ROSE_3 | 181 | | #d7afaf | |
| | XTERM_THISTLE_3 | 182 | | #d7afd7 | |
| | XTERM_PLUM_2 | 183 | | #d7afff | |
| | XTERM_YELLOW_3 | 184 | | #d7d700 | |
| | XTERM_KHAKI_3 | 185 | | #d7d75f | |
| | XTERM_LIGHT_GOLDENROD_3 | 186 | | #d7d787 | LightGoldenrod2 |
| | XTERM_LIGHT_YELLOW_3 | 187 | | #d7d7af | |
| | XTERM_GREY_84 | 188 | | #d7d7d7 | |
| | XTERM_LIGHT_STEEL_BLUE_1 | 189 | | #d7d7ff | |
| | XTERM_YELLOW_2 | 190 | | #d7ff00 | |
| | XTERM_DARK_OLIVE_GREEN_2 | 191 | | #d7ff5f | DarkOliveGreen1 |
| | XTERM_DARK_OLIVE_GREEN_1 | 192 | | #d7ff87 | |
| | XTERM_DARK_SEA_GREEN_2 | 193 | | #d7ffaaf | DarkSeaGreen1 |
| | XTERM_HONEYDEW_2 | 194 | | #d7ffd7 | |
| | XTERM_LIGHT_CYAN_1 | 195 | | #d7ffff | |
| | XTERM_RED_1 | 196 | | #ff0000 | |
| | XTERM_DEEP_PINK_4 | 197 | | #ff005f | DeepPink2 |
| | XTERM_DEEP_PINK_2 | 198 | | #ff0087 | DeepPink1 |
| | XTERM_DEEP_PINK_1 | 199 | | #ff00af | |
| | XTERM_MAGENTA_2 | 200 | | #ff00d7 | |
| | XTERM_MAGENTA_1 | 201 | | #ff00ff | |
| | XTERM_ORANGE_RED_1 | 202 | | #ff5f00 | |
| | XTERM_INDIAN_RED_1 | 203 | | #ff5f5f | |
| | XTERM_INDIAN_RED_2 | 204 | | #ff5f87 | IndianRed1 |
| | XTERM_HOT_PINK_2 | 205 | | #ff5faf | HotPink |
| | XTERM_HOT_PINK | 206 | | #ff5fd7 | |
| | XTERM_MEDIUM_ORCHID_1 | 207 | | #ff5fff | |
| | XTERM_DARK_ORANGE | 208 | | #ff8700 | |
| | XTERM_SALMON_1 | 209 | | #ff875f | |

continues on next page

Table 2 – continued from previous page

| | Name | INT | STY | RGB code | XTerm name |
|--|-------------------------|-----|-----|----------|------------------------|
| | XTERM_LIGHT_CORAL | 210 | | #ff8787 | |
| | XTERM_PALE_VIOLET_RED_1 | 211 | | #ff87af | |
| | XTERM_ORCHID_2 | 212 | | #ff87d7 | |
| | XTERM_ORCHID_1 | 213 | | #ff87ff | |
| | XTERM_ORANGE_1 | 214 | | #ffa000 | |
| | XTERM_SANDY_BROWN | 215 | | #ffa05f | |
| | XTERM_LIGHT_SALMON_1 | 216 | | #ffa087 | |
| | XTERM_LIGHT_PINK_1 | 217 | | #ffa0af | |
| | XTERM_PINK_1 | 218 | | #ffa0d7 | |
| | XTERM_PLUM_1 | 219 | | #ffa0ff | |
| | XTERM_GOLD_1 | 220 | | #ffd700 | |
| | XTERM_LIGHT_GOLDENROD_4 | 221 | | #ffd75f | LightGoldenrod2 |
| | XTERM_LIGHT_GOLDENROD_2 | 222 | | #ffd787 | |
| | XTERM_NAVAJO_WHITE_1 | 223 | | #ffd7af | |
| | XTERM_MISTY_ROSE_1 | 224 | | #ffd7d7 | |
| | XTERM_THISTLE_1 | 225 | | #ffd7ff | |
| | XTERM_YELLOW_1 | 226 | | #ffff00 | |
| | XTERM_LIGHT_GOLDENROD_1 | 227 | | #ffff5f | |
| | XTERM_KHAKI_1 | 228 | | #ffff87 | |
| | XTERM_WHEAT_1 | 229 | | #ffffaf | |
| | XTERM_CORNSILK_1 | 230 | | #ffffd7 | |
| | XTERM_GREY_100 | 231 | | #ffffff | |
| | XTERM_GREY_3 | 232 | | #080808 | |
| | XTERM_GREY_7 | 233 | | #121212 | |
| | XTERM_GREY_11 | 234 | | #1c1c1c | |
| | XTERM_GREY_15 | 235 | | #262626 | |
| | XTERM_GREY_19 | 236 | | #303030 | |
| | XTERM_GREY_23 | 237 | | #3a3a3a | |
| | XTERM_GREY_27 | 238 | | #444444 | |
| | XTERM_GREY_30 | 239 | | #4e4e4e | |
| | XTERM_GREY_35 | 240 | | #585858 | |
| | XTERM_GREY_39 | 241 | | #626262 | |
| | XTERM_GREY_42 | 242 | | #6c6c6c | |
| | XTERM_GREY_46 | 243 | | #767676 | |
| | XTERM_GREY_50 | 244 | | #808080 | |
| | XTERM_GREY_54 | 245 | | #8a8a8a | |
| | XTERM_GREY_58 | 246 | | #949494 | |
| | XTERM_GREY_62 | 247 | | #9e9e9e | |
| | XTERM_GREY_66 | 248 | | #a8a8a8 | |
| | XTERM_GREY_70 | 249 | | #b2b2b2 | |
| | XTERM_GREY_74 | 250 | | #bcbcbc | |
| | XTERM_GREY_78 | 251 | | #c6c6c6 | |
| | XTERM_GREY_82 | 252 | | #d0d0d0 | |
| | XTERM_GREY_85 | 253 | | #dadada | |
| | XTERM_GREY_89 | 254 | | #e4e4e4 | |
| | XTERM_GREY_93 | 255 | | #eeeeee | |

³ First 16 colors are effectively the same as colors in *default* 16-color mode and share with them the same color values (and depend on terminal color scheme as well).

⁴ XTerm name list contains duplicates; variable names for these were slightly modified (different numbers at the end) to avoid namespace conflicts. Every changed name is displayed with **bold** font.

Sources

1. https://en.wikipedia.org/wiki/ANSI_escape_code
2. <https://www.ditig.com/256-colors-cheat-sheet>

1.9 Color spaces

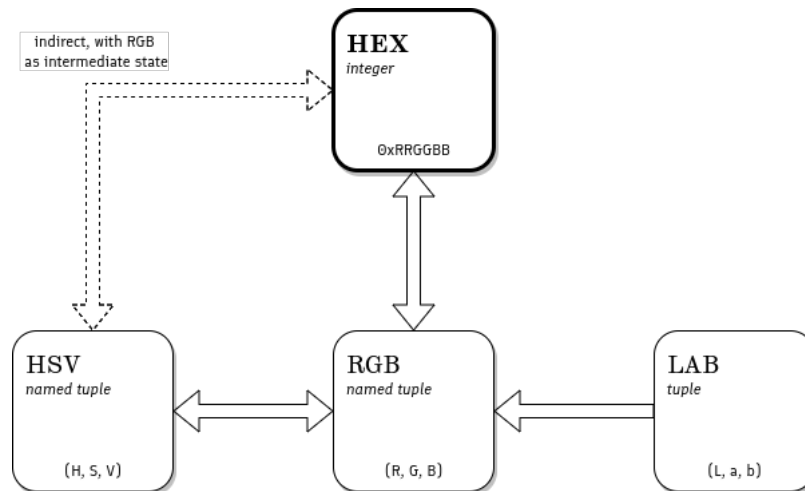


Fig. 8: Supported color spaces and transformations

1.10 Color256 palette

Actual colors of *default* palette depend on user's terminal settings, i.e. the result color of *Color16* is not guaranteed to exactly match the corresponding color listed below. What's more, note that *default* palette is actually a part of *indexed* one (first 16 colors of 256-color table).

Todo: (Verify) The approximation algorithm was explicitly made to ignore these colors because otherwise the results of transforming *RGB* values into *indexed* ones would be unpredictable, in addition to different results for different users, depending on their terminal emulator setup.

However, it doesn't mean that *Color16* is useless. Just the opposite – it's ideal for situations when you don't actually **have to** set exact values and it's easier to specify estimation of desired color. I.e. setting color to 'red' is usually more than enough for displaying an error message – we don't really care of precise hue or brightness values for it.

Todo: Approximation algorithm is as simple as iterating through all colors in the *lookup table* (which contains all possible ...

| | | | | | | | | | | | |
|-----------------------|-----------------------|-----------------------|------------------------|------------------------|------------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| | 000 #000000 | 001 #800000 | 002 #008000 | 003 #808000 | 004 #000080 | 005 #800080 | 006 #008080 | 007 #c0c0c0 | | | |
| | 008 #808080 | 009 #ff0000 | 010 #00ff00 | 011 #ffff00 | 012 #0000ff | 013 #ff00ff | 014 #00ffff | 015 #ffffff | | | |
| 016 #000000 | 022 #005f00 | 028 #008700 | 034 #00af00 | 040 #00d700 | 046 #00ff00 | 052 #5fff00 | 058 #5fd700 | 064 #5faf00 | 070 #5f8700 | 076 #5f5f00 | 082 #5f0000 |
| 017 #00005f | 023 #005f5f | 029 #00875f | 035 #00af5f | 041 #00d75f | 047 #00ff5f | 053 #5fff5f | 059 #5fd75f | 065 #5faf5f | 071 #5f875f | 077 #5f5f5f | 083 #5f005f |
| 018 #000087 | 024 #005f87 | 030 #008787 | 036 #00af87 | 042 #00d787 | 048 #00ff87 | 054 #5fff87 | 060 #5fd787 | 066 #5faf87 | 072 #5f8787 | 078 #5f5f87 | 084 #5f0087 |
| 019 #0000af | 025 #005faf | 031 #0087af | 037 #00afaf | 043 #00d7af | 049 #00ffaf | 055 #5fffaf | 061 #5fd7af | 067 #5fafaf | 073 #5f87af | 079 #5f5faf | 085 #5f00af |
| 020 #0000d7 | 026 #005fd7 | 032 #0087d7 | 038 #00afd7 | 044 #00dd7 | 050 #00ffd7 | 056 #5fffd7 | 062 #5fd7d7 | 068 #5fadd7 | 074 #5f87d7 | 080 #5f5fd7 | 086 #5f00d7 |
| 021 #0000ff | 027 #005fff | 033 #0087ff | 039 #00afff | 045 #00d7ff | 051 #00ffff | 057 #5fffff | 063 #5fd7ff | 069 #5fafff | 075 #5f87ff | 081 #5f5fff | 087 #5f00ff |
| 093 #8700ff | 099 #875fff | 105 #8787ff | 111 #87afff | 117 #87d7ff | 123 #87ffff | 129 #afffff | 135 #afd7ff | 141 #afafff | 147 #af87ff | 153 #af5fff | 159 #af00ff |
| 092 #8700d7 | 098 #875fd7 | 104 #8787d7 | 110 #87afd7 | 116 #87dd7 | 122 #87ffd7 | 128 #afffd7 | 134 #afd7d7 | 140 #afadd7 | 146 #af87d7 | 152 #af5fd7 | 158 #af00d7 |
| 091 #8700af | 097 #875faf | 103 #8787af | 109 #87afaf | 115 #87d7af | 121 #87ffaf | 127 #afffaf | 133 #afd7af | 139 #afafaf | 145 #af87af | 151 #af5faf | 157 #af00af |
| 090 #870087 | 096 #875f87 | 102 #878787 | 108 #87af87 | 114 #87d787 | 120 #87ff87 | 126 #afff87 | 132 #afd787 | 138 #afaf87 | 144 #af8787 | 150 #af5f87 | 156 #af0087 |
| 089 #87005f | 095 #875f5f | 101 #87875f | 107 #87af5f | 113 #87d75f | 119 #87ff5f | 125 #afff5f | 131 #afd75f | 137 #afaf5f | 143 #af875f | 149 #af5f5f | 155 #af005f |
| 088 #870000 | 094 #875f00 | 100 #878700 | 106 #87af00 | 112 #87d700 | 118 #87ff00 | 124 #afff00 | 130 #afd700 | 136 #afaf00 | 142 #af8700 | 148 #af5f00 | 154 #af0000 |
| 160 #d70000 | 166 #d75f00 | 172 #d78700 | 178 #dafaf00 | 184 #dfd700 | 190 #dffff00 | 196 #ffff00 | 202 #ffdf00 | 208 #ffaf00 | 214 #ff8700 | 220 #ff5f00 | 226 #ff0000 |
| 161 #d7005f | 167 #d75f5f | 173 #d7875f | 179 #dafaf5f | 185 #dfd75f | 191 #dffff5f | 197 #ffff5f | 203 #ffdf5f | 209 #ffaf5f | 215 #ff875f | 221 #ff5f5f | 227 #ff005f |
| 162 #d70087 | 168 #d75f87 | 174 #d78787 | 180 #dafaf87 | 186 #dfd787 | 192 #dffff87 | 198 #ffff87 | 204 #ffdf87 | 210 #ffaf87 | 216 #ff8787 | 222 #ff5f87 | 228 #ff0087 |
| 163 #d700af | 169 #d75faf | 175 #d787af | 181 #dafafaf | 187 #dfd7af | 193 #dffffaf | 199 #ffffaf | 205 #ffdfaf | 211 #ffafaf | 217 #ff87af | 223 #ff5faf | 229 #ff00af |
| 164 #d700d7 | 170 #d75fd7 | 176 #d787d7 | 182 #dafadd7 | 188 #dfd7d7 | 194 #dffffd7 | 200 #ffffd7 | 206 #ffdfd7 | 212 #ffafd7 | 218 #ff87d7 | 224 #ff5fd7 | 230 #ff00d7 |
| 165 #d700ff | 171 #d75fff | 177 #d787ff | 183 #dafafff | 189 #dfd7fff | 195 #dffffff | 201 #ffffff | 207 #ffdff | 213 #ffaaff | 219 #ff87ff | 225 #ff5fff | 231 #ff00ff |
| 232 #080808 | 233 #121212 | 234 #1c1c1c | 235 #262626 | 236 #303030 | 237 #3a3a3a | 238 #444444 | 239 #4e4e4e | 240 #585858 | 241 #626262 | 242 #6c6c6c | 243 #767676 |
| 244 #808080 | 245 #8a8a8a | 246 #949494 | 247 #9e9e9e | 248 #a8a8a8 | 249 #b2b2b2 | 250 #bcbcbc | 251 #c6c6c6 | 252 #d0d0d0 | 253 #dadada | 254 #e4e4e4 | 255 #eeeeee |

Fig. 9: Indexed mode palette

Sources

1. <https://www.tweaking4all.com/software/linux-software/xterm-color-cheat-sheet/>

1.11 Configuration

PYTERMOR_RENDERER_CLASS
YES

PYTERMOR_OUTPUT_MODE
YES

PYTERMOR_TRACE_RENDERERS
yare-yare-daze

PYTERMOR_PREFER_RGB
YES

See also:

Config – class containing configuration variables.

1.12 Docs guidelines

(mostly as a reminder for myself)

1.12.1 General

- Basic types and built-in values should be surrounded with asterisks:

`*True*` → *True*

`*None*` → *None*

`*int*` → *int*

- Library classes, methods, etc. should be enclosed in single backticks in order to become a hyperlinks:

``SgrRenderer.render()`` → *[SgrRenderer.render\(\)](#)*

- Argument names and string literals that include escape sequences or their fragments should be wrapped in double backticks:

```arg1``` → *arg1*

```ESC [31m ESC [m``` → *ESC [31m ESC [m*

On the top of that, ESC control char should be padded with spaces for better readability. This also triggers automatic application of custom style for even more visual difference.

- Any formula should be formatted using LaTeX syntax (`:math:` role or `.. math::` directive):

$$d_{min} = 350 * 10^{-3}$$

- Hexadecimal numbers should be displayed using `:hex:` role (applies to all examples below except the last one). In general, when the characters are supposed to be typed manually, or when the result length is 6+ chars, it's better to use lower case; when the numbers are distinct or “U+” notation is used, the upper case is acceptable:

separate bytes

0x1B 0x23 0x88

Unicode codepoints

U+21BC ; U+F0909

hex dump

“0x 00AF 00BB 96CA” ; “0x 80 80 11 BD AA B5”

memory address or size

0000:9cf0

RGB colors (*int/str* forms)

0xeb0c0c ; #ff00ff

escaped strings

```
"\u21bc", "\U000f0909", re.compile(R"\x1b\[ [0-9;]*m")
```

1.12.2 References

| Type | Code | Example |
|-----------------|--|---|
| Internal pydoc | use <code>`SgrRenderer.render()`</code> | use <code><i>SgrRenderer.render()</i></code> |
| Internal page | called <code>`renderers<guide. →renderers>`</code> | called <i>renderers</i> |
| Internal anchor | <code>`References`_</code> | <i>References</i> |
| External pydoc | see <code>`:class:`logging. →NullHandler`</code> | see <code>logging.NullHandler</code> |
| External page | <code>`https://github.com`</code> | https://github.com |

1.12.3 Headers

Section header**Subsection header****Paragraph header****Rubric**

```
#####
Docs guidelines
#####
.. part header
```

(continues on next page)

(continued from previous page)

```
=====
Headers
=====
.. chapter header

-----
Section header
-----

Subsection header
-----

Paragraph header
=====

.. rubric:: Rubric

.. code-block:: rst

...

```

2

API REFERENCE

Note: Almost all public classes are imported into the first package level on its initialization, which makes kind of a contract on library's API. The exceptions include some abstract superclasses or metaclasses, which generally should not be used outside of the library, but still can be imported directly using a full module path.

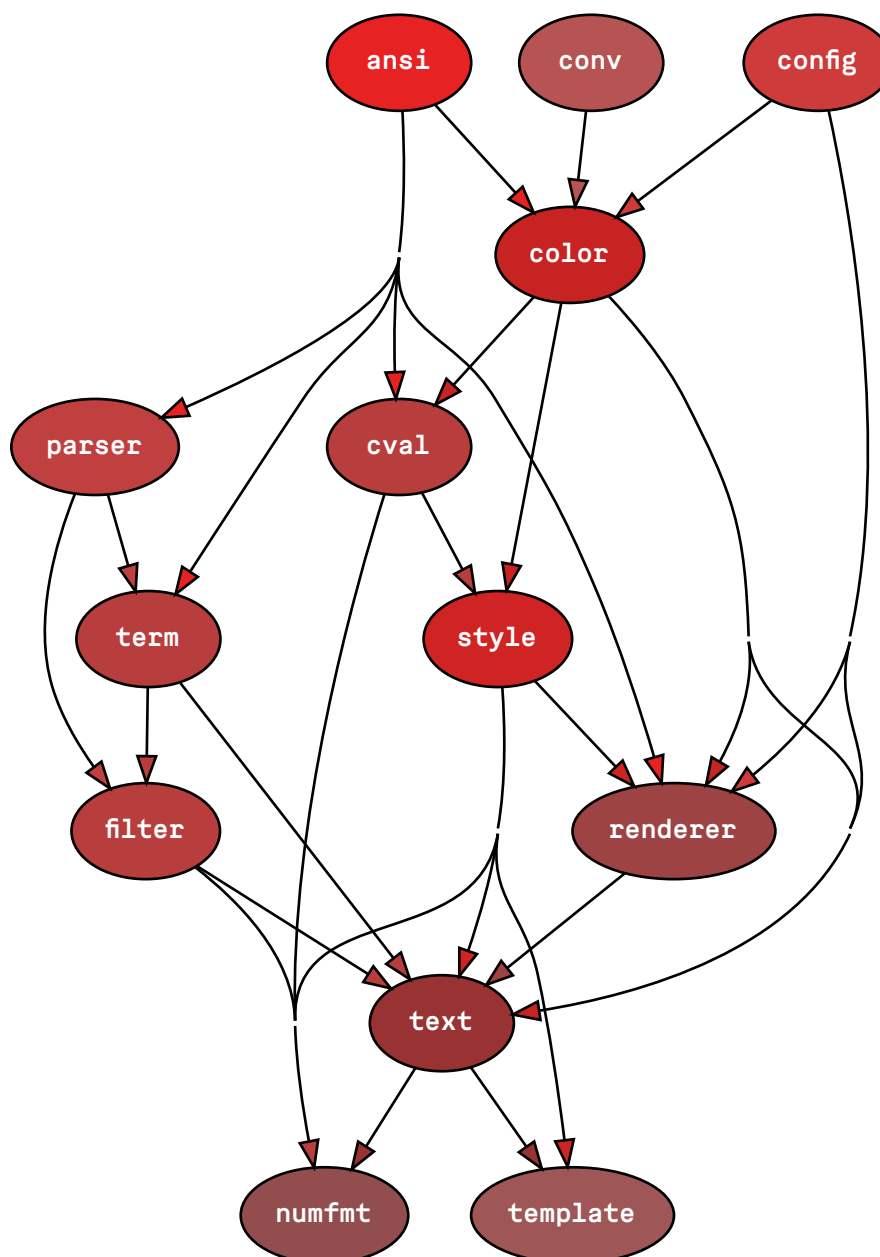


Fig. 1: Module dependency graph^{Page 28, 1}

¹ Overly common modules `exception` and `log` are not shown, as they turn the graph into a mess. Same applies to internal modules which name starts with `_`.

| | |
|------------------|--|
| <i>ansi</i> | Classes for working with ANSI sequences on lower level. |
| <i>color</i> | Color main classes and helper functions. |
| <i>config</i> | Library fine tuning. |
| <i>conv</i> | A |
| <i>cval</i> | Color preset list: |
| <i>exception</i> | |
| <i>filter</i> | Formatters for prettier output and utility classes to avoid writing boilerplate code when dealing with escape sequences. |
| <i>numfmt</i> | utilnum |
| <i>log</i> | |
| <i>parser</i> | |
| <i>renderer</i> | Output formatters. |
| <i>style</i> | |
| <i>template</i> | |
| <i>term</i> | A |
| <i>text</i> | "Front-end" module of the library. |

2.1 pytermor.ansi

Classes for working with ANSI sequences on lower level. Can be used for creating a variety of sequences including:

- SGR sequences (text and background coloring, other text formatting and effects);
- CSI sequences (cursor management, selective screen clearing);
- OSC (Operating System Command) sequences (various system commands).

Important: blah-blah-blah low-level @TODO

Module Attributes

| | |
|-----------------|---|
| <i>NOOP_SEQ</i> | Special sequence in case one <i>has to</i> provide one or another SGR, but does not want any control sequences to be actually included in the output. |
|-----------------|---|

Functions

| | |
|---|---|
| <i>compose_hyperlink</i> (url[, label]) | Syntax: (OSC 8 ; ;) (url) (ST) (label) (OSC 8 ; ;) (ST), where <i>OSC</i> is ESC] |
| <i>enclose</i> (opening_seq, string) | param opening_seq |

continues on next page

Table 1 – continued from previous page

| <code>get_closing_seq(opening_seq)</code> | param opening_seq |
|--|--|
| <code>make_clear_display()</code> | Create ED (Erase in Display) sequence that clears an entire screen. |
| <code>make_clear_display_after_cursor()</code> | Create ED sequence that clears a part of the screen from cursor to the end of the screen. |
| <code>make_clear_display_before_cursor()</code> | Create ED sequence that clears a part of the screen from cursor to the beginning of the screen. |
| <code>make_clear_history()</code> | Create ED sequence that clears history, i.e., invisible lines on the top that can be scrolled back down. |
| <code>make_clear_line()</code> | Create EL (Erase in Line) sequence that clears an entire line at the cursor position. |
| <code>make_clear_line_after_cursor()</code> | Create EL sequence that clears a part of the line from cursor to the end of the same line. |
| <code>make_clear_line_before_cursor()</code> | Create EL sequence that clears a part of the line from cursor to the beginning of the same line. |
| <code>make_color_256(code[, target])</code> | Wrapper for creation of <i>SequenceSGR</i> that sets foreground (or background) to one of 256-color palette value.: |
| <code>make_color_rgb(r, g, b[, target])</code> | Wrapper for creation of <i>SequenceSGR</i> operating in True Color mode (16M). Valid values for r, g and b are in range of [0; 255]. This range linearly translates into [0x00; 0xFF] for each channel. The result value is composed as "#RRGGBB". For example, a sequence with color of #ff3300 can be created with:. |
| <code>make_disable_alt_screen_buffer()</code> | C |
| <code>make_enable_alt_screen_buffer()</code> | C |
| <code>make_erase_in_display([mode])</code> | Create ED sequence that clears a part of the screen or the entire screen. |
| <code>make_erase_in_line([mode])</code> | Create EL sequence that clears a part of the line or the entire line at the cursor position. |
| <code>make_hide_cursor()</code> | C |
| <code>make_hyperlink()</code> | Create a hyperlink in the text (<i>supported by limited amount of terminals</i>). |
| <code>make_move_cursor_down([lines])</code> | Create CUD (Cursor Down) sequence that moves the cursor down by specified amount of lines. |
| <code>make_move_cursor_down_to_start([lines])</code> | Create CNL (Cursor Next Line) sequence that moves the cursor to the beginning of the line and down by specified amount of lines. |
| <code>make_move_cursor_left([columns])</code> | Create CUB (Cursor Back) sequence that moves the cursor left by specified amount of columns. |
| <code>make_move_cursor_right([columns])</code> | Create CUF (Cursor Forward) sequence that moves the cursor right by specified amount of columns. |
| <code>make_move_cursor_up([lines])</code> | Create CUU (Cursor Up) sequence that moves the cursor up by specified amount of lines. |
| <code>make_move_cursor_up_to_start([lines])</code> | Create CPL (Cursor Previous Line) sequence that moves the cursor to the beginning of the line and up by specified amount of lines. |
| <code>make_query_cursor_position()</code> | Create QCP (Query Cursor Position) sequence that requests an output device to respond with a structure containing current cursor coordinates (RCP). |
| <code>make_reset_cursor()</code> | Create CUP (Cursor Position) sequence without params, which moves the cursor to top left corner of the screen. |

continues on next page

Table 1 – continued from previous page

| | |
|---|---|
| <code>make_restore_cursor_position()</code> | example ESC 8 |
| <code>make_restore_screen()</code> | C |
| <code>make_save_cursor_position()</code> | example ESC 7 |
| <code>make_save_screen()</code> | C |
| <code>make_set_cursor([line, column])</code> | Create CUP sequence that moves the cursor to specified amount <code>line</code> and <code>column</code> . |
| <code>make_set_cursor_column([column])</code> | Create CHA (Cursor Character Absolute) sequence that sets cursor horizontal position to <code>column</code> . |
| <code>make_set_cursor_line([line])</code> | Create VPA (Vertical Position Absolute) sequence that sets cursor vertical position to <code>line</code> . |
| <code>make_show_cursor()</code> | C |

Classes

| | |
|--|---|
| <code>ColorTarget(value)</code> | An enumeration. |
| <code>ISequence([classifier, interm, final, abbr])</code> | Abstract ancestor of all escape sequences. |
| <code>IntCode(value)</code> | Complete or almost complete list of reliably working SGR param integer codes. |
| <code>SeqIndex()</code> | Registry of static sequences that can be utilized without implementing an extra logic. |
| <code>SequenceCSI([final, interm, abbr])</code> | Class representing CSI-type ANSI escape sequence. |
| <code>SequenceFe(classifier[, interm, final, abbr])</code> | C1 set sequences -- a wide range of sequences that includes <i>CSI</i> , <i>OSC</i> and more. |
| <code>SequenceFp(classifier[, interm, abbr])</code> | Sequence class representing private control functions. |
| <code>SequenceFs(classifier, final[, abbr])</code> | Sequences referred by ECMA-48 as "independent control functions". |
| <code>SequenceNf(final[, interm, abbr])</code> | Escape sequences mostly used for ANSI/ISO code-switching mechanisms. |
| <code>SequenceOSC(interm, *params)</code> | OSC-type sequence. |
| <code>SequenceSGR(*params)</code> | Class representing SGR-type escape sequence with varying amount of parameters. |
| <code>SequenceST()</code> | String Terminator sequence (ST). |
| <code>SubtypedParam(value, subtype)</code> | |

class `pytermor.ansi.ISequence`(*classifier=None, interm=None, final=None, abbr='ESC*')*

Bases: `Sized`

Abstract ancestor of all escape sequences.

class `pytermor.ansi.SequenceNf`(*final, interm=None, abbr='nF')*

Bases: `ISequence`

Escape sequences mostly used for ANSI/ISO code-switching mechanisms.

All **nF**-class sequences start with ESC plus ASCII byte from the range 0x20-0x2F (space, !, ", #, \$, %, &, ', (,), *, +, ,, -, ., /).

Parameters**interm** (*str*) – intermediate bytes 0x20-0x2F**assemble()**

Build up actual byte sequence and return as an ASCII-encoded string.

Return type

str

class pytermor.ansi.**SequenceFp**(*classifier, interm=None, abbr='Fp'*)Bases: [ISequence](#)

Sequence class representing private control functions.

All **Fp**-class sequences start with ESC plus ASCII byte in the range 0x30-0x3F (0-9, :, ;, <, =, >, ?).

.

class pytermor.ansi.**SequenceFs**(*classifier, final, abbr='Fs'*)Bases: [ISequence](#)

Sequences referred by ECMA-48 as “independent control functions”.

All **Fs**-class sequences start with ESC plus a byte in the range 0x60-0x7E (` , a-z, {, |, }).

.

class pytermor.ansi.**SequenceFe**(*classifier, interm=None, final=None, abbr='Fe'*)Bases: [ISequence](#)C1 set sequences – a wide range of sequences that includes [CSI](#), [OSC](#) and more.All **Fe**-class sequences start with ESC plus ASCII byte from 0x40 to 0x5F (@, [, \,], _, ^ and capital letters A-Z).

.

class pytermor.ansi.**SequenceST**Bases: [SequenceFe](#)

String Terminator sequence (ST). Terminates strings in other control sequences. Encoded as ESC \ (0x1B 0x5C).

.

class pytermor.ansi.**SequenceOSC**(*interm, *params*)Bases: [SequenceFe](#)OSC-type sequence. Starts a control string for the operating system to use. Encoded as ESC], plus params separated by ;. The control string can contain bytes from ranges 0x08-0x0D, 0x20-0x7E and are usually terminated by [ST](#).

.

class pytermor.ansi.**SequenceCSI**(*final=None, *params, interm=None, abbr='CSI'*)Bases: [SequenceFe](#)

Class representing CSI-type ANSI escape sequence. All subtypes of this sequence start with ESC [.

Sequences of this type are used to control text formatting, change cursor position, erase screen and more.

```
>>> make_clear_line().assemble()
'[2K'
```

class `pytermor.ansi.SequenceSGR(*params)`

Bases: `SequenceCSI`

Class representing SGR-type escape sequence with varying amount of parameters. SGR sequences allow to change the color of text or/and terminal background (in 3 different color spaces) as well as set decorate text with italic style, underlining, overlining, cross-lining, making it bold or blinking etc.

```
>>> SequenceSGR(IntCode.HI_CYAN, 'underlined', 1)
<SGR[96,4,1]>
```

To encode into control sequence byte-string invoke `assemble()` method or cast the instance to `str`, which internally does the same (this actually applies to all children of `ISequence`):

```
>>> SequenceSGR('blue', 'italic').assemble()
'[34;3m'
>>> str(SequenceSGR('blue', 'italic'))
'[34;3m'
```

The latter also allows fluent usage in f-strings:

```
>>> f'{SeqIndex.RED}should be red{SeqIndex.RESET}'
'[31mshould be red[0m'
```

Note: `SequenceSGR` with zero params was specifically implemented to translate into empty string and not into ESC [m, which would have made sense, but also would be entangling, as this sequence is the equivalent of ESC [0m – hard reset sequence. The empty-string-sequence is predefined at module level as `NOOP_SEQ`.

Note: The module doesn't distinguish “single-instruction” sequences from several ones merged together, e.g. `Style(fg='red', bold=True)` produces only one opening `SequenceSGR` instance:

```
>>> SequenceSGR(IntCode.BOLD, IntCode.RED).assemble()
'[1;31m'
```

...although generally speaking it is two of them (ESC [1m and ESC [31m). However, the module can automatically match terminating sequences for any form of input SGRs and translate it to specified format.

It is possible to add of one SGR sequence to another, resulting in a new one with merged params:

```
>>> SequenceSGR('blue') + SequenceSGR('italic')
<SGR[34,3]>
```

Parameters

args – Sequence params. Resulting param order is the same as an argument order. Each argument can be specified as:

- *str* – any of `IntCode` names, case-insensitive;
- *int* – `IntCode` instance or plain integer;
- *SubtypeParam*

- another [SequenceSGR](#) instance (params will be extracted).

assemble()

Build up actual byte sequence and return as an ASCII-encoded string.

Return type

str

property params: List[int | pytermor.ansi.SubtypedParam]

Returns

Sequence params as integers.

pytermor.ansi.NOOP_SEQ = <SGR[NOP][>

Special sequence in case one *has to* provide one or another SGR, but does not want any control sequences to be actually included in the output.

NOOP_SEQ.assemble() returns empty string, NOOP_SEQ.params returns empty list:

```
>>> NOOP_SEQ.assemble()
""
>>> NOOP_SEQ.params
[]
```

Important: Casting to *bool* results in **False** for all NOOP instances in the library ([NOOP_SEQ](#), [NOOP_COLOR](#) and [NOOP_STYLE](#)). This is intended.

Can be safely added to regular [SequenceSGR](#) from any side, as internally [SequenceSGR](#) always makes a new instance with concatenated params from both items, rather than modifies state of either of them:

```
>>> NOOP_SEQ + SequenceSGR(1)
<SGR[1]>
>>> SequenceSGR(3) + NOOP_SEQ
<SGR[3]>
```

class pytermor.ansi.IntCode(value)

Bases: IntEnum

Complete or almost complete list of reliably working SGR param integer codes. Fully interchangeable with plain *int*. Suitable for [SequenceSGR](#) default constructor.

Note: [IntCode](#) predefined constants are omitted from documentation to avoid useless repeats and save space, as most of the time “higher-level” class [SeqIndex](#) is more appropriate, and on top of that, the constant names are literally the same for [SeqIndex](#) and [IntCode](#).

classmethod resolve(name)

Parameters

name (str) –

Return type

[IntCode](#)

class pytermor.ansi.ColorTarget(value)

Bases: Enum

An enumeration.

class pytermor.ansi.SegIndex

Registry of static sequences that can be utilized without implementing an extra logic.

RESET = <SGR[0]>

Hard reset sequence.

BOLD = <SGR[1]>

Bold or increased intensity.

DIM = <SGR[2]>

Faint, decreased intensity.

ITALIC = <SGR[3]>

Italic (*not widely supported*).

UNDERLINED = <SGR[4]>

Underline.

CURLY_UNDERLINED = <SGR[4:3]>

Curly underline.

BLINK_SLOW = <SGR[5]>

Set blinking to < 150 cpm.

BLINK_FAST = <SGR[6]>

Set blinking to 150+ cpm (*not widely supported*).

INVERSED = <SGR[7]>

Swap foreground and background colors.

HIDDEN = <SGR[8]>

Conceal characters (*not widely supported*).

CROSSLINED = <SGR[9]>

Strikethrough.

DOUBLE_UNDERLINED = <SGR[21]>

Double-underline. *On several terminals disables **BOLD** instead.*

FRAMED = <SGR[51]>

Rectangular border (*not widely supported, to say the least*).

OVERLINED = <SGR[53]>

Overline (*not widely supported*).

BOLD_DIM_OFF = <SGR[22]>

Disable BOLD and DIM attributes.

Special aspects... It's impossible to reliably disable them on a separate basis.

ITALIC_OFF = <SGR[23]>

Disable italic.

UNDERLINED_OFF = <SGR[24]>

Disable underlining.

BLINK_OFF = <SGR[25]>

Disable blinking.

INVERSED_OFF = <SGR[27]>

Disable inverting.

HIDDEN_OFF = <SGR[28]>

Disable conecaling.

CROSSLINED_OFF = <SGR[29]>

Disable strikethrough.

FRAMED_OFF = <SGR[54]>

Disable border.

OVERLINED_OFF = <SGR[55]>

Disable overlining.

BLACK = <SGR[30]>

Set text color to 0x000000.

RED = <SGR[31]>

Set text color to 0x800000.

GREEN = <SGR[32]>

Set text color to 0x008000.

YELLOW = <SGR[33]>

Set text color to 0x808000.

BLUE = <SGR[34]>

Set text color to 0x000080.

MAGENTA = <SGR[35]>

Set text color to 0x800080.

CYAN = <SGR[36]>

Set text color to 0x008080.

WHITE = <SGR[37]>

Set text color to 0xc0c0c0.

COLOR_OFF = <SGR[39]>

Reset foreground color.

BG_BLACK = <SGR[40]>

Set background color to 0x000000.

BG_RED = <SGR[41]>

Set background color to 0x800000.

BG_GREEN = <SGR[42]>

Set background color to 0x008000.

BG_YELLOW = <SGR[43]>

Set background color to 0x808000.

BG_BLUE = <SGR[44]>

Set background color to 0x000080.

BG_MAGENTA = <SGR[45]>

Set background color to 0x800080.

BG_CYAN = <SGR[46]>

Set background color to 0x008080.

BG_WHITE = <SGR[47]>

Set background color to 0xc0c0c0.

BG_COLOR_OFF = <SGR[49]>

Reset background color.

GRAY = <SGR[90]>

Set text color to 0x808080.

HI_RED = <SGR[91]>

Set text color to 0xff0000.

HI_GREEN = <SGR[92]>

Set text color to 0x00ff00.

HI_YELLOW = <SGR[93]>

Set text color to 0xffff00.

HI_BLUE = <SGR[94]>

Set text color to 0x0000ff.

HI_MAGENTA = <SGR[95]>

Set text color to 0xff00ff.

HI_CYAN = <SGR[96]>

Set text color to 0x00ffff.

HI_WHITE = <SGR[97]>

Set text color to 0xffffffff.

BG_GRAY = <SGR[100]>

Set background color to 0x808080.

BG_HI_RED = <SGR[101]>

Set background color to 0xff0000.

BG_HI_GREEN = <SGR[102]>

Set background color to 0x00ff00.

BG_HI_YELLOW = <SGR[103]>

Set background color to 0xffff00.

BG_HI_BLUE = <SGR[104]>

Set background color to 0x0000ff.

BG_HI_MAGENTA = <SGR[105]>

Set background color to 0xff00ff.

BG_HI_CYAN = <SGR[106]>

Set background color to 0x00ffff.

BG_HI_WHITE = <SGR[107]>

Set background color to 0xffffffff.

`pytermor.ansi.get_closing_seq(opening_seq)`

Parameters

opening_seq ([SequenceSGR](#)) –

Returns

Return type

[SequenceSGR](#)

`pytermor.ansi.enclose(opening_seq, string)`

Parameters

- **opening_seq** ([SequenceSGR](#)) –
- **string** (*str*) –

Returns

Return type

`str`

`pytermor.ansi.make_color_256(code, target=ColorTarget.FG)`

Wrapper for creation of [SequenceSGR](#) that sets foreground (or background) to one of 256-color palette value.:

```
>>> make_color_256(141)
<SGR[38,5,141]>
```

See also:

[Color256](#) class.

Parameters

- **code** (*int*) – Index of the color in the palette, 0 – 255.
- **target** ([ColorTarget](#)) –

Example

ESC [38;5;141m

Return type

[SequenceSGR](#)

`pytermor.ansi.make_color_rgb(r, g, b, target=ColorTarget.FG)`

Wrapper for creation of [SequenceSGR](#) operating in True Color mode (16M). Valid values for **r**, **g** and **b** are in range of [0; 255]. This range linearly translates into [0x00; 0xFF] for each channel. The result value is composed as “#RRGGBB”. For example, a sequence with color of #ff3300 can be created with:

```
>>> make_color_rgb(255, 51, 0)
<SGR[38,2,255,51,0]>
```

See also:

[ColorRGB](#) class.

Parameters

- **r** (*int*) – Red channel value, 0 – 255.
- **g** (*int*) – Blue channel value, 0 – 255.
- **b** (*int*) – Green channel value, 0 – 255.
- **target** ([ColorTarget](#)) –

Example

ESC [38;2;255;51;0m

Return type

[SequenceSGR](#)

`pytermor.ansi.make_reset_cursor()`

Create CUP sequence without params, which moves the cursor to top left corner of the screen. See [make_set_cursor\(\)](#).

Example

ESC [H

Return type

[SequenceCSI](#)

`pytermor.ansi.make_set_cursor(line=1, column=1)`

Create CUP sequence that moves the cursor to specified amount `line` and `column`. The values are 1-based, i.e. (1; 1) is top left corner of the screen.

Note: Both sequence params are optional and defaults to 1 if omitted, e.g. ESC [;3H is effectively ESC [1;3H, and ESC [4H is the same as ESC [4;H or ESC [4;1H.

Example

ESC [9;15H

Return type

[SequenceCSI](#)

`pytermor.ansi.make_move_cursor_up(lines=1)`

Create CUU sequence that moves the cursor up by specified amount of `lines`. If the cursor is already at the top of the screen, this has no effect.

Example

ESC [2A

Return type

[SequenceCSI](#)

`pytermor.ansi.make_move_cursor_down(lines=1)`

Create CUD sequence that moves the cursor down by specified amount of `lines`. If the cursor is already at the bottom of the screen, this has no effect.

Example

ESC [3B

Return type

[SequenceCSI](#)

`pytermor.ansi.make_move_cursor_left(columns=1)`

Create CUB sequence that moves the cursor left by specified amount of `columns`. If the cursor is already at the left edge of the screen, this has no effect.

Example

ESC [4D

Return type

[SequenceCSI](#)

`pytermor.ansi.make_move_cursor_right(columns=1)`

Create CUF sequence that moves the cursor right by specified amount of `columns`. If the cursor is already at the right edge of the screen, this has no effect.

Example

ESC [5C

Return type

[SequenceCSI](#)

`pytermor.ansi.make_move_cursor_up_to_start(lines=1)`

Create CPL sequence that moves the cursor to the beginning of the line and up by specified amount of lines.

Example

ESC [2F

Return type

[SequenceCSI](#)

`pytermor.ansi.make_move_cursor_down_to_start(lines=1)`

Create CNL sequence that moves the cursor to the beginning of the line and down by specified amount of lines.

Example

ESC [3E

Return type

[SequenceCSI](#)

`pytermor.ansi.make_set_cursor_line(line=1)`

Create VPA sequence that sets cursor vertical position to line.

Example

ESC [9d

Return type

[SequenceCSI](#)

`pytermor.ansi.make_set_cursor_column(column=1)`

Create CHA sequence that sets cursor horizontal position to column.

Parameters

column (*int*) – New cursor horizontal position.

Example

ESC [15G

Return type

[SequenceCSI](#)

`pytermor.ansi.make_query_cursor_position()`

Create QCP sequence that requests an output device to respond with a structure containing current cursor coordinates (RCP).

Warning: Sending this sequence to the terminal may **block** infinitely. Consider using a thread or set a timeout for the main thread using a signal.

Example

ESC [6n

Return type

[SequenceCSI](#)

`pytermor.ansi.make_erase_in_display(mode=0)`

Create ED sequence that clears a part of the screen or the entire screen. Cursor position does not change.

Parameters

mode (*int*) – Sequence operating mode.

- If set to 0, clear from cursor to the end of the screen.
- If set to 1, clear from cursor to the beginning of the screen.
- If set to 2, clear the entire screen.

- If set to 3, clear terminal history (xterm only).

Example

```
ESC [0J
```

Return type

[SequenceCSI](#)

`pytermor.ansi.make_clear_display_after_cursor()`

Create ED sequence that clears a part of the screen from cursor to the end of the screen. Cursor position does not change.

Example

```
ESC [0J
```

Return type

[SequenceCSI](#)

`pytermor.ansi.make_clear_display_before_cursor()`

Create ED sequence that clears a part of the screen from cursor to the beginning of the screen. Cursor position does not change.

Example

```
ESC [1J
```

Return type

[SequenceCSI](#)

`pytermor.ansi.make_clear_display()`

Create ED sequence that clears an entire screen. Cursor position does not change.

Example

```
ESC [2J
```

Return type

[SequenceCSI](#)

`pytermor.ansi.make_clear_history()`

Create ED sequence that clears history, i.e., invisible lines on the top that can be scrolled back down. Cursor position does not change. This is a xterm extension.

Example

```
ESC [3J
```

Return type

[SequenceCSI](#)

`pytermor.ansi.make_erase_in_line(mode=0)`

Create EL sequence that clears a part of the line or the entire line at the cursor position. Cursor position does not change.

Parameters

mode (*int*) – Sequence operating mode.

- If set to 0, clear from cursor to the end of the line.
- If set to 1, clear from cursor to the beginning of the line.
- If set to 2, clear the entire line.

Example

```
ESC [0K
```

Return type

[SequenceCSI](#)

`pytermor.ansi.make_clear_line_after_cursor()`

Create EL sequence that clears a part of the line from cursor to the end of the same line. Cursor position does not change.

Example

ESC [0K

Return type

[SequenceCSI](#)

`pytermor.ansi.make_clear_line_before_cursor()`

Create EL sequence that clears a part of the line from cursor to the beginning of the same line. Cursor position does not change.

Example

ESC [1K

Return type

[SequenceCSI](#)

`pytermor.ansi.make_clear_line()`

Create EL sequence that clears an entire line at the cursor position. Cursor position does not change.

Example

ESC [2K

Return type

[SequenceCSI](#)

`pytermor.ansi.make_show_cursor()`

C

Return type

[SequenceCSI](#)

`pytermor.ansi.make_hide_cursor()`

C

Return type

[SequenceCSI](#)

`pytermor.ansi.make_save_screen()`

C

Return type

[SequenceCSI](#)

`pytermor.ansi.make_restore_screen()`

C

Return type

[SequenceCSI](#)

`pytermor.ansi.make_enable_alt_screen_buffer()`

C

Return type

[SequenceCSI](#)

`pytermor.ansi.make_disable_alt_screen_buffer()`

C

Return type

[SequenceCSI](#)

pytermor.ansi.make_hyperlink()

Create a hyperlink in the text (*supported by limited amount of terminals*). Note that a complete set of commands to define a hyperlink consists of 4 of them (two *OSC-8* and two *ST*).

See also:

`compose_hyperlink()`.

Return type

`SequenceOSC`

pytermor.ansi.compose_hyperlink(url, label=None)

Syntax: (OSC 8 ; ;) (url) (ST) (label) (OSC 8 ; ;) (ST), where *OSC* is ESC].

Parameters

- **url** (*str*) –
- **label** (*Optional[str]*) –

Example

ESC]8;;http://localhost ESC \Text ESC]8;; ESC \

Return type

`str`

pytermor.ansi.make_save_cursor_position()**Example**

ESC 7

Return type

`SequenceFp`

pytermor.ansi.make_restore_cursor_position()**Example**

ESC 8

Return type

`SequenceFp`

2.2 pytermor.color

Color main classes and helper functions.

Module Attributes

| | |
|----------------------------|---|
| <code>CDT</code> | CDT (Color descriptor type) represents a RGB color value. |
| <code>CT</code> | Any non-abstract <code>IColor</code> type. |
| <code>NOOP_COLOR</code> | Special <code>IColor</code> instance always rendering into empty string. |
| <code>DEFAULT_COLOR</code> | Special <code>IColor</code> instance rendering to SGR sequence telling the terminal to reset fg or bg color; same for <i>TmuxRenderer</i> . |

Functions

| | |
|--|---|
| <code>approximate(hex_value[, color_type, max_results])</code> | Search for nearest to <code>hex_value</code> colors of specified <code>color_type</code> and return the first <code>max_results</code> of them. |
| <code>find_closest(hex_value[, color_type])</code> | Search and return nearest to <code>hex_value</code> instance of specified <code>color_type</code> . |
| <code>resolve_color(subject[, color_type, ...])</code> | Suggested usage is to transform the user input in a free form in an attempt to find any matching color. |

Classes

| | |
|--|---|
| <code>ApxResult(color, distance)</code> | Approximation result. |
| <code>Color16(hex_value, code_fg, code_bg[, name, ...])</code> | Variant of a <code>IColor</code> operating within the most basic color set -- xterm-16 . |
| <code>Color256(hex_value, code[, name, register, ...])</code> | Variant of a <code>IColor</code> operating within relatively modern xterm-256 indexed color table. |
| <code>ColorRGB(hex_value[, name, register, index, ...])</code> | Variant of a <code>IColor</code> operating within RGB color space. |
| <code>IColor(hex_value[, name])</code> | Abstract superclass for other Colors. |

Exceptions

| |
|--|
| <code>ColorCodeConflictError(code, existing_color, ...)</code> |
| <code>ColorNameConflictError(tokens, ...)</code> |

pytermor.color.CDT

CDT represents a RGB color value. Primary handler is `resolve_color()`. Valid values include:

- *str* with a color name in any form distinguishable by the color resolver; the color lists can be found at: [ANSI preset list](#) and [ColorRGB collection](#);
- *str* starting with a “#” and consisting of 6 more hexadecimal characters, case insensitive (RGB regular form), e.g. “#0b0cca”;
- *str* starting with a “#” and consisting of 3 more hexadecimal characters, case insensitive (RGB short form), e.g. “#666”;
- *int* in a [0; 0xffff] range.

alias of `TypeVar('CDT', int, str)`

pytermor.color.CT

Any non-abstract `IColor` type.

alias of `TypeVar('CT', bound=IColor)`

class `pytermor.color.ApxResult(color, distance)`

Bases: `Generic[CT]`

Approximation result.

color: CT

Found IColor instance.

distance: int

Squared sRGB distance from this instance to the approximation target.

property distance_real: float

Actual distance from instance to target:

$$distance_{real} = \sqrt{distance}$$

class pytermor.color.Color16(hex_value, code_fg, code_bg, name=None, *, register=False, index=False, aliases=None)

Bases: IColor

Variant of a IColor operating within the most basic color set – **xterm-16**. Represents basic color-setting SGRs with primary codes 30-37, 40-47, 90-97 and 100-107 (see [Color16 presets](#)).

Note: Arguments register, index and aliases are *kwonly*-type args.

Parameters

- **hex_value** (int) – Color RGB value, e.g. 0x800000.
- **code_fg** (int) – Int code for a foreground color setup, e.g. 30.
- **code_bg** (int) – Int code for a background color setup. e.g. 40.
- **name** (str) – Name of the color, e.g. “red”.
- **register** (bool) – If *True*, add color to registry for resolving by name.
- **index** (bool) – If *True*, add color to approximation index.
- **aliases** (list[str]) – Alternative color names (used in [resolve_color\(\)](#)).

property code_fg: int

Int code for a foreground color setup, e.g. 30.

property code_bg: int

Int code for a background color setup. e.g. 40.

classmethod get_by_code(code)

Get a [Color16](#) instance with specified code. Only *foreground* (=text) colors are indexed, therefore it is impossible to look up for a [Color16](#) with given background color.

Parameters

code (int) – Foreground integer code to look up for (see [Color16 presets](#)).

Raises

KeyError – If no color with specified code is found.

Return type

[Color16](#)

to_sgr(target=ColorTarget.FG, upper_bound=None)

Make an [SGR sequence](#) out of IColor. Used by [SgrRenderer](#).

Parameters

- **target** (ColorTarget) –
- **upper_bound** (Optional[Type[IColor]]) – Required result IColor type upper boundary, i.e., the maximum acceptable color class, which will be the basis for SGR being made. See [Color256.to_sgr\(\)](#) for the details.

Return type[SequenceSGR](#)**to_tmux**(*target=ColorTarget.FG*)

Make a tmux markup directive, which will change the output color to this color's value (after tmux processes and prints it). Used by [TmuxRenderer](#).

Parameters**target** ([ColorTarget](#)) –**Return type**

str

classmethod approximate(*hex_value, max_results=1*)

Search for the colors nearest to *hex_value* and return the first *max_results*.

See[color.approximate\(\)](#) for the details**Parameters**

- **hex_value** (*int*) – Target RGB value.
- **max_results** (*int*) – Result limit.

Return type[List](#)[[ApxResult](#)[[CT](#)]]**classmethod find_closest**(*hex_value*)

Search and return nearest to *hex_value* color instance.

See[color.find_closest\(\)](#) for the details**Parameters****hex_value** (*int*) – Target RGB value.**Return type**[CT](#)**format_value**(*prefix='0x'*)

Format color value as “0xRRGGBB”.

Parameters**prefix** (*str*) – Can be customized.**Return type**

str

property hex_value: [int](#)

Color value, e.g. 0x3aeb0c.

property name: [str](#) | [None](#)

Color name, e.g. “navy-blue”.

classmethod resolve(*name*)

Case-insensitive search through registry contents.

See[resolve_color\(\)](#) for the details**Parameters****name** (*str*) – IColor name to search for.**Return type**[CT](#)

to_hsv()

Wrapper around [hex_to_hsv\(\)](#) for concrete instance.

See

[hex_to_hsv\(\)](#) for the details

Return type

[Union](#)[[HSV](#), [Tuple](#)[float, float, float]]

to_rgb()

Wrapper around [to_rgb\(\)](#) for concrete instance.

See

[to_rgb\(\)](#) for the details

Return type

[Union](#)[[RGB](#), [Tuple](#)[int, int, int]]

class `pytermor.color.Color256`(*hex_value*, *code*, *name*=None, *, *register*=False, *index*=False, *aliases*=None, *color16_equiv*=None)

Bases: `IColor`

Variant of a `IColor` operating within relatively modern **xterm-256** indexed color table. Represents SGR complex codes `38;5;* and 48;5;*` (see [Color256 presets](#)).

Note: Arguments `register`, `index`, `aliases` and `color16_equiv` are *kwonly*-type args.

Parameters

- **hex_value** (*int*) – Color RGB value, e.g. `0x5f0000`.
- **code** (*int*) – Int code for a color setup, e.g. `52`.
- **name** (*str*) – Name of the color, e.g. “dark-red”.
- **register** (*bool*) – If *True*, add color to registry for resolving by name.
- **index** (*bool*) – If *True*, add color to approximation index.
- **aliases** (*t.List[str]*) – Alternative color names (used in [resolve_color\(\)](#)).
- **color16_equiv** ([Color16](#)) – [Color16](#) counterpart (applies only to codes 0-15).

to_sgr(*target*=`ColorTarget.FG`, *upper_bound*=None)

Make an [SGR sequence](#) out of `IColor`. Used by [SgrRenderer](#).

Each `IColor` type represents one SGR type in the context of colors. For example, if `upper_bound` is set to [Color16](#), the resulting SGR will always be one of 16-color index table, even if the original color was of different type – it will be approximated just before the SGR assembling.

The reason for this is the necessity to provide a similar look for all users with different terminal settings/capabilities. When the library sees that user’s output device supports 256 colors only, it cannot assemble True Color SGRs, because they will be ignored (if we are lucky), or displayed in a glitchy way, or mess up the output completely. The good news is that the process is automatic and in most cases the library will manage the transformations by itself. If it’s not the case, the developer can correct the behaviour by overriding the renderers’ output mode. See [SgrRenderer](#) and [OutputMode](#) docs.

Parameters

- **target** ([ColorTarget](#)) –
- **upper_bound** (*Optional*[*Type*[`IColor`]]) – Required result `IColor` type upper boundary, i.e., the maximum acceptable color class, which will be the basis for SGR being made.

Return type[SequenceSGR](#)**to_tmux**(*target*=*ColorTarget.FG*)

Make a tmux markup directive, which will change the output color to this color's value (after tmux processes and prints it). Used by [TmuxRenderer](#).

Parameters**target** (*ColorTarget*) –**Return type**

str

property code: int

Int code for a color setup, e.g. 52.

classmethod get_by_code(*code*)

Get a [Color256](#) instance with specified code (=position in the index).

Parameters**code** (*int*) – Color code to look up for (see [Color256 presets](#)).**Raises****KeyError** – If no color with specified code is found.**Return type**[Color256](#)**classmethod approximate**(*hex_value*, *max_results*=1)

Search for the colors nearest to *hex_value* and return the first *max_results*.

See[color.approximate\(\)](#) for the details**Parameters**

- **hex_value** (*int*) – Target RGB value.
- **max_results** (*int*) – Result limit.

Return typeList[[ApxResult\[CT\]](#)]**classmethod find_closest**(*hex_value*)

Search and return nearest to *hex_value* color instance.

See[color.find_closest\(\)](#) for the details**Parameters****hex_value** (*int*) – Target RGB value.**Return type***CT***format_value**(*prefix*='0x')

Format color value as “0xRRGGBB”.

Parameters**prefix** (*str*) – Can be customized.**Return type**

str

property hex_value: int

Color value, e.g. 0x3aeb0c.

property name: `str` | `None`

Color name, e.g. “navy-blue”.

classmethod `resolve(name)`

Case-insensitive search through registry contents.

See

[`resolve_color\(\)`](#) for the details

Parameters

name (`str`) – IColor name to search for.

Return type

`CT`

to_hsv()

Wrapper around [`hex_to_hsv\(\)`](#) for concrete instance.

See

[`hex_to_hsv\(\)`](#) for the details

Return type

`Union[HSV, Tuple[float, float, float]]`

to_rgb()

Wrapper around [`to_rgb\(\)`](#) for concrete instance.

See

[`to_rgb\(\)`](#) for the details

Return type

`Union[RGB, Tuple[int, int, int]]`

class `pytermor.color.ColorRGB(hex_value, name=None, *, register=False, index=False, aliases=None, variation_map=None)`

Bases: `IColor`

Variant of a `IColor` operating within RGB color space. Presets include *es7s named colors*, a unique collection of colors compiled from several known sources after careful selection. However, it’s not limited to aforementioned color list and can be easily extended.

Note: Arguments `register`, `index`, `aliases` and `variation_map` are *kwonly*-type args.

Parameters

- **hex_value** (`int`) – Color RGB value, e.g. 0x73a9c2.
- **name** (`str`) – Name of the color, e.g. “moonstone-blue”.
- **register** (`bool`) – If `True`, add color to registry for resolving by name.
- **index** (`bool`) – If `True`, add color to approximation index.
- **aliases** (`t.List[str]`) – Alternative color names (used in [`resolve_color\(\)`](#)).
- **variation_map** (`t.Dict[int, str]`) – Mapping {`int`: `str`}, where keys are hex values, and values are variation names.

to_sgr(target=ColorTarget.FG, upper_bound=None)

Make an *SGR sequence* out of `IColor`. Used by [`SgrRenderer`](#).

Parameters

- **target** (`ColorTarget`) –

- **upper_bound** (*Optional[Type[IColor]]*) – Required result IColor type upper boundary, i.e., the maximum acceptable color class, which will be the basis for SGR being made. See [Color256.to_sgr\(\)](#) for the details.

Return type[SequenceSGR](#)**to_tmux**(*target=ColorTarget.FG*)

Make a tmux markup directive, which will change the output color to this color's value (after tmux processes and prints it). Used by [TmuxRenderer](#).

Parameters**target** ([ColorTarget](#)) –**Return type**

str

property base: [Optional\[CT\]](#)

Parent color for color variations. Empty for regular colors.

property variations: [Dict\[str, CT\]](#)

List of color variations. *Variation* of a color is a similar color with almost the same name, but with differing suffix. The main idea of variations is to provide a basis for fuzzy searching, which will return several results for one query; i.e., when the query matches a color with variations, the whole color family can be considered a match, which should increase searching speed.

classmethod approximate(*hex_value, max_results=1*)

Search for the colors nearest to *hex_value* and return the first *max_results*.

See[color.approximate\(\)](#) for the details**Parameters**

- **hex_value** (*int*) – Target RGB value.
- **max_results** (*int*) – Result limit.

Return type[List\[ApxResult\[CT\]\]](#)**classmethod find_closest**(*hex_value*)

Search and return nearest to *hex_value* color instance.

See[color.find_closest\(\)](#) for the details**Parameters****hex_value** (*int*) – Target RGB value.**Return type**[CT](#)**format_value**(*prefix='0x'*)

Format color value as “0xRRGGBB”.

Parameters**prefix** (*str*) – Can be customized.**Return type**

str

property hex_value: [int](#)

Color value, e.g. 0x3aeb0c.

property name: `str` | `None`

Color name, e.g. “navy-blue”.

classmethod `resolve(name)`

Case-insensitive search through registry contents.

See

[`resolve_color\(\)`](#) for the details

Parameters

name (`str`) – IColor name to search for.

Return type

`CT`

to_hsv()

Wrapper around [`hex_to_hsv\(\)`](#) for concrete instance.

See

[`hex_to_hsv\(\)`](#) for the details

Return type

`Union[HSV, Tuple[float, float, float]]`

to_rgb()

Wrapper around [`to_rgb\(\)`](#) for concrete instance.

See

[`to_rgb\(\)`](#) for the details

Return type

`Union[RGB, Tuple[int, int, int]]`

`pytermor.color.NOOP_COLOR = <_NoopColor[NOP]>`

Special IColor instance always rendering into empty string.

Important: Casting to `bool` results in **False** for all NOOP instances in the library ([`NOOP_SEQ`](#), [`NOOP_COLOR`](#) and [`NOOP_STYLE`](#)). This is intended.

`pytermor.color.DEFAULT_COLOR = <_DefaultColor[DEF]>`

Special IColor instance rendering to SGR sequence telling the terminal to reset fg or bg color; same for [`TmuxRenderer`](#). Useful when you inherit some [`Style`](#) with fg or bg color which you don’t need, but at the same time you don’t actually want to set up any color whatsoever (as using [`NOOP_COLOR`](#) will result in an inheritance of parent style color instead of terminal default).

```
>>> DEFAULT_COLOR.to_sgr(bg=False)
<SGR[39]>
```

```
>>> import pytermor as pt
>>> pt.Style(pt.Styles.CRITICAL, fg=NOOP_COLOR)
<Style[hi-white:X160[D70000]]>
```

```
>>> pt.Style(pt.Styles.CRITICAL, fg=DEFAULT_COLOR)
<Style[DEF:X160[D70000]]>
```

`pytermor.color.resolve_color(subject, color_type=None, approx_cache=True)`

Suggested usage is to transform the user input in a free form in an attempt to find any matching color. The method operates in three different modes depending on arguments: resolving by name, resolving by value and instantiating.

Resolving by name: If *subject* is a *str* starting with any character except #, case-insensitive search through the registry of *color_type* colors is performed. In this mode the algorithm looks for the instance which has all the words from *subject* as parts of its name (the order must be the same). Color names are stored in registries as sets of tokens, which allows to use any form of input and get the correct result regardless. The only requirement is to separate the words in any matter (see the example below), so that they could be split to tokens which will be matched with the registry keys.

If *color_type* is omitted, all the registries will be requested in this order: [*Color16*, *Color256*, *ColorRGB*]. Should any registry find a full match, the resolving is stopped and the result is returned.

```
>>> resolve_color('deep-sky-blue-7')
<Color256[x23(#005f5f deep-sky-blue-7)]>
>>> resolve_color('DEEP SKY BLUE 7')
<Color256[x23(#005f5f deep-sky-blue-7)]>
>>> resolve_color('DeepSkyBlue7')
<Color256[x23(#005f5f deep-sky-blue-7)]>
```

```
>>> resolve_color('deepskyblue7')
Traceback (most recent call last):
LookupError: Color 'deepskyblue7' was not found in any registry
```

Resolving by value or instantiating: if *subject* is specified as:

- 1) *int* in [0x000000; 0xffffffff] range, or
- 2) *str* in full hexadecimal form: “#RRGGBB”, or
- 3) *str* in short hexadecimal form: “#RGB”,

and *color_type* is **present**, the result will be the best *subject* approximation to corresponding color index. Note that this value is expected to differ from the requested one (and sometimes differs a lot). If *color_type* is **missing**, no searching is performed; instead a new nameless *ColorRGB* is instantiated and returned.

Note: The instance created this way is an “unbound” color, i.e. it does not end up in a registry or an index bound to its type, thus the resolver and approximation algorithms are unaware of its existence. The rationale for this is to keep the registries clean and stateless to ensure that the same input always resolves to the same output.

```
>>> resolve_color("#333")
<ColorRGB[#333333]>
>>> resolve_color(0xfafef0)
<ColorRGB[#fafef0]>
```

Parameters

- **subject** (*str/int*) – IColor name or hex value to search for. See *CDT*.
- **color_type** (*Optional[Type[CT]]*) – Target color type (*Color16*, *Color256* or *ColorRGB*).
- **approx_cache** – Use the approximation cache for **resolving by value** mode or ignore it. For the details see *find_closest* and *approximate* which are actually invoked by this method under the hood.

Raises

LookupError – If nothing was found in either of registries.

Returns

IColor instance with specified name or value.

Return type*CT*`pytermor.color.find_closest(hex_value, color_type=None)`

Search and return nearest to `hex_value` instance of specified `color_type`. If `color_type` is omitted, search for the closest [Color256](#) element.

Method is useful for finding applicable color alternatives if user's terminal is incapable of operating in more advanced mode. Usually it is done by the library automatically and transparently for both the developer and the end-user.

Note: This method caches the results, i.e., the same search query will from then onward result in the same return value without the necessity of iterating through the color index. If that's not applicable, use similar method [approximate\(\)](#), which is unaware of caching mechanism altogether.

Parameters

- **hex_value** (*int*) – Target color RGB value.
- **color_type** (*Optional[Type[CT]]*) – Target color type ([Color16](#), [Color256](#) or [ColorRGB](#)).

Returns

Nearest to `hex_value` color instance of specified type.

Return type*CT*`pytermor.color.approximate(hex_value, color_type=None, max_results=1)`

Search for nearest to `hex_value` colors of specified `color_type` and return the first `max_results` of them. If `color_type` is omitted, search for the closest [Color256](#) instances. This method is similar to the [find_closest\(\)](#), although they differ in some aspects:

- [approximate\(\)](#) can return more than one result;
- [approximate\(\)](#) returns not just a `IColor` instance(s), but also a number equal to squared distance to the target color for each of them;
- [find_closest\(\)](#) caches the results, while [approximate\(\)](#) ignores the cache completely.

Parameters

- **hex_value** (*int*) – Target color RGB value.
- **color_type** (*Optional[Type[CT]]*) – Target color type ([Color16](#), [Color256](#) or [ColorRGB](#)).
- **max_results** (*int*) – Return no more than `max_results` items.

Returns

Pairs of closest `IColor` instance(s) found with their distances to the target color, sorted by distance descending, i.e., element at index 0 is the closest color found, paired with its distance to the target; element with index 1 is second-closest color (if any) and corresponding distance value, etc.

Return type*List[ApxResult[CT]]***exception** `pytermor.color.ColorNameConflictError(tokens, existing_color, new_color)`

Bases: `Exception`

with_traceback()

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception `pytermor.color.ColorCodeConflictError(code, existing_color, new_color)`

Bases: Exception

with_traceback()

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

2.3 pytermor.config

Library fine tuning.

Functions

| | |
|----------------------------------|---|
| <code>get_config()</code> | Return the current config instance. |
| <code>init_config()</code> | Reset all config vars to default values. |
| <code>replace_config(cfg)</code> | Replace the global config instance with provided one. |

Classes

| | |
|---|------------------------------------|
| <code>Config([renderer_class, output_mode, ...])</code> | Configuration variables container. |
|---|------------------------------------|

class `pytermor.config.Config(renderer_class=<factory>, output_mode=<factory>, trace_renders=<factory>, prefer_rgb=<factory>)`

Configuration variables container. Values can be modified in two ways:

- 1) create new `Config` instance from scratch and activate with `replace_config()`;
- 2) or preliminarily set the corresponding environment variables to intended values, and the default config instance will catch them up on initialization.

See also:

Environment variable list is located in [Configuration](#) guide section.

Parameters

- **renderer_class** (*str*) – `renderer_class`
- **output_mode** (*str*) – `output_mode`
- **trace_renders** (*bool*) – Set to `True` to log hex dumps of rendered strings. Note that default handler is `logging.NullHandler` with `WARNING` level, so in order to see the traces attached handler is required.
- **prefer_rgb** (*bool*) – By default SGR renderer transforms `Color256` instances to ESC `[38;5;<N>m` sequences even if True Color support is detected. With this flag set to `True`, the behaviour is different, and `Color256` will be rendered as ESC `[38;2;<R>;<G>;m` sequence (if True Color is available).

`pytermor.config.get_config()`

Return the current config instance.

Return type

`Config`

`pytermor.config.init_config()`

Reset all config vars to default values.

`pytermor.config.replace_config(cfg)`

Replace the global config instance with provided one.

2.4 pytermor.conv

A

Functions

| | |
|------------------------------------|--|
| <code>hex_to_hsv(hex_value)</code> | Transforms <code>hex_value</code> in <i>int</i> form into named tuple consisting of three floats corresponding to hue , saturation and value channel values respectively. |
| <code>hex_to_rgb(hex_value)</code> | Transforms <code>hex_value</code> in <i>int</i> format into a tuple of three integers corresponding to red , blue and green channel value respectively. |
| <code>hsv_to_hex()</code> | Transforms HSV value in three-floats form (where $0 \leq h < 360$, $0 \leq s \leq 1$, and $0 \leq v \leq 1$) into an one-integer form. |
| <code>hsv_to_rgb()</code> | Transforms HSV value in three-floats form (where $0 \leq h < 360$, $0 \leq s \leq 1$, and $0 \leq v \leq 1$) into RGB three-integer form ([0; 255], [0; 255], [0; 255]). |
| <code>lab_to_xyz()</code> | |
| <code>rgb_to_hex()</code> | Transforms RGB value in a three-integers form ([0; 255], [0; 255], [0; 255]) to an one-integer form. |
| <code>rgb_to_hsv()</code> | Transforms RGB value in a three-integers form ([0; 255], [0; 255], [0; 255]) to an HSV in three-floats form such as ($0 \leq h < 360$, $0 \leq s \leq 1$, and $0 \leq v \leq 1$). |
| <code>rgb_to_xyz()</code> | |
| <code>xyz_to_lab()</code> | |
| <code>xyz_to_rgb()</code> | |

Classes

| | |
|--|--|
| <code>HSV(hue, saturation, value)</code> | Create new instance of HSV(hue, saturation, value) |
| <code>LAB(L, a, b)</code> | Create new instance of LAB(L, a, b) |
| <code>RGB(red, green, blue)</code> | Create new instance of RGB(red, green, blue) |
| <code>XYZ(x, y, z)</code> | Create new instance of XYZ(x, y, z) |

class `pytermor.conv.RGB(red, green, blue)`

Bases: `NamedTuple`

Create new instance of RGB(red, green, blue)

red: int

Red channel value (0—255)

green: int

Green channel value (0—255)

blue: int

Blue channel value (0—255)

count(*value*, /)

Return number of occurrences of value.

index(*value*, *start*=0, *stop*=9223372036854775807, /)

Return first index of value.

Raises ValueError if the value is not present.

pytermor.conv.hex_to_rgb(*hex_value*)Transforms *hex_value* in *int* format into a tuple of three integers corresponding to **red**, **blue** and **green** channel value respectively. Values are within [0; 255] range.

```
>>> hex_to_rgb(0x80ff80)
RGB(red=128, green=255, blue=128)
```

Parameters**hex_value** (*int*) – RGB integer value.**Returns**

tuple with R, G, B channel values.

Return type

RGB

pytermor.conv.rgb_to_hex(*rgb*: RGB) → int**pytermor.conv.rgb_to_hex**(*r*: int, *g*: int, *b*: int) → int

Transforms RGB value in a three-integers form ([0; 255], [0; 255], [0; 255]) to an one-integer form.

```
>>> hex(rgb_to_hex(0, 128, 0))
'0x80000'
>>> hex(rgb_to_hex(RGB(red=16, green=16, blue=0)))
'0x101000'
```

class **pytermor.conv.HSV**(*hue*, *saturation*, *value*)Bases: `NamedTuple`Create new instance of HSV(*hue*, *saturation*, *value*)**hue: float**

Hue channel value (0—360)

saturation: float

Saturation channel value (0.0—1.0)

value: float

Value channel value (0.0—1.0)

count(*value*, /)

Return number of occurrences of value.

index(value, start=0, stop=9223372036854775807, /)

Return first index of value.

Raises ValueError if the value is not present.

pytermor.conv.hsv_to_rgb(hsv: HSV) → RGB

pytermor.conv.hsv_to_rgb(h: float, s: float, v: float) → RGB

Transforms HSV value in three-floats form (where $0 \leq h < 360$, $0 \leq s \leq 1$, and $0 \leq v \leq 1$) into RGB three-integer form ([0; 255], [0; 255], [0; 255]).

```
>>> hsv_to_rgb(270, 2/3, 0.75)
RGB(red=128, green=64, blue=192)
>>> hsv_to_rgb(HSV(hue=120, saturation=0.5, value=0.77))
RGB(red=99, green=197, blue=99)
```

pytermor.conv.rgb_to_hsv(rgb: RGB) → HSV

pytermor.conv.rgb_to_hsv(r: int, g: int, b: int) → HSV

Transforms RGB value in a three-integers form ([0; 255], [0; 255], [0; 255]) to an HSV in three-floats form such as ($0 \leq h < 360$, $0 \leq s \leq 1$, and $0 \leq v \leq 1$).

```
>>> rgb_to_hsv(0, 0, 255)
HSV(hue=240.0, saturation=1.0, value=1.0)
```

Parameters

- **r** – value of red channel.
- **g** – value of green channel.
- **b** – value of blue channel.

Returns

H, S, V channel values correspondingly.

pytermor.conv.hex_to_hsv(hex_value)

Transforms hex_value in int form into named tuple consisting of three floats corresponding to **hue**, **saturation** and **value** channel values respectively. Hue is within [0, 359] range, both saturation and value are within [0; 1] range.

```
>>> hex_to_hsv(0x999999)
HSV(hue=0.0, saturation=0.0, value=0.6)
```

Parameters

hex_value (int) – RGB value.

Returns

named tuple with H, S and V channel values

Return type

HSV

pytermor.conv.hsv_to_hex(hsv: HSV) → int

pytermor.conv.hsv_to_hex(h: float, s: float, v: float) → int

Transforms HSV value in three-floats form (where $0 \leq h < 360$, $0 \leq s \leq 1$, and $0 \leq v \leq 1$) into an one-integer form.

```
>>> hex(hsv_to_hex(90, 0.5, 0.5))
'0x608040'
```

Parameters

- **h** – hue channel value.
- **s** – saturation channel value.
- **v** – value channel value.

Returns

RGB value.

class pytermor.conv.**XYZ**(x, y, z)

Bases: NamedTuple

Create new instance of XYZ(x, y, z)

count(value, /)

Return number of occurrences of value.

index(value, start=0, stop=9223372036854775807, /)

Return first index of value.

Raises ValueError if the value is not present.

x: float

X channel value (0.0—1.0+)

y: float

Luminance (0.0—1.0)

z: float

Quasi-equal to blue (0.0—1.0+)

class pytermor.conv.**LAB**(L, a, b)

Bases: NamedTuple

Create new instance of LAB(L, a, b)

count(value, /)

Return number of occurrences of value.

index(value, start=0, stop=9223372036854775807, /)

Return first index of value.

Raises ValueError if the value is not present.

L: float

Luminance (0—100)

a: float

Green–magenta axis (-100—100 in general, but can be less/more)

b: float

Blue–yellow axis (-100—100 in general, but can be less/more)

2.5 pytermor.cval

Color preset list:

- 16x *Color16* (16 unique)
- 256x *Color256* (247 unique)
- 1649x *ColorRGB* (1644 unique)

Classes

ColorValuesRGB()

ColorValuesXterm()

| | |
|-----------|----------------------------------|
| <i>cv</i> | alias of <i>ColorValuesXterm</i> |
|-----------|----------------------------------|

| | |
|------------|--------------------------------|
| <i>cvr</i> | alias of <i>ColorValuesRGB</i> |
|------------|--------------------------------|

class pytermor.cval.ColorValuesXterm

class pytermor.cval.ColorValuesRGB

pytermor.cval.cv

alias of *ColorValuesXterm*

pytermor.cval.cvr

alias of *ColorValuesRGB*

2.6 pytermor.exception

Exceptions

ArgTypeError(var_name[, arg_name, suggestion])

ConflictError

LogicError

UserAbort

UserCancel

exception pytermor.exception.LogicError

Bases: Exception

with_traceback()

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception pytermor.exception.ConflictError

Bases: Exception

with_traceback()

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception `pytermor.exception.UserCancel`Bases: `Exception`**with_traceback()**

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception `pytermor.exception.UserAbort`Bases: `Exception`**with_traceback()**

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

2.7 pytermor.filter

Formatters for prettier output and utility classes to avoid writing boilerplate code when dealing with escape sequences. Also includes several Python Standard Library methods rewritten for correct work with strings containing control sequences.

Module Attributes

| | |
|-------------------------------|---|
| <code>CONTROL_CHARS</code> | Set of ASCII control characters: 0x00-0x08, 0x0E-0x1F and 0x7F. |
| <code>WHITESPACE_CHARS</code> | Set of ASCII whitespace characters: 0x09-0x0D and 0x20. |
| <code>PRINTABLE_CHARS</code> | Set of ASCII "normal" characters, i.e. non-control and non-space ones: letters, digits and punctuation (0x21-0x7E). |
| <code>NON_ASCII_CHARS</code> | Set of bytes that are invalid in ASCII-7 context: 0x80-0xFF. |
| <code>IT</code> | input-type |
| <code>OT</code> | output-type |
| <code>PTT</code> | pattern type |
| <code>RPT</code> | replacer type |
| <code>MPT</code> | # map |

Functions

| | |
|---|--|
| <code>apply_filters(inp, *args)</code> | Method for applying dynamic filter list to a target string/bytes. |
| <code>center_sgr(s, width[, fillchar, actual_len])</code> | SGR-formatting-aware implementation of <code>str.center</code> . |
| <code>chunk(items, size)</code> | Split item list into chunks of size <code>size</code> and return these chunks as <i>tuples</i> . |
| <code>dump(data[, label, max_len_shift])</code> | |
| <code>ljust_sgr(s, width[, fillchar, actual_len])</code> | SGR-formatting-aware implementation of <code>str.ljust</code> . |
| <code>pad(n)</code> | Convenient method to use instead of <code>"" . ljust(n)</code> . |
| <code>padv(n)</code> | Convenient method to use instead of <code>"\n" * n</code> . |
| <code>rjust_sgr(s, width[, fillchar, actual_len])</code> | SGR-formatting-aware implementation of <code>str.rjust</code> . |

Classes

| | |
|---|--|
| <i>AbstractStringTracer</i> (char_per_line) | |
| <i>AbstractTracer</i> (char_per_line) | |
| <i>Align</i> (value) | Align type. |
| <i>BytesTracer</i> ([char_per_line]) | str/bytes as byte hex codes, grouped by 4 |
| <i>CsiStringReplacer</i> ([repl]) | Find all <i>CSI</i> seqs (i.e., starting with ESC <code>[]</code>) and replace with given string. |
| <i>EscSeqStringReplacer</i> ([repl]) | |
| <i>ExtendedEnum</i> (value) | Standard Enum with a few additional methods on top. |
| <i>IFilter</i> () | Main idea is to provide a common interface for string filtering, that can make possible working with filters like with objects rather than with functions/lambdas. |
| <i>NonPrintsOmniVisualizer</i> ([override]) | Input type: <i>str</i> , <i>bytes</i> . |
| <i>NonPrintsStringVisualizer</i> ([keep_newlines]) | Input type: <i>str</i> . |
| <i>NoopFilter</i> () | |
| <i>OmniDecoder</i> () | |
| <i>OmniEncoder</i> () | |
| <i>OmniMapper</i> ([override]) | Input type: <i>str</i> , <i>bytes</i> . |
| <i>OmniSanitizer</i> ([repl]) | Input type: <i>str</i> , <i>bytes</i> . |
| <i>SgrStringReplacer</i> ([repl]) | Find all <i>SGR</i> seqs (e.g., ESC <code>[]1;4m</code>) and replace with given string. |
| <i>StringAligner</i> (align, width, *[, sgr_aware]) | |
| <i>StringLinearizer</i> ([repl]) | Filter transforms all whitespace sequences in the input string into a single space character, or into a specified string. |
| <i>StringMapper</i> ([override]) | a |
| <i>StringReplacer</i> (pattern, repl) | . |
| <i>StringTracer</i> ([char_per_line]) | str as byte hex codes (UTF-8), grouped by characters |
| <i>StringUcpTracer</i> ([char_per_line]) | str as Unicode codepoints |
| <i>TracerExtra</i> (label) | |
| <i>WhitespaceRemover</i> () | Special case of <i>StringLinearizer</i> . |

class pytermor.filter.**ExtendedEnum**(value)

Bases: Enum

Standard Enum with a few additional methods on top.

classmethod list()

Return all enum values as list.

```
>>> Align.list()
['<', '>', '^']
```

classmethod dict()

Return mapping of all enum keys to corresponding enum values.

```
>>> Align.dict()
{<Align.LEFT: '<': '<', <Align.RIGHT: '>': '>', <Align.CENTER: '^': '^'}
```

class pytermor.filter.Align(*value*)

Bases: str, *ExtendedEnum*

Align type.

pytermor.filter.chunk(*items*, *size*)

Split item list into chunks of size *size* and return these chunks as *tuples*.

```
>>> for c in chunk(range(5), 2):
...     print(c)
(0, 1)
(2, 3)
(4,)
```

Parameters

- **items** (*Iterable*[*T*]) – Input elements.
- **size** (*int*) – Chunk size.

Return type

Iterator[*Tuple*[*T*, ...]]

pytermor.filter.pad(*n*)

Convenient method to use instead of `"".ljust(n)`.

Return type

str

pytermor.filter.padv(*n*)

Convenient method to use instead of `"\n" * n`.

Return type

str

pytermor.filter.ljust_sgr(*s*, *width*, *fillchar*=' ', *actual_len*=None)

SGR-formatting-aware implementation of `str.ljust`.

Return a left-justified string of length *width*. Padding is done using the specified fill character (default is a space).

Return type

str

pytermor.filter.rjust_sgr(*s*, *width*, *fillchar*=' ', *actual_len*=None)

SGR-formatting-aware implementation of `str.rjust`.

Return a right-justified string of length *width*. Padding is done using the specified fill character (default is a space).

Return type

str

pytermor.filter.center_sgr(*s*, *width*, *fillchar*=' ', *actual_len*=None)

SGR-formatting-aware implementation of `str.center`.

Return a centered string of length *width*. Padding is done using the specified fill character (default is a space).

Todo: (.) – f-

Return type

str

pytermor.filter.CONTROL_CHARS

Set of ASCII control characters: 0x00-0x08, 0x0E-0x1F and 0x7F.

pytermor.filter.WHITESPACE_CHARS

Set of ASCII whitespace characters: 0x09-0x0D and 0x20.

pytermor.filter.PRINTABLE_CHARS

Set of ASCII “normal” characters, i.e. non-control and non-space ones: letters, digits and punctuation (0x21-0x7E).

pytermor.filter.NON_ASCII_CHARS

Set of bytes that are invalid in ASCII-7 context: 0x80-0xFF.

pytermor.filter.IT

input-type

alias of TypeVar('IT', str, bytes)

pytermor.filter.OT

output-type

alias of TypeVar('OT', str, bytes)

pytermor.filter.PTT

pattern type

alias of Union[IT, Pattern[IT]]

pytermor.filter.RPT

replacer type

alias of Union[OT, Callable[[Match[OT]], OT]]

pytermor.filter.MPT

map

alias of Dict[int, IT]

class pytermor.filter.IFilter

Bases: Generic[IT, OT]

Main idea is to provide a common interface for string filtering, that can make possible working with filters like with objects rather than with functions/lambda's.

abstract apply(inp, extra=None)Apply the filter to input *str* or *bytes*.**Parameters**

- **inp** (IT) – input string
- **extra** (Optional[Any]) – additional options

Returns

transformed string; the type can match the input type, as well as be different – that depends on filter type.

Return type*OT***class** pytermor.filter.**StringAligner**(*align*, *width*, *, *sgr_aware*=*True*)Bases: *IFilter*[*str*, *str*]**Note:** *sgr_aware* is *kwonly*-type arg.**Parameters**

- **align** (*Align*) –
- **width** (*int*) –
- **sgr_aware** (*bool*) –

apply(*inp*, *extra*=*None*)Apply the filter to input *str* or *bytes*.**Parameters**

- **inp** (*str*) – input string
- **extra** (*Optional*[*Any*]) – additional options

Returns

transformed string; the type can match the input type, as well as be different – that depends on filter type.

Return type*str***class** pytermor.filter.**AbstractTracer**(*char_per_line*)Bases: *IFilter*[*IT*, *str*]**apply**(*inp*, *extra*=*None*)Apply the filter to input *str* or *bytes*.**Parameters**

- **inp** (*IT*) – input string
- **extra** (*Optional*[*TracerExtra*]) – additional options

Returns

transformed string; the type can match the input type, as well as be different – that depends on filter type.

Return type*str***class** pytermor.filter.**BytesTracer**(*char_per_line*=32)Bases: *AbstractTracer*[*bytes*]*str/bytes* as byte hex codes, grouped by 4

Listing 1: Example output

| | | | |
|------|-------------------------|-------------------------|---|
| 0000 | 0A 20 32 31 36 20 20 20 | E2 94 82 20 20 75 70 6C | a |
| 0010 | 20 20 20 20 20 20 20 20 | 20 20 20 20 20 20 20 20 | a |

apply(*inp*, *extra=None*)

Apply the filter to input *str* or *bytes*.

Parameters

- **inp** (*IT*) – input string
- **extra** (*Optional* [[TracerExtra](#)]) – additional options

Returns

transformed string; the type can match the input type, as well as be different – that depends on filter type.

Return type

str

class `pytermor.filter.AbstractStringTracer`(*char_per_line*)

Bases: [AbstractTracer](#)[str]

apply(*inp*, *extra=None*)

Apply the filter to input *str* or *bytes*.

Parameters

- **inp** (*IT*) – input string
- **extra** (*Optional* [[TracerExtra](#)]) – additional options

Returns

transformed string; the type can match the input type, as well as be different – that depends on filter type.

Return type

str

class `pytermor.filter.StringTracer`(*char_per_line=16*)

Bases: [AbstractStringTracer](#)

str as byte hex codes (UTF-8), grouped by characters

Listing 2: Example output

| | | | | | | | | | | | | | | | | | |
|------|----|----|----|----|----|----|--------|--------|----|----|----|----|------|----|----|----|---|
| 0056 | 45 | 4D | 20 | 43 | 50 | 55 | 20 | 4F | 56 | 48 | 20 | 4E | 45 | 3E | 0A | 20 | E |
| 0072 | 20 | 20 | 20 | 20 | 20 | 20 | E29482 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | _ |
| 0088 | 20 | 20 | 20 | 20 | 37 | 20 | 2B | 30 | 20 | 20 | 20 | 20 | CE94 | 20 | 32 | 68 | _ |
| 0104 | 20 | 33 | 33 | 6D | 20 | 20 | 20 | EFAA8F | 20 | 2D | 35 | 20 | C2B0 | 43 | 20 | 20 | _ |

apply(*inp*, *extra=None*)

Apply the filter to input *str* or *bytes*.

Parameters

- **inp** (*IT*) – input string
- **extra** (*Optional* [[TracerExtra](#)]) – additional options

Returns

transformed string; the type can match the input type, as well as be different – that depends on filter type.

Return type

str

```
class pytermor.filter.StringUcpTracer(char_per_line=16)
```

Bases: [AbstractStringTracer](#)

str as Unicode codepoints

Todo: venv/lib/python3.8/site-packages/pygments/lexers/hexdump.py

Listing 3: Example output

| | | | | | | | | | | | | | | | | | | | |
|-----|----|----|----|----|----|----|----|------|------|----|----|----|----|-----|----|----|----|--|------------------|
| 56 | U+ | 45 | 4d | 20 | 43 | 50 | 55 | 20 | 4f | 56 | 48 | 20 | 4e | 45 | 3e | 0a | 20 | | EM_CPU_OVH_NE> |
| 72 | U+ | 20 | 20 | 20 | 20 | 20 | 20 | 2502 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | | xxxxxxxxxxxxxxxx |
| 88 | U+ | 20 | 20 | 20 | 20 | 37 | 20 | 2b | 30 | 20 | 20 | 20 | 20 | 394 | 20 | 32 | 68 | | xxxx7+0xxxx2h |
| 104 | U+ | 20 | 33 | 33 | 6d | 20 | 20 | 20 | fa8f | 20 | 2d | 35 | 20 | b0 | 43 | 20 | 20 | | 33mxxxx-5°C |

```
apply(inp, extra=None)
```

Apply the filter to input *str* or *bytes*.

Parameters

- **inp** (*IT*) – input string
- **extra** (*Optional* [[TracerExtra](#)]) – additional options

Returns

transformed string; the type can match the input type, as well as be different – that depends on filter type.

Return type

str

```
class pytermor.filter.TracerExtra(label: 'str')
```

```
class pytermor.filter.StringReplacer(pattern, repl)
```

Bases: [IFilter](#)[str, str]

.

```
apply(inp, extra=None)
```

Apply the filter to input *str* or *bytes*.

Parameters

- **inp** (*str*) – input string
- **extra** (*Optional* [*Any*]) – additional options

Returns

transformed string; the type can match the input type, as well as be different – that depends on filter type.

Return type

str

```
class pytermor.filter.SgrStringReplacer(repl='')
```

Bases: [StringReplacer](#)

Find all *SGR* seqs (e.g., ESC [1;4m) and replace with given string. More specific version of *CsiReplacer*.

Parameters

repl (*RPT[*str*]*) – Replacement, can contain regexp groups (see [apply_filters\(\)](#)).

apply(*inp*, *extra=None*)

Apply the filter to input *str* or *bytes*.

Parameters

- **inp** (*str*) – input string
- **extra** (*Optional[Any]*) – additional options

Returns

transformed string; the type can match the input type, as well as be different – that depends on filter type.

Return type

str

class pytermor.filter.CsiStringReplacer(*repl=""*)

Bases: [StringReplacer](#)

Find all *CSI* seqs (i.e., starting with ESC []) and replace with given string. Less specific version of SgrReplacer, as CSI consists of SGR and many other sequence subtypes.

Parameters

repl (*RPT[*str*]*) – Replacement, can contain regexp groups (see [apply_filters\(\)](#)).

apply(*inp*, *extra=None*)

Apply the filter to input *str* or *bytes*.

Parameters

- **inp** (*str*) – input string
- **extra** (*Optional[Any]*) – additional options

Returns

transformed string; the type can match the input type, as well as be different – that depends on filter type.

Return type

str

class pytermor.filter.StringLinearizer(*repl=' '*)

Bases: [StringReplacer](#)

Filter transforms all whitespace sequences in the input string into a single space character, or into a specified string. Most obvious application is pre-formatting strings for log output in order to keep the messages one-lined.

Parameters

repl (*RPT[*str*]*) – Replacement character(s).

apply(*inp*, *extra=None*)

Apply the filter to input *str* or *bytes*.

Parameters

- **inp** (*str*) – input string
- **extra** (*Optional[Any]*) – additional options

Returns

transformed string; the type can match the input type, as well as be different – that depends on filter type.

Return type

str

class pytermor.filter.WhitespaceRemover

Bases: [StringLinearizer](#)

Special case of [StringLinearizer](#). Removes all the whitespaces from the input string.

apply(inp, extra=None)

Apply the filter to input *str* or *bytes*.

Parameters

- **inp** (*str*) – input string
- **extra** (*Optional[Any]*) – additional options

Returns

transformed string; the type can match the input type, as well as be different – that depends on filter type.

Return type

str

class pytermor.filter.OmniMapper(override=None)

Bases: [IFilter\[IT, IT\]](#)

Input type: *str*, *bytes*. Abstract mapper. Replaces every character found in map keys to corresponding map value. Map should be a dictionary of this type: `dict[int, str|bytes|None]`; moreover, length of *str/bytes* must be strictly 1 character (ASCII codepage). If there is a necessity to map Unicode characters, [StringMapper](#) should be used instead.

```
>>> OmniMapper({0x20: '.'}).apply(b'abc def ghi')
b'abc.def.ghi'
```

For mass mapping it is better to subclass [OmniMapper](#) and override two methods – `_get_default_keys` and `_get_default_replacer`. In this case you don't have to manually compose a replacement map with every character you want to replace.

Parameters

override (*MPT*) – a dictionary with mappings: keys must be *ints*, values must be either a single-char *strs* or *bytes*, or *None*.

See

[NonPrintsOmniVisualizer](#)

apply(inp, extra=None)

Apply the filter to input *str* or *bytes*.

Parameters

- **inp** (*IT*) – input string
- **extra** (*Optional[Any]*) – additional options

Returns

transformed string; the type can match the input type, as well as be different – that depends on filter type.

Return type

IT

class pytermor.filter.StringMapper(override=None)

Bases: [OmniMapper\[str\]](#)

a

apply(*inp*, *extra*=None)

Apply the filter to input *str* or *bytes*.

Parameters

- **inp** (*str*) – input string
- **extra** (*Optional*[*Any*]) – additional options

Returns

transformed string; the type can match the input type, as well as be different – that depends on filter type.

Return type

str

class pytermor.filter.NonPrintsOmniVisualizer(*override*=None)

Bases: *OmniMapper*

Input type: *str*, *bytes*. Replace every whitespace character with `.`

apply(*inp*, *extra*=None)

Apply the filter to input *str* or *bytes*.

Parameters

- **inp** (*IT*) – input string
- **extra** (*Optional*[*Any*]) – additional options

Returns

transformed string; the type can match the input type, as well as be different – that depends on filter type.

Return type

IT

class pytermor.filter.NonPrintsStringVisualizer(*keep_newlines*=True)

Bases: *StringMapper*

Input type: *str*. Replace every whitespace character with `“.”`, except newlines. Newlines are kept and get prepended with same char by default, but this behaviour can be disabled with `keep_newlines = False`.

```
>>> NonPrintsStringVisualizer(keep_newlines=False).apply("S"+os.linesep+"K")
'SK'
```

Parameters

keep_newlines (*bool*) – When *True*, transform newline characters into `“\n”`, or into just `“”` otherwise.

apply(*inp*, *extra*=None)

Apply the filter to input *str* or *bytes*.

Parameters

- **inp** (*str*) – input string
- **extra** (*Optional*[*Any*]) – additional options

Returns

transformed string; the type can match the input type, as well as be different – that depends on filter type.

Return type

str

class pytermor.filter.OmniSanitizer(*repl=b'.'*)

Bases: *OmniMapper*

Input type: *str*, *bytes*. Replace every control character and every non-ASCII character (0x80-0xFF) with “.”, or with specified char. Note that the replacement should be a single ASCII character, because Omni - filters are designed to work with *str* inputs and *bytes* inputs on equal terms.

Parameters

repl (*IT*) – Value to replace control/non-ascii characters with. Should be strictly 1 character long.

apply(*inp*, *extra=None*)

Apply the filter to input *str* or *bytes*.

Parameters

- **inp** (*IT*) – input string
- **extra** (*Optional[Any]*) – additional options

Returns

transformed string; the type can match the input type, as well as be different – that depends on filter type.

Return type

IT

pytermor.filter.apply_filters(*inp*, **args*)

Method for applying dynamic filter list to a target string/bytes.

Example (will replace all ESC control characters to E and thus make SGR params visible):

```
>>> from pytermor import SeqIndex
>>> test_str = f'{SeqIndex.RED}test{SeqIndex.COLOR_OFF}'
>>> apply_filters(test_str, SgrStringReplacer('E\2\3\4'))
'E[31mtestE[39m'

>>> apply_filters('[31mtest[39m', OmniSanitizer)
'. [31mtest. [39m'
```

Note that type of *inp* argument must be same as filter parameterized input type (*IT*), i.e. *StringReplacer* is *IFilter[str, str]* type, so you can apply it only to *str*-type inputs.

Parameters

- **inp** (*IT*) – String/bytes to filter.
- **args** (*Union[IFilter, Type[IFilter]]*) – Instance(s) implementing *IFilter* or their type(s).

Return type

OT

pytermor.filter.dump(*data*, *label=None*, *max_len_shift=None*)

Todo:

- format selection
- special handling of one-line input
- squash repeating lines

Return type

str | *None*

2.8 pytermor.numfmt

utilnum

Module Attributes

| | |
|------------------------------|--|
| <code>PREFIXES_SI_DEC</code> | Prefix preset used by <code>format_si()</code> and <code>format_bytes_human()</code> . |
|------------------------------|--|

Functions

| | |
|--|--|
| <code>format_auto_float(val, req_len[, al- low_exp_form])</code> | Dynamically adjust decimal digit amount and format to fill up the output string with as many significant digits as possible, and keep the output length strictly equal to <code>req_len</code> at the same time. |
| <code>format_bytes_human(val[, auto_color])</code> | Invoke special case of fixed-length SI formatter optimized for processing byte-based values. |
| <code>format_si(val[, unit, auto_color])</code> | Invoke fixed-length decimal SI formatter; format value as a unitless value with SI-prefixes; a unit can be provided as an argument of <code>format()</code> method. |
| <code>format_si_binary(val[, unit, auto_color])</code> | Invoke fixed-length binary SI formatter which formats value as binary size ("KiB", "MiB") with base 1024. |
| <code>format_thousand_sep(val[, separator])</code> | Returns input <code>val</code> with integer part split into groups of three digits, joined then with <code>separator</code> string. |
| <code>format_time(val_sec[, auto_color])</code> | Invoke dynamic-length general-purpose time formatter, which supports a wide range of output units, including seconds, minutes, hours, days, weeks, months, years, milliseconds, microseconds, nanoseconds etc. |
| <code>format_time_delta(val_sec[, max_len, auto_color])</code> | Format time interval using the most suitable format with one or two time units, depending on <code>max_len</code> argument. |
| <code>format_time_delta_longest(val_sec[, auto_color])</code> | Wrapper around <code>format_time_delta()</code> with pre-set longest formatter. |
| <code>format_time_delta_shortest(val_sec[, auto_color])</code> | Wrapper around <code>format_time_delta()</code> with pre-set shortest formatter. |
| <code>format_time_ms(value_ms[, auto_color])</code> | Invoke a variation of <code>formatter_time</code> specifically configured to format small time intervals. |
| <code>format_time_ns(value_ns[, auto_color])</code> | Wrapper for <code>format_time_ms()</code> expecting input value as nanoseconds. |
| <code>highlight(string)</code> | |

Classes

| | |
|---|---|
| <code>BaseUnit</code> (oom[, unit, prefix, _integer]) | |
| <code>DualBaseUnit</code> (name[, in_next, ...]) | TU |
| <code>DualFormatter</code> ([fallback, units, auto_color, ...]) | Formatter designed for time intervals. |
| <code>DualFormatterRegistry</code> () | Simple <code>DualFormatter</code> registry for storing formatters and selecting the suitable one by max output length. |
| <code>DynamicFormatter</code> ([fallback, units, ...]) | A simplified version of static formatter for cases, when length of the result string doesn't matter too much (e.g., for log output), and you don't have intention to customize the output (too much). |
| <code>Highlighter</code> ([dim_units]) | S |
| <code>NumFormatter</code> (auto_color, highlighter) | |
| <code>StaticFormatter</code> ([fallback, max_value_len, ...]) | Format value using settings passed to constructor. |
| <code>SupportsFallback</code> () | |

`pytermor.numfmt.PREFIXES_SI_DEC = ['q', 'r', 'y', 'z', 'a', 'f', 'p', 'n', 'μ', 'm', None, 'k', 'M', 'G', 'T', 'P', 'E', 'Z', 'Y', 'R', 'Q']`

Prefix preset used by `format_si()` and `format_bytes_human()`. Covers values from 10^{-30} to 10^{32} . Note lower-cased 'k' prefix.

class `pytermor.numfmt.Highlighter`(*dim_units=True*)
S

colorize(*string*)

parse and highlight

Parameters

string (*str*) –

Returns

Return type

Text

apply(*intp, frac, sep, pfx, unit*)

highlight already parsed

Parameters

- **intp** (*str*) –
- **frac** (*str*) –
- **sep** (*str*) –
- **pfx** (*str*) –
- **unit** (*str*) –

Returns

Return type

List[Fragment]

```
class pytermor.numfmt.StaticFormatter(fallback=None, *, max_value_len=None, auto_color=None,
                                     allow_negative=None, allow_fractional=None,
                                     discrete_input=None, unit=None, unit_separator=None,
                                     mcoef=None, pad=None, legacy_rounding=None,
                                     prefixes=None, prefix_refpoint_shift=None,
                                     value_mapping=None, highlighter=None)
```

Bases: NumFormatter

Format value using settings passed to constructor. The purpose of this class is to fit into specified string length as much significant digits as it's theoretically possible by using multipliers and unit prefixes. Designed for metric systems with bases 1000 or 1024.

The key property of this formatter is maximum length – the output will not exceed specified amount of characters no matter what (that's what is "static" for).

You can create your own formatters if you need fine tuning of the output and customization. If that's not the case, there are facade methods `format_si()`, `format_si_binary()` and `format_bytes_human()`, which will invoke predefined formatters and doesn't require setting up.

Note: All arguments except `fallback` are *kwonly*-type arguments.

Parameters

- **fallback** (`StaticFormatter`) – For any (constructing) instance attribute without a value (`=None`): look up for this attribute in `fallback` instance, and if the value is specified, take it and save as yours own; if the attribute is undefined in `fallback` as well, use the default class' value for this attribute instead.
- **max_value_len** (`int`) – [default: 4] Target string length. Must be at least **3**, because it's a minimum requirement for formatting values from 0 to 999. Next number to 999 is 1000, which will be formatted as "1k".

Setting `allow_negative` to `True` increases lower bound to **4** because the values now can be less than 0, and minus sign also occupies one char in the output.

Setting `mcoef` to anything other than 1000.0 also increases the minimum by 1, to **5**. The reason is that non-decimal coefficients like 1024 require additional char to render as switching to the next prefix happens later: "999 b", "1000 b", "1001 b", ... "1023 b", "1 Kb".

- **auto_color** (`bool`) – [default: `False`] Enable automatic colorizing of the result. Color depends on order of magnitude of the value, and always the same, e.g.: blue color for numbers in $[1000; 10^6]$ and $[10^{-3}; 1]$ ranges (prefixes nearest to 1, kilo- and milli-); cyan for values in $[10^6; 10^9]$ and $[10^{-6}; 10^{-3}]$ ranges (next ones, mega-/micro-), etc. The values from $[1; 999]$ are colored in neutral gray. See [Highlighter](#).
- **allow_negative** (`bool`) – [default: `True`] Allow negative numbers handling, or (if set to `False`) ignore the sign and round all of them to 0.0. This option effectively increases lower limit of `max_value_len` by 1 (when enabled).
- **allow_fractional** (`bool`) – [default: `True`] Allows the usage of fractional values in the output. If set to `False`, the results will be rounded. Does not affect lower limit of `max_value_len`.
- **discrete_input** (`bool`) – [default: `False`] If set to `True`, truncate the fractional part off the input and do not use floating-point format for *base output*, i.e., without prefix and multiplying coefficient. Useful when the values are originally discrete (e.g., bytes). Note that the same effect could be achieved by setting `allow_fractional` to `False`, except that it will influence prefixed output as well ("1.08 kB" -> "1kB").
- **unit** (`str`) – [default: empty `str`] Unit to apply prefix to (e.g., "m", "B"). Can be empty.

- **unit_separator** (*str*) – [default: a space] String to place in between the value and the (prefixed) unit. Can be empty.
- **mcoef** (*float*) – [default: 1000.0] Multiplying coefficient applied to the value:

$$V_{out} = V_{in} * b^{(-m/3)},$$

where: V_{in} is an input value, V_{out} is a numeric part of the output, b is mcoef (base), and m is the order of magnitude corresponding to a selected unit prefix. For example, in case of default (decimal) formatter and input value equal to 17345989 the selected prefix will be “M” with the order of magnitude = 6:

$$V_{out} = 17345989 * 1000^{(-6/3)} = 17345989 * 10^{-6} = 17.346.$$

- **pad** (*bool*) – [default: *False*]
- **legacy_rounding** (*bool*) – [default: *False*]
- **prefixes** (*list[str|None]*) – [default: `PREFIXES_SI_DEC`] Prefix list from min power to max. Reference point (with zero-power multiplier, or 1.0) is determined by searching for *None* in the list provided, therefore it’s a requirement for the argument to have at least one *None* value. Prefix list for a formatter without fractional values support could look like this:

```
[None, "k", "M", "G", "T"]
```

Prefix step is fixed to $\log_{10}1000 = 3$, as specified for metric prefixes.

- **prefix_refpoint_shift** (*int*) – [default: 0] Should be set to a non-zero number if input represents already prefixed value; e.g. to correctly format a variable, which stores the frequency in MHz, set prefix shift to 2; the formatter then will render 2333 as “2.33 GHz” instead of incorrect “2.33 kHz”.
- **value_mapping** (*t.Dict[float, RT] | t.Callable[[float], RT]*) – @TODO
- **highlighter** (*Highlighter*) – ...

get_max_len(*unit=None*)

Parameters

unit (*Optional[str]*) – Unit override. Set to *None* to use formatter default.

Returns

Maximum length of the result. Note that constructor argument is `max_value_len`, which is a different parameter.

Return type

int

format(*val, unit=None, auto_color=None*)

Parameters

- **val** (*float*) – Input value.
- **unit** (*Optional[str]*) – Unit override. Set to *None* to use formatter default.
- **auto_color** (*Optional[bool]*) – Color mode, *bool* to enable/disable auto-colorizing, *None* to use formatter default value.

Returns

Formatted value, *Text* if colorizing is on, *str* otherwise.

Return type

RT

```
class pytermor.numfmt.DynamicFormatter(fallback=None, units=None, *, auto_color=None,
                                       allow_fractional=None, unit_separator=None,
                                       oom_shift=None, highlighter=None)
```

Bases: NumFormatter

A simplified version of static formatter for cases, when length of the result string doesn't matter too much (e.g., for log output), and you don't have intention to customize the output (too much).

Note: All arguments except `fallback` and `units` are *kwonly*-type arguments.

```
format(val, auto_color=False, oom_shift=None)
    __:param val: :param oom_shift: :param auto_color: :return:
```

Return type
RT

```
class pytermor.numfmt.BaseUnit(oom: 'float', unit: 'str' = '', prefix: 'str' = '', _integer: 'bool' = None)
```

```
class pytermor.numfmt.DualFormatter(fallback=None, units=None, *, auto_color=None,
                                       allow_negative=None, allow_fractional=None,
                                       unit_separator=None, pad=None, plural_suffix=None,
                                       overflow_msg=None, highlighter=None)
```

Bases: NumFormatter

Formatter designed for time intervals. Key feature of this formatter is ability to combine two units and display them simultaneously, e.g. return “3h 48min” instead of “228 mins” or “3 hours”, etc.

It is possible to create custom formatters if fine tuning of the output and customization is necessary; otherwise use a facade method `format_time_delta()`, which selects appropriate formatter by specified max length from a preset list.

Example output:

```
"10 secs", "5 mins", "4h 15min", "5d 22h"
```

Parameters

- **fallback** (`DualFormatter`) –
- **units** (`t.List[DualBaseUnit]`) –
- **auto_color** (`bool`) – If `True`, the result will be colorized depending on unit type.
- **allow_negative** (`bool`) –
- **allow_fractional** (`bool`) –
- **unit_separator** (`str`) –
- **pad** (`bool`) – Set to `True` to pad the value with spaces on the left side and ensure it's length is equal to `max_len`, or to `False` to allow shorter result strings.
- **plural_suffix** (`str`) –
- **overflow_msg** (`str`) –
- **highlighter** (`Highlighter`) –

property max_len: int

This property cannot be set manually, it is computed on initialization automatically.

Returns

Maximum possible output string length.

format(*val_sec*, *auto_color=None*)

Pretty-print difference between two moments in time. If input value is too big for the current formatter to handle, return “OVERFLOW” string (or a part of it, depending on *max_len*).

Parameters

- **val_sec** (*float*) – Input value in seconds.
- **auto_color** (*Optional[bool]*) – Color mode, *bool* to enable/disable colorizing, *None* to use formatter default value.

Returns

Formatted time delta, *Text* if colorizing is on, *str* otherwise.

Return type

RT

format_base(*val_sec*, *auto_color=None*)

Pretty-print difference between two moments in time. If input value is too big for the current formatter to handle, return *None*.

Parameters

- **val_sec** (*float*) – Input value in seconds.
- **auto_color** (*Optional[bool]*) – Color mode, *bool* to enable/disable colorizing, *None* to use formatter default value.

Returns

Formatted value as *Text* if colorizing is on; as *str* otherwise. Returns *None* on overflow.

Return type

Optional[RT]

class pytermor.numfmt.DualBaseUnit(*name*, *in_next=None*, *overflow_after=None*, *custom_short=None*, *collapsible_after=None*)

TU

Important: *in_next* and *overflow_after* are mutually exclusive, and either of them is required.

Parameters

- **name** (*str*) – A unit name to display.
- **in_next** (*int*) – The base – how many current units the next (single) unit contains, e.g., for an hour in context of days:

```
CustomBaseUnit("hour", 24)
```

- **overflow_after** (*int*) – Value upper limit.
- **custom_short** (*str*) – Use specified short form instead of first letter of *name* when operating in double-value mode.
- **collapsible_after** (*int*) – Min threshold for double output to become a regular one.

class pytermor.numfmt.DualFormatterRegistry

Simple DualFormatter registry for storing formatters and selecting the suitable one by max output length.

register(*formatters)

...

find_matching(max_len)

...

Return type

pytermor.numfmt.DualFormatter | None

get_by_max_len(max_len)

...

Return type

pytermor.numfmt.DualFormatter | None

get_shortest()

...

Return type

pytermor.numfmt.DualFormatter | None

get_longest()

...

Return type

pytermor.numfmt.DualFormatter | None

pytermor.numfmt.highlight(string)

Todo: @TODO

Max output len

same as input

Parameters

string (str) – input text

Return type

RT

pytermor.numfmt.format_thousand_sep(val, separator='')

Returns input val with integer part split into groups of three digits, joined then with separator string.

```
>>> format_thousand_sep(260341)
'260 341'
>>> format_thousand_sep(-9123123123.55, ',')
'-9, 123, 123, 123.55'
```

Max output len

$(L + \max(0, \text{floor}(M/3)))$,

where L is val length, and M is order of magnitude of val

Parameters

- **val** (int | float) – value to format
- **separator** (str) – character(s) to use as thousand separators

Return type

str

`pytermor.numfmt.format_auto_float(val, req_len, allow_exp_form=True)`

Dynamically adjust decimal digit amount and format to fill up the output string with as many significant digits as possible, and keep the output length strictly equal to `req_len` at the same time.

For values impossible to fit into a string of required length and when rounding doesn't help (e.g. 12 500 000 and 5 chars) algorithm switches to scientific notation, and the result looks like '1.2e7'. If this feature is explicitly disabled with `allow_exp_form = False`, then:

- 1) if absolute value is less than 1, zeros will be returned ('0.0000');
- 2) if value is a big number (like 10^9), `ValueError` will be raised instead.

```
>>> format_auto_float(0.012345678, 5)
'0.012'
>>> format_auto_float(0.123456789, 5)
'0.123'
>>> format_auto_float(1.234567891, 5)
'1.235'
>>> format_auto_float(12.34567891, 5)
'12.35'
>>> format_auto_float(123.4567891, 5)
'123.5'
>>> format_auto_float(1234.567891, 5)
'1235'
>>> format_auto_float(12345.67891, 5)
'12346'
```

Max output len

adjustable

Parameters

- **val** (*float*) – Value to format.
- **req_len** (*int*) – Required output string length.
- **allow_exp_form** (*bool*) – Allow scientific notation usage when that's the only way of fitting the value into a string of required length.

Raises

ValueError – When value is too long and `allow_exp_form` is *False*.

Return type

str

`pytermor.numfmt.format_si(val, unit=None, auto_color=None)`

Invoke fixed-length decimal SI formatter; format value as a unitless value with SI-prefixes; a unit can be provided as an argument of `format()` method. Suitable for formatting any SI unit with values from 10^{-30} to 10^{32} .

Total maximum length is `max_value_len` + 2, which is 6 by default (4 from value + 1 from separator and + 1 from prefix). If the unit is defined and is a non-empty string, the maximum output length increases by length of that unit.

Listing 4: Extending the formatter

```
my_formatter = StaticFormatter(formatter_si)
```

```
>>> format_si(1010, 'm²')
'1.01 km²'
>>> format_si(0.223, 'g')
'223 mg'
```

(continues on next page)

(continued from previous page)

```
>>> format_si(1213531546, 'W') # great scott
'1.21 GW'
>>> format_si(1.22e28, 'eV') # the Planck energy
'12.2 ReV'
```

Max output len

6

Parameters

- **val** (*float*) – Input value (unitless).
- **unit** (*Optional[str]*) – A unit override [default unit is an empty string].
- **auto_color** (*Optional[bool]*) – Color mode override, *bool* to enable/disable colorizing depending on unit type, *None* to use formatters’ setting value [*False* by default].

ReturnsFormatted value, *Text* if colorizing is on, *str* otherwise.**Return type***RT*

`pytermor.numfmt.format_si_binary(val, unit=None, auto_color=False)`

Invoke fixed-length binary SI formatter which formats *value* as binary size (“KiB”, “MiB”) with base 1024. Unit can be customized. Covers values from 0 to 10^{32} .

While being similar to `formatter_si`, this formatter differs in one aspect. Given a variable with default value = 995, formatting it results in “995 B”. After increasing it by 20 it equals to 1015, which is still not enough to become a kilobyte – so returned value will be “1015 B”. Only after one more increase (at 1024 and more) the value will morph into “1.00 KiB” form.

That’s why the initial `max_value_len` should be at least 5 – because it is a minimum requirement for formatting values from 1023 to -1023. However, The negative values for this formatter are disabled by default and rendered as 0, which decreases the `max_value_len` minimum value back to 4.

Total maximum length of the result is `max_value_len + 4 = 8` (base + 1 from separator + 1 from unit + 2 from prefix, assuming all of them have default values defined in `formatter_si_binary`).

Listing 5: Extending the formatter

```
my_formatter = StaticFormatter(formatter_si_binary)
```

```
>>> format_si_binary(1010) # 1010 b < 1 kb
'1010 B'
>>> format_si_binary(1080)
'1.05 KiB'
>>> format_si_binary(45200)
'44.1 KiB'
>>> format_si_binary(1.258 * pow(10, 6), 'b')
'1.20 Mib'
```

Max output len

8

Parameters

- **val** (*float*) – Input value in bytes.
- **unit** (*Optional[str]*) – A unit override [default unit is “B”].

- **auto_color** (*bool*) – Color mode override, *bool* to enable/disable colorizing depending on unit type, *None* to use formatters' setting value [*False* by default].

Returns

Formatted value, *Text* if colorizing is on, *str* otherwise.

Return type

RT

`pytermor.numfmt.format_bytes_human(val, auto_color=False)`

Invoke special case of fixed-length SI formatter optimized for processing byte-based values. Inspired by default stats formatting used in `htop`. Comprises traits of both preset SI formatters, the key ones being:

- expecting integer inputs;
- prohibiting negative inputs;
- operating in decimal mode with the base of 1000 (not 1024);
- the absence of units and value-unit separators in the output, while prefixes are still present;
- (if colors allowed) utilizing `Highlighter` with a bit customized setup, as detailed below.

Total maximum length is `max_value_len + 1`, which is **5** by default (4 from value + 1 from prefix).

Highlighting options

Default highlighter for this formatter does not render units (as well as prefixes) dimmed. The main reason for that is the absence of actual unit in the output of this formatter, while prefixes are still there; this allows to format the fractional output this way: `[1].57[k]`, where brackets `[]` indicate brighter colors.

This format is acceptable because only essential info gets highlighted; however, in case of other formatters with actual units in the output this approach leads to complex and mixed-up formatting; furthermore, it doesn't matter if the highlighting affects the prefix part only or both prefix and unit parts – in either case it's just too much formatting on a unit of surface: `[1].53 [Ki]B` (looks patchworky).

Table 2: Default formatters comparison

| Value | SI(<code>unit='B'</code>) | SI_BINARY | BYTES_HUMAN |
|----------------|-----------------------------|------------|-------------|
| 1568 | '1.57 kB' | '1.53 KiB' | '1.57k' |
| 218371331 | '218 MB' | '208 MiB' | '218M' |
| 0.25 | '250 mB' ¹ | '0 B' | '0' |
| -1218371331232 | '-1.2 TB' | '0 B' | '0' |

Listing 6: Extending the formatter

```
my_formatter = StaticFormatter(formatter_bytes_human, unit_separator=" ")
```

```
>>> format_bytes_human(990)
'990'
>>> format_bytes_human(1010)
'1.01k'
>>> format_bytes_human(45200)
'45.2k'
>>> format_bytes_human(1.258 * pow(10, 6))
'1.26M'
```

Max output len

5

¹ 250 millibytes is not something you would see every day

Parameters

- **val** (*int*) – Input value in bytes.
- **auto_color** (*bool*) – Color mode override, *bool* to enable/disable colorizing depending on unit type, *None* to use formatters' setting value [*False* by default].

Returns

Formatted value, *Text* if colorizing is on, *str* otherwise.

Return type

RT

`pytermor.numfmt.format_time(val_sec, auto_color=None)`

Invoke dynamic-length general-purpose time formatter, which supports a wide range of output units, including seconds, minutes, hours, days, weeks, months, years, milliseconds, microseconds, nanoseconds etc.

Listing 7: Extending the formatter

```
my_formatter = DynamicFormatter(formatter_time, unit_separator=" ")
```

```
>>> format_time(12)
'12.0 s'
>>> format_time(65536)
'18 h'
>>> format_time(0.00324)
'3.2 ms'
```

Max output len

varying

Parameters

- **val_sec** (*float*) – Input value in seconds.
- **auto_color** (*Optional[bool]*) – Color mode override, *bool* to enable/disable colorizing depending on unit type, *None* to use formatters' setting value [*False* by default].

Return type

RT

`pytermor.numfmt.format_time_ms(value_ms, auto_color=None)`

Invoke a variation of `formatter_time` specifically configured to format small time intervals.

Listing 8: Extending the formatter

```
my_formatter = DynamicFormatter(formatter_time_ms, unit_separator=" ")
```

```
>>> format_time_ms(1)
'1ms'
>>> format_time_ms(344)
'344ms'
>>> format_time_ms(0.967)
'967μs'
```

Parameters

- **value_ms** (*float*) – Input value in milliseconds.
- **auto_color** (*Optional[bool]*) – Color mode override, *bool* to enable/disable colorizing depending on unit type, *None* to use formatters' setting value [*False* by default].

Returns**Return type***RT*

`pytermor.numfmt.format_time_ns(value_ns, auto_color=None)`

Wrapper for `format_time_ms()` expecting input value as nanoseconds.

```
>>> format_time_ns(1003000)
'1ms'
>>> format_time_ns(3232332224)
'3s'
>>> format_time_ns(9932248284343.32)
'2h'
```

Parameters

- **value_ns** (*float*) – Input value in nanoseconds.
- **auto_color** (*Optional[bool]*) – Color mode override, *bool* to enable/disable coloring depending on unit type, *None* to use formatters' setting value [*False* by default].

Returns**Return type***RT*

`pytermor.numfmt.format_time_delta(val_sec, max_len=None, auto_color=None)`

Format time interval using the most suitable format with one or two time units, depending on `max_len` argument. Key feature of this formatter is an ability to combine two units and display them simultaneously, e.g. return “3h 48min” instead of “228 mins” or “3 hours”, and on top of that – fixed-length output.

There are predefined formatters with output lengths of **3**, **4**, **5**, **6** and **10** characters. Therefore, you can pass in any value from 3 inclusive and it's guaranteed that result's length will be less or equal to required length. If `max_len` is omitted, longest registered formatter will be used.

Note: Negative values are supported by formatters 5 and 10 only.

```
>>> format_time_delta(10, 3)
'10s'
>>> format_time_delta(10, 6)
'10.0s'
>>> format_time_delta(15350, 4)
'4 h'
>>> format_time_delta(15350)
'4h 15min'
```

Max output len

3, 4, 5, 6, 10

Parameters

- **val_sec** (*float*) – Input value in seconds.
- **max_len** (*Optional[int]*) – Maximum output string length (total).
- **auto_color** (*Optional[bool]*) – Color mode override, *bool* to enable/disable coloring depending on unit type, *None* to use formatters' setting value [*False* by default].

Return type*RT*

`pytermor.numfmt.format_time_delta_shortest(val_sec, auto_color=None)`

Wrapper around `format_time_delta()` with pre-set shortest formatter.

Max output len

3

Parameters

- **val_sec** (*float*) – Input value in seconds.
- **auto_color** (*Optional[bool]*) – Color mode override, *bool* to enable/disable coloring depending on unit type, *None* to use formatters' setting value [*False* by default].

Return type

RT

`pytermor.numfmt.format_time_delta_longest(val_sec, auto_color=None)`

Wrapper around `format_time_delta()` with pre-set longest formatter.

Max output len

10

Parameters

- **val_sec** (*float*) – Input value in seconds.
- **auto_color** (*Optional[bool]*) – Color mode override, *bool* to enable/disable coloring depending on unit type, *None* to use formatters' setting value [*False* by default].

Return type

RT

2.9 pytermor.log

Functions

`get_qname(obj)`

Convenient method for getting a class name for class instances as well as for the classes themselves.

`pytermor.log.get_qname(obj)`

Convenient method for getting a class name for class instances as well as for the classes themselves.

```
>>> get_qname("aaa")
'str'
>>> get_qname(logging.Logger)
'<Logger>'
```

Return type

str

2.10 pytermor.parser

Module Attributes

| | |
|-------------------------------|---|
| <code>ESCAPE_SEQ_REGEX</code> | Regular expression that matches all classes of escape sequences. |
| <code>SGR_SEQ_REGEX</code> | Regular expression that matches <i>SGR</i> sequences. |
| <code>CSI_SEQ_REGEX</code> | Regular expression that matches CSI sequences (a superset which includes <i>SGRs</i>). |
| <code>RCP_REGEX</code> | Regular expression for RCP (Report Cursor Position) sequence parsing. |

Functions

| | |
|---|--|
| <code>contains_sgr(string, *codes)</code> | Return the first match of <i>SGR</i> sequence in <code>string</code> with specified <code>codes</code> as params, strictly inside a single sequence in specified order, or <i>None</i> if nothing was found. |
| <code>decompose_report_cursor_position(string)</code> | Parse RCP sequence that usually comes from a terminal as a response to <i>QCP</i> sequence and contains a cursor's current line and column. |
| <code>parse(string)</code> | |

`pytermor.parser.ESCAPE_SEQ_REGEX`

Regular expression that matches all classes of escape sequences.

More specifically, it recognizes **nF**, **Fp**, **Fe** and **Fs**¹ classes. Useful for removing the sequences as well as for granular search thanks to named match groups, which include:

escape_byte

first byte of every sequence – ESC, or 0x1B.

data

remaining bytes of the sequence (without escape byte) represented as one of the following groups: `nf_class_seq`, `fp_class_seq`, `fe_class_seq` or `fs_class_seq`; each of these splits further to even more specific subgroups:

- `nf_interm` and `nf_final` as parts of **nF**-class sequences,
- `fp_classifier` and `fp_interm` for **Fp**-class sequences,
- `fe_classifier`, `fe_param`, `fe_interm` and `fe_final` for **Fe**-class sequences (including *SGRs*),
- `fs_classifier` and `fs_final` for **Fs**-class sequences.

`pytermor.parser.SGR_SEQ_REGEX`

Regular expression that matches *SGR* sequences. Group 3 can be used for sequence params extraction.

¹ ECMA-35 specification

pytermor.parser.CSI_SEQ_REGEX

Regular expression that matches CSI sequences (a superset which includes *SGRs*).

pytermor.parser.RCP_REGEX

Regular expression for RCP sequence parsing. See *decompose_report_cursor_position()*.

pytermor.parser.contains_sgr(string, *codes)

Return the first match of *SGR* sequence in *string* with specified codes as params, strictly inside a single sequence in specified order, or *None* if nothing was found.

The match object has one group (or, technically, two):

- Group #0: the whole matched SGR sequence;
- Group #1: the requested code bytes only.

Example regex used for searching: **regex: `\x1b[(?:[\\d;]*) (48;5) (?:[\\d;]*) m``**.

Unknown interpreted text role “regex”.

```
>>> contains_sgr(make_color_256(128).assemble(), 38)
<re.Match object; span=(0, 11), match='[38;5;128m'>
>>> contains_sgr(make_color_256(84, ColorTarget.BG).assemble(), 48, 5)
<re.Match object; span=(0, 10), match='[48;5;84m'>
```

Parameters

- **string** (*str*) – String to search the SGR in.
- **codes** (*int*) – Integer SGR codes to find.

Return type

re.Match | None

pytermor.parser.decompose_report_cursor_position(string)

Parse RCP sequence that usually comes from a terminal as a response to *QCP* sequence and contains a cursor's current line and column.

Note: As the library in general provides sequence assembling methods, but not the disassembling ones, there is no dedicated class for RCP sequences yet.

```
>>> decompose_report_cursor_position('[9;15R')
(9, 15)
```

Parameters

string (*str*) – Terminal response with a sequence.

Returns

Current line and column if the expected sequence exists in *string*, *None* otherwise.

Return type

Optional[*Tuple*[int, int]]

2.11 pytermor.renderer

Output formatters. Default global renderer type is *SgrRenderer*.

Functions

init_renderer()

Classes

| | |
|---------------------------------------|---|
| <i>HtmlRenderer()</i> | Translate <i>Styles</i> attributes into a rudimentary HTML markup. |
| <i>IRenderer()</i> | Renderer interface. |
| <i>NoOpRenderer()</i> | Special renderer type that does nothing with the input string and just returns it as is (i.e. |
| <i>OutputMode(value)</i> | Determines what types of SGR sequences are allowed to use in the output. |
| <i>RendererManager()</i> | Class for global rendering mode setup. |
| <i>SgrDebugger([output_mode])</i> | Subclass of regular <i>SgrRenderer</i> with two differences -- instead of rendering the proper ANSI escape sequences it renders them with ESC character replaced by '"', and encloses the whole sequence into '()' for visual separation. |
| <i>SgrRenderer([output_mode, io])</i> | Default renderer invoked by <i>Text.render()</i> . |
| <i>TemplateRenderer()</i> | |
| <i>TmuxRenderer()</i> | Translates <i>Styles</i> attributes into <i>tmux-compatible</i> markup. |

class pytermor.renderer.RendererManager

Class for global rendering mode setup.

Selecting the renderer can be accomplished in several ways:

- By using general-purpose functions *text.render()* and *text.echo()* – both have an argument *renderer* (preferable; introduced in *pytermor 2.x*).
- Method *RendererManager.set_default()* sets the default renderer globally. After that calling *text.render()* will automatically invoke a said renderer and apply the required formatting (that is, if *renderer* argument is left empty).
- Alternatively, you can use renderer's instance method *render()* directly and avoid messing up with the manager, but that's not recommended and possibly will be deprecated in future versions).

Generally speaking, if you need to invoke a custom renderer just once, it's convenient to use the first method for this matter, and use the second one in all the other cases.

On the contrary, if there is a necessity to use more than one renderer alternately, it's better to avoid using the global one at all, and just instantiate and invoke both renderers independently.

TL;DR

To unconditionally print formatted message to standard output, use `RendererManager.set_default_format_always()` and then `render()`.

classmethod `set_default(renderer=None)`

Select a global renderer.

Parameters

renderer (*Optional*[*Union*[*IRenderer*, *Type*[*IRenderer*]]]) – Default renderer to use globally. Calling this method without arguments will result in library default renderer `SgrRenderer` being set as default.

All the methods with the `renderer` argument (e.g., `text.render()`) will use the global default one if said argument is omitted or set to `None`.

You can specify either the renderer class, in which case manager will instantiate it with the default parameters, or provide already instantiated and set up renderer, which will be registered as global.

classmethod `get_default()`

Get global renderer instance (`SgrRenderer`, or the one provided earlier with `set_default()`).

Return type

`IRenderer`

classmethod `set_default_format_always()`

Shortcut for forcing all control sequences to be present in the output of a global renderer.

Note that it applies only to the renderer that is set up as default at the moment of calling this method, i.e., all previously created instances, as well as the ones that will be created afterwards, are unaffected.

classmethod `set_default_format_never()`

Shortcut for disabling all output formatting of a global renderer.

class `pytermor.renderer.IRenderer`

Renderer interface.

abstract property `is_caching_allowed: bool`

Class-level property.

Returns

True if caching of renderer's results makes any sense and *False* otherwise.

abstract property `is_format_allowed: bool`

Returns

True if renderer is set up to use the formatting and will do it on invocation, and *False* otherwise.

abstract `render(string, fmt=None)`

Apply colors and attributes described in `fmt` argument to `string` and return the result. Output format depends on renderer's class, which defines the implementation.

Parameters

- **string** (*str*) – String to format.
- **fmt** (*Optional*[*FT*]) – Style or color to apply. If `fmt` is a `IColor` instance, it is assumed to be a foreground color. See `FT`.

Returns

String with formatting applied, or without it, depending on renderer settings.

Return type

`str`

clone(*args, **kwargs)

Make a copy of the renderer with the same setup.

Return type

T

class pytermor.renderer.**OutputMode**(value)

Bases: Enum

Determines what types of SGR sequences are allowed to use in the output.

NO_ANSI = 'no_ansi'

The renderer discards all color and format information completely.

XTERM_16 = 'xterm_16'

16-colors mode. Enforces the renderer to approximate all color types to [Color16](#) and render them as basic mode selection SGR sequences (ESC [31m, ESC [42m etc). See [Color.approximate\(\)](#) for approximation algorithm details.

XTERM_256 = 'xterm_256'

256-colors mode. Allows the renderer to use either [Color16](#) or [Color256](#) (but RGB will be approximated to 256-color palette).

TRUE_COLOR = 'true_color'

RGB color mode. Does not apply restrictions to color rendering.

AUTO = 'auto'

Lets the renderer select the most suitable mode by itself. See [SgrRenderer](#) constructor documentation for the details.

class pytermor.renderer.**SgrRenderer**(output_mode=OutputMode.AUTO, io=<_io.TextIOWrapper name='<stdout>' mode='w' encoding='utf-8'>)

Bases: [IRenderer](#)

Default renderer invoked by [Text.render\(\)](#). Transforms [IColor](#) instances defined in [style](#) into ANSI control sequence bytes and merges them with input string. Type of resulting [SequenceSGR](#) depends on type of [IColor](#) instances in [style](#) argument and current output mode of the renderer.

1. [ColorRGB](#) can be rendered as True Color sequence, 256-color sequence or 16-color sequence depending on specified [OutputMode](#) and config variable [Config.prefer_rgb](#).
2. [Color256](#) can be rendered as 256-color sequence or 16-color sequence.
3. [Color16](#) will be rendered as 16-color sequence.
4. Nothing of the above will happen and all formatting will be discarded completely if output device is not a terminal emulator or if the developer explicitly set up the renderer to do so ([OutputMode.NO_ANSI](#)).

Renderer approximates RGB colors to closest **indexed** colors if terminal doesn't support RGB output. In case terminal doesn't support even 256 colors, it falls back to 16-color palette and picks closest samples again the same way. See [OutputMode](#) documentation for exact mappings.

```
>>> SgrRenderer(OutputMode.XTERM_256).render('text', Styles.WARNING_LABEL)
'[1;33mtext[22;39m'
>>> SgrRenderer(OutputMode.NO_ANSI).render('text', Styles.WARNING_LABEL)
'text'
```

Parameters

output_mode ([OutputMode](#)) – SGR output mode to use. Valid values are listed in [OutputMode](#) enum.

With [OutputMode.AUTO](#) the renderer will first check if the output device is a terminal emulator, and use [OutputMode.NO_ANSI](#) when it is not. Otherwise, the renderer will read TERM environment variable and follow these rules:

- `OutputMode.NO_ANSI` if TERM is set to `xterm`.
- `OutputMode.XTERM_16` if TERM is set to `xterm-color`.
- `OutputMode.XTERM_256` in all other cases.

Special case is when TERM equals to `xterm-256color` and COLORTERM is either `truecolor` or `24bit`, then `OutputMode.TRUE_COLOR` will be used.

property is_caching_allowed: bool

Class-level property.

Returns

True if caching of renderer's results makes any sense and *False* otherwise.

property is_format_allowed: bool

Returns

True if renderer is set up to use the formatting and will do it on invocation, and *False* otherwise.

render(string, fmt=None)

Apply colors and attributes described in `fmt` argument to `string` and return the result. Output format depends on renderer's class, which defines the implementation.

Parameters

- **string** (*str*) – String to format.
- **fmt** (*Optional[FT]*) – Style or color to apply. If `fmt` is a `IColor` instance, it is assumed to be a foreground color. See [FT](#).

Returns

String with formatting applied, or without it, depending on renderer settings.

Return type

`str`

clone()

Make a copy of the renderer with the same setup.

Return type

`SgrRenderer`

class pytermor.renderer.TmuxRenderer

Bases: `IRenderer`

Translates *Styles* attributes into *tmux-compatible* markup. *tmux* is a commonly used terminal multiplexer.

```
>>> TmuxRenderer().render('text', Style(fg='blue', bold=True))
'#[fg=blue bold]text#[fg=default nobold]'
```

property is_caching_allowed: bool

Class-level property.

Returns

True if caching of renderer's results makes any sense and *False* otherwise.

property is_format_allowed: bool

Returns

Always *True*, because *tmux* markup can be used without regard to the type of output device and its capabilities – all the dirty work will be done by the multiplexer itself.

render(*string*, *fmt=None*)

Apply colors and attributes described in *fmt* argument to *string* and return the result. Output format depends on renderer's class, which defines the implementation.

Parameters

- **string** (*str*) – String to format.
- **fmt** (*Optional[FT]*) – Style or color to apply. If *fmt* is a *IColor* instance, it is assumed to be a foreground color. See *FT*.

Returns

String with formatting applied, or without it, depending on renderer settings.

Return type

str

clone(**args*, ***kwargs*)

Make a copy of the renderer with the same setup.

Return type

T

class `pytermor.renderer.NoOpRenderer`

Bases: *IRenderer*

Special renderer type that does nothing with the input string and just returns it as is (i.e. raw text without any *Styles* applied. Often used as a default argument value (along with similar “NoOps” like *NOOP_STYLE*, *NOOP_COLOR* etc.)

```
>>> NoOpRenderer().render('text', Style(fg='green', bold=True))
'text'
```

property `is_caching_allowed`: `bool`

Class-level property.

Returns

True if caching of renderer's results makes any sense and *False* otherwise.

property `is_format_allowed`: `bool`

Returns

Nothing to apply → nothing to allow, thus the returned value is always *False*.

render(*string*, *fmt=None*)

Return the *string* argument untouched, don't mind the *fmt*.

Parameters

- **string** (*str*) – String to format ignore.
- **fmt** (*Optional[FT]*) – Style or color to appl discard.

Return type

str

clone(**args*, ***kwargs*)

Make a copy of the renderer with the same setup.

Return type

T

class `pytermor.renderer.HtmlRenderer`

Bases: *IRenderer*

Translate *Styles* attributes into a rudimentary HTML markup. All the formatting is inlined into *style* attribute of the `` elements. Can be optimized by extracting the common styles as CSS classes and referencing them by DOM elements instead.

```
>>> HtmlRenderer().render('text', Style(fg='red', bold=True))
'<span style="color: #800000; font-weight: 700">text</span>'
```

property is_caching_allowed: bool

Class-level property.

Returns

True if caching of renderer's results makes any sense and *False* otherwise.

property is_format_allowed: bool

Returns

Always *True*, because the capabilities of the terminal have nothing to do with HTML markup meant for web-browsers.

render(*string*, *fmt=None*)

Apply colors and attributes described in *fmt* argument to *string* and return the result. Output format depends on renderer's class, which defines the implementation.

Parameters

- **string** (*str*) – String to format.
- **fmt** (*Optional[FT]*) – Style or color to apply. If *fmt* is a *IColor* instance, it is assumed to be a foreground color. See *FT*.

Returns

String with formatting applied, or without it, depending on renderer settings.

Return type

str

clone(*args, **kwargs)

Make a copy of the renderer with the same setup.

Return type

T

class pytermor.renderer.SgrDebugger(*output_mode=OutputMode.AUTO*)

Bases: *SgrRenderer*

Subclass of regular *SgrRenderer* with two differences – instead of rendering the proper ANSI escape sequences it renders them with ESC character replaced by “”, and encloses the whole sequence into ‘()’ for visual separation.

Can be used for debugging of assembled sequences, because such a transformation reliably converts a control sequence into a harmless piece of bytes completely ignored by the terminals.

```
>>> SgrDebugger(OutputMode.XTERM_16).render('text', Style(fg='red', bold=True))
'([1;31m)text([22;39m)'
```

property is_caching_allowed: bool

Class-level property.

Returns

True if caching of renderer's results makes any sense and *False* otherwise.

property is_format_allowed: bool

Returns

True if renderer is set up to use the formatting and will do it on invocation, and *False* otherwise.

render(*string*, *fmt=None*)

Apply colors and attributes described in *fmt* argument to *string* and return the result. Output format depends on renderer's class, which defines the implementation.

Parameters

- **string** (*str*) – String to format.
- **fmt** (*Optional[FT]*) – Style or color to apply. If *fmt* is a *IColor* instance, it is assumed to be a foreground color. See [FT](#).

Returns

String with formatting applied, or without it, depending on renderer settings.

Return type

str

clone()

Make a copy of the renderer with the same setup.

Return type

[SgrDebugger](#)

set_format_always()

Force all control sequences to be present in the output.

set_format_auto()

Reset the force formatting flag and let the renderer decide by itself (see [SgrRenderer](#) docs for the details).

set_format_never()

Force disabling of all output formatting.

class `pytermor.renderer.TemplateRenderer`

Bases: [IRenderer](#)

clone(**args*, ***kwargs*)

Make a copy of the renderer with the same setup.

Return type

T

property is_caching_allowed: bool

Class-level property.

Returns

True if caching of renderer's results makes any sense and *False* otherwise.

property is_format_allowed: bool

Returns

Always *True*, because template renderer is not expected to put the results directly to a tty.

render(*string*, *fmt=None*)

Apply colors and attributes described in *fmt* argument to *string* and return the result. Output format depends on renderer's class, which defines the implementation.

Parameters

- **string** (*str*) – String to format.

- **fmt** (*Optional[FT]*) – Style or color to apply. If **fmt** is a `IColor` instance, it is assumed to be a foreground color. See [FT](#).

Returns

String with formatting applied, or without it, depending on renderer settings.

Return type

str

2.12 pytermor.style

Todo: S

Module Attributes

| | |
|----------------------------|---|
| FT | FT (Format type) is a style descriptor. |
| NOOP_STYLE | Special style passing the text through without any modifications. |

Functions

| | |
|--|--|
| make_style ([fmt]) | General Style constructor. |
| merge_styles ([base, fallbacks, overwrites]) | Bulk style merging method. |

Classes

| | |
|--|--|
| Style ([fallback, fg, bg, frozen, bold, dim, ...]) | Create new text render descriptor. |
| Styles () | Some ready-to-use styles which also can be used as examples. |

pytermor.style.FT

FT is a style descriptor. Used as a shortcut precursor for actual styles. Primary handler is [make_style\(\)](#).

alias of `TypeVar('FT', int, str, ~pytermor.color.IColor, Style, None)`

class `pytermor.style.Style`(*fallback=None, fg=None, bg=None, frozen=False, *, bold=None, dim=None, italic=None, underlined=None, overlined=None, crosslined=None, double_underlined=None, curly_underlined=None, underline_color=None, inversed=None, blink=None, framed=None, class_name=None*)

Create new text render descriptor.

Both **fg** and **bg** can be specified as existing `IColor` instance as well as plain *str* or *int* (for the details see [resolve_color\(\)](#)).

```
>>> Style(fg='green', bold=True)
<Style[green +BOLD]>
>>> Style(bg=0x0000ff)
<Style[| #0000ff]>
>>> Style(fg='DeepSkyBlue1', bg='gray3')
<Style[x39/x232]>
```

Attribute merging from fallback works this way:

- If constructor argument is *not* empty (*True*, *False*, *IColor* etc.), keep it as attribute value.
- **If constructor argument is empty (*None*, *NOOP_COLOR*), take the value from fallback's corresponding attribute.**

See [merge_fallback\(\)](#) and [merge_overwrite\(\)](#) methods and take the differences into account. The method used in the constructor is the first one.

Important: Both empty (i.e., *None*) attributes of type *IColor* after initialization will be replaced with special constant [NOOP_COLOR](#), which behaves like there was no color defined, and at the same time makes it safer to work with nullable color-type variables. Merge methods are aware of this and treat [NOOP_COLOR](#) as *None*.

Important: *None* and [NOOP_COLOR](#) are always treated as placeholders for fallback values, i.e., they can't be used as *resetters* – that's what [DEFAULT_COLOR](#) is for.

Note: All arguments except *fallback*, *fg*, *bg* and *frozen* are *kwonly*-type args.

Parameters

- **fallback** (*Style*) – Copy empty attributes from specified fallback style. See [merge_fallback\(\)](#).
- **fg** (*CDT* | *IColor*) – Foreground (=text) color.
- **bg** (*CDT* | *IColor*) – Background color.
- **frozen** (*bool*) – Set to *True* to make an immutable instance.
- **bold** (*bool*) – Bold or increased intensity.
- **dim** (*bool*) – Faint, decreased intensity.
- **italic** (*bool*) – Italic.
- **underlined** (*bool*) – Underline.
- **overlined** (*bool*) – Overline.
- **crosslined** (*bool*) – Strikethrough.
- **double_underlined** (*bool*) – Double underline.
- **curly_underlined** (*bool*) – Curly underline.
- **underline_color** (*CDT* | *IColor*) – Underline color, if applicable.
- **inversed** (*bool*) – Swap foreground and background colors.
- **blink** (*bool*) – Blinking effect.
- **framed** (*bool*) – Enclosed in a rectangle border.
- **class_name** (*str*) – Custom class name for the element.

property fg: *IColor*

Foreground (i.e., text) color. Can be set as [CDT](#) or *IColor*, stored always as *IColor*.

property bg: *IColor*

Background color. Can be set as [CDT](#) or *IColor*, stored always as *IColor*.

property underline_color: IColor

Underline color. Can be set as [CDT](#) or IColor, stored always as IColor.

bold: bool

Bold or increased intensity (depending on terminal settings).

dim: bool

Faint, decreased intensity.

Terminal-based rendering

Terminals apply this effect to foreground (=text) color, but when it's used together with [inversed](#), they usually make the background darker instead.

Also note that usually it affects indexed colors only and has no effect on RGB-based ones (True Color mode).

italic: bool

Italic (some terminals may display it as inversed instead).

underlined: bool

Underline.

overlined: bool

Overline.

crosslined: bool

Strikethrough.

double_underlined: bool

Double underline.

curly_underlined: bool

Curly underline.

inversed: bool

Swap foreground and background colors. When inversed effect is active, changing the background color will actually change the text color, and vice versa.

blink: bool

Blinking effect. Supported by a limited set of [renderers](#).

framed: bool

Add a rectangular border around the text; the border color is equal to the text color. Supported by a limited set of [renderers](#) and (even more) limited amount of terminal emulators.

class_name: str

Arbitrary string used by some [renderers](#), e.g. by `HtmlRenderer`, which will include the value of this property to an output element class list. This property is not inheritable.

clone(*frozen=False*)

Make a copy of the instance. Note that a copy is mutable by default even if an original was frozen.

Parameters

frozen – Set to *True* to make an immutable instance.

Return type

[Style](#)

autopick_fg()

Pick `fg_color` depending on `bg_color`. Set `fg_color` to either 3% gray (almost black) if background is bright, or to 80% gray (bright gray) if it is dark. If background is `None`, do nothing.

Todo: check if there is a better algorithm, because current thinks text on #000080 should be black

Modifies the instance in-place and returns it as well (for chained calls).

Return type

`Style`

flip()

Swap foreground color and background color. Modifies the instance in-place and returns it as well (for chained calls).

Return type

`Style`

merge_fallback(fallback)

Merge current style with specified fallback `style`, following the rules:

1. `self` attribute value is in priority, i.e. when both `self` and `fallback` attributes are defined, keep `self` value.
2. If `self` attribute is `None`, take the value from `fallback`'s corresponding attribute, and vice versa.
3. If both attribute values are `None`, keep the `None`.

All attributes corresponding to constructor arguments except `fallback` are subject to merging. `NOOP_COLOR` is treated like `None` (default for `fg` and `bg`).

Modifies the instance in-place and returns it as well (for chained calls).

Listing 9: Merging different values in fallback mode

| | FALLBACK | BASE(SELF) | RESULT | |
|--------|------------|------------|---------|----------------------------------|
| | +-----+ | +-----+ | +-----+ | |
| ATTR-1 | False --∅ | True ==> | True | BASE val is in priority |
| ATTR-2 | True ----- | None --> | True | no BASE val, taking FALLBACK val |
| ATTR-3 | None | True ==> | True | BASE val is in priority |
| ATTR-4 | None | None | None | no vals, keeping unset |
| | +-----+ | +-----+ | +-----+ | |

See also:

`merge_styles` for the examples.

Parameters

fallback (`Style`) – Style to merge the attributes with.

Return type

`Style`

merge_overwrite(overwrite)

Merge current style with specified `overwrite style`, following the rules:

1. `overwrite` attribute value is in priority, i.e. when both `self` and `overwrite` attributes are defined, replace `self` value with `overwrite` one (in contrast to `merge_fallback()`, which works the opposite way).
2. If `self` attribute is `None`, take the value from `overwrite`'s corresponding attribute, and vice versa.
3. If both attribute values are `None`, keep the `None`.

All attributes corresponding to constructor arguments except `fallback` are subject to merging. `NOOP_COLOR` is treated like `None` (default for `fg` and `bg`).

Modifies the instance in-place and returns it as well (for chained calls).

Listing 10: Merging different values in overwrite mode

| | BASE(SELF) | OVERWRITE | RESULT | |
|--------|------------|------------|---------|-------------------------------------|
| | +-----+ | +-----+ | +-----+ | |
| ATTR-1 | True ==∅ | False ---> | False | OVERWRITE val is in priority |
| ATTR-2 | None | True ---> | True | OVERWRITE val is in priority |
| ATTR-3 | True === | None ==> | True | no OVERWRITE val, keeping BASE val |
| ATTR-4 | None | None | None | no vals, keeping unset |
| | +-----+ | +-----+ | +-----+ | |

See also:

`merge_styles` for the examples.

Parameters

overwrite (`Style`) – Style to merge the attributes with.

Return type

`Style`

```
pytermor.style.NOOP_STYLE = <*_NoOpStyle[]>
```

Special style passing the text through without any modifications.

Important: Casting to `bool` results in **False** for all NOOP instances in the library (`NOOP_SEQ`, `NOOP_COLOR` and `NOOP_STYLE`). This is intended.

This class is immutable, i.e. `LogicError` will be raised upon an attempt to modify any of its attributes, which could potentially lead to schrödinbugs:

```
st1.merge_fallback(Style(bold=True), [Style(italic=False)])
```

If `st1` is a regular style instance, it's safe to call self-modifying methods, but if it happens to be a `NOOP_STYLE`, the statement could have been alter the internal state of the style, which is referenced all over the library, which could lead to the changes appearing in an unexpected places.

To be safe from this outcome one could merge styles via frontend method `merge_styles`, which always makes a copy of base argument and thus cannot lead to such results.

class pytermor.style.Styles

Some ready-to-use styles which also can be used as examples. All instances are immutable.

```
WARNING = <*Style[yellow]>
```

```
WARNING_LABEL = <*Style[yellow +BOLD]>
```

```
WARNING_ACCENT = <*Style[hi-yellow]>
```

```
ERROR = <*Style[red]>
```

```
ERROR_LABEL = <*Style[red +BOLD]>
```

```
ERROR_ACCENT = <*Style[hi-red]>
```

```
CRITICAL = <*Style[hi-white|x160]>
```

```
CRITICAL_LABEL = <*Style[hi-white|x160 +BOLD]>
```

```
CRITICAL_ACCENT = <*Style[hi-white|x160 +BLIN +BOLD]>
```

```
pytermor.style.make_style(fmt=None)
```

General *Style* constructor. Accepts a variety of argument types:

- *CDT* (*str* or *int*)
This argument type implies the creation of basic *Style* with the only attribute set being *fg* (i.e., text color). For the details on color resolving see *resolve_color()*.
- *Style*
Existing style instance. Return it as is.
- *None*
Return *NOOP_STYLE*.

Parameters

fmt (*FT*) – See *FT*.

Return type


Style

```
pytermor.style.merge_styles(base=<*_NoOpStyle[]>, *, fallbacks=(), overwrites=())
```

Bulk style merging method. First merge fallbacks *styles* with the base in the same order they are iterated, using *merge_fallback()* algorithm; then do the same for overwrites styles, but using *merge_overwrite()* merge method.

The original *base* is left untouched, as all the operations are performed on its clone.

Listing 11: Dual mode merge diagram

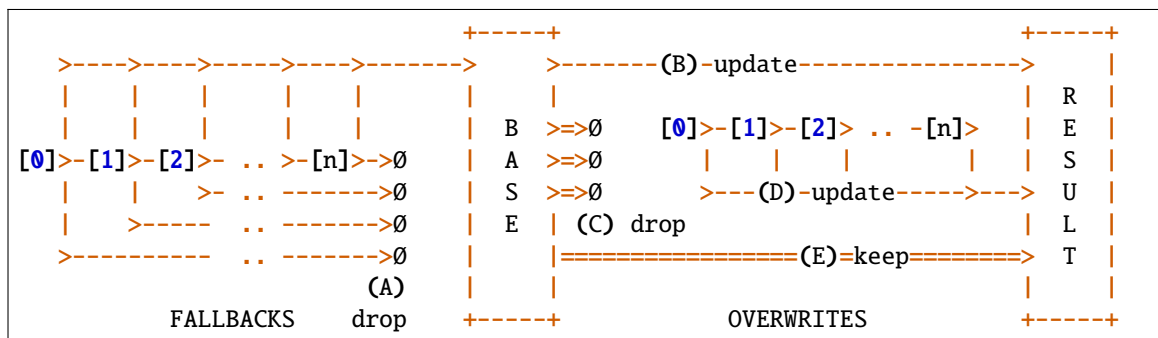

The key actions are marked with (A) to (E) letters. In reality the algorithm works in slightly different order, but the exact scheme would be less illustrative.

(A),(B)

Iterate fallback styles one by one; discard all the attributes of a current fallback style, that are already set in base style (i.e., that are not *Nones*). Update all base style empty attributes with corresponding fallback values, if they exist and are not empty. Repeat these steps for the next fallback in the list, until the list is empty.

Listing 12: Fallback merge algorithm example №1

```
>>> base = Style(fg='red')
...
>>> fallbacks = [Style(fg='blue'), Style(bold=True),
↳ Style(bold=False)]
...
>>> merge_styles(base, fallbacks=fallbacks)
<Style[red +BOLD]>
```

In the example above:

- the first fallback will be ignored, as `fg` is already set;
- the second fallback will be applied (base style will now have `bold` set to `True`;
- which will make the handler ignore third fallback completely; if third fallback was encountered earlier than the 2nd one, base `bold` attribute would have been set to `False`, but alas.

Note: Fallbacks allow to build complex style conditions, e.g. take a look into `Highlighter.colorize()` method:

```
int_st = merge_styles(st, fallbacks=[Style(bold=True)])
```

Instead of using `Style(st, bold=True)` the merging algorithm is invoked. This changes the logic of “bold” attribute application – if there is a necessity to explicitly forbid bold text at base/parent level, one could write:

```
STYLE_NUL = Style(STYLE_DEFAULT, cv.GRAY, bold=False)
STYLE_PRC = Style(STYLE_DEFAULT, cv.MAGENTA)
STYLE_KIL = Style(STYLE_DEFAULT, cv.BLUE)
...
```

As you can see, resulting `int_st` will be bold for all styles other than `STYLE_NUL`.

Listing 13: Fallback merge algorithm example №2

```
>>> merge_styles(Style(fg=cv.BLUE), fallbacks=[Style(bold=True)])
<Style[blue +BOLD]>
>>> merge_styles(Style(fg=cv.GRAY, bold=False),
↳ fallbacks=[Style(bold=True)])
<Style[gray -BOLD]>
```

(C),(D),(E)

Iterate `overwrite` styles one by one; discard all the attributes of a base style that have a non-empty counterpart in `overwrite` style, and put corresponding `overwrite` attribute values instead of them. Keep base attribute values that have no counterpart in current `overwrite` style (i.e., if attribute value is `None`). Then pick next `overwrite` style from the input list and repeat all these steps.

Listing 14: Overwrite merge algorithm example

```
>>> base = Style(fg='red')
...
>>> overwrites = [Style(fg='blue'), Style(bold=True),
↳ Style(bold=False)]
...
>>> merge_styles(base, overwrites=overwrites)
<Style[blue -BOLD]>
```

In the example above all the `overwrites` will be applied in order they were put into `list`, and the result attribute values are equal to the last encountered non-empty values in `overwrites` list.

Parameters

- **base** (`Style`) – Basis style instance.
- **fallbacks** (`Iterable[Style]`) – List of styles to be used as a backup attribute storage, when there is no value set for the attribute in question. Uses `merge_fallback()` merging strategy.

- **overwrites** (*Iterable[Style]*) – List of styles to be used as attribute storage force override regardless of actual *base* attribute valuse.

Returns

Clone of base style with all specified styles merged into.

Return type

Style

2.13 pytermor.template

Classes

`TemplateEngine([custom_styles])`

2.14 pytermor.term

A

Functions

| | |
|--|---|
| <code>confirm([attempts, default, keymap, prompt, ...])</code> | Ensure the next action is manually confirmed by user. |
| <code>get_char_width(char, block)</code> | General-purpose method for getting width of a character in terminal columns. |
| <code>get_preferable_wrap_width([force_width])</code> | Return preferable terminal width for comfort reading of wrapped text (max=120). |
| <code>get_terminal_width([fallback, pad])</code> | Return current terminal width with an optional "safety buffer", which ensures that no unwanted line wrapping will happen. |
| <code>guess_char_width(c)</code> | Determine how many columns are needed to display a character in a terminal. |
| <code>measure_char_width(char[, clear_after])</code> | Low-level function that returns the exact character width in terminal columns. |
| <code>wait_key([block])</code> | Wait for a key press on the console and return it. |

`pytermor.term.get_terminal_width(fallback=80, pad=2)`

Return current terminal width with an optional “safety buffer”, which ensures that no unwanted line wrapping will happen.

Parameters

- **fallback** (*int*) – Default value when shutil is unavailable and environment variable COLUMNS is unset.
- **pad** (*int*) – Additional safety space to prevent unwanted line wrapping.

Return type

int

`pytermor.term.get_preferable_wrap_width(force_width=None)`

Return preferable terminal width for comfort reading of wrapped text (max=120).

Parameters

force_width (*Optional[int]*) – Ignore current terminal width and use this value as a result.

Return type

int

`pytermor.term.wait_key(block=True)`

Wait for a key press on the console and return it.

Parameters

block (*bool*) – Determines setup of O_NONBLOCK flag.

Return type

Optional[AnyStr]

`pytermor.term.confirm(attempts=1, default=False, keymap=None, prompt=None, quiet=False, required=False)`

Ensure the next action is manually confirmed by user. Print the terminal prompt with **prompt** text and wait for a keypress. Return *True* if user pressed Y and *False* in all the other cases (by default).

Valid keys are Y and N (case insensitive), while all the other keys and combinations are considered invalid, and will trigger the return of the **default** value, which is *False* if not set otherwise. In other words, by default the user is expected to press either Y or N, and if that's not the case, the confirmation request will be automatically failed.

Ctrl+C instantly aborts the confirmation process regardless of attempts count and raises *UserAbort*.

Example keymap (default one):

```
keymap = {"y": True, "n": False}
```

Parameters

- **attempts** (*int*) – Set how many times the user is allowed to perform the input before auto-cancellation (or auto-confirmation) will occur. 1 means there will be only one attempt, the first one. When set to -1, allows to repeat the input infinitely.
- **default** (*bool*) – Default value that will be returned when user presses invalid key (e.g. Backspace, Ctrl+Q etc.) and his **attempts** counter decreases to 0. Setting this to *True* effectively means that the user's only way to deny the request is to press N or Ctrl+C, while all the other keys are treated as Y.
- **keymap** (*Optional[Mapping[str, bool]]*) – Key to result mapping.
- **prompt** (*Optional[str]*) – String to display before each input attempt. Default is: "Press Y to continue, N to cancel, Ctrl+C to abort: "
- **quiet** (*bool*) – If set to *True*, suppress all messages to stdout and work silently.
- **required** (*bool*) – If set to *True*, raise *UserCancel* or *UserAbort* when user rejects to confirm current action. If set to *False*, do not raise any exceptions, just return *False*.

Raises

- *UserAbort* – On corresponding event, if **required** is *True*.
- *UserCancel* – On corresponding event, if **required** is *True*.

Returns

True if there was a confirmation by user's input or automatically, *False* otherwise.

Return type

bool

`pytermor.term.get_char_width(char, block)`

General-purpose method for getting width of a character in terminal columns.

Uses `guess_char_width()` method based on `unicodedata` package, or/and QCP-RCP ANSI control sequence communication protocol.

Parameters

- **char** (*str*) – Input char.
- **block** (*bool*) – Set to *True* if you prefer slow, but 100% accurate *measuring* (which **blocks** and requires an output tty), or *False* for a device-independent, deterministic and non-blocking *guessing*, which works most of the time, although there could be rare cases when it is not precise enough.

Return type

int

`pytermor.term.measure_char_width(char, clear_after=True)`

Low-level function that returns the exact character width in terminal columns.

The main idea is to reset a cursor position to 1st column, print the required character and *QCP* control sequence; after that wait for the response and **parse** it. Normally it contains the cursor coordinates, which can tell the exact width of a character in question.

After reading the response clear it from the screen and reset the cursor to column 1 again.

Important: The `stdout` must be a tty. If it is not, consider using `guess_char_width()` instead, or `IOError` will be raised.

Warning: Invoking this method produces a bit of garbage in the output stream, which looks like this: `[3;2R`. By default, it is hidden using screen line clearing (see `clear_after`).

Warning: Invoking this method may **block** infinitely. Consider using a thread or set a timeout for the main thread using a signal if that is unwanted.

Parameters

- **char** (*str*) – Input char.
- **clear_after** (*bool*) – Send *EL* control sequence after the terminal response to hide excessive utility information from the output if set to *True*, or leave it be otherwise.

Raises

IOError – If `stdout` is not a terminal emulator.

Return type

int

`pytermor.term.guess_char_width(c)`

Determine how many columns are needed to display a character in a terminal.

Returns -1 if the character is not printable. Returns 0, 1 or 2 for other characters.

Utilizes `unicodedata` table. A terminal emulator is unnecessary.

Parameters

c (*str*) –

Return type

int

2.15 pytermor.text

“Front-end” module of the library. Contains classes supporting high-level operations such as nesting-aware style application, concatenating and cropping of styled strings before the rendering, text alignment and wrapping, etc.

Module Attributes

| | |
|-----------|--|
| <i>RT</i> | RT (Renderable type) includes regular <i>strs</i> as well as <i>IRenderable</i> implementations. |
|-----------|--|

Functions

| | |
|---|---|
| <i>apply_style_selective</i> (regex, string[, st]) | Main purpose: application of under(over cross)lined styles to strings containing more than one word. |
| <i>apply_style_words_selective</i> (string, st) | |
| <i>as_fragments</i> (string) | |
| <i>distribute_padded</i> () | param max_len |
| <i>echo</i> ([string, fmt, renderer, nl, file, ...]) | . |
| <i>echoi</i> ([string, fmt, renderer, file, flush]) | echo inline |
| <i>flatten</i> (items) | @TODO @DRAFT didnt test it yet |
| <i>flatten1</i> (items) | Take a list of nested lists and unpack all nested elements one level up. |
| <i>render</i> ([string, fmt, renderer, no_log]) | . |
| <i>wrap_sgr</i> (raw_input, width[, indent_first, ...]) | A workaround to make standard library <code>textwrap.wrap()</code> more friendly to an SGR-formatted strings. |

Classes

| | |
|---|---|
| <i>Composite</i> (*parts) | Simple class-container supporting concatenation of any <i>IRenderable</i> instances with each other without extra logic on top of it. |
| <i>Fragment</i> ([string, fmt, close_this, close_prev]) | <Immutable> |
| <i>FrozenText</i> () | param align default is left |
| <i>IRenderable</i> () | I |
| <i>SimpleTable</i> (*rows[, width, sep, border_st]) | Table class with dynamic (not bound to each other) rows. |
| <i>Text</i> () | |

pytermor.text.RT

RT includes regular *strs* as well as *IRenderable* implementations.

alias of `TypeVar('RT', str, IRenderable)`

class pytermor.text.IRenderable

Bases: `Sized`, `ABC`

I

abstract raw()

pass

Return type

`str`

abstract render(*renderer=None*)

pass

Return type

`str`

abstract set_width(*width*)

raise `NotImplementedError`

abstract property has_width: bool

return `self._width` is not `None`

abstract property allows_width_setup: bool

return `False`

class pytermor.text.Fragment(*string='', fmt=None, *, close_this=True, close_prev=False*)

Bases: *IRenderable*

<Immutable>

Can be formatted with f-strings. The text `:s` mode is required. Supported features:

- width [of the result];
- max length [of the content];
- alignment;
- filling.

```
>>> f'{Fragment("1234567890"): ^8.4s}'
' 1234 '
```

Parameters

- **string** (*str*) –
- **fmt** (*FT*) –
- **close_this** (*bool*) –
- **close_prev** (*bool*) –

raw()

pass

Return type

`str`

```

property has_width: bool
    return self._width is not None

property allows_width_setup: bool
    return False

render(renderer=None)
    pass

    Return type
    str

set_width(width)
    raise NotImplementedError

```

```

class pytermor.text.FrozenText(string: str, fmt: FT = NOOP_STYLE, *, width: int = None, align: str |
    pytermor.filter.Align = None, fill: str = ' ', overflow: str = ", pad: int =
    0, pad_styled: bool = True)

```

```

class pytermor.text.FrozenText(*fragments: Fragment, width: int = None, align: str |
    pytermor.filter.Align = None, fill: str = ' ', overflow: str = ", pad: int =
    0, pad_styled: bool = True)

```

Bases: [IRenderable](#)

Parameters

align (*str* / [Align](#)) – default is left

raw()

pass

Return type

str

render(*renderer=None*)

pass

Return type

str

property allows_width_setup: bool

return False

property has_width: bool

return self._width is not None

set_width(*width*)

raise NotImplementedError

```

class pytermor.text.Text(string: str, fmt: FT = NOOP_STYLE, *, width: int = None, align: str |
    pytermor.filter.Align = None, fill: str = ' ', overflow: str = ", pad: int = 0,
    pad_styled: bool = True)

```

```

class pytermor.text.Text(*fragments: Fragment, width: int = None, align: str | pytermor.filter.Align =
    None, fill: str = ' ', overflow: str = ", pad: int = 0, pad_styled: bool = True)

```

Bases: [FrozenText](#)

set_width(*width*)

raise NotImplementedError

```
property allows_width_setup: bool
```

```
    return False
```

```
property has_width: bool
```

```
    return self._width is not None
```

```
raw()
```

```
    pass
```

Return type

str

```
render(renderer=None)
```

```
    pass
```

Return type

str

```
class pytermor.text.Composite(*parts)
```

Bases: [*IRenderable*](#)

Simple class-container supporting concatenation of any [*IRenderable*](#) instances with each other without extra logic on top of it. Renders parts joined by an empty string.

Parameters

parts ([*IRenderable*](#)) – text parts in any format implementing [*IRenderable*](#) interface.

```
raw()
```

```
    pass
```

Return type

str

```
render(renderer=None)
```

```
    pass
```

Return type

str

```
set_width(width)
```

```
    raise NotImplementedError
```

```
property has_width: bool
```

```
    return self._width is not None
```

```
property allows_width_setup: bool
```

```
    return False
```

```
class pytermor.text.SimpleTable(*rows, width=None, sep=' ', border_st=<*_NoOpStyle[]>)
```

Bases: [*IRenderable*](#)

Table class with dynamic (not bound to each other) rows. By default expands to the maximum width (terminal size).

Allows 0 or 1 dynamic-width cell in each row, while all the others should be static, i.e., be instances of [*FrozenText*](#).

```
>>> echo(
...     SimpleTable(
...         [
...             Text("1", width=1),
...             Text("word", width=6, align='center'),
```

(continues on next page)

(continued from previous page)

```

...     Text("smol string"),
... ],
... [
...     Text("2", width=1),
...     Text("padded word", width=6, align='center', pad=2),
...     Text("biiiiiiiiiiiiiiiiiiiiiiiig string"),
... ],
... width=30,
... sep="|"
... ), file=sys.stdout)
|1| word |smol string      |
|2| padd |biiiiiiiiiiiiiii|

```

Create

Note: All arguments except **rows* are *kwonly*-type args.

Parameters

- **rows** (*t.Iterable[RT]*) –
- **width** (*int*) – Table width, in characters. When omitted, equals to terminal size if applicable, and to fallback value (80) otherwise.
- **sep** (*str*) –
- **border_st** (*Style*) –

raw()

pass

Return type

str

property allows_width_setup: bool

return False

property has_width: bool

return self._width is not None

render(*renderer=None*)

pass

Return type

str

set_width(*width*)

raise NotImplementedError

pytermor.text.render(*string="", fmt=<*_NoOpStyle[]>, renderer=None, *, no_log=False*)

.

Parameters

- **string** (*Union[RT, Iterable[RT]]*) – 2
- **fmt** (*FT*) – 2
- **renderer** (*IRenderer*) – 2

- **no_log** (*bool*) – 2

Returns

Return type

Union[str, List[str]]

```
pytermor.text.echo(string="", fmt=<*NoOpStyle[]>, renderer=None, *, nl=True,
                    file=<_io.TextIOWrapper name='<stdout>' mode='w' encoding='utf-8'>, flush=True,
                    wrap=False, indent_first=0, indent_subseq=0)
```

Parameters

- **string** (*Union[RT, Iterable[RT]]*) –
- **fmt** (*FT*) –
- **renderer** (*Optional[IRenderer]*) –
- **nl** (*bool*) –
- **file** (*IO*) –
- **flush** (*bool*) –
- **wrap** (*bool | int*) –
- **indent_first** (*int*) –
- **indent_subseq** (*int*) –

```
pytermor.text.choi(string="", fmt=<*NoOpStyle[]>, renderer=None, *, file=<_io.TextIOWrapper
                    name='<stdout>' mode='w' encoding='utf-8'>, flush=True)
```

echo inline

Parameters

- **string** (*Union[RT, Iterable[RT]]*) –
- **fmt** (*FT*) –
- **renderer** (*Optional[IRenderer]*) –
- **file** (*IO*) –
- **flush** (*bool*) –

Returns

```
pytermor.text.distribute_padded(max_len: int, *values: str, pad_left: int = 0, pad_right: int = 0) → str
pytermor.text.distribute_padded(max_len: int, *values: RT, pad_left: int = 0, pad_right: int = 0) →
    Text
```

Parameters

- **max_len** –
- **values** –
- **pad_left** –
- **pad_right** –

Returns

```
pytermor.text.wrap_sgr(raw_input, width, indent_first=0, indent_subseq=0)
```

A workaround to make standard library `textwrap.wrap()` more friendly to an SGR-formatted strings.

The main idea is

Parameters

- **raw_input** (*str* | *list[str]*) –
- **width** (*int*) –
- **indent_first** (*int*) –
- **indent_subseq** (*int*) –

Return type*str*

`pytermor.text.apply_style_words_selective(string, st)`

Return type*Sequence*[*Fragment*]

`pytermor.text.apply_style_selective(regex, string, st=<*_NoOpStyle[]>)`

Main purpose: application of under(over|cross)lined styles to strings containing more than one word. Although the method can be used with any style and splitting rule provided. The result is a sequence of *Fragment*s with styling applied only to specified parts of the original string.

Regex should consist of two groups, first for parts to apply style to, second for parts to return without any style (see *NOOP_STYLE*). This regex is used internally for python's `re.findall()` method.

The example below demonstrates how to color all the capital letters in the string in red color:

```
>>> render([
...     *apply_style_selective(
...         re.compile(R'([A-Z]+)([^A-Z]+|$)'),
...         "A few CAPITALS",
...         Style(fg='red'),
...     )
... ], renderer=SgrRenderer(OutputMode.XTERM_16))
['[31mA[39m', ' few ', '[31mCAPITAL[39m', 's']
```

Parameters

- **regex** (*Pattern*) –
- **string** (*str*) –
- **st** (*Style*) –

Return type*Sequence*[*Fragment*]

`pytermor.text.flatten1(items)`

Take a list of nested lists and unpack all nested elements one level up.

```
>>> flatten1([[1, 2, 3], [4, 5, 6], [[10, 11, 12]]])
[1, 2, 3, 4, 5, 6, [10, 11, 12]]
```

Parameters

items (*Iterable*[*Iterable*[*T*]]) – Input lists.

Return type*List*[*T*]

`pytermor.text.flatten(items)`

@TODO @DRAFT didnt test it yet

Return type*List*[*T*]

3

CHANGELOG

3.1 Releases

This project uses Semantic Versioning – <https://semver.org> (starting from v2.0)

3.1.1 pending

- [UPDATE] Update coverage.yml
- pdf documentation
- cleanup
- (c) update
- [FIX] flake8
- [NEW] *IRenderable.raw()* method
- [NEW] *cval* atlassian colors
- [REFACTOR] made *measure* and *trace* private
- [NEW] *utilmisc* color transform methods overloaded
- [DOCS] a lot
- [FIX] pydeps invocation
- [FIX] *ESCAPE_SEQ_REGEX*
- [NEW] *contains_sgr* method
- [NEW] *Text.split_by_spaces()*, *Composite*
- [NEW] +3 base sequence classes, +26 preset sequences
- [TESTS] *Style/IColor* reprs
- [FIX] *make_clear_display_and_history()* -> *make_clear_history()*
- CI coverage now running on python 3.10 (was 3.8)

- [DOCS] fixed pydoc escaped spaces to stop python's warnings whining that breaks the CI
- upload to coveralls debug mode !@\$
- replaced GITHUB_TOKEN secret to COVERALLS_REPO_TOKEN
- disabled verbose mode on CI
- [NEW] "frozen" *Style* attribute
- [NEW] `__str__` methods override for named tuples *RGB*, *HSV*
- [REFACTOR] color resolver
- add `updated` field in `_version.py`
- add `__updated__` field to init file
- [NEW] implement missing 1st-level sequence classes
- [NEW] add *ColorTarget* enum as there are three extended color modes instead of two
- [NEW] add `SubtypedParam` support that allows specifying SGRs with subparams like `'ESC[4:3m'`
- [NEW] *LAB*, *XYZ* named tuples + conversions
- [FIX] *filter.AbstractTracer* faulty offset rendering
- [REFACTOR] sequence internal composition
- [NEW] `IntCodes`: `FRAMED (+``_OFF``)`, `UNDERLINE_COLOR_EXTENDED (+``_OFF``)`
- [NEW] `SeqIndex`: `CURLY_UNDERLINED`, `FRAMED`, `FRAMED_OFF`
- [NEW] *Style*, ```SgrRenderer``` and *TmuxRenderer* support of all the above
Inline literal start-string without end-string.
- [DRAFT] *parser* module
- [REWORK] `util*` -> *numfmt*, *filter*, *conv*

3.1.2 v2.48-dev

Apr 23

- [DOCS] small fixes
- [DOCS] updated changelog
- [FIX] *measure_char_width* and *get_char_width* internal logic
- [FIX] pipelines
- [FIX] *AbstractTracer* failure on empty input
- [FIX] *StaticFormatter* padding
- [FIX] bug in *SimpleTable* renderer when row is wider than a terminal
- [FIX] debug logging
- coverage git ignore
- `cli-docker` make command
- `Dockerfile` for repeatable builds
- hatch as build backend
- copyrights update
- host system/docker interchangeable building automations
- [NEW] *format_time*, *format_time_ms*, *format_time_ns*

- [NEW] `Highlighter` from static methods to real class
- [NEW] `lab_to_rgb()`
- [NEW] numeric formatters fallback mechanics
- [REFACTOR] `TDF_REGISTRY` -> `dual_registry`- ```FORMATTER_``` constants from top-level imports
- [REFACTOR] `utilnum._TDF_REGISTRY` -> `TDF_REGISTRY`
- [REFACTOR] edited highlighter styles
- [REFACTOR] naming:
 - `CustomBaseUnit` -> *`DualBaseUnit`*
 - `DynamicBaseFormatter` -> *`DynamicFormatter`*
 - `StaticBaseFormatter` -> *`StaticFormatter`*
- [TESTS] numeric formatters colorizing
- [UPDATE] README
- [UPDATE] license is now Lesser GPL v3

3.1.3 v2.40-dev

Feb 23

- [DOCS] changelog update
- [DOCS] `utilnum` module
- [DOCS] rethinking of references style
- [FIX] parse method of `TemplateEngine`
- [FIX] *`Highlighter`*
- [FIX] critical *`Styles`* color
- 2023 copytight update
- [NEW] `coveralls.io` integration
- [NEW] *`echoi`*, *`flatten`*, *`flatten1`* methods; *`SimpleTable`* class
- [NEW] *`StringLinearizer`*, *`WhitespaceRemover`*
- [NEW] *`text`* Fragments validation
- [NEW] *`Config`* class
- [NEW] hex rst text role
- [NEW] `utilnum.format_bytes_human()`
- [NEW] add es7s C45/Kalm to rgb colors list
- [NEW] methods percentile and median ; `render_benchmark` example
- [REFACTOR] *`IRenderable`* rewrite
- [REFACTOR] *`distribute_padded`* overloads
- [REFACTOR] attempt to break cyclic dependency of `util.*` modules
- [REFACTOR] moved color transformations and type vars from `_commons`
- [TESTS] additional coverage for `utilnum`

3.1.4 v2.32-dev

Jan 23

- [DOCS] utilnum update
- [DOCS] docstrings, typing
- [DOCS] utilnum module
- [FIX] `format_prefixed` and `format_auto_float` inaccuracies
- [FIX] `Text.prepend` typing
- [FIX] `TmuxRenderer` RGB output
- [NEW] `Color256` aliases “colorNN”
- [NEW] `Highlighter` from es7s, colorizing options of `utilnum` helpers
- [NEW] `IRenderable` result caching
- [NEW] `pad`, `padv` helpers
- [NEW] `prefix_refpoint_shift` argument of `PrefixedUnitFormatter`
- [NEW] `PrefixedUnitFormatter` inheritance
- [NEW] `String` and `FixedString` base renderables
- [NEW] `style.merge_styles()`
- [NEW] `Renderable` `__eq__` methods
- [NEW] `StyledString`
- [NEW] `utilmisc` `get_char_width()`, `guess_char_width()`, `measure_char_width()`
- [NEW] style merging strategies: `merge_fallback()`, `merge_overwrite`
- [NEW] subsecond delta support for `TimeDeltaFormatter`
- [TESTS] utilnum update
- [TESTS] integrated in-code doctests into pytest

3.1.5 v2.23-dev

- [FIX] `OmniHexPrinter` missed out newlines
- [NEW] `dump` printer caching
- [NEW] `Printers` and `Mappers`
- [NEW] `SgrRenderer` now supports non-default IO stream specifying
- [NEW] `utilstr.StringHexPrinter` and `utilstr.StringUcpPrinter`
- [NEW] add missing `hsv_to_rgb` function
- [NEW] extracted `resolve`, `approximate`, `find_closest` from `Color` class to module level, as well as color transform functions
- [NEW] split `Text` to `Text` and `FrozenText`

3.1.6 v2.18-dev

- [FIX] Disabled automatic rendering of `echo()` and `render()`.
- [NEW] `ArgCountError` migrated from `es7s/core`.
- [NEW] `black` code style.
- [NEW] `cval` autobuild.
- [NEW] Add `OmniHexPrinter` and `chunk()` helper.
- [NEW] Typehinting.

3.1.7 v2.14-dev

Dec 22

- [DOCS] Docs design fixes.
- [NEW] `confirm()` helper command.
- [NEW] `EscapeSequenceStringReplacer` filter.
- [NEW] `examples/terminal_benchmark` script.
- [NEW] `StringFilter` and `OmniFilter` classes.
- [NEW] Minor core improvements.
- [NEW] RGB and variations full support.
- [TESTS] Tests for `color` module.

3.1.8 v2.6-dev

Nov 22

- [NEW] `TemplateEngine` implementation.
- [NEW] `Text` nesting.
- [REFACTOR] Changes in `ConfigurableRenderer.force_styles` logic.
- [REFACTOR] Got rid of `Span` class.
- [REFACTOR] Package reorganizing.
- [REFACTOR] Rewrite of `color` module.

3.1.9 v2.2-dev

Oct 22

- [NEW] `TmuxRenderer`
- [NEW] `wait_key()` input helper.
- [NEW] Color config.
- [NEW] `IRenderable`` interface.
- [NEW] Named colors list.

3.1.10 v2.1-dev

Aug 22

- [NEW] Color presets.
- [TESTS] More unit tests for formatters.

3.1.11 v2.0-dev

Jul 22

- [REWORK] Complete library rewrite.
- [DOCS] sphinx and readthedocs integraton.
- [NEW] High-level abstractions *Color*, *Renderer* and *Style*.
- [TESTS] pytest and coverage integration.
- [TESTS] Unit tests for formatters and new modules.

3.1.12 v1.8

Jun 22

- [NEW] `format_prefixed_unit` extended for working with decimal and binary metric prefixes.
- [NEW] `sequence.NOOP` SGR sequence and `span.NOOP` format.
- [NEW] `format_time_delta` extended with new settings.
- [NEW] Added 3 formatters: `format_prefixed_unit`, `format_time_delta`, `format_auto_float`.
- [NEW] Max decimal points for `auto_float` extended from (2) to (max-2).
- [REFACTOR] Utility classes reorganization.
- [REFACTOR] Value rounding transferred from `format_auto_float` to `format_prefixed_unit`.
- [TESTS] Unit tests output formatting.

3.1.13 v1.7

May 22

- [FIX] Print reset sequence as `\e[m` instead of `\e[0m`.
- [NEW] `Span` constructor can be called without arguments.
- [NEW] Added `span.BG_BLACK` format.
- [NEW] Added `ljust_sgr`, `rjust_sgr`, `center_sgr` util functions to align strings with SGRs correctly.
- [NEW] Added SGR code lists.

3.1.14 v1.6

- [REFACTOR] Renamed code module to `sgr` because of conflicts in PyCharm debugger (`pydevd_console_integration.py`).
- [REFACTOR] Ridded of `EmptyFormat` and `AbstractFormat` classes.
- [TESTS] Excluded `tests` dir from distribution package.

3.1.15 v1.5

- [REFACTOR] Removed excessive `EmptySequenceSGR` – default `SGR` class was specifically implemented to print out as empty string instead of `\e[m` if constructed without params.

3.1.16 v1.4

- [NEW] `Span.wrap()` now accepts any type of argument, not only *str*.
- [NEW] Added equality methods for *SequenceSGR* and `Span` classes/subclasses.
- [REFACTOR] Rebuilt `Sequence` inheritance tree.
- [TESTS] Added some tests for `fmt.*` and `seq.*` classes.

3.1.17 v1.3

- [NEW] Added `span.GRAY` and `span.BG_GRAY` format presets.
- [REFACTOR] Interface revisioning.

3.1.18 v1.2

- [NEW] `EmptySequenceSGR` and `EmptyFormat` classes.
- [NEW] `opening_seq` and `closing_seq` properties for `Span` class.

3.1.19 v1.1

Apr 22

- [NEW] Autoformat feature.

3.1.20 v1.0

- First public version.

3.1.21 v0.90

Mar 22

- First commit.

4

LICENSE

GNU LESSER GENERAL PUBLIC LICENSE

Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<https://fsf.org/>> Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

This version of the GNU Lesser General Public License incorporates the terms and conditions of version 3 of the GNU General Public License, supplemented by the additional permissions listed below.

0. Additional Definitions.

As used herein, “this License” refers to version 3 of the GNU Lesser General Public License, and the “GNU GPL” refers to version 3 of the GNU General Public License.

“The Library” refers to a covered work governed by this License, other than an Application or a Combined Work as defined below.

An “Application” is any work that makes use of an interface provided by the Library, but which is not otherwise based on the Library. Defining a subclass of a class defined by the Library is deemed a mode of using an interface provided by the Library.

A “Combined Work” is a work produced by combining or linking an Application with the Library. The particular version of the Library with which the Combined Work was made is also called the “Linked Version”.

The “Minimal Corresponding Source” for a Combined Work means the Corresponding Source for the Combined Work, excluding any source code for portions of the Combined Work that, considered in isolation, are based on the Application, and not on the Linked Version.

The “Corresponding Application Code” for a Combined Work means the object code and/or source code for the Application, including any data and utility programs needed for reproducing the Combined Work from the Application, but excluding the System Libraries of the Combined Work.

1. Exception to Section 3 of the GNU GPL.

You may convey a covered work under sections 3 and 4 of this License without being bound by section 3 of the GNU GPL.

2. Conveying Modified Versions.

If you modify a copy of the Library, and, in your modifications, a facility refers to a function or data to be supplied by an Application that uses the facility (other than as an argument passed when the facility is invoked), then you may convey a copy of the modified version:

- a) under this License, provided that you make a good faith effort to ensure that, in the event an Application does not supply the function or data, the facility still operates, and performs whatever part of its purpose remains meaningful, or
- b) under the GNU GPL, with none of the additional permissions of this License applicable to that copy.

3. Object Code Incorporating Material from Library Header Files.

The object code form of an Application may incorporate material from a header file that is part of the Library. You may convey such object code under terms of your choice, provided that, if the incorporated material is not limited to numerical parameters, data structure layouts and accessors, or small macros, inline functions and templates (ten or fewer lines in length), you do both of the following:

- a) Give prominent notice with each copy of the object code that the Library is used in it and that the Library and its use are covered by this License.
- b) Accompany the object code with a copy of the GNU GPL and this license document.

4. Combined Works.

You may convey a Combined Work under terms of your choice that, taken together, effectively do not restrict modification of the portions of the Library contained in the Combined Work and reverse engineering for debugging such modifications, if you also do each of the following:

- a) Give prominent notice with each copy of the Combined Work that the Library is used in it and that the Library and its use are covered by this License.
- b) Accompany the Combined Work with a copy of the GNU GPL and this license document.
- c) For a Combined Work that displays copyright notices during execution, include the copyright notice for the Library among these notices, as well as a reference directing the user to the copies of the GNU GPL and this license document.
- d) Do one of the following:
 - 0) Convey the Minimal Corresponding Source under the terms of this License, and the Corresponding Application Code in a form suitable for, and under terms that permit, the user to recombine or relink the Application with a modified version of the Linked Version to produce a modified Combined Work, in the manner specified by section 6 of the GNU GPL for conveying Corresponding Source.
 - 1) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (a) uses at run time a copy of the Library already present on the user's computer system, and (b) will operate properly with a modified version of the Library that is interface-compatible with the Linked Version.

- e) Provide Installation Information, but only if you would otherwise be required to provide such information under section 6 of the GNU GPL, and only to the extent that such information is necessary to install and execute a modified version of the Combined Work produced by recombining or relinking the Application with a modified version of the Linked Version. (If you use option 4d0, the Installation Information must accompany the Minimal Corresponding Source and Corresponding Application Code. If you use option 4d1, you must provide the Installation Information in the manner specified by section 6 of the GNU GPL for conveying Corresponding Source.)

5. Combined Libraries.

You may place library facilities that are a work based on the Library side by side in a single library together with other library facilities that are not Applications and are not covered by this License, and convey such a combined library under terms of your choice, if you do both of the following:

- a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities, conveyed under the terms of this License.

b) Give prominent notice with the combined library that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

6. Revised Versions of the GNU Lesser General Public License.

The Free Software Foundation may publish revised and/or new versions of the GNU Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library as you received it specifies that a certain numbered version of the GNU Lesser General Public License “or any later version” applies to it, you have the option of following the terms and conditions either of that published version or of any later version published by the Free Software Foundation. If the Library as you received it does not specify a version number of the GNU Lesser General Public License, you may choose any version of the GNU Lesser General Public License ever published by the Free Software Foundation.

If the Library as you received it specifies that a proxy can decide whether future versions of the GNU Lesser General Public License shall apply, that proxy’s public statement of acceptance of any version is permanent authorization for you to choose that version for the Library.

4.1 Disclaimer of Warranty

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM “AS IS” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

4.2 Limitation of Liability

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM, INCLUDING BUT NOT LIMITED TO LOSSES OF DATA, FAILURES OF THE PROGRAM TO OPERATE WITH OTHER PROGRAMS, OTHER LOSSES AS WELL AS ACQUISITIONS, BREAKDOWNS, REPAIRS, UNSCREWINGS, BLACKOUTS, FAINTINGS, INJURIES, BURNS, SNOW AVALANCHES, EARTHQUAKES, VOLCANIC, GEYSER AND LIMNIC ERUPTIONS, TYPHOONS, METEORITE AND SATELLITE FALLS AND OTHER NATURAL DISASTERS, AS WELL AS BEHAVIORAL DEVIATIONS OF PEOPLE, SHARKS, SNAKES AND OTHER ANIMALS, ROBBERIES, ASSAULTS, RAPES, THEFTS AND BURGLARIES, DRUNKEN BRAWLS AND RIOTS, INCESTS, ABORTIONS, SHOULDER DISLOCATIONS, MILITARY CONSCRIPTIONS, DISFELLOWSHIPPINGS, CONFINEMENTS AND EXTRADITIONS, DIVORCEMENTS, DEMOTIONS AND PROMOTIONS, EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

PYTHON MODULE INDEX

p

- `pytermor`, [27](#)
- `pytermor.ansi`, [29](#)
- `pytermor.color`, [43](#)
- `pytermor.config`, [54](#)
- `pytermor.conv`, [55](#)
- `pytermor.cval`, [59](#)
- `pytermor.exception`, [59](#)
- `pytermor.filter`, [60](#)
- `pytermor.log`, [83](#)
- `pytermor.numfmt`, [71](#)
- `pytermor.parser`, [84](#)
- `pytermor.renderer`, [86](#)
- `pytermor.style`, [93](#)
- `pytermor.template`, [100](#)
- `pytermor.term`, [100](#)
- `pytermor.text`, [103](#)

INDEX

A

`a` (*pytermor.conv.LAB* attribute), 58
`AbstractStringTracer` (class in *pytermor.filter*), 65
`AbstractTracer` (class in *pytermor.filter*), 64
`Align` (class in *pytermor.filter*), 62
`allows_width_setup` (*pytermor.text.Composite* property), 106
`allows_width_setup` (*pytermor.text.Fragment* property), 105
`allows_width_setup` (*pytermor.text.FrozenText* property), 105
`allows_width_setup` (*pytermor.text.IRenderable* property), 104
`allows_width_setup` (*pytermor.text.SimpleTable* property), 107
`allows_width_setup` (*pytermor.text.Text* property), 105
ANSI escape sequence, 11
`apply()` (*pytermor.filter.AbstractStringTracer* method), 65
`apply()` (*pytermor.filter.AbstractTracer* method), 64
`apply()` (*pytermor.filter.BytesTracer* method), 64
`apply()` (*pytermor.filter.CsiStringReplacer* method), 67
`apply()` (*pytermor.filter.IFilter* method), 63
`apply()` (*pytermor.filter.NonPrintsOmniVisualizer* method), 69
`apply()` (*pytermor.filter.NonPrintsStringVisualizer* method), 69
`apply()` (*pytermor.filter.OmniMapper* method), 68
`apply()` (*pytermor.filter.OmniSanitizer* method), 70
`apply()` (*pytermor.filter.SgrStringReplacer* method), 67
`apply()` (*pytermor.filter.StringAligner* method), 64
`apply()` (*pytermor.filter.StringLinearizer* method), 67
`apply()` (*pytermor.filter.StringMapper* method), 68
`apply()` (*pytermor.filter.StringReplacer* method), 66
`apply()` (*pytermor.filter.StringTracer* method), 65
`apply()` (*pytermor.filter.StringUpTracer* method), 66
`apply()` (*pytermor.filter.WhitespaceRemover* method), 68
`apply()` (*pytermor.numfmt.Highlighter* method), 72
`apply_filters()` (in module *pytermor.filter*), 70
`apply_style_selective()` (in module *pytermor.text*), 109
`apply_style_words_selective()` (in module *pytermor.text*), 109
`approximate()` (in module *pytermor.color*), 53
`approximate()` (*pytermor.color.Color16* class method), 46
`approximate()` (*pytermor.color.Color256* class method), 48
`approximate()` (*pytermor.color.ColorRGB* class method), 50
`ApxResult` (class in *pytermor.color*), 44
`assemble()` (*pytermor.ansi.SequenceNf* method), 32
`assemble()` (*pytermor.ansi.SequenceSGR* method), 34
`AUTO` (*pytermor.renderer.OutputMode* attribute), 88
`autopick_fg()` (*pytermor.style.Style* method), 95

B

`b` (*pytermor.conv.LAB* attribute), 58
`base` (*pytermor.color.ColorRGB* property), 50
`BaseUnit` (class in *pytermor.numfmt*), 75
`bg` (*pytermor.style.Style* property), 94
`BG_BLACK` (*pytermor.ansi.SeqIndex* attribute), 36
`BG_BLUE` (*pytermor.ansi.SeqIndex* attribute), 36
`BG_COLOR_OFF` (*pytermor.ansi.SeqIndex* attribute), 36
`BG_CYAN` (*pytermor.ansi.SeqIndex* attribute), 36
`BG_GRAY` (*pytermor.ansi.SeqIndex* attribute), 37

`BG_GREEN` (*pytermor.ansi.SeqIndex* attribute), 36
`BG_HI_BLUE` (*pytermor.ansi.SeqIndex* attribute), 37
`BG_HI_CYAN` (*pytermor.ansi.SeqIndex* attribute), 37
`BG_HI_GREEN` (*pytermor.ansi.SeqIndex* attribute), 37
`BG_HI_MAGENTA` (*pytermor.ansi.SeqIndex* attribute), 37
`BG_HI_RED` (*pytermor.ansi.SeqIndex* attribute), 37
`BG_HI_WHITE` (*pytermor.ansi.SeqIndex* attribute), 37
`BG_HI_YELLOW` (*pytermor.ansi.SeqIndex* attribute), 37
`BG_MAGENTA` (*pytermor.ansi.SeqIndex* attribute), 36
`BG_RED` (*pytermor.ansi.SeqIndex* attribute), 36
`BG_WHITE` (*pytermor.ansi.SeqIndex* attribute), 36
`BG_YELLOW` (*pytermor.ansi.SeqIndex* attribute), 36
`BLACK` (*pytermor.ansi.SeqIndex* attribute), 36
`blink` (*pytermor.style.Style* attribute), 95
`BLINK_FAST` (*pytermor.ansi.SeqIndex* attribute), 35
`BLINK_OFF` (*pytermor.ansi.SeqIndex* attribute), 35
`BLINK_SLOW` (*pytermor.ansi.SeqIndex* attribute), 35
`BLUE` (*pytermor.ansi.SeqIndex* attribute), 36
`blue` (*pytermor.conv.RGB* attribute), 56
`BOLD` (*pytermor.ansi.SeqIndex* attribute), 35
`bold` (*pytermor.style.Style* attribute), 95
`BOLD_DIM_OFF` (*pytermor.ansi.SeqIndex* attribute), 35
`BytesTracer` (class in *pytermor.filter*), 64

C

`CDT` (in module *pytermor.color*), 44
`center_sgr()` (in module *pytermor.filter*), 62
`chunk()` (in module *pytermor.filter*), 62
`class_name` (*pytermor.style.Style* attribute), 95
`clone()` (*pytermor.renderer.HtmlRenderer* method), 91
`clone()` (*pytermor.renderer.IRenderer* method), 87
`clone()` (*pytermor.renderer.NoOpRenderer* method), 90
`clone()` (*pytermor.renderer.SgrDebugger* method), 92
`clone()` (*pytermor.renderer.SgrRenderer* method), 89
`clone()` (*pytermor.renderer.TemplateRenderer* method), 92
`clone()` (*pytermor.renderer.TmuxRenderer* method), 90
`clone()` (*pytermor.style.Style* method), 95
`code` (*pytermor.color.Color256* property), 48
`code_bg` (*pytermor.color.Color16* property), 45
`code_fg` (*pytermor.color.Color16* property), 45
`color`, 6
`color` (*pytermor.color.ApxResult* attribute), 44
`Color16` (class in *pytermor.color*), 45
`Color256` (class in *pytermor.color*), 47
`COLOR_OFF` (*pytermor.ansi.SeqIndex* attribute), 36
`ColorCodeConflictError`, 54
`colorize()` (*pytermor.numfmt.Highlighter* method), 72
`ColorNameConflictError`, 53
`ColorRGB` (class in *pytermor.color*), 49
`ColorTarget` (class in *pytermor.ansi*), 34
`ColorValuesRGB` (class in *pytermor.cval*), 59
`ColorValuesXterm` (class in *pytermor.cval*), 59
`compose_hyperlink()` (in module *pytermor.ansi*), 43

Composite (class in pytermor.text), 106
 Config (class in pytermor.config), 54
 confirm() (in module pytermor.term), 101
 ConflictError, 59
 contains_sgr() (in module pytermor.parser), 85
 CONTROL_CHARS (in module pytermor.filter), 63
 count() (pytermor.conv.HSV method), 56
 count() (pytermor.conv.LAB method), 58
 count() (pytermor.conv.RGB method), 56
 count() (pytermor.conv.XYZ method), 58
 CRITICAL (pytermor.style.Styles attribute), 97
 CRITICAL_ACCENT (pytermor.style.Styles attribute), 97
 CRITICAL_LABEL (pytermor.style.Styles attribute), 97
 CROSSLINED (pytermor.ansi.SeqIndex attribute), 35
 crosslined (pytermor.style.Style attribute), 95
 CROSSLINED_OFF (pytermor.ansi.SeqIndex attribute), 36
 CSI_SEQ_REGEX (in module pytermor.parser), 84
 CsiStringReplacer (class in pytermor.filter), 67
 CT (in module pytermor.color), 44
 CURLY_UNDERLINED (pytermor.ansi.SeqIndex attribute), 35
 curly_underlined (pytermor.style.Style attribute), 95
 cv (in module pytermor.cval), 59
 cvr (in module pytermor.cval), 59
 CYAN (pytermor.ansi.SeqIndex attribute), 36

D

decompose_report_cursor_position() (in module pytermor.parser), 85
 DEFAULT_COLOR (in module pytermor.color), 51
 dict() (pytermor.filter.ExtendedEnum class method), 61
 DIM (pytermor.ansi.SeqIndex attribute), 35
 dim (pytermor.style.Style attribute), 95
 distance (pytermor.color.ApxResult attribute), 45
 distance_real (pytermor.color.ApxResult property), 45
 distribute_padded() (in module pytermor.text), 108
 DOUBLE_UNDERLINED (pytermor.ansi.SeqIndex attribute), 35
 double_underlined (pytermor.style.Style attribute), 95
 DualBaseUnit (class in pytermor.numfmt), 76
 DualFormatter (class in pytermor.numfmt), 75
 DualFormatterRegistry (class in pytermor.numfmt), 76
 dump() (in module pytermor.filter), 70
 DynamicFormatter (class in pytermor.numfmt), 74

E

echo() (in module pytermor.text), 108
 echoi() (in module pytermor.text), 108
 enclose() (in module pytermor.ansi), 37
 ERROR (pytermor.style.Styles attribute), 97
 ERROR_ACCENT (pytermor.style.Styles attribute), 97
 ERROR_LABEL (pytermor.style.Styles attribute), 97
 ESCAPE_SEQ_REGEX (in module pytermor.parser), 84
 ExtendedEnum (class in pytermor.filter), 61

F

fg (pytermor.style.Style property), 94
 find_closest() (in module pytermor.color), 53
 find_closest() (pytermor.color.Color16 class method), 46
 find_closest() (pytermor.color.Color256 class method), 48
 find_closest() (pytermor.color.ColorRGB class method), 50
 find_matching() (pytermor.numfmt.DualFormatterRegistry method), 77
 flatten() (in module pytermor.text), 109
 flatten1() (in module pytermor.text), 109
 flip() (pytermor.style.Style method), 96
 format() (pytermor.numfmt.DualFormatter method), 76
 format() (pytermor.numfmt.DynamicFormatter method), 75
 format() (pytermor.numfmt.StaticFormatter method), 74
 format_auto_float() (in module pytermor.numfmt), 77
 format_base() (pytermor.numfmt.DualFormatter method), 76
 format_bytes_human() (in module pytermor.numfmt), 80
 format_si() (in module pytermor.numfmt), 78

format_si_binary() (in module pytermor.numfmt), 79
 format_thousand_sep() (in module pytermor.numfmt), 77
 format_time() (in module pytermor.numfmt), 81
 format_time_delta() (in module pytermor.numfmt), 82
 format_time_delta_longest() (in module pytermor.numfmt), 83
 format_time_delta_shortest() (in module pytermor.numfmt), 83
 format_time_ms() (in module pytermor.numfmt), 81
 format_time_ns() (in module pytermor.numfmt), 82
 format_value() (pytermor.color.Color16 method), 46
 format_value() (pytermor.color.Color256 method), 48
 format_value() (pytermor.color.ColorRGB method), 50
 Fragment (class in pytermor.text), 104
 FRAMED (pytermor.ansi.SeqIndex attribute), 35
 framed (pytermor.style.Style attribute), 95
 FRAMED_OFF (pytermor.ansi.SeqIndex attribute), 36
 FrozenText (class in pytermor.text), 105
 FT (in module pytermor.style), 93

G

get_by_code() (pytermor.color.Color16 class method), 45
 get_by_code() (pytermor.color.Color256 class method), 48
 get_by_max_len() (pytermor.numfmt.DualFormatterRegistry method), 77
 get_char_width() (in module pytermor.term), 101
 get_closing_seq() (in module pytermor.ansi), 37
 get_config() (in module pytermor.config), 54
 get_default() (pytermor.renderer.RendererManager class method), 87
 get_longest() (pytermor.numfmt.DualFormatterRegistry method), 77
 get_max_len() (pytermor.numfmt.StaticFormatter method), 74
 get_preferable_wrap_width() (in module pytermor.term), 100
 get_qname() (in module pytermor.log), 83
 get_shortest() (pytermor.numfmt.DualFormatterRegistry method), 77
 get_terminal_width() (in module pytermor.term), 100
 GRAY (pytermor.ansi.SeqIndex attribute), 37
 GREEN (pytermor.ansi.SeqIndex attribute), 36
 green (pytermor.conv.RGB attribute), 56
 guess_char_width() (in module pytermor.term), 102

H

has_width (pytermor.text.Composite property), 106
 has_width (pytermor.text.Fragment property), 104
 has_width (pytermor.text.FrozenText property), 105
 has_width (pytermor.text.IRenderable property), 104
 has_width (pytermor.text.SimpleTable property), 107
 has_width (pytermor.text.Text property), 106
 hex_to_hsv() (in module pytermor.conv), 57
 hex_to_rgb() (in module pytermor.conv), 56
 hex_value (pytermor.color.Color16 property), 46
 hex_value (pytermor.color.Color256 property), 48
 hex_value (pytermor.color.ColorRGB property), 50
 HI_BLUE (pytermor.ansi.SeqIndex attribute), 37
 HI_CYAN (pytermor.ansi.SeqIndex attribute), 37
 HI_GREEN (pytermor.ansi.SeqIndex attribute), 37
 HI_MAGENTA (pytermor.ansi.SeqIndex attribute), 37
 HI_RED (pytermor.ansi.SeqIndex attribute), 37
 HI_WHITE (pytermor.ansi.SeqIndex attribute), 37
 HI_YELLOW (pytermor.ansi.SeqIndex attribute), 37
 HIDDEN (pytermor.ansi.SeqIndex attribute), 35
 HIDDEN_OFF (pytermor.ansi.SeqIndex attribute), 35
 highlight() (in module pytermor.numfmt), 77
 Highlighter (class in pytermor.numfmt), 72
 HSV (class in pytermor.conv), 56
 hsv_to_hex() (in module pytermor.conv), 57
 hsv_to_rgb() (in module pytermor.conv), 57
 HtmlRenderer (class in pytermor.renderer), 90
 hue (pytermor.conv.HSV attribute), 56

I

IFilter (class in pytermor.filter), 63
 index() (pytermor.conv.HSV method), 56
 index() (pytermor.conv.LAB method), 58
 index() (pytermor.conv.RGB method), 56
 index() (pytermor.conv.XYZ method), 58
 init_config() (in module pytermor.config), 55
 IntCode (class in pytermor.ansi), 34
 INVERSED (pytermor.ansi.SeqIndex attribute), 35
 inversed (pytermor.style.Style attribute), 95
 INVERSED_OFF (pytermor.ansi.SeqIndex attribute), 35
 IRenderable (class in pytermor.text), 104
 IRenderer (class in pytermor.renderer), 87
 is_caching_allowed (pytermor.renderer.HtmlRenderer property), 91
 is_caching_allowed (pytermor.renderer.IRenderer property), 87
 is_caching_allowed (pytermor.renderer.NoOpRenderer property), 90
 is_caching_allowed (pytermor.renderer.SgrDebugger property), 91
 is_caching_allowed (pytermor.renderer.SgrRenderer property), 89
 is_caching_allowed (pytermor.renderer.TemplateRenderer property), 92
 is_caching_allowed (pytermor.renderer.TmuxRenderer property), 89
 is_format_allowed (pytermor.renderer.HtmlRenderer property), 91
 is_format_allowed (pytermor.renderer.IRenderer property), 87
 is_format_allowed (pytermor.renderer.NoOpRenderer property), 90
 is_format_allowed (pytermor.renderer.SgrDebugger property), 91
 is_format_allowed (pytermor.renderer.SgrRenderer property), 89
 is_format_allowed (pytermor.renderer.TemplateRenderer property), 92
 is_format_allowed (pytermor.renderer.TmuxRenderer property), 89
 ISequence (class in pytermor.ansi), 31
 IT (in module pytermor.filter), 63
 ITALIC (pytermor.ansi.SeqIndex attribute), 35
 italic (pytermor.style.Style attribute), 95
 ITALIC_OFF (pytermor.ansi.SeqIndex attribute), 35

L

L (pytermor.conv.LAB attribute), 58
 LAB (class in pytermor.conv), 58
 list() (pytermor.filter.ExtendedEnum class method), 61
 ljust_sgr() (in module pytermor.filter), 62
 LogicError, 59

M

MAGENTA (pytermor.ansi.SeqIndex attribute), 36
 make_clear_display() (in module pytermor.ansi), 41
 make_clear_display_after_cursor() (in module pytermor.ansi), 41
 make_clear_display_before_cursor() (in module pytermor.ansi), 41
 make_clear_history() (in module pytermor.ansi), 41
 make_clear_line() (in module pytermor.ansi), 42
 make_clear_line_after_cursor() (in module pytermor.ansi), 41
 make_clear_line_before_cursor() (in module pytermor.ansi), 42
 make_color_256() (in module pytermor.ansi), 38
 make_color_rgb() (in module pytermor.ansi), 38
 make_disable_alt_screen_buffer() (in module pytermor.ansi), 42
 make_enable_alt_screen_buffer() (in module pytermor.ansi), 42
 make_erase_in_display() (in module pytermor.ansi), 40
 make_erase_in_line() (in module pytermor.ansi), 41

make_hide_cursor() (in module pytermor.ansi), 42
 make_hyperlink() (in module pytermor.ansi), 42
 make_move_cursor_down() (in module pytermor.ansi), 39
 make_move_cursor_down_to_start() (in module pytermor.ansi), 40
 make_move_cursor_left() (in module pytermor.ansi), 39
 make_move_cursor_right() (in module pytermor.ansi), 39
 make_move_cursor_up() (in module pytermor.ansi), 39
 make_move_cursor_up_to_start() (in module pytermor.ansi), 39
 make_query_cursor_position() (in module pytermor.ansi), 40
 make_reset_cursor() (in module pytermor.ansi), 38
 make_restore_cursor_position() (in module pytermor.ansi), 43
 make_restore_screen() (in module pytermor.ansi), 42
 make_save_cursor_position() (in module pytermor.ansi), 43
 make_save_screen() (in module pytermor.ansi), 42
 make_set_cursor() (in module pytermor.ansi), 39
 make_set_cursor_column() (in module pytermor.ansi), 40
 make_set_cursor_line() (in module pytermor.ansi), 40
 make_show_cursor() (in module pytermor.ansi), 42
 make_style() (in module pytermor.style), 98
 max_len (pytermor.numfmt.DualFormatter property), 75
 measure_char_width() (in module pytermor.term), 102
 merge_fallback() (pytermor.style.Style method), 96
 merge_overwrite() (pytermor.style.Style method), 96
 merge_styles() (in module pytermor.style), 98
 module
 pytermor, 27
 pytermor.ansi, 29
 pytermor.color, 43
 pytermor.config, 54
 pytermor.conv, 55
 pytermor.cval, 59
 pytermor.exception, 59
 pytermor.filter, 60
 pytermor.log, 83
 pytermor.numfmt, 71
 pytermor.parser, 84
 pytermor.renderer, 86
 pytermor.style, 93
 pytermor.template, 100
 pytermor.term, 100
 pytermor.text, 103
 MPT (in module pytermor.filter), 63

N

name (pytermor.color.Color16 property), 46
 name (pytermor.color.Color256 property), 48
 name (pytermor.color.ColorRGB property), 50
 NO_ANSI (pytermor.renderer.OutputMode attribute), 88
 NON_ASCII_CHARS (in module pytermor.filter), 63
 NonPrintsOmniVisualizer (class in pytermor.filter), 69
 NonPrintsStringVisualizer (class in pytermor.filter), 69
 NOOP_COLOR (in module pytermor.color), 51
 NOOP_SEQ (in module pytermor.ansi), 34
 NOOP_STYLE (in module pytermor.style), 97
 NoOpRenderer (class in pytermor.renderer), 90

O

OmniMapper (class in pytermor.filter), 68
 OmniSanitizer (class in pytermor.filter), 69
 OT (in module pytermor.filter), 63
 OutputMode (class in pytermor.renderer), 88
 OVERLINED (pytermor.ansi.SeqIndex attribute), 35
 overlined (pytermor.style.Style attribute), 95
 OVERLINED_OFF (pytermor.ansi.SeqIndex attribute), 36

P

pad() (in module pytermor.filter), 62
 padv() (in module pytermor.filter), 62

params (*pytermor.ansi.SequenceSGR* property), 34
 PREFIXES_SI_DEC (in module *pytermor.numfmt*), 72
 PRINTABLE_CHARS (in module *pytermor.filter*), 63
 PTT (in module *pytermor.filter*), 63
 pytermor
 module, 27
 pytermor.ansi
 module, 29
 pytermor.color
 module, 43
 pytermor.config
 module, 54
 pytermor.conv
 module, 55
 pytermor.cval
 module, 59
 pytermor.exception
 module, 59
 pytermor.filter
 module, 60
 pytermor.log
 module, 83
 pytermor.numfmt
 module, 71
 pytermor.parser
 module, 84
 pytermor.renderer
 module, 86
 pytermor.style
 module, 93
 pytermor.template
 module, 100
 pytermor.term
 module, 100
 pytermor.text
 module, 103

R

raw() (*pytermor.text.Composite* method), 106
 raw() (*pytermor.text.Fragment* method), 104
 raw() (*pytermor.text.FrozenText* method), 105
 raw() (*pytermor.text.IRenderable* method), 104
 raw() (*pytermor.text.SimpleTable* method), 107
 raw() (*pytermor.text.Text* method), 106
 RCP_REGEX (in module *pytermor.parser*), 85
 RED (*pytermor.ansi.SeqIndex* attribute), 36
 red (*pytermor.conv.RGB* attribute), 55
 register() (*pytermor.numfmt.DualFormatterRegistry* method), 76
 render() (in module *pytermor.text*), 107
 render() (*pytermor.renderer.HtmlRenderer* method), 91
 render() (*pytermor.renderer.IRenderer* method), 87
 render() (*pytermor.renderer.NoOpRenderer* method), 90
 render() (*pytermor.renderer.SgrDebugger* method), 92
 render() (*pytermor.renderer.SgrRenderer* method), 89
 render() (*pytermor.renderer.TemplateRenderer* method), 92
 render() (*pytermor.renderer.TmuxRenderer* method), 89
 render() (*pytermor.text.Composite* method), 106
 render() (*pytermor.text.Fragment* method), 105
 render() (*pytermor.text.FrozenText* method), 105
 render() (*pytermor.text.IRenderable* method), 104
 render() (*pytermor.text.SimpleTable* method), 107
 render() (*pytermor.text.Text* method), 106
 RendererManager (class in *pytermor.renderer*), 86
 rendering, 6
 replace_config() (in module *pytermor.config*), 55
 RESET (*pytermor.ansi.SeqIndex* attribute), 35
 resolve() (*pytermor.ansi.IntCode* class method), 34
 resolve() (*pytermor.color.Color16* class method), 46
 resolve() (*pytermor.color.Color256* class method), 49
 resolve() (*pytermor.color.ColorRGB* class method), 51
 resolve_color() (in module *pytermor.color*), 51
 RGB (class in *pytermor.conv*), 55
 rgb_to_hex() (in module *pytermor.conv*), 56

rgb_to_hsv() (in module *pytermor.conv*), 57
 rjust_sgr() (in module *pytermor.filter*), 62
 RPT (in module *pytermor.filter*), 63
 RT (in module *pytermor.text*), 103

S

saturation (*pytermor.conv.HSV* attribute), 56
 SeqIndex (class in *pytermor.ansi*), 34
 SequenceCSI (class in *pytermor.ansi*), 32
 SequenceFe (class in *pytermor.ansi*), 32
 SequenceFp (class in *pytermor.ansi*), 32
 SequenceFs (class in *pytermor.ansi*), 32
 SequenceNf (class in *pytermor.ansi*), 31
 SequenceOSC (class in *pytermor.ansi*), 32
 SequenceSGR (class in *pytermor.ansi*), 33
 SequenceST (class in *pytermor.ansi*), 32
 set_default() (*pytermor.renderer.RendererManager* class method), 87
 set_default_format_always() (*pytermor.renderer.RendererManager* class method), 87
 set_default_format_never() (*pytermor.renderer.RendererManager* class method), 87
 set_format_always() (*pytermor.renderer.SgrDebugger* method), 92
 set_format_auto() (*pytermor.renderer.SgrDebugger* method), 92
 set_format_never() (*pytermor.renderer.SgrDebugger* method), 92
 set_width() (*pytermor.text.Composite* method), 106
 set_width() (*pytermor.text.Fragment* method), 105
 set_width() (*pytermor.text.FrozenText* method), 105
 set_width() (*pytermor.text.IRenderable* method), 104
 set_width() (*pytermor.text.SimpleTable* method), 107
 set_width() (*pytermor.text.Text* method), 105
 SGR, 11
 SGR_SEQ_REGEX (in module *pytermor.parser*), 84
 SgrDebugger (class in *pytermor.renderer*), 91
 SgrRenderer (class in *pytermor.renderer*), 88
 SgrStringReplacer (class in *pytermor.filter*), 66
 SimpleTable (class in *pytermor.text*), 106
 StaticFormatter (class in *pytermor.numfmt*), 72
 StringAligner (class in *pytermor.filter*), 64
 StringLinearizer (class in *pytermor.filter*), 67
 StringMapper (class in *pytermor.filter*), 68
 StringReplacer (class in *pytermor.filter*), 66
 StringTracer (class in *pytermor.filter*), 65
 StringUcpTracer (class in *pytermor.filter*), 65
 style, 6
 Style (class in *pytermor.style*), 93
 Styles (class in *pytermor.style*), 97

T

TemplateRenderer (class in *pytermor.renderer*), 92
 Text (class in *pytermor.text*), 105
 TmuxRenderer (class in *pytermor.renderer*), 89
 to_hsv() (*pytermor.color.Color16* method), 46
 to_hsv() (*pytermor.color.Color256* method), 49
 to_hsv() (*pytermor.color.ColorRGB* method), 51
 to_rgb() (*pytermor.color.Color16* method), 47
 to_rgb() (*pytermor.color.Color256* method), 49
 to_rgb() (*pytermor.color.ColorRGB* method), 51
 to_sgr() (*pytermor.color.Color16* method), 45
 to_sgr() (*pytermor.color.Color256* method), 47
 to_sgr() (*pytermor.color.ColorRGB* method), 49
 to_tmux() (*pytermor.color.Color16* method), 46
 to_tmux() (*pytermor.color.Color256* method), 48
 to_tmux() (*pytermor.color.ColorRGB* method), 50
 TracerExtra (class in *pytermor.filter*), 66
 TRUE_COLOR (*pytermor.renderer.OutputMode* attribute), 88

U

underline_color (*pytermor.style.Style* property), 94

`UNDERLINED` (*pytermor.ansi.SeqIndex* attribute), 35
`underlined` (*pytermor.style.Style* attribute), 95
`UNDERLINED_OFF` (*pytermor.ansi.SeqIndex* attribute), 35
`UserAbort`, 60
`UserCancel`, 59

V

`value` (*pytermor.conv.HSV* attribute), 56
`variations` (*pytermor.color.ColorRGB* property), 50

W

`wait_key()` (in module *pytermor.term*), 101
`WARNING` (*pytermor.style.Styles* attribute), 97
`WARNING_ACCENT` (*pytermor.style.Styles* attribute), 97
`WARNING_LABEL` (*pytermor.style.Styles* attribute), 97
`WHITE` (*pytermor.ansi.SeqIndex* attribute), 36
`WHITESPACE_CHARS` (in module *pytermor.filter*), 63
`WhitespaceRemover` (class in *pytermor.filter*), 67
`with_traceback()` (*pytermor.color.ColorCodeConflictError* method), 54
`with_traceback()` (*pytermor.color.ColorNameConflictError* method), 53
`with_traceback()` (*pytermor.exception.ConflictError* method), 59
`with_traceback()` (*pytermor.exception.LogicError* method), 59
`with_traceback()` (*pytermor.exception.UserAbort* method), 60
`with_traceback()` (*pytermor.exception.UserCancel* method), 60
`wrap_sgr()` (in module *pytermor.text*), 108

X

`x` (*pytermor.conv.XYZ* attribute), 58
`XTERM_16` (*pytermor.renderer.OutputMode* attribute), 88
`XTERM_256` (*pytermor.renderer.OutputMode* attribute), 88
`XYZ` (class in *pytermor.conv*), 58

Y

`y` (*pytermor.conv.XYZ* attribute), 58
`YELLOW` (*pytermor.ansi.SeqIndex* attribute), 36

Z

`z` (*pytermor.conv.XYZ* attribute), 58