



# **pytermor**

***Release 2.46.1-dev1***

**Alexandr Shavykin**

**Mar 21, 2023**



# CONTENTS

<b>1</b>	<b>Guide</b>	<b>3</b>
1.1	Getting started . . . . .	3
1.2	High-level API . . . . .	7
1.3	Renderers . . . . .	8
1.4	String filters . . . . .	8
1.5	Number formatters . . . . .	8
1.6	es7s color collection . . . . .	11
1.7	Low-level API . . . . .	11
1.8	ANSI preset list . . . . .	14
1.9	xterm color palette . . . . .	23
1.10	Configuration . . . . .	25
1.11	Docs guidelines . . . . .	25
<b>2</b>	<b>API reference</b>	<b>29</b>
2.1	pytermor.ansi . . . . .	30
2.2	pytermor.color . . . . .	41
2.3	pytermor.common . . . . .	52
2.4	pytermor.config . . . . .	56
2.5	pytermor.cval . . . . .	57
2.6	pytermor.renderer . . . . .	57
2.7	pytermor.style . . . . .	64
2.8	pytermor.text . . . . .	71
2.9	pytermor.utilmisc . . . . .	76
2.10	pytermor.utilnum . . . . .	82
2.11	pytermor.utilstr . . . . .	95
<b>3</b>	<b>Changelog</b>	<b>107</b>
<b>4</b>	<b>License</b>	<b>113</b>
	<b>Python Module Index</b>	<b>127</b>



(yet another) Python library initially designed for formatting terminal output using ANSI escape codes.

Provides *high-level* methods for working with text sections, colors, formats, alignment and wrapping, as well as *low-level* *ansi* module which allows operating with SGR (Select Graphic Rendition) *sequences* and also implements automatic “soft” format termination. Depending on the context and technical requirements either approach can be used. Also includes a set of additional number/string/date formatters for pretty output.

Key feature of this library is extendability and a variety of formatters (called *renderers*), which determine the output syntax:

- *SgrRenderer* (global default)
- *TmuxRenderer*
- *HtmlRenderer*
- *SgrDebugger* (mostly for development)
- etc.

No dependencies required, only Python Standard Library (there are some for testing and docs building, though).

---

**Todo:** This is how you **should** format examples:

---

We put these pieces together to create a SGR command. Thus, `ESC[1m` specifies bold (or bright) text, and `ESC[31m` specifies red foreground text. We can chain together parameters; for example, `ESC[32;47m` specifies green foreground text on a white background.

The following diagram shows a complete example for rendering the word “text” in red with a single underline.



#### Notes

- For terminals that support bright foreground colors, `ESC[1;3Xm` is usually equivalent to `ESC[9Xm` (where `X` is a digit in 0-7). However, the reverse does not seem to hold, at least anecdotally: `ESC[2;9Xm` usually does not render the same as `ESC[3Xm`.
- Not all terminals support every effect.

Fig. 1: <https://chrisyeh96.github.io/2020/03/28/terminal-colors.html#color-schemes>



## 1.1 Getting started

### 1.1.1 Installation

Python 3.8 or later should be installed and available in `$PATH`; that's basically it if intended usage of the package is as a library.

Listing 1: Installing into a project

```
$ python -m pip install pytermor
```

Listing 2: Standalone installation (for developing or experimenting)

```
$ git clone git@github.com:delameter/pytermor.git .  
$ python -m venv venv  
$ PYTHONPATH=. venv/bin/python -m pytermor  
v2.41.1-dev1:Feb-23
```

## 1.1.2 Structure

A L	Module	Class(es)	Purpose
Hi	<i>text</i>	<i>Text</i>	Container consisting of text pieces each with attached <i>Style</i> . Renders into specified format keeping all the formatting.
		<i>Style</i> <i>Styles</i>	Reusable abstractions defining colors and text attributes (text color, bg color, <i>bold</i> attribute, <i>underlined</i> attribute etc).
		<i>SgrRenderer</i> <i>HtmlRenderer</i> <i>TmuxRenderer</i> etc.	<i>SgrRenderer</i> transforms <i>Style</i> instances into <i>Color</i> , <i>Span</i> and <i>SequenceSGR</i> instances and assembles it all up. There are several other implementations depending on what output format is required.
	<i>color</i>	<i>Color16</i> <i>Color256</i> <i>ColorRGB</i>	Abstractions for color operations in different color modes (default 16-color, 256-color, RGB). Tools for color approximation and transformations.
		<i>pytermor</i>	Color registry.
Lo	<i>ansi</i>	<i>Span</i>	Abstraction consisting of “opening” SGR sequence defined by the developer (or taken from preset list) and complementary “closing” SGR sequence that is built automatically.
		<i>Spans</i>	Registry of predefined instances in case the developer doesn’t need dynamic output formatting and just wants to colorize an error message.
		<i>SequenceSGR</i> <i>SeqIndex</i>	Abstractions for manipulating ANSI control sequences and classes-factories, plus a registry of preset SGRs.
		<i>IntCodes</i>	Registry of escape control sequence parameters.
	<i>util</i>	*	Additional formatters and common methods for manipulating strings with SGRs inside.

## 1.1.3 Features

One of the core concepts of the library is *Span* class. *Span* is a combination of two control sequences; it wraps specified string with pre-defined leading and trailing SGR definitions.

Example code:

```

1 from pytermor import Spans
2
3 print(Spans.RED('Feat') + Spans.BOLD('ures'))
```


## Content-aware format nesting

Compose text spans with automatic content-aware span termination. Preset spans can safely overlap with each other (as long as they require different *breaker* sequences to reset).

```

1 from pytermor import Span
2
3 span1 = Span('blue', 'bold')
4 span2 = Span('cyan', 'inversed', 'underlined', 'italic')
5
6 msg = span1(f'Content{span2("-aware format")} nesting')
7 print(msg)
```



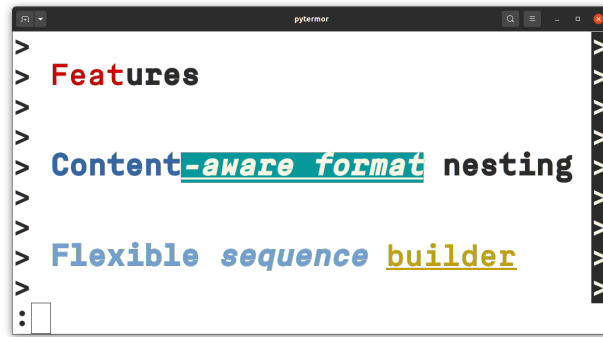

### Flexible sequence builder

Create your own *SGR sequences* using default constructor, which accepts color/attribute keys, integer codes and even existing *SGRs*, in any amount and in any order. Key resolving is case-insensitive.

```

1 from pytermor import SeqIndex, SequenceSGR
2
3 seq1 = SequenceSGR('hi_blue', 1) # keys or integer codes
4 seq2 = SequenceSGR(seq1, SeqIndex.ITALIC) # existing SGRs
5 seq3 = SequenceSGR('underlined', 'YELLOW') # case-insensitive
6
7 msg = f'{seq1}Flexible{SeqIndex.RESET} ' + \
8       f'{seq2}sequence{SeqIndex.RESET} ' + \
9       str(seq3) + 'builder' + str(SeqIndex.RESET)
10 print(msg)

```

### 256 colors / True Color support


The library supports extended color modes:

- XTerm 256 colors indexed mode (see [ANSI preset list](#));
- True Color RGB mode (16M colors).

```

1 from pytermor import SequenceSGR, SeqIndex
2
3 start_color = 41
4 for idx, c in enumerate(range(start_color, start_color+(36*6), 36)):
5     print(f'{SequenceSGR.new_color_256(c)}{SeqIndex.COLOR_OFF}', end='')
6
7 print('\n')
8 for idx, c in enumerate(range(0, 256, 256//17)):
9     r = max(0, 255-c)
10    g = max(0, min(255, 127-(c*2)))
11    b = c
12    print(f'{SequenceSGR.new_color_rgb(r, g, b)}{SeqIndex.COLOR_OFF}', end='')

```

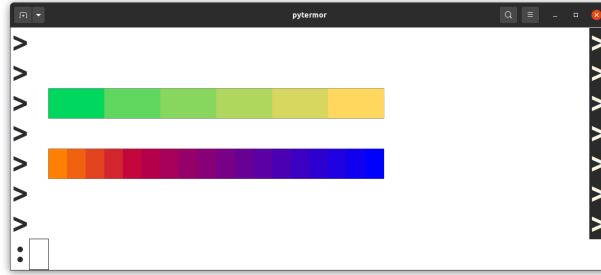

## Customizable output formats

---

**Todo:** @TODOTODO

---

## String and number formatters

---

**Todo:** @TODOTODO

---

### 1.1.4 CLI usage

Commands like these can be used for quick experimenting without loading the IDE:

- One-liner for system-wide installation (not recommended):

```
$ python -c "import pytermor as pt; pt.echo('RED', 'red')"
```

- One-liner for virtual environment (venv) with *pytermor* pre-installed (see [Installation](#)) (note that the library source code root folder should be used as current working directory):

```
$ PYTHONPATH=. venv/bin/python -c "import pytermor as pt; pt.echo('GREEN', 'green')"
```

- Interactive mode for virtual environment with *pytermor* pre-installed (again, current working directory should be sources root dir):

```
$ PYTHONSTARTUP=.run-startup.py PYTHONPATH=. venv/bin/python -qi
```

```
python 3.8.10
pytermor 2.41.1-dev1
>>> pt.echo("This is warning, be warned", pt.Styles.WARNING)
```

## 1.2 High-level API

### 1.2.1 Core methods

---

`text.render([string, fmt, renderer, ...])`

---

`text.echo([string, fmt, renderer, ...])`

---

<code>color.resolve_color(subject[, color_type])</code>	Case-insensitive search through registry contents.
---	--

<code>style.make_style([fmt])</code>	General <i>Style</i> constructor.
--------------------------------------	-----------------------------------

<code>style.merge_styles([base, fallbacks, overwrites])</code>	Bulk style merging method.
--	----------------------------

---

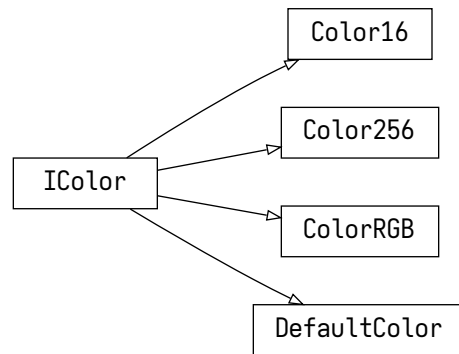


Fig. 1: `IColor` inheritance tree

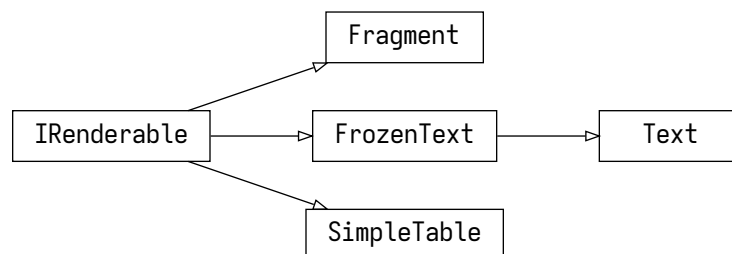


Fig. 2: *IRenderable* inheritance tree

## 1.2.2 Colors

## 1.2.3 Styles

## 1.2.4 Output format control

## 1.2.5 Color mode fallbacks

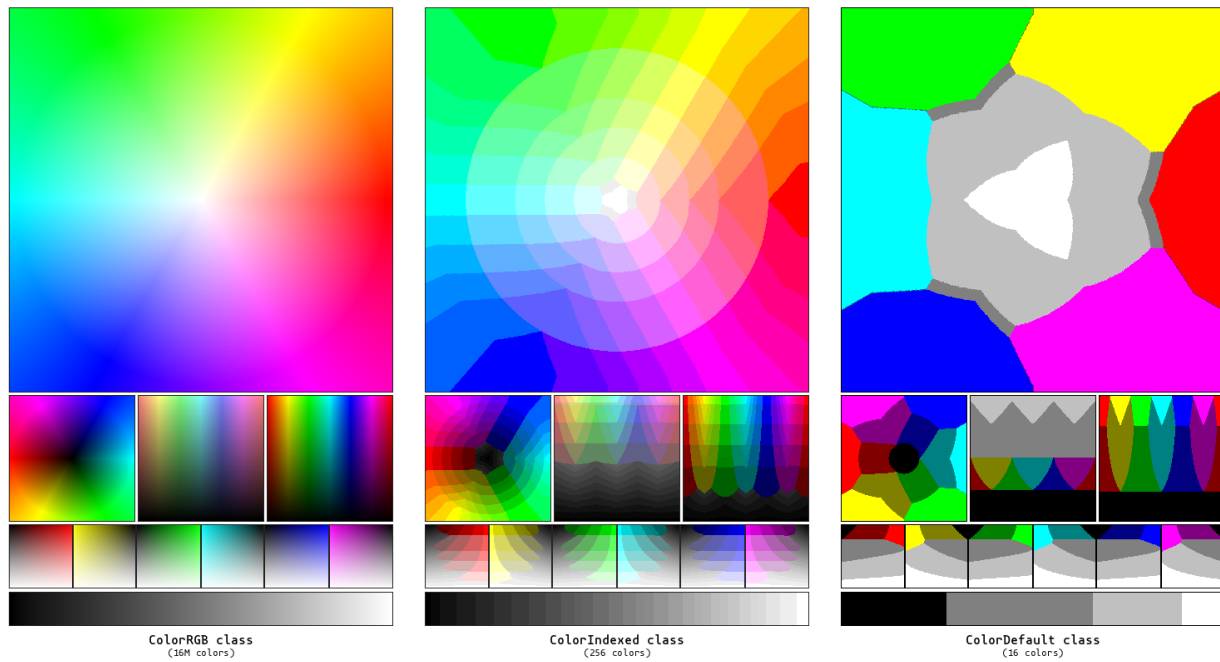


Fig. 3: Color approximations for indexed modes

## 1.3 Renderers

---

**Todo:** Win32Renderer ?

---



## 1.4 String filters

## 1.5 Number formatters

---

**Todo:** The library contains @TODO

---

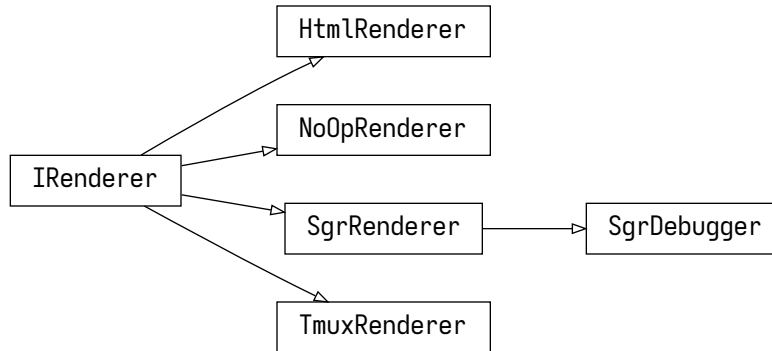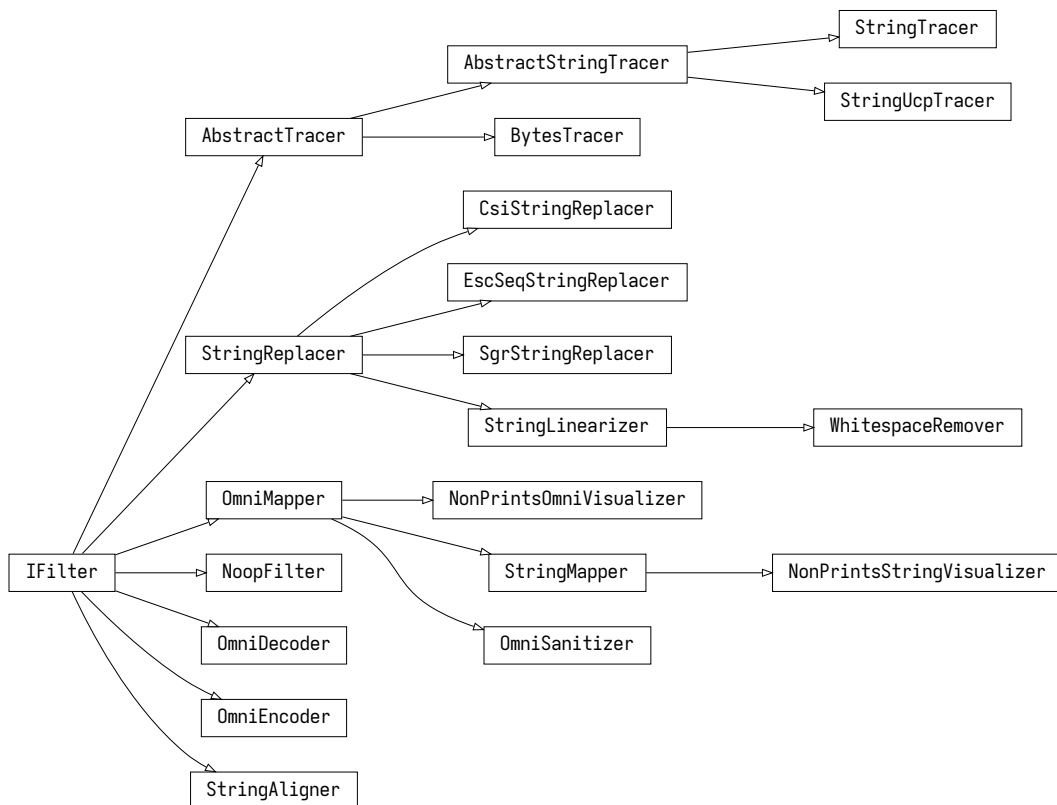Fig. 4: *IRenderer* inheritance treeFig. 5: *IFilter* inheritance tree

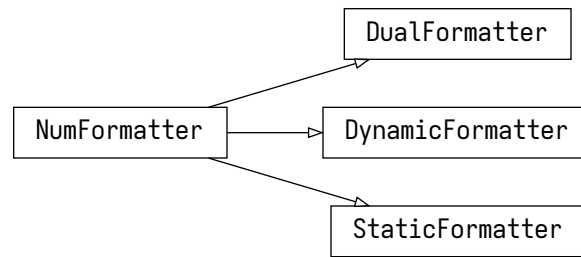


Fig. 6: NumFormatter inheritance tree


### 1.5.1 Auto-float formatter

### 1.5.2 Prefixed-unit formatter

### 1.5.3 Time delta formatter

```

1 import pytermor.utilnum
2 from pytermor import RendererManager, SgrRenderer
3 from pytermor.util import time_delta
4
5 seconds_list = [2, 10, 60, 2700, 32340, 273600, 4752000, 864000000]
6 max_len_list = [3, 6, 10]
7
8 for max_len in max_len_list:
9     formatter = pytermor.utilnum.dual_registry.find_matching(max_len)
10
11 RendererManager.set_default(SgrRenderer)
12 for seconds in seconds_list:
13     for max_len in max_len_list:
14         formatter = pytermor.utilnum.dual_registry.get_by_max_len(max_len)
15         print(formatter.format(seconds), end=' ')
16 print()
  
```

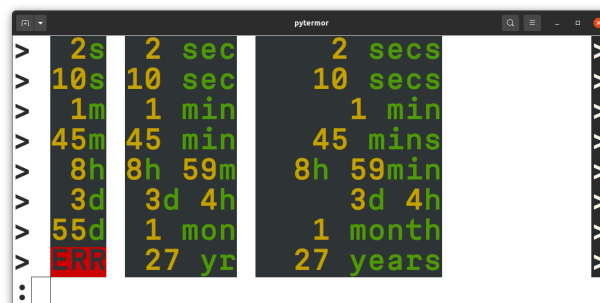

## 1.6 es7s color collection

Todo: @TODO

## 1.7 Low-level API

So, what's happening under the hood?

### 1.7.1 Core methods

<code>ansi.SequenceSGR(*args)</code>	Class representing SGR-type escape sequence with varying amount of parameters.
<code>ansi.make_color_256(code[, bg])</code>	Wrapper for creation of <a href="#">SequenceSGR</a> that sets foreground (or background) to one of 256-color palette value.:
<code>ansi.make_color_rgb(r, g, b[, bg])</code>	Wrapper for creation of <a href="#">SequenceSGR</a> operating in True Color mode (16M). Valid values for r, g and b are in range of [0; 255]. This range linearly translates into [0x00; 0xFF] for each channel. The result value is composed as "0xRRGGBB". For example, sequence with color of 0xFF3300 can be created with::

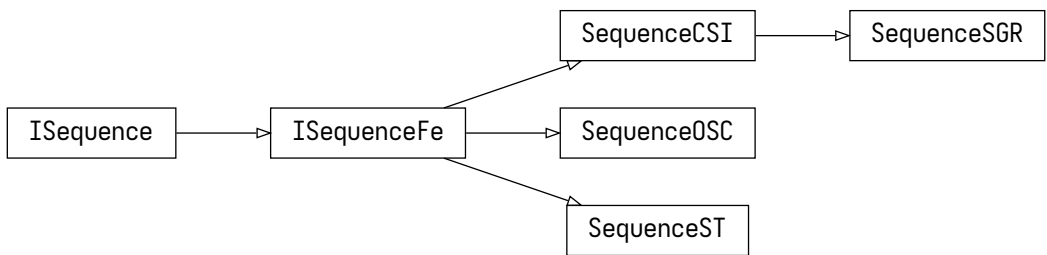


Fig. 7: *ISequence* inheritance tree

## 1.7.2 Format soft reset

There are two ways to manage color and attribute termination:

- hard reset (SGR-0 or ESC [0m)
- soft reset (SGR-22, 23, 24 etc.)

The main difference between them is that *hard* reset disables all formatting after itself, while *soft* reset disables only actually necessary attributes (i.e. used as opening sequence in `Span` instance's context) and keeps the other.

That's what `Span` class is designed for: to simplify creation of soft-resetting text spans, so that developer doesn't have to restore all previously applied formats after every closing sequence.

### Example


We are given a text span which is initially *bold* and *underlined*. We want to recolor a few words inside of this span. By default this will result in losing all the formatting to the right of updated text span (because `RESET`, or ESC [0m, clears all text attributes).

However, there is an option to specify what attributes should be disabled or let the library do that for you:

```

1 from pytermor import Span, Spans, SeqIndex
2
3 # implicitly:
4 span_warn = Span(93, 4)
5 # or explicitly:
6 span_warn = Span.init_explicit(
7     SeqIndex.HI_YELLOW + SeqIndex.UNDERLINED, # sequences can be summed up, remember?
8     SeqIndex.COLOR_OFF + SeqIndex.UNDERLINED_OFF, # "counteractive" sequences
9     hard_reset_after=False
10 )
11
12 orig_text = Spans.BOLD(f'this is {SeqIndex.BG_GRAY}the original{SeqIndex.RESET} string')
13 updated_text = orig_text.replace('original', span_warn('updated'), 1)
14 print(orig_text, '\n', updated_text)

```

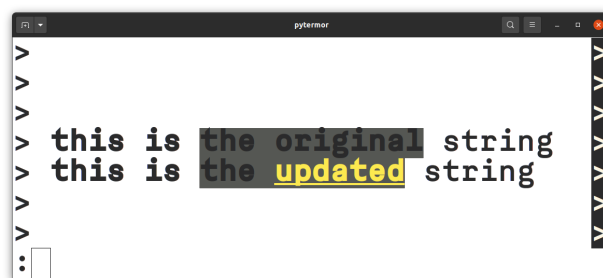

As you can see, the update went well – we kept all the previously applied formatting. Of course, this method cannot be 100% applicable; for example, imagine that original text was colored blue. After the update “string” word won’t be blue anymore, as we used `SeqIndex.COLOR_OFF` escape sequence to neutralize our own yellow color. But it still can be helpful for a majority of cases (especially when text is generated and formatted by the same program and in one go).



### 1.7.3 Working with Spans

Use `Span` constructor to create new instance with specified control sequence(s) as a opening/starter sequence and **automatically composed** closing sequence that will terminate attributes defined in opening sequence while keeping the others (soft reset).

Resulting sequence params' order is the same as argument's order.

Each sequence param can be specified as:

- string key (see [ANSI preset list](#));
- integer param value;
- existing [SequenceSGR](#) instance (params will be extracted).

It's also possible to avoid auto-composing mechanism and create `Span` with explicitly set parameters using `Span.init_explicit()`.

### 1.7.4 Creating and applying SGRs

You can use any of predefined sequences from [SeqIndex](#) registry or create your own via standard constructor. Valid argument values as well as preset constants are described in [ANSI preset list](#) page.

---

**Important:** `SequenceSGR` with zero params was specifically implemented to translate into an empty string and not into ESC [m, which would make sense, but also could be very entangling, as terminal emulators interpret that sequence as ESC [0m, which is *hard* reset sequence.

---

There is also a set of methods for dynamic `SequenceSGR` creation:


- [make\\_color\\_256\(\)](#) will produce sequence operating in 256-colors mode (for a complete list see [ANSI preset list](#));
- [make\\_color\\_rgb\(\)](#) will create a sequence capable of setting the colors in True Color 16M mode (however, some terminal emulators doesn't support it).

To get the resulting sequence chars use [assemble\(\)](#) method or cast instance to `str`.

```

1 from pytermor import SequenceSGR
2
3 seq = SequenceSGR(4, 7)
4 msg = f'({seq})'
5
6 print(msg + f'{SequenceSGR(0).assemble()}')
7 print(str(msg.assemble()))
8 print(msg.assemble().hex(':'))

```

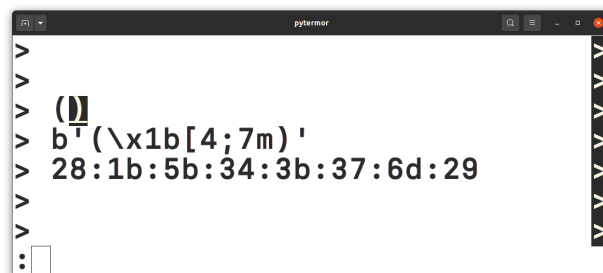

- First line is the string with encoded escape sequence;
- Second line shows up the string in raw mode, as if sequences were ignored by the terminal;
- Third line is hexadecimal string representation.

### 1.7.5 SGR sequence structure

1. ESC is escape *control character*, which opens a control sequence (can also be written as `\x1b`, `\033` or `\e`).
2. `[` is sequence *introducer*; it determines the type of control sequence (in this case it's CSI (Control Sequence Introducer)).
3. 4 and 7 are *parameters* of the escape sequence; they mean “underlined” and “inversed” attributes respectively. Those parameters must be separated by `;`.
4. `m` is sequence *terminator*; it also determines the sub-type of sequence, in our case SGR. Sequences of this kind are most commonly encountered.

### 1.7.6 Combining SGRs

One instance of `SequenceSGR` can be added to another. This will result in a new `SequenceSGR` with combined params.

```
1 from pytermor import SequenceSGR, SeqIndex
2
3 combined = SequenceSGR(1, 31) + SequenceSGR(4)
4 print(f'{combined}{combined}{SeqIndex.RESET}', str(combined).assemble())
```

---

### Sources

1. [XTerm Control Sequences](#)
2. [ECMA-48 specification](#)

## 1.8 ANSI preset list

Preset lists are omitted from API docs to avoid unnesessary duplication; summary list of all presets defined in the library (excluding `util*`) is displayed here.

---

**Todo:** USAGE - list all memthods that accept string keys of those prsets.

---

There are two types of color palettes used in modern terminals – first one containing 16 colors (`Color16`), and second one consisting of 256 colors (`Color256`). There is also True Color mode (referenced as *RGB* mode), but it is not palette-based.

## Legend

- INT (intcode module -- 1st or 3rd SGR param value)
- SEQ (sequence module)
- SPN (span module)
- CLR (color module)
- STY (style module)

































### 1.8.1 Meta, attributes, resetters

	Name	INT	SEQ	SPN	CLR	STY	Description
<b>Meta</b>							
	NOOP		V	V	V	V	No-operation; always assembled as empty string
	RESET	0	V				Reset all attributes and colors
<b>Attributes</b>							
	BOLD	1	V	V		V <sup>1</sup>	Bold or increased intensity
	DIM	2	V	V		V	Faint, decreased intensity
	ITALIC	3	V	V		V	Italic; <i>not widely supported</i>
	UNDERLINED	4	V	V		V	Underline
	BLINK_SLOW	5	V			V <sup>2</sup>	Set blinking to < 150 cpm
	BLINK_FAST	6	V				Set blinking to 150+ cpm; <i>not widely supported</i>
	INVERSED	7	V	V		V	Swap foreground and background colors
	HIDDEN	8	V				Conceal characters; <i>not widely supported</i>
	CROSSLINED	9	V			V	Strikethrough
	DOUBLE_UNDERLINED	21	V				Double-underline; <i>on several terminals disables BOLD instead</i>
	COLOR_EXTENDED	38					Set foreground color [ <i>indexed/RGB mode</i> ]; use <a href="#">make_color_256</a> and <a href="#">make_color_rgb</a> instead
	BG_COLOR_EXTENDED	48					Set background color [ <i>indexed/RGB mode</i> ]; use <a href="#">make_color_256</a> and <a href="#">make_color_rgb</a> instead
	OVERLINED	53	V	V		V	Overline; <i>not widely supported</i>
<b>Resetters</b>							
	BOLD_DIM_OFF	22	V				Disable BOLD and DIM attributes. <i>Special aspects... It's impossible to reliably disable them on a separate basis.</i>
	ITALIC_OFF	23	V				Disable italic
	UNDERLINED_OFF	24	V				Disable underlining
	BLINK_OFF	25	V				Disable blinking
	INVERSED_OFF	27	V				Disable inverting
	HIDDEN_OFF	28	V				Disable concealing
	CROSSLINED_OFF	29	V				Disable strikethrough
	COLOR_OFF	39	V				Reset foreground color
	BG_COLOR_OFF	49	V				Reset background color
	OVERLINED_OFF	55	V				Disable overlining










































<sup>1</sup> for this and subsequent items in “Attributes” section: as boolean flags.

<sup>2</sup> as `blink`.

## 1.8.2 Color16 presets













































	Name	INT	SEQ	SPN	CLR	STY	RGB code	XTerm name
<b>Foreground default colors</b>								
	BLACK	30	V	V	V		#000000	Black
	RED	31	V	V	V		#800000	Maroon
	GREEN	32	V	V	V		#008000	Green
	YELLOW	33	V	V	V		#808000	Olive
	BLUE	34	V	V	V		#000080	Navy
	MAGENTA	35	V	V	V		#800080	Purple
	CYAN	36	V	V	V		#008080	Teal
	WHITE	37	V	V	V		#c0c0c0	Silver
<b>Background default colors</b>								
	BG_BLACK	40	V	V	V		#000000	Black
	BG_RED	41	V	V	V		#800000	Maroon
	BG_GREEN	42	V	V	V		#008000	Green
	BG_YELLOW	43	V	V	V		#808000	Olive
	BG_BLUE	44	V	V	V		#000080	Navy
	BG_MAGENTA	45	V	V	V		#800080	Purple
	BG_CYAN	46	V	V	V		#008080	Teal
	BG_WHITE	47	V	V	V		#c0c0c0	Silver
<b>High-intensity foreground default colors</b>								
	GRAY	90	V	V	V		#808080	Grey
	HI_RED	91	V	V	V		#ff0000	Red
	HI_GREEN	92	V	V	V		#00ff00	Lime
	HI_YELLOW	93	V	V	V		#ffff00	Yellow
	HI_BLUE	94	V	V	V		#0000ff	Blue
	HI_MAGENTA	95	V	V	V		#ff00ff	Fuchsia
	HI_CYAN	96	V	V	V		#00ffff	Aqua
	HI_WHITE	97	V	V	V		#ffffff	White
<b>High-intensity background default colors</b>								
	BG_GRAY	100	V	V	V		#808080	Grey
	BG_HI_RED	101	V	V	V		#ff0000	Red
	BG_HI_GREEN	102	V	V	V		#00ff00	Lime
	BG_HI_YELLOW	103	V	V	V		#ffff00	Yellow
	BG_HI_BLUE	104	V	V	V		#0000ff	Blue
	BG_HI_MAGENTA	105	V	V	V		#ff00ff	Fuchsia
	BG_HI_CYAN	106	V	V	V		#00ffff	Aqua
	BG_HI_WHITE	107	V	V	V		#ffffff	White

### 1.8.3 Color256 presets

	Name	INT	SEQ	SPN	CLR	STY	RGB code	XTerm name
	XTERM_BLACK <sup>3</sup>	0			V		#000000	
	XTERM_MAROON	1			V		#800000	
	XTERM_GREEN	2			V		#008000	
	XTERM_OLIVE	3			V		#808000	
	XTERM_NAVY	4			V		#000080	
	XTERM_PURPLE_5	5			V		#800080	Purple <sup>4</sup>
	XTERM_TEAL	6			V		#008080	
	XTERM_SILVER	7			V		#c0c0c0	
	XTERM_GREY	8			V		#808080	
	XTERM_RED	9			V		#ff0000	
	XTERM_LIME	10			V		#00ff00	
	XTERM_YELLOW	11			V		#ffff00	
	XTERM_BLUE	12			V		#0000ff	
	XTERM_FUCHSIA	13			V		#ff00ff	
	XTERM_AQUA	14			V		#00ffff	
	XTERM_WHITE	15			V		#ffffff	
	XTERM_GREY_0	16			V		#000000	
	XTERM_NAVY_BLUE	17			V		#00005f	
	XTERM_DARK_BLUE	18			V		#000087	
	XTERM_BLUE_3	19			V		#0000af	
	XTERM_BLUE_2	20			V		#0000d7	Blue3
	XTERM_BLUE_1	21			V		#0000ff	
	XTERM_DARK_GREEN	22			V		#005f00	
	XTERM_DEEP_SKY_BLUE_7	23			V		#005f5f	DeepSkyBlue4
	XTERM_DEEP_SKY_BLUE_6	24			V		#005f87	DeepSkyBlue4
	XTERM_DEEP_SKY_BLUE_5	25			V		#005faf	DeepSkyBlue4
	XTERM_DODGER_BLUE_3	26			V		#005fd7	
	XTERM_DODGER_BLUE_2	27			V		#005fff	
	XTERM_GREEN_5	28			V		#008700	Green4
	XTERM_SPRING_GREEN_4	29			V		#00875f	
	XTERM_TURQUOISE_4	30			V		#008787	
	XTERM_DEEP_SKY_BLUE_4	31			V		#0087af	DeepSkyBlue3
	XTERM_DEEP_SKY_BLUE_3	32			V		#0087d7	
	XTERM_DODGER_BLUE_1	33			V		#0087ff	
	XTERM_GREEN_4	34			V		#00af00	Green3
	XTERM_SPRING_GREEN_5	35			V		#00af5f	SpringGreen3
	XTERM_DARK_CYAN	36			V		#00af87	
	XTERM_LIGHT_SEA_GREEN	37			V		#00afaf	
	XTERM_DEEP_SKY_BLUE_2	38			V		#00afd7	
	XTERM_DEEP_SKY_BLUE_1	39			V		#00afff	
	XTERM_GREEN_3	40			V		#00d700	
	XTERM_SPRING_GREEN_3	41			V		#00d75f	
	XTERM_SPRING_GREEN_6	42			V		#00d787	SpringGreen2
	XTERM_CYAN_3	43			V		#00d7af	
	XTERM_DARK_TURQUOISE	44			V		#00d7d7	
	XTERM_TURQUOISE_2	45			V		#00d7ff	
	XTERM_GREEN_2	46			V		#00ff00	Green1















continues on next page

Table 2 – continued from previous page

	Name	INT	SEQ	SPN	CLR	STY	RGB code	XTerm name
	XTERM_SPRING_GREEN_2	47			V		#00ff5f	
	XTERM_SPRING_GREEN_1	48			V		#00ff87	
	XTERM_MEDIUM_SPRING_GREEN	49			V		#00ffa5	
	XTERM_CYAN_2	50			V		#00ffd7	
	XTERM_CYAN_1	51			V		#00ffff	
	XTERM_DARK_RED_2	52			V		#5f0000	DarkRed
	XTERM_DEEP_PINK_8	53			V		#5f005f	DeepPink4
	XTERM_PURPLE_6	54			V		#5f0087	Purple4
	XTERM_PURPLE_4	55			V		#5f00af	
	XTERM_PURPLE_3	56			V		#5f00d7	
	XTERM_BLUE_VIOLET	57			V		#5f00ff	
	XTERM_ORANGE_4	58			V		#5f5f00	
	XTERM_GREY_37	59			V		#5f5f5f	
	XTERM_MEDIUM_PURPLE_7	60			V		#5f5f87	MediumPurple4
	XTERM_SLATE_BLUE_3	61			V		#5f5faf	
	XTERM_SLATE_BLUE_2	62			V		#5f5fd7	SlateBlue3
	XTERM_ROYAL_BLUE_1	63			V		#5f5fff	
	XTERM_CHARTREUSE_6	64			V		#5f8700	Chartreuse4
	XTERM_DARK_SEA_GREEN_9	65			V		#5f875f	DarkSeaGreen4
	XTERM_PALE_TURQUOISE_4	66			V		#5f8787	
	XTERM_STEEL_BLUE	67			V		#5f87af	
	XTERM_STEEL_BLUE_3	68			V		#5f87d7	
	XTERM_CORNFLOWER_BLUE	69			V		#5f87ff	
	XTERM_CHARTREUSE_5	70			V		#5faf00	Chartreuse3
	XTERM_DARK_SEA_GREEN_8	71			V		#5faf5f	DarkSeaGreen4
	XTERM_CADET_BLUE_2	72			V		#5faf87	CadetBlue
	XTERM_CADET_BLUE	73			V		#5fafaf	
	XTERM_SKY_BLUE_3	74			V		#5fafd7	
	XTERM_STEEL_BLUE_2	75			V		#5fafff	SteelBlue1
	XTERM_CHARTREUSE_4	76			V		#5fd700	Chartreuse3
	XTERM_PALE_GREEN_4	77			V		#5fd75f	PaleGreen3
	XTERM_SEA_GREEN_3	78			V		#5fd787	
	XTERM_AQUAMARINE_3	79			V		#5fd7af	
	XTERM_MEDIUM_TURQUOISE	80			V		#5fd7d7	
	XTERM_STEEL_BLUE_1	81			V		#5fd7ff	
	XTERM_CHARTREUSE_2	82			V		#5fff00	
	XTERM_SEA_GREEN_4	83			V		#5fff5f	SeaGreen2
	XTERM_SEA_GREEN_2	84			V		#5fff87	SeaGreen1
	XTERM_SEA_GREEN_1	85			V		#5fffaf	
	XTERM_AQUAMARINE_2	86			V		#5fffd7	Aquamarine1
	XTERM_DARK_SLATE_GRAY_2	87			V		#5ffffff	
	XTERM_DARK_RED	88			V		#870000	
	XTERM_DEEP_PINK_7	89			V		#87005f	DeepPink4
	XTERM_DARK_MAGENTA_2	90			V		#870087	DarkMagenta
	XTERM_DARK_MAGENTA	91			V		#8700af	
	XTERM_DARK_VIOLET_2	92			V		#8700d7	DarkViolet
	XTERM_PURPLE_2	93			V		#8700ff	Purple
	XTERM_ORANGE_3	94			V		#875f00	Orange4
	XTERM_LIGHT_PINK_3	95			V		#875f5f	LightPink4

continues on next page


















































Table 2 – continued from previous page

	Name	INT	SEQ	SPN	CLR	STY	RGB code	XTerm name
	XTERM_PLUM_4	96			V		#875f87	
	XTERM_MEDIUM_PURPLE_6	97			V		#875faf	MediumPurple3
	XTERM_MEDIUM_PURPLE_5	98			V		#875fd7	MediumPurple3
	XTERM_SLATE_BLUE_1	99			V		#875fff	
	XTERM_YELLOW_6	100			V		#878700	Yellow4
	XTERM_WHEAT_4	101			V		#87875f	
	XTERM_GREY_53	102			V		#878787	
	XTERM_LIGHT_SLATE_GREY	103			V		#8787af	
	XTERM_MEDIUM_PURPLE_4	104			V		#8787d7	MediumPurple
	XTERM_LIGHT_SLATE_BLUE	105			V		#8787ff	
	XTERM_YELLOW_4	106			V		#87af00	
	XTERM_DARK_OLIVE_GREEN_6	107			V		#87af5f	DarkOliveGreen3
	XTERM_DARK_SEA_GREEN_7	108			V		#87af87	DarkSeaGreen
	XTERM_LIGHT_SKY_BLUE_3	109			V		#87afaf	
	XTERM_LIGHT_SKY_BLUE_2	110			V		#87afd7	LightSkyBlue3
	XTERM_SKY_BLUE_2	111			V		#87afff	
	XTERM_CHARTREUSE_3	112			V		#87d700	Chartreuse2
	XTERM_DARK_OLIVE_GREEN_4	113			V		#87d75f	DarkOliveGreen3
	XTERM_PALE_GREEN_3	114			V		#87d787	
	XTERM_DARK_SEA_GREEN_5	115			V		#87d7af	DarkSeaGreen3
	XTERM_DARK_SLATE_GRAY_3	116			V		#87d7d7	
	XTERM_SKY_BLUE_1	117			V		#87d7ff	
	XTERM_CHARTREUSE_1	118			V		#87ff00	
	XTERM_LIGHT_GREEN_2	119			V		#87ff5f	LightGreen
	XTERM_LIGHT_GREEN	120			V		#87ff87	
	XTERM_PALE_GREEN_1	121			V		#87ffaf	
	XTERM_AQUAMARINE_1	122			V		#87ffd7	
	XTERM_DARK_SLATE_GRAY_1	123			V		#87ffff	
	XTERM_RED_4	124			V		#af0000	Red3
	XTERM_DEEP_PINK_6	125			V		#af005f	DeepPink4
	XTERM_MEDIUM_VIOLET_RED	126			V		#af0087	
	XTERM_MAGENTA_6	127			V		#af00af	Magenta3
	XTERM_DARK_VIOLET	128			V		#af00d7	
	XTERM_PURPLE	129			V		#af00ff	
	XTERM_DARK_ORANGE_3	130			V		#af5f00	
	XTERM_INDIAN_RED_4	131			V		#af5f5f	IndianRed
	XTERM_HOT_PINK_5	132			V		#af5f87	HotPink3
	XTERM_MEDIUM_ORCHID_4	133			V		#af5faf	MediumOrchid3
	XTERM_MEDIUM_ORCHID_3	134			V		#af5fd7	MediumOrchid
	XTERM_MEDIUM_PURPLE_2	135			V		#af5fff	
	XTERM_DARK_GOLDENROD	136			V		#af8700	
	XTERM_LIGHT_SALMON_3	137			V		#af875f	
	XTERM_ROSY_BROWN	138			V		#af8787	
	XTERM_GREY_63	139			V		#af87af	
	XTERM_MEDIUM_PURPLE_3	140			V		#af87d7	MediumPurple2
	XTERM_MEDIUM_PURPLE_1	141			V		#af87ff	
	XTERM_GOLD_3	142			V		#afaf00	
	XTERM_DARK_KHAKI	143			V		#afaf5f	
	XTERM_NAVAJO_WHITE_3	144			V		#afaf87	

continues on next page
















Table 2 – continued from previous page

	Name	INT	SEQ	SPN	CLR	STY	RGB code	XTerm name
	XTERM_GREY_69	145			V		#afafaf	
	XTERM_LIGHT_STEEL_BLUE_3	146			V		#afafd7	
	XTERM_LIGHT_STEEL_BLUE_2	147			V		#afafff	LightSteelBlue
	XTERM_YELLOW_5	148			V		#afd700	Yellow3
	XTERM_DARK_OLIVE_GREEN_5	149			V		#afd75f	DarkOliveGreen3
	XTERM_DARK_SEA_GREEN_6	150			V		#afd787	DarkSeaGreen3
	XTERM_DARK_SEA_GREEN_4	151			V		#afd7af	DarkSeaGreen2
	XTERM_LIGHT_CYAN_3	152			V		#afd7d7	
	XTERM_LIGHT_SKY_BLUE_1	153			V		#afd7ff	
	XTERM_GREEN_YELLOW	154			V		#afff00	
	XTERM_DARK_OLIVE_GREEN_3	155			V		#afff5f	DarkOliveGreen2
	XTERM_PALE_GREEN_2	156			V		#afff87	PaleGreen1
	XTERM_DARK_SEA_GREEN_3	157			V		#afffaf	DarkSeaGreen2
	XTERM_DARK_SEA_GREEN_1	158			V		#afffd7	
	XTERM_PALE_TURQUOISE_1	159			V		#afffff	
	XTERM_RED_3	160			V		#d70000	
	XTERM_DEEP_PINK_5	161			V		#d7005f	DeepPink3
	XTERM_DEEP_PINK_3	162			V		#d70087	
	XTERM_MAGENTA_3	163			V		#d700af	
	XTERM_MAGENTA_5	164			V		#d700d7	Magenta3
	XTERM_MAGENTA_4	165			V		#d700ff	Magenta2
	XTERM_DARK_ORANGE_2	166			V		#d75f00	DarkOrange3
	XTERM_INDIAN_RED_3	167			V		#d75f5f	IndianRed
	XTERM_HOT_PINK_4	168			V		#d75f87	HotPink3
	XTERM_HOT_PINK_3	169			V		#d75faf	HotPink2
	XTERM_ORCHID_3	170			V		#d75fd7	Orchid
	XTERM_MEDIUM_ORCHID_2	171			V		#d75fff	MediumOrchid1
	XTERM_ORANGE_2	172			V		#d78700	Orange3
	XTERM_LIGHT_SALMON_2	173			V		#d7875f	LightSalmon3
	XTERM_LIGHT_PINK_2	174			V		#d78787	LightPink3
	XTERM_PINK_3	175			V		#d787af	
	XTERM_PLUM_3	176			V		#d787d7	
	XTERM_VIOLET	177			V		#d787ff	
	XTERM_GOLD_2	178			V		#d7af00	Gold3
	XTERM_LIGHT_GOLDENROD_5	179			V		#d7af5f	LightGoldenrod3
	XTERM_TAN	180			V		#d7af87	
	XTERM_MISTY_ROSE_3	181			V		#d7afaf	
	XTERM_THISTLE_3	182			V		#d7afd7	
	XTERM_PLUM_2	183			V		#d7afff	
	XTERM_YELLOW_3	184			V		#d7d700	
	XTERM_KHAKI_3	185			V		#d7d75f	
	XTERM_LIGHT_GOLDENROD_3	186			V		#d7d787	LightGoldenrod2
	XTERM_LIGHT_YELLOW_3	187			V		#d7d7af	
	XTERM_GREY_84	188			V		#d7d7d7	
	XTERM_LIGHT_STEEL_BLUE_1	189			V		#d7d7ff	
	XTERM_YELLOW_2	190			V		#d7ff00	
	XTERM_DARK_OLIVE_GREEN_2	191			V		#d7ff5f	DarkOliveGreen1
	XTERM_DARK_OLIVE_GREEN_1	192			V		#d7ff87	
	XTERM_DARK_SEA_GREEN_2	193			V		#d7ffaf	DarkSeaGreen1

continues on next page

Table 2 – continued from previous page

	Name	INT	SEQ	SPN	CLR	STY	RGB code	XTerm name
	XTERM_HONEYDEW_2	194			V		#d7ffd7	
	XTERM_LIGHT_CYAN_1	195			V		#d7ffff	
	XTERM_RED_1	196			V		#ff0000	
	XTERM_DEEP_PINK_4	197			V		#ff005f	DeepPink2
	XTERM_DEEP_PINK_2	198			V		#ff0087	DeepPink1
	XTERM_DEEP_PINK_1	199			V		#ff00af	
	XTERM_MAGENTA_2	200			V		#ff00d7	
	XTERM_MAGENTA_1	201			V		#ff00ff	
	XTERM_ORANGE_RED_1	202			V		#ff5f00	
	XTERM_INDIAN_RED_1	203			V		#ff5f5f	
	XTERM_INDIAN_RED_2	204			V		#ff5f87	IndianRed1
	XTERM_HOT_PINK_2	205			V		#ff5faf	HotPink
	XTERM_HOT_PINK	206			V		#ff5fd7	
	XTERM_MEDIUM_ORCHID_1	207			V		#ff5fff	
	XTERM_DARK_ORANGE	208			V		#ff8700	
	XTERM_SALMON_1	209			V		#ff875f	
	XTERM_LIGHT_CORAL	210			V		#ff8787	
	XTERM_PALE_VIOLET_RED_1	211			V		#ff87af	
	XTERM_ORCHID_2	212			V		#ff87d7	
	XTERM_ORCHID_1	213			V		#ff87ff	
	XTERM_ORANGE_1	214			V		#ffaf00	
	XTERM_SANDY_BROWN	215			V		#ffaf5f	
	XTERM_LIGHT_SALMON_1	216			V		#ffaf87	
	XTERM_LIGHT_PINK_1	217			V		#ffafaf	
	XTERM_PINK_1	218			V		#ffafd7	
	XTERM_PLUM_1	219			V		#ffaaff	
	XTERM_GOLD_1	220			V		#ffd700	
	XTERM_LIGHT_GOLDENROD_4	221			V		#ffd75f	LightGoldenrod2
	XTERM_LIGHT_GOLDENROD_2	222			V		#ffd787	
	XTERM_NAVAJO_WHITE_1	223			V		#ffd7af	
	XTERM_MISTY_ROSE_1	224			V		#ffd7d7	
	XTERM_THISTLE_1	225			V		#ffd7ff	
	XTERM_YELLOW_1	226			V		#ffff00	
	XTERM_LIGHT_GOLDENROD_1	227			V		#ffff5f	
	XTERM_KHAKI_1	228			V		#ffff87	
	XTERM_WHEAT_1	229			V		#ffffaf	
	XTERM_CORNSILK_1	230			V		#ffffd7	
	XTERM_GREY_100	231			V		#ffffff	
	XTERM_GREY_3	232			V		#080808	
	XTERM_GREY_7	233			V		#121212	
	XTERM_GREY_11	234			V		#1c1c1c	
	XTERM_GREY_15	235			V		#262626	
	XTERM_GREY_19	236			V		#303030	
	XTERM_GREY_23	237			V		#3a3a3a	
	XTERM_GREY_27	238			V		#444444	
	XTERM_GREY_30	239			V		#4e4e4e	
	XTERM_GREY_35	240			V		#585858	
	XTERM_GREY_39	241			V		#626262	
	XTERM_GREY_42	242			V		#6c6c6c	

continues on next page

Table 2 – continued from previous page

	Name	INT	SEQ	SPN	CLR	STY	RGB code	XTerm name
■	XTERM_GREY_46	243			V		#767676	
■	XTERM_GREY_50	244			V		#808080	
■	XTERM_GREY_54	245			V		#8a8a8a	
■	XTERM_GREY_58	246			V		#949494	
■	XTERM_GREY_62	247			V		#9e9e9e	
■	XTERM_GREY_66	248			V		#a8a8a8	
■	XTERM_GREY_70	249			V		#b2b2b2	
■	XTERM_GREY_74	250			V		#bcbcbc	
■	XTERM_GREY_78	251			V		#c6c6c6	
■	XTERM_GREY_82	252			V		#d0d0d0	
■	XTERM_GREY_85	253			V		#dadada	
■	XTERM_GREY_89	254			V		#e4e4e4	
■	XTERM_GREY_93	255			V		#eeeeee	

## Sources

1. [https://en.wikipedia.org/wiki/ANSI\\_escape\\_code](https://en.wikipedia.org/wiki/ANSI_escape_code)
2. <https://www.ditig.com/256-colors-cheat-sheet>

## 1.9 xterm color palette

Actual colors of *default* palette depend on user's terminal settings, i.e. the result color of *Color16* is not guaranteed to exactly match the corresponding color listed below. What's more, note that *default* palette is actually a part of *indexed* one (first 16 colors of 256-color table).

**Todo: (Verify)** The approximation algorithm was explicitly made to ignore these colors because otherwise the results of transforming *RGB* values into *indexed* ones would be unpredictable, in addition to different results for different users, depending on their terminal emulator setup.

However, it doesn't mean that *Color16* is useless. Just the opposite – it's ideal for situations when you don't actually **have to** set exact values and it's easier to specify estimation of desired color. I.e. setting color to 'red' is usually more than enough for displaying an error message – we don't really care of precise hue or brightness values for it.

**Todo:** Approximation algorithm is as simple as iterating through all colors in the *lookup table* (which contains all possible ...

<sup>3</sup> First 16 colors are effectively the same as colors in *default* 16-color mode and share with them the same color values (and depend on terminal color scheme as well).

<sup>4</sup> XTerm name list contains duplicates; variable names for these were slightly modified (different numbers at the end) to avoid namespace conflicts. Every changed name is displayed with **bold** font.

	<b>000</b> #000000	<b>001</b> #800000	<b>002</b> #008000	<b>003</b> #808000	<b>004</b> #000080	<b>005</b> #800080	<b>006</b> #008080	<b>007</b> #c0c0c0			
	<b>008</b> #808080	<b>009</b> #ff0000	<b>010</b> #00ff00	<b>011</b> #ffff00	<b>012</b> #0000ff	<b>013</b> #ff00ff	<b>014</b> #00ffff	<b>015</b> #ffffff			
<b>016</b> #000000	<b>022</b> #005f00	<b>028</b> #008700	<b>034</b> #00af00	<b>040</b> #00d700	<b>046</b> #00ff00	<b>082</b> #5fff00	<b>076</b> #5fd700	<b>070</b> #5faf00	<b>064</b> #5f8700	<b>058</b> #5f5f00	<b>052</b> #5f0000
<b>017</b> #00005f	<b>023</b> #005f5f	<b>029</b> #00875f	<b>035</b> #00af5f	<b>041</b> #00d75f	<b>047</b> #00ff5f	<b>083</b> #5fff5f	<b>077</b> #5fd75f	<b>071</b> #5faf5f	<b>065</b> #5f875f	<b>059</b> #5f5f5f	<b>053</b> #5f005f
<b>018</b> #000087	<b>024</b> #005f87	<b>030</b> #008787	<b>036</b> #00af87	<b>042</b> #00d787	<b>048</b> #00ff87	<b>084</b> #5fff87	<b>078</b> #5fd787	<b>072</b> #5faf87	<b>066</b> #5f8787	<b>060</b> #5f5f87	<b>054</b> #5f0087
<b>019</b> #0000af	<b>025</b> #005faf	<b>031</b> #0087af	<b>037</b> #00afaf	<b>043</b> #00d7af	<b>049</b> #00ffaf	<b>085</b> #5fffaf	<b>079</b> #5fd7af	<b>073</b> #5fafaf	<b>067</b> #5f87af	<b>061</b> #5f5faf	<b>055</b> #5f00af
<b>020</b> #0000d7	<b>026</b> #005fd7	<b>032</b> #0087d7	<b>038</b> #00afd7	<b>044</b> #00dd7	<b>050</b> #00ffd7	<b>086</b> #5fffd7	<b>080</b> #5fd7d7	<b>074</b> #5fadd7	<b>068</b> #5f87d7	<b>062</b> #5f5fd7	<b>056</b> #5f00d7
<b>021</b> #0000ff	<b>027</b> #005fff	<b>033</b> #0087ff	<b>039</b> #00afff	<b>045</b> #00d7ff	<b>051</b> #00ffff	<b>087</b> #5fffff	<b>081</b> #5fd7ff	<b>075</b> #5fafff	<b>069</b> #5f87ff	<b>063</b> #5f5fff	<b>057</b> #5f00ff
<b>093</b> #8700ff	<b>099</b> #875fff	<b>105</b> #8787ff	<b>111</b> #87afff	<b>117</b> #87d7ff	<b>123</b> #87ffff	<b>159</b> #afffff	<b>153</b> #afd7ff	<b>147</b> #afafff	<b>141</b> #af87ff	<b>135</b> #af5fff	<b>129</b> #af00ff
<b>092</b> #8700d7	<b>098</b> #875fd7	<b>104</b> #8787d7	<b>110</b> #87afd7	<b>116</b> #87dd7	<b>122</b> #87ffd7	<b>158</b> #afffd7	<b>152</b> #afd7d7	<b>146</b> #afadd7	<b>140</b> #af87d7	<b>134</b> #af5fd7	<b>128</b> #af00d7
<b>091</b> #8700af	<b>097</b> #875faf	<b>103</b> #8787af	<b>109</b> #87afaf	<b>115</b> #87d7af	<b>121</b> #87ffaf	<b>157</b> #afffaf	<b>151</b> #afd7af	<b>145</b> #afafaf	<b>139</b> #af87af	<b>133</b> #af5faf	<b>127</b> #af00af
<b>090</b> #870087	<b>096</b> #875f87	<b>102</b> #878787	<b>108</b> #87af87	<b>114</b> #87d787	<b>120</b> #87ff87	<b>156</b> #afff87	<b>150</b> #afd787	<b>144</b> #afaf87	<b>138</b> #af8787	<b>132</b> #af5f87	<b>126</b> #af0087
<b>089</b> #87005f	<b>095</b> #875f5f	<b>101</b> #87875f	<b>107</b> #87af5f	<b>113</b> #87d75f	<b>119</b> #87ff5f	<b>155</b> #afff5f	<b>149</b> #afd75f	<b>143</b> #afaf5f	<b>137</b> #af875f	<b>131</b> #af5f5f	<b>125</b> #af005f
<b>088</b> #870000	<b>094</b> #875f00	<b>100</b> #878700	<b>106</b> #87af00	<b>112</b> #87d700	<b>118</b> #87ff00	<b>154</b> #afff00	<b>148</b> #afd700	<b>142</b> #afaf00	<b>136</b> #af8700	<b>130</b> #af5f00	<b>124</b> #af0000
<b>160</b> #d70000	<b>166</b> #d75f00	<b>172</b> #d78700	<b>178</b> #dfa00	<b>184</b> #dfd00	<b>190</b> #dff00	<b>226</b> #ffff00	<b>220</b> #ffd00	<b>214</b> #ffa00	<b>208</b> #ff8700	<b>202</b> #ff5f00	<b>196</b> #ff0000
<b>161</b> #d7005f	<b>167</b> #d75f5f	<b>173</b> #d7875f	<b>179</b> #dfa5f	<b>185</b> #dfd5f	<b>191</b> #dff5f	<b>227</b> #ffff5f	<b>221</b> #ffd5f	<b>215</b> #ffa5f	<b>209</b> #ff875f	<b>203</b> #ff5f5f	<b>197</b> #ff005f
<b>162</b> #d70087	<b>168</b> #d75f87	<b>174</b> #d78787	<b>180</b> #dfa87	<b>186</b> #dfd87	<b>192</b> #dff87	<b>228</b> #ffff87	<b>222</b> #ffd87	<b>216</b> #ffa87	<b>210</b> #ff8787	<b>204</b> #ff5f87	<b>198</b> #ff0087
<b>163</b> #d700af	<b>169</b> #d75faf	<b>175</b> #d787af	<b>181</b> #dfaaf	<b>187</b> #dfdaf	<b>193</b> #dffaf	<b>229</b> #ffffaf	<b>223</b> #ffdaf	<b>217</b> #ffaaf	<b>211</b> #ff87af	<b>205</b> #ff5faf	<b>199</b> #ff00af
<b>164</b> #d700d7	<b>170</b> #d75fd7	<b>176</b> #d787d7	<b>182</b> #dafdf	<b>188</b> #dfd7d7	<b>194</b> #dff7d7	<b>230</b> #ffffd7	<b>224</b> #ffd7d7	<b>218</b> #ffd7d7	<b>212</b> #ff87d7	<b>206</b> #ff5fd7	<b>200</b> #ff00d7
<b>165</b> #d700ff	<b>171</b> #d75fff	<b>177</b> #d787ff	<b>183</b> #dafff	<b>189</b> #dff7ff	<b>195</b> #dff7ff	<b>231</b> #ffffff	<b>225</b> #ffd7ff	<b>219</b> #ffa7ff	<b>213</b> #ff87ff	<b>207</b> #ff5fff	<b>201</b> #ff00ff
<b>232</b> #080808	<b>233</b> #121212	<b>234</b> #1c1c1c	<b>235</b> #262626	<b>236</b> #303030	<b>237</b> #3a3a3a	<b>238</b> #444444	<b>239</b> #4e4e4e	<b>240</b> #585858	<b>241</b> #626262	<b>242</b> #6c6c6c	<b>243</b> #767676
<b>244</b> #808080	<b>245</b> #8a8a8a	<b>246</b> #949494	<b>247</b> #9e9e9e	<b>248</b> #a8a8a8	<b>249</b> #b2b2b2	<b>250</b> #bcbcbc	<b>251</b> #c6c6c6	<b>252</b> #d0d0d0	<b>253</b> #dadada	<b>254</b> #e4e4e4	<b>255</b> #eeeeee

Fig. 8: Indexed mode palette

## Sources

1. <https://www.tweaking4all.com/software/linux-software/xterm-color-cheat-sheet/>

## 1.10 Configuration

**PYTERMOR\_RENDERER\_CLASS**

YES

**PYTERMOR\_OUTPUT\_MODE**

YES

**PYTERMOR\_TRACE\_RENDERERS**

yare-yare-daze

**PYTERMOR\_PREFER\_RGB**

YES

**See also:**

*Config* – class containing configuration variables.

## 1.11 Docs guidelines

(mostly as a reminder for myself)

### 1.11.1 General

- Basic types and built-in values should be surrounded with asterisks:

*\*True\* → True*

*\*None\* → None*

*\*int\* → int*

- Library classes, methods, etc. should be enclosed in single backticks in order to become a hyperlinks:

*`SgrRenderer.render()` → [SgrRenderer.render\(\)](#)*

- Argument names and string literals that include escape sequences or their fragments should be wrapped in double backticks:

*``arg1`` → arg1*

*``ESC [31m ESC [m`` → ESC [31m ESC [m*

On the top of that, ESC control char should be padded with spaces for better readability. This also triggers automatic application of custom style for even more visual difference.

- Any formula should be formatted using LaTeX syntax (*:math:* role or *.. math::* directive):

$$d_{min} = 350 * 10^{-3}$$

### 1.11.2 References

Type	Code	Example
Internal pydoc	use <code>`SgrRenderer.render()`</code>	use <i>SgrRenderer.render()</i>
Internal page	called <code>`renderers&lt;guide. ↪renderers&gt;`</code>	called <i>renderers</i>
Internal anchor	<code>`References`_</code>	<i>References</i>
External pydoc	see <code>`:class:`logging. ↪NullHandler`</code>	see <code>logging.NullHandler</code>
External page	<code>`https://github.com`</code>	<i>https://github.com</i>

### 1.11.3 Headers

```
#####
Docs guidelines
#####
.. part header

=====
Headers
=====
.. chapter header
```

#### Section header

```
-----
Section header
-----
```

#### Subsection header

```
Subsection header
-----
```

## Paragraph header

```
Paragraph header
.....
```

## Rubric

```
.. rubric:: Rubric
```





## API REFERENCE


---

**Note:** Almost all public classes are imported into the first package level on its initialization, i.e., “short” forms like `from pytermor import ColorRGB` are supported, not only “full forms” as `from pytermor.color import ColorRGB`.

---

`pytermor.cv = <pytermor.cval.CVAL object>`

Shortcut to `CVAL()` color registry.

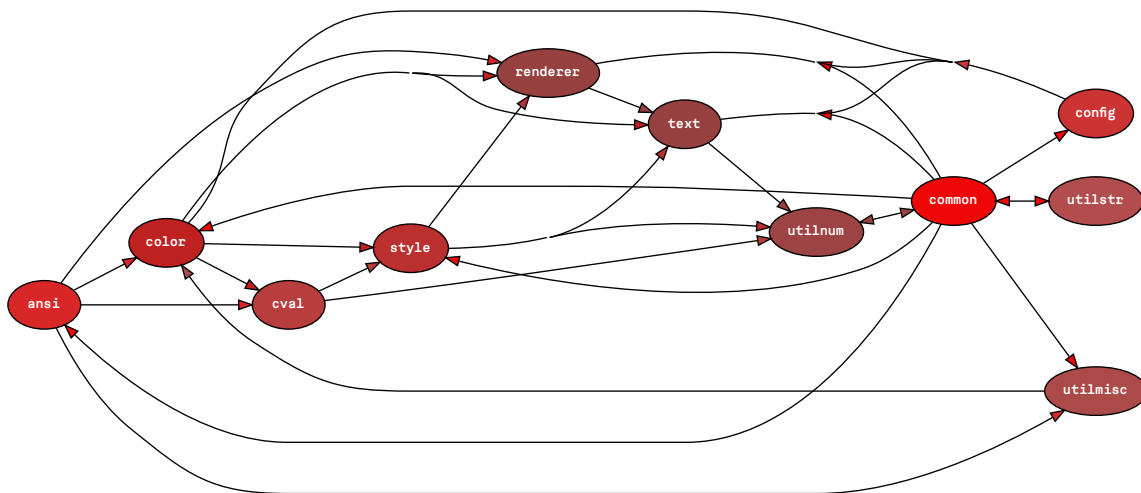

<i>ansi</i>	Classes for working with ANSI sequences on lower level.
<i>color</i>	Color main classes and helper functions.
<i>common</i>	Shared code suitable for the package as well as any other.
<i>config</i>	Library fine tuning.
<i>cval</i>	Color preset list.
<i>renderer</i>	Output formatters.
<i>style</i>	
<i>text</i>	"Front-end" module of the library.
<i>utilmisc</i>	A
<i>utilnum</i>	utilnum
<i>utilstr</i>	Formatters for prettier output and utility classes to avoid writing boilerplate code when dealing with escape sequences.

## 2.1 pytermor.ansi

Classes for working with ANSI sequences on lower level. Can be used for creating a variety of sequences including:

- SGR sequences (text and background coloring, other text formatting and effects);
- CSI sequences (cursor management, selective screen cleraing);
- OSC (Operating System Command) sequences (varoius system commands).

---

**Important:** blah-blah-blah low-level @TODO

---

### Module Attributes

---

<code>NOOP_SEQ</code>	Special sequence in case you <i>have to</i> provide one or another SGR, but do not want any control sequences to be actually included in the output.
-----------------------	--

---

## Functions

<code>assemble_hyperlink(url[, label])</code>	<b>param url</b>
<code>decompose_request_cursor_position(string)</code>	Parse RCP (Report Cursor Position) sequence that generally comes from a terminal as a response to <i>QCP</i> sequence and contains a cursor's current row and column.
<code>enclose(opening_seq, string)</code>	<b>param opening_seq</b>
<code>get_closing_seq(opening_seq)</code>	<b>param opening_seq</b>
<code>make_color_256(code[, bg])</code>	Wrapper for creation of <i>SequenceSGR</i> that sets foreground (or background) to one of 256-color palette value.:
<code>make_color_rgb(r, g, b[, bg])</code>	Wrapper for creation of <i>SequenceSGR</i> operating in True Color mode (16M). Valid values for <i>r</i> , <i>g</i> and <i>b</i> are in range of [0; 255]. This range linearly translates into [0x00; 0xFF] for each channel. The result value is composed as "0xRRGGBB". For example, sequence with color of 0xFF3300 can be created with:.
<code>make_erase_in_line([mode])</code>	Create EL (Erase in Line) sequence that erases a part of the line or the entire line.
<code>make_hyperlink_part([url])</code>	<b>param url</b>
<code>make_query_cursor_position()</code>	Create QCP (Query Cursor Position) sequence that requests an output device to respond with a structure containing current cursor coordinates ( <i>RCP</i> ).
<code>make_set_cursor_x_abs([x])</code>	Create CHA (Cursor Horizontal Absolute) sequence that sets cursor horizontal position, or column, to <i>x</i> .

## Classes

<code>ISequence(*params)</code>	Abstract ancestor of all escape sequences.
<code>ISequenceFe(*params)</code>	Wide range of sequence types that includes <i>CSI</i> , <i>OSC</i> and more.
<code>IntCode(value)</code>	Complete or almost complete list of reliably working SGR param integer codes.
<code>SeqIndex()</code>	Registry of static sequence presets.
<code>SequenceCSI(terminator, short_name, *params)</code>	Class representing CSI-type ANSI escape sequence.
<code>SequenceOSC(*params)</code>	OSC-type sequence.
<code>SequenceSGR(*args)</code>	Class representing SGR-type escape sequence with varying amount of parameters.
<code>SequenceST(*params)</code>	String Terminator sequence (ST).

**class** `pytermor.ansi.ISequence(*params)`

Bases: Sized

Abstract ancestor of all escape sequences.

**Parameters**

**params** – Sequence internal parameters; amount varies depending on sequence type.

**assemble()**

Build up actual byte sequence and return as an ASCII-encoded string.

**Return type**

str

**property params:** `t.List[int | str]`

Return internal params as array.

**class** `pytermor.ansi.ISequenceFe(*params)`

Bases: [\*ISequence\*](#)

Wide range of sequence types that includes [\*CSI\*](#), [\*OSC\*](#) and more.

All subtypes of this sequence start with ESC plus ASCII byte from 0x40 to 0x5F (@, [, \, ], \_, ^ and capital letters A-Z).

**Parameters**

**params** – Sequence internal parameters; amount varies depending on sequence type.

**assemble()**

Build up actual byte sequence and return as an ASCII-encoded string.

**Return type**

str

**property params:** `t.List[int | str]`

Return internal params as array.

**class** `pytermor.ansi.SequenceST(*params)`

Bases: [\*ISequenceFe\*](#)

String Terminator sequence (ST). Terminates strings in other control sequences. Encoded as ESC \ (0x1B 0x5C).

**Parameters**

**params** – Sequence internal parameters; amount varies depending on sequence type.

**assemble()**

Build up actual byte sequence and return as an ASCII-encoded string.

**Return type**

str

**property params:** `t.List[int | str]`

Return internal params as array.

**class** `pytermor.ansi.SequenceOSC(*params)`

Bases: [\*ISequenceFe\*](#)

OSC-type sequence. Starts a control string for the operating system to use. Encoded as ESC ], plus params separated by ;, and terminated with [\*SequenceST\*](#).

**Parameters**

**params** – Sequence internal parameters; amount varies depending on sequence type.

**assemble()**

Build up actual byte sequence and return as an ASCII-encoded string.

**Return type**

str

**property params: t.List[int | str]**

Return internal params as array.

**class** pytermor.ansi.SequenceCSI(*terminator, short\_name, \*params*)

Bases: *ISequenceFe*

Class representing CSI-type ANSI escape sequence. All subtypes of this sequence start with ESC [.

Sequences of this type are used to control text formatting, change cursor position, erase screen and more.

```
>>> make_erase_in_line().assemble()
'\0K'
```

**Parameters**

- **terminator** –
- **short\_name** –
- **params** –

**assemble()**

Build up actual byte sequence and return as an ASCII-encoded string.

**Return type**

str

**property params: t.List[int | str]**

Return internal params as array.

**class** pytermor.ansi.SequenceSGR(*\*args*)

Bases: *SequenceCSI*

Class representing SGR-type escape sequence with varying amount of parameters. SGR sequences allow to change the color of text or/and terminal background (in 3 different color spaces) as well as set decorate text with italic style, underlining, overlining, cross-lining, making it bold or blinking etc.

```
>>> SequenceSGR(IntCode.HI_CYAN, 'underlined', 1)
<SGR[96,4,1]>
```

To encode into control sequence byte-string invoke *assemble()* method or cast the instance to *str*, which internally does the same (this actually applies to all children of *ISequence*):

```
>>> SequenceSGR('blue', 'italic').assemble()
'\34;3m'
>>> str(SequenceSGR('blue', 'italic'))
'\34;3m'
```

The latter also allows fluent usage in f-strings:

```
>>> f'{SeqIndex.RED}should be red{SeqIndex.RESET}'
'\31mshould be red\0m'
```

---

**Note:** `SequenceSGR` with zero params was specifically implemented to translate into empty string and not into ESC [m, which would have made sense, but also would be entangling, as this sequence is the equivalent of ESC [0m – hard reset sequence. The empty-string-sequence is predefined at module level as `NOOP_SEQ`.

---

---

**Note:** The module doesn't distinguish “single-instruction” sequences from several ones merged together, e.g. `Style(fg='red', bold=True)` produces only one opening `SequenceSGR` instance:

```
>>> SequenceSGR(IntCode.BOLD, IntCode.RED).assemble()
'[1;31m'
```

...although generally speaking it is two of them (ESC [1m and ESC [31m). However, the module can automatically match terminating sequences for any form of input SGRs and translate it to specified format.

---

It is possible to add of one SGR sequence to another, resulting in a new one with merged params:

```
>>> SequenceSGR('blue') + SequenceSGR('italic')
<SGR[34, 3]>
```

### Parameters

- **args** – Sequence params. Resulting param order is the same as an argument order. Each argument can be specified as:
  - *str* – any of `IntCode` names, case-insensitive;
  - *int* – `IntCode` instance or plain integer;
  - another `SequenceSGR` instance (params will be extracted).
- **terminator** –
- **short\_name** –
- **params** –

### assemble()

Build up actual byte sequence and return as an ASCII-encoded string.

### Return type

str

**property params:** List[int]

### Returns

Sequence params as integers or `IntCode` instances.

`pytermor.ansi.NOOP_SEQ = <SGR[NOP]>`

Special sequence in case you *have to* provide one or another SGR, but do not want any control sequences to be actually included in the output.

`NOOP_SEQ.assemble()` returns empty string, `NOOP_SEQ.params` returns empty list:

```
>>> NOOP_SEQ.assemble()
''
>>> NOOP_SEQ.params
[]
```

Can be safely added to regular [SequenceSGR](#) from any side, as internally [SequenceSGR](#) always makes a new instance with concatenated params from both items, rather than modifies state of either of them:

```
>>> NOOP_SEQ + SequenceSGR(1)
<SGR[1]>
>>> SequenceSGR(3) + NOOP_SEQ
<SGR[3]>
```

**class** `pytermor.ansi.IntCode(value)`

Bases: `IntEnum`

Complete or almost complete list of reliably working SGR param integer codes. Fully interchangeable with plain *int*. Suitable for [SequenceSGR](#) default constructor.

---

**Note:** [IntCode](#) predefined constants are omitted from documentation to avoid useless repeats and save space, as most of the time “next level” class [SeqIndex](#) is more appropriate, and on top of that, the constant names are literally the same for [SeqIndex](#) and [IntCode](#).

---

**classmethod** `resolve(name)`

**Parameters**

**name** (*str*) –

**Return type**

[IntCode](#)

**class** `pytermor.ansi.SeqIndex`

Registry of static sequence presets.

**RESET** = `<SGR[0]>`

Hard reset sequence.

**BOLD** = `<SGR[1]>`

Bold or increased intensity.

**DIM** = `<SGR[2]>`

Faint, decreased intensity.

**ITALIC** = `<SGR[3]>`

Italic (*not widely supported*).

**UNDERLINED** = `<SGR[4]>`

Underline.

**BLINK\_SLOW** = `<SGR[5]>`

Set blinking to < 150 cpm.

**BLINK\_FAST** = `<SGR[6]>`

Set blinking to 150+ cpm (*not widely supported*).

**INVERSED** = `<SGR[7]>`

Swap foreground and background colors.

**HIDDEN** = `<SGR[8]>`

Conceal characters (*not widely supported*).

**CROSSLINED** = <SGR[9]>

Strikethrough.

**DOUBLE\_UNDERLINED** = <SGR[21]>

Double-underline. *On several terminals disables **BOLD** instead.*

**OVERLINED** = <SGR[53]>

Overline (*not widely supported*).

**BOLD\_DIM\_OFF** = <SGR[22]>

Disable BOLD and DIM attributes.

*Special aspects... It's impossible to reliably disable them on a separate basis.*

**ITALIC\_OFF** = <SGR[23]>

Disable italic.

**UNDERLINED\_OFF** = <SGR[24]>

Disable underlining.

**BLINK\_OFF** = <SGR[25]>

Disable blinking.

**INVERSED\_OFF** = <SGR[27]>

Disable inversing.

**HIDDEN\_OFF** = <SGR[28]>

Disable conecaling.

**CROSSLINED\_OFF** = <SGR[29]>

Disable strikethrough.

**OVERLINED\_OFF** = <SGR[55]>

Disable overlining.

**BLACK** = <SGR[30]>

Set text color to 0x000000.

**RED** = <SGR[31]>

Set text color to 0x800000.

**GREEN** = <SGR[32]>

Set text color to 0x008000.

**YELLOW** = <SGR[33]>

Set text color to 0x808000.

**BLUE** = <SGR[34]>

Set text color to 0x000080.

**MAGENTA** = <SGR[35]>

Set text color to 0x800080.

**CYAN** = <SGR[36]>

Set text color to 0x008080.

**WHITE** = <SGR[37]>

Set text color to 0xC0C0C0.



**COLOR\_OFF** = <SGR[39]>  
Reset foreground color.

**BG\_BLACK** = <SGR[40]>  
Set background color to 0x000000.

**BG\_RED** = <SGR[41]>  
Set background color to 0x800000.

**BG\_GREEN** = <SGR[42]>  
Set background color to 0x008000.

**BG\_YELLOW** = <SGR[43]>  
Set background color to 0x808000.

**BG\_BLUE** = <SGR[44]>  
Set background color to 0x000080.

**BG\_MAGENTA** = <SGR[45]>  
Set background color to 0x800080.

**BG\_CYAN** = <SGR[46]>  
Set background color to 0x008080.

**BG\_WHITE** = <SGR[47]>  
Set background color to 0xC0C0C0.

**BG\_COLOR\_OFF** = <SGR[49]>  
Reset background color.

**GRAY** = <SGR[90]>  
Set text color to 0x808080.

**HI\_RED** = <SGR[91]>  
Set text color to 0xFF0000.

**HI\_GREEN** = <SGR[92]>  
Set text color to 0x00FF00.

**HI\_YELLOW** = <SGR[93]>  
Set text color to 0xFFFF00.

**HI\_BLUE** = <SGR[94]>  
Set text color to 0x0000FF.

**HI\_MAGENTA** = <SGR[95]>  
Set text color to 0xFF00FF.

**HI\_CYAN** = <SGR[96]>  
Set text color to 0x00FFFF.

**HI\_WHITE** = <SGR[97]>  
Set text color to 0FFFFFFF.

**BG\_GRAY** = <SGR[100]>  
Set background color to 0x808080.

**BG\_HI\_RED** = <SGR[101]>

Set background color to 0xFF0000.

**BG\_HI\_GREEN** = <SGR[102]>

Set background color to 0x00FF00.

**BG\_HI\_YELLOW** = <SGR[103]>

Set background color to 0xFFFF00.

**BG\_HI\_BLUE** = <SGR[104]>

Set background color to 0x0000FF.

**BG\_HI\_MAGENTA** = <SGR[105]>

Set background color to 0xFF00FF.

**BG\_HI\_CYAN** = <SGR[106]>

Set background color to 0x00FFFF.

**BG\_HI\_WHITE** = <SGR[107]>

Set background color to 0xFFFFFF.

**HYPERLINK** = <OSC[8]>

Create a hyperlink in the text (*supported by limited amount of terminals*). Note that for a working hyperlink you'll need two sequences, not just one.

See also:

[make\\_hyperlink\\_part\(\)](#) and [assemble\\_hyperlink\(\)](#).

`pytermor.ansi.get_closing_seq(opening_seq)`

**Parameters**

**opening\_seq** ([SequenceSGR](#)) –

**Returns**

**Return type**

[SequenceSGR](#)

`pytermor.ansi.enclose(opening_seq, string)`

**Parameters**

- **opening\_seq** ([SequenceSGR](#)) –

- **string** (*str*) –

**Returns**

**Return type**

*str*

`pytermor.ansi.make_set_cursor_x_abs(x=1)`

Create CHA sequence that sets cursor horizontal position, or column, to **x**.

**Parameters**

**x** (*int*) – New cursor horizontal position.

**Example**

ESC [1G

**Return type**

[SequenceCSI](#)

`pytermor.ansi.make_erase_in_line(mode=0)`

Create EL sequence that erases a part of the line or the entire line. Cursor position does not change.

**Parameters**

**mode** (*int*) – Sequence operating mode.

- If set to 0, clear from cursor to the end of the line.
- If set to 1, clear from cursor to beginning of the line.
- If set to 2, clear the entire line.

**Example**

ESC [OK

**Return type**

[SequenceCSI](#)

`pytermor.ansi.make_query_cursor_position()`

Create QCP sequence that requests an output device to respond with a structure containing current cursor coordinates ([RCP](#)).

**Warning:** Sending this sequence to the terminal may **block** infinitely. Consider using a thread or set a timeout for the main thread using a signal.

**Example**

ESC [6n

**Return type**

[SequenceCSI](#)

`pytermor.ansi.decompose_request_cursor_position(string)`

Parse RCP sequence that generally comes from a terminal as a response to [QCP](#) sequence and contains a cursor's current row and column.

---

**Note:** As the library in general provides sequence assembling methods, but not the disassembling ones, there is no dedicated class for RCP sequences yet.

---

```
>>> decompose_request_cursor_position('[18;2R')
(18, 2)
```

**Parameters**

**string** (*str*) – Terminal response with a sequence.

**Returns**

Current row and column if the expected sequence exists in *string*, *None* otherwise.

**Return type**

t.Tuple[int, int] | None

`pytermor.ansi.make_color_256(code, bg=False)`

Wrapper for creation of [SequenceSGR](#) that sets foreground (or background) to one of 256-color palette value.:

```
>>> make_color_256(141)
<SGR[38, 5, 141]>
```

See also:

[\*Color256\*](#) class.

#### Parameters

- **code** (*int*) – Index of the color in the palette, 0 – 255.
- **bg** (*bool*) – Set to *True* to change the background color (default is foreground).

#### Example

```
ESC [38;5;141m
```

#### Return type

[\*SequenceSGR\*](#)

`pytermor.ansi.make_color_rgb(r, g, b, bg=False)`

Wrapper for creation of [\*SequenceSGR\*](#) operating in True Color mode (16M). Valid values for *r*, *g* and *b* are in range of [0; 255]. This range linearly translates into [0x00; 0xFF] for each channel. The result value is composed as “0xRRGGBB”. For example, sequence with color of 0xFF3300 can be created with:

```
>>> make_color_rgb(255, 51, 0)
<SGR[38,2,255,51,0]>
```

See also:

[\*ColorRGB\*](#) class.

#### Parameters

- **r** (*int*) – Red channel value, 0 – 255.
- **g** (*int*) – Blue channel value, 0 – 255.
- **b** (*int*) – Green channel value, 0 – 255.
- **bg** (*bool*) – Set to *True* to change the background color (default is foreground).

#### Example

```
ESC [38;2;255;51;0m
```

#### Return type

[\*SequenceSGR\*](#)

`pytermor.ansi.make_hyperlink_part(url=None)`

#### Parameters

**url** (*Optional[str]*) –

#### Example

```
ESC ]8;;http://localhost ESC \
```

#### Return type

[\*SequenceOSC\*](#)

`pytermor.ansi.assemble_hyperlink(url, label=None)`

#### Parameters

- **url** (*str*) –
- **label** (*Optional[str]*) –

**Example**

```
ESC ]8;;http://localhost ESC \Text ESC ]8;; ESC \
```

**Return type**

```
str
```

## 2.2 pytermor.color

Color main classes and helper functions.

### Module Attributes

<i>CDT</i>	CDT (Color descriptor type) represents a RGB color value.
<i>CT</i>	Any non-abstract IColor type.
<i>NOOP_COLOR</i>	Special IColor instance always rendering into empty string.
<i>DEFAULT_COLOR</i>	Special IColor instance rendering to SGR sequence telling the terminal to reset fg or bg color; same for <i>TmuxRenderer</i> .

### Functions

<i>approximate</i> (hex_value[, color_type, max_results])	Search for nearest to hex_value colors of specified color_type and return the first max_results of them.
<i>find_closest</i> (hex_value[, color_type])	Search and return nearest to hex_value instance of specified color_type.
<i>resolve_color</i> (subject[, color_type])	Case-insensitive search through registry contents.

### Classes

<i>ApxResult</i> (color, distance)	Approximation result.
<i>Color16</i> (*args, **kwargs)	Variant of a IColor operating within the most basic color set -- <b>Xterm-16</b> .
<i>Color256</i> (*args, **kwargs)	Variant of a IColor operating within relatively modern <b>Xterm-256</b> indexed color table.
<i>ColorRGB</i> (*args, **kwargs)	Variant of a IColor operating within RGB color space.
<i>DefaultColor</i> (*args, **kwargs)	
<i>IColor</i> (*args, **kwargs)	Abstract superclass for other Colors.

## Exceptions

---

`ColorCodeConflictError`(code, existing\_color, ...)

---

`ColorNameConflictError`(tokens, ...)

---

### `pytermor.color.CDT`

CDT represents a RGB color value. Primary handler is `resolve_color()`. Valid values include:

- *str* with a color name in any form distinguishable by the color resolver; the color lists can be found at: [ANSI preset list](#) and [es7s color collection](#);
- *str* starting with a “#” and consisting of 6 more hexadecimal characters, case insensitive (RGB regular form), e.g. “#0B0CCA”;
- *str* starting with a “#” and consisting of 3 more hexadecimal characters, case insensitive (RGB short form), e.g. “#666”;
- *int* in a [0; 0xFFFFFFFF] range.

alias of `TypeVar('CDT', int, str)`

### `pytermor.color.CT`

Any non-abstract `IColor` type.

alias of `TypeVar('CT', bound=IColor)`

### `class pytermor.color.ApxResult`(color, distance)

Bases: `Generic[CT]`

Approximation result.

**color:** `pytermor.color.CT`

Found `IColor` instance.

**distance:** `int`

Squared sRGB distance from this instance to the approximation target.

**property distance\_real:** `float`

Actual distance from instance to target:

$$distance_{real} = \sqrt{distance}$$

### `class pytermor.color.Color16`(\*args, \*\*kwargs)

Bases: `IColor`

Variant of a `IColor` operating within the most basic color set – **Xterm-16**. Represents basic color-setting SGRs with primary codes 30-37, 40-47, 90-97 and 100-107 (see [Color16 presets](#)).

---

**Note:** Arguments `register`, `index` and `aliases` are *kwonly*-type args.

---

#### Parameters

- **hex\_value** (*int*) – Color RGB value, e.g. 0x800000.
- **code\_fg** (*int*) – Int code for a foreground color setup, e.g. 30.

- **code\_bg** (*int*) – Int code for a background color setup. e.g. 40.
- **name** (*str*) – Name of the color, e.g. “red”.
- **register** (*bool*) – If *True*, add color to registry for resolving by name.
- **index** (*bool*) – If *True*, add color to approximation index.
- **aliases** (*list[str]*) – Alternative color names (used in [resolve\\_color\(\)](#)).

**property code\_fg: int**

Int code for a foreground color setup, e.g. 30.

**property code\_bg: int**

Int code for a background color setup. e.g. 40.

**classmethod get\_by\_code(*code*)**

Get a [Color16](#) instance with specified code. Only *foreground* (=text) colors are indexed, therefore it is impossible to look up for a [Color16](#) with given background color.

**Parameters**

**code** (*int*) – Foreground integer code to look up for (see [Color16 presets](#)).

**Raises**

**KeyError** – If no color with specified code is found.

**Return type**

[Color16](#)

**to\_sgr(*bg*, *upper\_bound=None*)**

Make an [SGR sequence](#) out of [IColor](#). Used by [SgrRenderer](#).

**Parameters**

- **bg** (*bool*) – Set to *True* if required SGR should change the background color, or *False* for the foreground (=text) color.
- **upper\_bound** (*Optional[Type[pytermor.color.IColor]]*) – Required result [IColor](#) type upper boundary, i.e., the maximum acceptable color class, which will be the basis for SGR being made. See [Color256.to\\_sgr\(\)](#) for the details.

**Return type**

[SequenceSGR](#)

**to\_tmux(*bg*)**

Make a tmux markup directive, which will change the output color to this color’s value (after tmux processes and prints it). Used by [TmuxRenderer](#).

**Parameters**

**bg** (*bool*) – Set to *True* if required tmux directive should change the background color, or *False* for the foreground (=text) color.

**Return type**

str

**classmethod approximate(*hex\_value*, *max\_results=1*)**

Search for the colors nearest to *hex\_value* and return the first *max\_results*.

**See**

[color.approximate\(\)](#) for the details

**Parameters**

- **hex\_value** (*int*) – Target RGB value.
- **max\_results** (*int*) – Result limit.

**Return type**

*List*[[ApxResult](#)[pytermor.color.CT]]

**classmethod find\_closest**(*hex\_value*)

Search and return nearest to **hex\_value** color instance.

**See**

[color.find\\_closest\(\)](#) for the details

**Parameters**

**hex\_value** (*int*) – Target RGB value.

**Return type**

pytermor.color.CT

**format\_value**(*prefix='0x'*)

Format color value as “0xRRGGBB”.

**Parameters**

**prefix** (*str*) – Can be customized.

**Return type**

str

**property hex\_value: int**

Color value, e.g. 0x3AEB0C.

**property name: str | None**

Color name, e.g. “navy-blue”.

**classmethod resolve**(*name*)

Case-insensitive search through registry contents.

**See**

[resolve\\_color\(\)](#) for the details

**Parameters**

**name** (*str*) – IColor name to search for.

**Return type**

pytermor.color.CT

**to\_hsv()**

Wrapper around [hex\\_to\\_hsv\(\)](#) for concrete instance.

**See**

[hex\\_to\\_hsv\(\)](#) for the details

**Return type**

*Tuple*[float, float, float]

**to\_rgb()**

Wrapper around [to\\_rgb\(\)](#) for concrete instance.

**See**

[to\\_rgb\(\)](#) for the details

**Return type**

*Tuple*[int, int, int]



---

```
class pytermor.color.Color256(*args, **kwargs)
```

Bases: IColor

Variant of a IColor operating within relatively modern **Xterm-256** indexed color table. Represents SGR complex codes 38;5;\* and 48;5;\* (see [Color256 presets](#)).

---

**Note:** Arguments `register`, `index`, `aliases` and `color16_equiv` are *kwonly*-type args.

---

#### Parameters

- **hex\_value** – Color RGB value, e.g. 0x5f0000.
- **code** – Int code for a color setup, e.g. 52.
- **name** – Name of the color, e.g. “dark-red”.
- **register** – If *True*, add color to registry for resolving by name.
- **index** – If *True*, add color to approximation index.
- **aliases** – Alternative color names (used in [resolve\\_color\(\)](#)).
- **color16\_equiv** – [Color16](#) counterpart (applies only to codes 0-15).

```
to_sgr(bg, upper_bound=None)
```

Make an [SGR sequence](#) out of IColor. Used by [SgrRenderer](#).

Each IColor type represents one SGR type in the context of colors. For example, if `upper_bound` is set to [Color16](#), the resulting SGR will always be one of 16-color index table, even if the original color was of different type – it will be approximated just before the SGR assembling.

The reason for this is the necessity to provide a similar look for all users with different terminal settings/capabilities. When the library sees that user’s output device supports 256 colors only, it cannot assemble True Color SGRs, because they will be ignored (if we are lucky), or displayed in a glitchy way, or mess up the output completely. The good news is that the process is automatic and in most cases the library will manage the transformations by itself. If it’s not the case, the developer can correct the behaviour by overriding the renderers’ output mode. See [SgrRenderer](#) and [OutputMode](#) docs.

#### Parameters

- **bg** (*bool*) – Set to *True* if required SGR should change the background color, or *False* for the foreground (=text) color.
- **upper\_bound** (*Optional[Type[pytermor.color.IColor]]*) – Required result IColor type upper boundary, i.e., the maximum acceptable color class, which will be the basis for SGR being made.

#### Return type

[SequenceSGR](#)

```
to_tmux(bg)
```

Make a tmux markup directive, which will change the output color to this color’s value (after tmux processes and prints it). Used by [TmuxRenderer](#).

#### Parameters

- **bg** (*bool*) – Set to *True* if required tmux directive should change the background color, or *False* for the foreground (=text) color.

#### Return type

str

**property code:** `int`

Int code for a color setup, e.g. 52.

**classmethod** `get_by_code(code)`

Get a [Color256](#) instance with specified code (=position in the index).

**Parameters**

**code** (`int`) – Color code to look up for (see [Color256 presets](#)).

**Raises**

**KeyError** – If no color with specified code is found.

**Return type**

[Color256](#)

**classmethod** `approximate(hex_value, max_results=1)`

Search for the colors nearest to `hex_value` and return the first `max_results`.

**See**

[color.approximate\(\)](#) for the details

**Parameters**

- **hex\_value** (`int`) – Target RGB value.
- **max\_results** (`int`) – Result limit.

**Return type**

`List[ApxResult[pytermor.color.CT]]`

**classmethod** `find_closest(hex_value)`

Search and return nearest to `hex_value` color instance.

**See**

[color.find\\_closest\(\)](#) for the details

**Parameters**

**hex\_value** (`int`) – Target RGB value.

**Return type**

`pytermor.color.CT`

**format\_value**(`prefix='0x'`)

Format color value as “0xRRGGBB”.

**Parameters**

**prefix** (`str`) – Can be customized.

**Return type**

`str`

**property hex\_value:** `int`

Color value, e.g. 0x3AEB0C.

**property name:** `str | None`

Color name, e.g. “navy-blue”.

**classmethod** `resolve(name)`

Case-insensitive search through registry contents.

**See**

[resolve\\_color\(\)](#) for the details

**Parameters**

**name** (*str*) – IColor name to search for.

**Return type**

pytermor.color.CT

**to\_hsv()**

Wrapper around [hex\\_to\\_hsv\(\)](#) for concrete instance.

**See**

[hex\\_to\\_hsv\(\)](#) for the details

**Return type**

*Tuple*[float, float, float]

**to\_rgb()**

Wrapper around [to\\_rgb\(\)](#) for concrete instance.

**See**

[to\\_rgb\(\)](#) for the details

**Return type**

*Tuple*[int, int, int]

**class** pytermor.color.ColorRGB(\*args, \*\*kwargs)

Bases: IColor

Variant of a IColor operating within RGB color space. Presets include *es7s named colors*, a unique collection of colors compiled from several known sources after careful selection. However, it's not limited to aforementioned color list and can be easily extended.

---

**Note:** Arguments `register`, `index`, `aliases` and `variation_map` are *kwonly*-type args.

---

**Parameters**

- **hex\_value** – Color RGB value, e.g. 0x73A9C2.
- **name** – Name of the color, e.g. “moonstone-blue”.
- **register** – If *True*, add color to registry for resolving by name.
- **index** – If *True*, add color to approximation index.
- **aliases** – Alternative color names (used in [resolve\\_color\(\)](#)).
- **variation\_map** – Mapping {*int*: *str*}, where keys are hex values, and values are variation names.

**to\_sgr(bg, upper\_bound=None)**

Make an *SGR sequence* out of IColor. Used by [SgrRenderer](#).

**Parameters**

- **bg** (*bool*) – Set to *True* if required SGR should change the background color, or *False* for the foreground (=text) color.
- **upper\_bound** (*Optional*[*Type*[pytermor.color.IColor]]) – Required result IColor type upper boundary, i.e., the maximum acceptable color class, which will be the basis for SGR being made. See [Color256.to\\_sgr\(\)](#) for the details.

**Return type**[SequenceSGR](#)**to\_tmux(bg)**

Make a tmux markup directive, which will change the output color to this color's value (after tmux processes and prints it). Used by [TmuxRenderer](#).

**Parameters**

**bg** (*bool*) – Set to *True* if required tmux directive should change the background color, or *False* for the foreground (=text) color.

**Return type**

str

**property base: CT | None**

Parent color for color variations. Empty for regular colors.

**property variations: Dict[str, pytermor.color.CT]**

List of color variations. *Variation* of a color is a similar color with almost the same name, but with differing suffix. The main idea of variations is to provide a basis for fuzzy searching, which will return several results for one query; i.e., when the query matches a color with variations, the whole color family can be considered a match, which should increase searching speed.

**classmethod approximate(hex\_value, max\_results=1)**

Search for the colors nearest to **hex\_value** and return the first **max\_results**.

**See**[color.approximate\(\)](#) for the details**Parameters**

- **hex\_value** (*int*) – Target RGB value.
- **max\_results** (*int*) – Result limit.

**Return type**[List\[ApxResult\[pytermor.color.CT\]\]](#)**classmethod find\_closest(hex\_value)**

Search and return nearest to **hex\_value** color instance.

**See**[color.find\\_closest\(\)](#) for the details**Parameters**

**hex\_value** (*int*) – Target RGB value.

**Return type**[pytermor.color.CT](#)**format\_value(prefix='0x')**

Format color value as “0xRRGGBB”.

**Parameters**

**prefix** (*str*) – Can be customized.

**Return type**

str

**property hex\_value: int**

Color value, e.g. 0x3AEB0C.

**property name:** `str` | `None`

Color name, e.g. “navy-blue”.

**classmethod** `resolve(name)`

Case-insensitive search through registry contents.

See

[`resolve\_color\(\)`](#) for the details

**Parameters**

**name** (`str`) – IColor name to search for.

**Return type**

`pytermor.color.CT`

**to\_hsv()**

Wrapper around [`hex\_to\_hsv\(\)`](#) for concrete instance.

See

[`hex\_to\_hsv\(\)`](#) for the details

**Return type**

`Tuple[float, float, float]`

**to\_rgb()**

Wrapper around [`to\_rgb\(\)`](#) for concrete instance.

See

[`to\_rgb\(\)`](#) for the details

**Return type**

`Tuple[int, int, int]`

`pytermor.color.NOOP_COLOR = <_NoopColor[NOP]>`

Special IColor instance always rendering into empty string.

`pytermor.color.DEFAULT_COLOR = <DefaultColor[DEF]>`

Special IColor instance rendering to SGR sequence telling the terminal to reset fg or bg color; same for [`TmuxRenderer`](#). Useful when you inherit some [`Style`](#) with fg or bg color which you don’t need, but at the same time you don’t actually want to set up any value whatsoever.

---

**Important:** *None* and [`NOOP\_COLOR`](#) are always treated as placeholders for fallback values, i.e., they can’t be used as re-setters – that’s what [`DEFAULT\_COLOR`](#) is for.

---

```
>>> DEFAULT_COLOR.to_sgr(bg=False)
<SGR[39]>
```

`pytermor.color.resolve_color(subject, color_type=None)`

Case-insensitive search through registry contents. Search is performed for IColor instance named as specified in `subject` argument, and of specified `color_type`, or for any type if argument is omitted: first it will be performed in the registry of [`Color16`](#) class, then – in [`Color256`](#), and, if previous two were unsuccessful, in the largest [`ColorRGB`](#) registry. Therefore, the return value could be any of these types:

```
>>> resolve_color('red')
<Color16[#31,8000000?,red]>
```

If `color_type` is [ColorRGB](#) or if it is omitted, there is one more way to specify a color: in form of a hexadecimal value “#RRGGBB” (or in short form, as “#RGB”), as well as just use an *int* in [0x00; 0xFFFFFFFF] range. In this case no actual searching is performed, and a new nameless instance of [ColorRGB](#) is created and returned.

```
>>> resolve_color("#333")
<ColorRGB[333333]>
>>> resolve_color(0xfafef0)
<ColorRGB[FAFEF0]>
```

Color names are stored in registries as tokens, which allows to use any form of input and get the correct result regardless. The only requirement is to split the words in any matter, so that tokenizer could distinguish the words from each other:

```
>>> resolve_color('deep-sky-blue-7')
<Color256[X23, 005F5F, deep-sky-blue-7]>
>>> resolve_color('DEEP_SKY_BLUE_7')
<Color256[X23, 005F5F, deep-sky-blue-7]>
>>> resolve_color('DeepSkyBlue7')
<Color256[X23, 005F5F, deep-sky-blue-7]>
```

```
>>> resolve_color('deepskyblue7')
Traceback (most recent call last):
LookupError: Color 'deepskyblue7' was not found in any of registries
```

#### Parameters

- **subject** (*str/int*) – IColor name or hex value to search for. See [CDT](#).
- **color\_type** (*Optional[Type[pytermor.color.CT]]*) – Target color type ([Color16](#), [Color256](#) or [ColorRGB](#)).

#### Raises

**LookupError** – If nothing was found in either of registries.

#### Returns

IColor instance with specified name or value.

#### Return type

pytermor.color.CT

`pytermor.color.find_closest(hex_value, color_type=None)`

Search and return nearest to `hex_value` instance of specified `color_type`. If `color_type` is omitted, search for the closest [Color256](#) element.

Method is useful for finding applicable color alternatives if user’s terminal is incapable of operating in more advanced mode. Usually it is done by the library automatically and transparently for both the developer and the end-user.

---

**Note:** This method caches the results, i.e., the same search query will from then onward result in the same return value without the necessity of iterating through the color index. If that’s not applicable, use similar method [approximate\(\)](#), which is unaware of caching mechanism altogether.

---

#### Parameters

- **hex\_value** (*int*) – Target color RGB value.

- **color\_type** (*Optional*[*Type*[*pytermor.color.CT*]]) – Target color type (*Color16*, *Color256* or *ColorRGB*).

**Returns**

Nearest to `hex_value` color instance of specified type.

**Return type**

`pytermor.color.CT`

`pytermor.color.approximate(hex_value, color_type=None, max_results=1)`

Search for nearest to `hex_value` colors of specified `color_type` and return the first `max_results` of them. If `color_type` is omitted, search for the closest *Color256* elements. This method is similar to the *find\_closest()*, although they differ in some aspects:

- *approximate()* can return more than one result;
- *approximate()* returns not just a *IColor* instance(s), but also a number equal to squared distance to the target color for each of them;
- *find\_closest()* caches the results, while *approximate()* ignores the cache completely.

**Parameters**

- **hex\_value** (*int*) – Target color RGB value.
- **color\_type** (*Optional*[*Type*[*pytermor.color.CT*]]) – Target color type (*Color16*, *Color256* or *ColorRGB*).
- **max\_results** (*int*) – Return no more than `max_results` items.

**Returns**

Pairs of closest *IColor* instance(s) found with their distances to the target color, sorted by distance descending, i.e., element at index 0 is the closest color found, paired with its distance to the target; element with index 1 is second-closest color (if any) and corresponding distance value, etc.

**Return type**

*List*[*ApxResult*[*pytermor.color.CT*]]

**exception** `pytermor.color.ColorNameConflictError(tokens, existing_color, new_color)`

Bases: *Exception*

**with\_traceback()**

*Exception.with\_traceback(tb)* – set `self.__traceback__` to `tb` and return `self`.

**exception** `pytermor.color.ColorCodeConflictError(code, existing_color, new_color)`

Bases: *Exception*

**with\_traceback()**

*Exception.with\_traceback(tb)* – set `self.__traceback__` to `tb` and return `self`.

## 2.3 pytermor.common

Shared code suitable for the package as well as any other.

### Module Attributes

<code>ALIGN_LEFT</code>	Left align (add padding on the right side, if necessary).
<code>ALIGN_RIGHT</code>	Right align (add padding on the left side, if necessary).
<code>ALIGN_CENTER</code>	Center align (add paddings on both sides evenly, if necessary).

### Functions

<code>chunk(items, size)</code>	Split item list into chunks of size <code>size</code> and return these chunks as <i>tuples</i> .
<code>flatten(items)</code>	
<code>flatten1(items)</code>	Take a list of nested lists and unpack all nested elements one level up.
<code>get_preferable_wrap_width([force_width])</code>	Return preferable terminal width for comfort reading of wrapped text (max=120).
<code>get_qname(obj)</code>	Convenient method for getting a class name for class instances as well as for the classes themselves.
<code>get_terminal_width([fallback, pad])</code>	Return current terminal width with an optional "safety buffer", which ensures that no unwanted line wrapping will happen.
<code>measure([level, template])</code>	<b>param level</b>
<code>median(N[, key])</code>	Find the median of a list of values.
<code>percentile(N, percent[, key])</code>	Find the percentile of a list of values.
<code>trace([enabled, level, label])</code>	<b>param enabled</b>

### Classes

<code>Align(value)</code>	Align type.
<code>ExtendedEnum(value)</code>	An enumeration.



## Exceptions

---

`ArgCountError(actual, *expected)`

---

`ArgTypeError(actual_type[, arg_name, fn])`

---

*ConflictError*

---

*LogicError*

---

*UserAbort*

---

*UserCancel*

---

**class** `pytermor.common.ExtendedEnum(value)`

Bases: `Enum`

An enumeration.

**class** `pytermor.common.Align(value)`

Bases: `str`, *ExtendedEnum*

Align type.

**exception** `pytermor.common.UserCancel`

Bases: `Exception`

**with\_traceback()**

Exception.with\_traceback(tb) – set self.\_\_traceback\_\_ to tb and return self.

**exception** `pytermor.common.UserAbort`

Bases: `Exception`

**with\_traceback()**

Exception.with\_traceback(tb) – set self.\_\_traceback\_\_ to tb and return self.

**exception** `pytermor.common.LogicError`

Bases: `Exception`

**with\_traceback()**

Exception.with\_traceback(tb) – set self.\_\_traceback\_\_ to tb and return self.

**exception** `pytermor.common.ConflictError`

Bases: `Exception`

**with\_traceback()**

Exception.with\_traceback(tb) – set self.\_\_traceback\_\_ to tb and return self.

`pytermor.common.ALIGN_LEFT = Align.LEFT`

Left align (add padding on the right side, if necessary).

`pytermor.common.ALIGN_RIGHT = Align.RIGHT`

Right align (add padding on the left side, if necessary).

`pytermor.common.ALIGN_CENTER = Align.CENTER`

Center align (add paddings on both sides evenly, if necessary).

`pytermor.common.get_qname(obj)`

Convenient method for getting a class name for class instances as well as for the classes themselves. Suitable for debug output in `__repr__` methods, for example.

```
>>> get_qname("aaa")
'str'
>>> get_qname(threading.Thread)
'Thread'
```

**Return type**

str

`pytermor.common.get_terminal_width(fallback=80, pad=2)`

Return current terminal width with an optional “safety buffer”, which ensures that no unwanted line wrapping will happen.

**Parameters**

- **fallback** (*int*) – Default value when `shutil` is unavailable and environment variable `COLUMNS` is unset.
- **pad** (*int*) – Additional safety space to prevent unwanted line wrapping.

**Return type**

int

`pytermor.common.get_preferable_wrap_width(force_width=None)`

Return preferable terminal width for comfort reading of wrapped text (max=120).

**Parameters**

**force\_width** (*Optional[int]*) – Ignore current terminal width and use this value as a result.

**Return type**

int

`pytermor.common.trace(enabled=True, level=5, label='Dump')`

**Parameters**

- **enabled** (*bool*) –
- **level** (*int*) –
- **label** (*str*) –

**Returns**

`pytermor.common.measure(level=10, template='Done in %s')`

**Parameters**

- **level** (*int*) –
- **template** (*str*) –

**Returns**

`pytermor.common.chunk(items, size)`

Split item list into chunks of size `size` and return these chunks as *tuples*.

```
>>> for c in chunk(range(5), 2):
...     print(c)
(0, 1)
(2, 3)
(4,)
```

#### Parameters

- **items** (*Iterable*[*T*]) – Input elements.
- **size** (*int*) – Chunk size.

#### Return type

*Iterator*[*Tuple*[*T*, ...]]

`pytermor.common.flatten1(items)`

Take a list of nested lists and unpack all nested elements one level up.

```
>>> flatten1([[1, 2, 3], [4, 5, 6], [[10, 11, 12]]])
[1, 2, 3, 4, 5, 6, [10, 11, 12]]
```

#### Parameters

**items** (*Iterable*[*Iterable*[*T*]]) – Input lists.

#### Return type

*List*[*T*]

`pytermor.common.flatten(items)`

---

**Todo:** recursive

---

#### Return type

*List*[*T*]

`pytermor.common.percentile(N, percent, key=<function <lambda>>)`

Find the percentile of a list of values.

#### Parameters

- **N** (*Sequence*[*float*]) – List of values. MUST BE already sorted.
- **percent** (*float*) – Float value from 0.0 to 1.0.
- **key** (*Callable*[[*float*], *float*]) – Optional key function to compute value from each element of N.

#### Return type

*float*

`pytermor.common.median(N, key=<function <lambda>>)`

Find the median of a list of values. Wrapper around `percentile()` with fixed `percent` argument (=0.5).

#### Parameters

- **N** (*Sequence[float]*) – List of values. MUST BE already sorted.
- **key** (*Callable[[float], float]*) – Optional key function to compute value from each element of N.

**Return type**  
float

## 2.4 pytermor.config

Library fine tuning.

### Functions

<code>get_config()</code>	Return the current config instance.
<code>init_config()</code>	Reset all config vars to default values.
<code>replace_config(cfg)</code>	Replace the global config instance with provided one.

### Classes

<code>Config([renderer_class, output_mode, ...])</code>	Configuration variables container.
---	------------------------------------

```
class pytermor.config.Config(renderer_class=<factory>, output_mode=<factory>,  
                             trace_renders=<factory>, prefer_rgb=<factory>)
```

Configuration variables container. Values can be modified in two ways:

- 1) create new `Config` instance from scratch and activate with `replace_config()`;
- 2) or preliminarily set the corresponding environment variables to intended values, and the default config instance will catch them up on initialization.

#### See also:

Environment variable list is located in [Configuration](#) guide section.

#### Parameters

- **renderer\_class** (*str*) – `renderer_class`
- **output\_mode** (*str*) – `output_mode`
- **trace\_renders** (*bool*) – Set to `True` to log hex dumps of rendered strings. Note that default logger is `logging.NullHandler` with `WARNING` level, so in order to see the traces attached handler is required.
- **prefer\_rgb** (*bool*) – By default SGR renderer transforms `Color256` instances to ESC `[38;5;<N>m` sequences even if True Color support is detected. With this flag set to `True`, the behaviour is different, and `Color256` will be rendered as ESC `[38;2;<R>;<G>;<B>m` sequence (if True Color is available).

`pytermor.config.get_config()`

Return the current config instance.

**Return type**

[Config](#)

`pytermor.config.init_config()`

Reset all config vars to default values.

`pytermor.config.replace_config(cfg)`

Replace the global config instance with provided one.

## 2.5 pytermor.cval

Color preset list.

### Classes

---

[CVAL\(\)](#)

---

`class pytermor.cval.CVAL`

## 2.6 pytermor.renderer

Output formatters. Default global renderer type is [SgrRenderer](#).

### Functions

---

`init_renderer()`

---

## Classes

<code>HtmlRenderer()</code>	Translate <i>Styles</i> attributes into a rudimentary HTML markup.
<code>IRenderer()</code>	Renderer interface.
<code>NoOpRenderer()</code>	Special renderer type that does nothing with the input string and just returns it as is (i.e.
<code>OutputMode(value)</code>	Determines what types of SGR sequences are allowed to use in the output.
<code>RendererManager()</code>	Class for global rendering mode setup.
<code>SgrDebugger([output_mode])</code>	Subclass of regular <i>SgrRenderer</i> with two differences - - instead of rendering the proper ANSI escape sequences it renders them with ESC character replaced by '"', and encloses the whole sequence into '()' for visual separation.
<code>SgrRenderer([output_mode, io])</code>	Default renderer invoked by <i>Text.render()</i> .
<code>TmuxRenderer()</code>	Translates <i>Styles</i> attributes into <i>tmux-compatible</i> markup.

### class pytermor.renderer.RendererManager

Class for global rendering mode setup.

Selecting the renderer can be accomplished in several ways:

- By using general-purpose functions *text.render()* and *text.echo()* – both have an argument *renderer* (preferable; introduced in pytermor 2.x).
- Method *RendererManager.set\_default()* sets the default renderer globally. After that calling *text.render()* will automatically invoke a said renderer and apply the required formatting (that is, if *renderer* argument is left empty).
- Alternatively, you can use renderer's instance method *render()* directly and avoid messing up with the manager, but that's not recommended and possibly will be deprecated in future versions).

Generally speaking, if you need to invoke a custom renderer just once, it's convenient to use the first method for this matter, and use the second one in all the other cases.

On the contrary, if there is a necessity to use more than one renderer alternately, it's better to avoid using the global one at all, and just instantiate and invoke both renderers independently.

## TL;DR

To unconditionally print formatted message to standard output, use *RendererManager.set\_default\_format\_always()* and then *render()*.

### classmethod set\_default(renderer=None)

Select a global renderer.

#### Parameters

**renderer** (*IRenderer* / *t.Type[IRenderer]*) – Default renderer to use globally. Calling this method without arguments will result in library default renderer *SgrRenderer* being set as default.

All the methods with the *renderer* argument (e.g., *text.render()*) will use the global default one if said argument is omitted or set to *None*.

You can specify either the renderer class, in which case manager will instantiate it with the default parameters, or provide already instantiated and set up renderer, which will be registered as global.

**classmethod** `get_default()`

Get global renderer instance (*SgrRenderer*, or the one provided earlier with *set\_default()*).

**Return type**  
*IRenderer*

**classmethod** `set_default_format_always()`

Shortcut for forcing all control sequences to be present in the output of a global renderer.

Note that it applies only to the renderer that is set up as default at the moment of calling this method, i.e., all previously created instances, as well as the ones that will be created afterwards, are unaffected.

**classmethod** `set_default_format_never()`

Shortcut for disabling all output formatting of a global renderer.

**class** `pytermor.renderer.IRenderer`

Renderer interface.

**abstract property** `is_caching_allowed: bool`

Class-level property.

**Returns**  
*True* if caching of renderer's results makes any sense and *False* otherwise.

**abstract property** `is_format_allowed: bool`

**Returns**  
*True* if renderer is set up to use the formatting and will do it on invocation, and *False* otherwise.

**abstract** `render(string, fmt=None)`

Apply colors and attributes described in `fmt` argument to `string` and return the result. Output format depends on renderer's class, which defines the implementation.

**Parameters**

- **string** (*str*) – String to format.
- **fmt** (*Optional[pytermor.style.FT]*) – Style or color to apply. If `fmt` is a *IColor* instance, it is assumed to be a foreground color. See *FT*.

**Returns**  
String with formatting applied, or without it, depending on renderer settings.

**Return type**  
*str*

**abstract** `clone(*args, **kwargs)`

Make a copy of the renderer with the same setup.

**Return type**  
*self*

**class** `pytermor.renderer.OutputMode(value)`

Bases: *Enum*

Determines what types of SGR sequences are allowed to use in the output.

**NO\_ANSI** = 'no\_ansi'

The renderer discards all color and format information completely.

**XTERM\_16** = 'xterm\_16'

16-colors mode. Enforces the renderer to approximate all color types to [Color16](#) and render them as basic mode selection SGR sequences (ESC [31m, ESC [42m etc). See [Color.approximate\(\)](#) for approximation algorithm details.

**XTERM\_256** = 'xterm\_256'

256-colors mode. Allows the renderer to use either [Color16](#) or [Color256](#) (but RGB will be approximated to 256-color palette).

**TRUE\_COLOR** = 'true\_color'

RGB color mode. Does not apply restrictions to color rendering.

**AUTO** = 'auto'

Lets the renderer select the most suitable mode by itself. See [SgrRenderer](#) constructor documentation for the details.

```
class pytermor.renderer.SgrRenderer(output_mode=OutputMode.AUTO, io=<_io.TextIOWrapper
                                   name='<stdout>' mode='w' encoding='utf-8'>)
```

Bases: [IRenderer](#)

Default renderer invoked by [Text.render\(\)](#). Transforms [IColor](#) instances defined in `style` into ANSI control sequence bytes and merges them with input string. Type of resulting [SequenceSGR](#) depends on type of [IColor](#) instances in `style` argument and current output mode of the renderer.

1. [ColorRGB](#) can be rendered as True Color sequence, 256-color sequence or 16-color sequence depending on specified [OutputMode](#) and config variable `Config.prefer_rgb`.
2. [Color256](#) can be rendered as 256-color sequence or 16-color sequence.
3. [Color16](#) will be rendered as 16-color sequence.
4. Nothing of the above will happen and all formatting will be discarded completely if output device is not a terminal emulator or if the developer explicitly set up the renderer to do so ([OutputMode.NO\\_ANSI](#)).

Renderer approximates RGB colors to closest **indexed** colors if terminal doesn't support RGB output. In case terminal doesn't support even 256 colors, it falls back to 16-color palette and picks closest samples again the same way. See [OutputMode](#) documentation for exact mappings.

```
>>> SgrRenderer(OutputMode.XTERM_256).render('text', Styles.WARNING_LABEL)
'[1;33mtext[22;39m'
>>> SgrRenderer(OutputMode.NO_ANSI).render('text', Styles.WARNING_LABEL)
'text'
```

### Parameters

**output\_mode** ([OutputMode](#)) – SGR output mode to use. Valid values are listed in [OutputMode](#) enum.

With [OutputMode.AUTO](#) the renderer will first check if the output device is a terminal emulator, and use [OutputMode.NO\\_ANSI](#) when it is not. Otherwise, the renderer will read TERM environment variable and follow these rules:

- [OutputMode.NO\\_ANSI](#) if TERM is set to `xterm`.
- [OutputMode.XTERM\\_16](#) if TERM is set to `xterm-color`.
- [OutputMode.XTERM\\_256](#) in all other cases.



Special case is when TERM equals to xterm-256color and COLORTERM is either truecolor or 24bit, then `OutputMode.TRUE_COLOR` will be used.

**property is\_caching\_allowed: bool**

Class-level property.

**Returns**

*True* if caching of renderer's results makes any sense and *False* otherwise.

**property is\_format\_allowed: bool**

**Returns**

*True* if renderer is set up to use the formatting and will do it on invocation, and *False* otherwise.

**render(string, fmt=None)**

Apply colors and attributes described in `fmt` argument to `string` and return the result. Output format depends on renderer's class, which defines the implementation.

**Parameters**

- **string** (*str*) – String to format.
- **fmt** (*Optional[pytermor.style.FT]*) – Style or color to apply. If `fmt` is a `IColor` instance, it is assumed to be a foreground color. See [FT](#).

**Returns**

String with formatting applied, or without it, depending on renderer settings.

**Return type**

`str`

**clone()**

Make a copy of the renderer with the same setup.

**Return type**

`self`

**class pytermor.renderer.TmuxRenderer**

Bases: [IRenderer](#)

Translates [Styles](#) attributes into `tmux-compatible` markup. `tmux` is a commonly used terminal multiplexer.

```
>>> TmuxRenderer().render('text', Style(fg='blue', bold=True))
'#[fg=blue bold]text#[fg=default nobold]'
```

**property is\_caching\_allowed: bool**

Class-level property.

**Returns**

*True* if caching of renderer's results makes any sense and *False* otherwise.

**property is\_format\_allowed: bool**

**Returns**

Always *True*, because `tmux` markup can be used without regard to the type of output device and its capabilities – all the dirty work will be done by the multiplexer itself.

**render(string, fmt=None)**

Apply colors and attributes described in `fmt` argument to `string` and return the result. Output format depends on renderer's class, which defines the implementation.

**Parameters**

- **string** (*str*) – String to format.
- **fmt** (*Optional[pytermor.style.FT]*) – Style or color to apply. If **fmt** is a `IColor` instance, it is assumed to be a foreground color. See [FT](#).

**Returns**

String with formatting applied, or without it, depending on renderer settings.

**Return type**

`str`

**clone()**

Make a copy of the renderer with the same setup.

**Return type**

`self`

**class** `pytermor.renderer.NoOpRenderer`

Bases: [IRenderer](#)

Special renderer type that does nothing with the input string and just returns it as is (i.e. raw text without any [Styles](#) applied. Often used as a default argument value (along with similar “NoOps” like [NOOP\\_STYLE](#), [NOOP\\_COLOR](#) etc.)

```
>>> NoOpRenderer().render('text', Style(fg='green', bold=True))
'text'
```

**property** `is_caching_allowed`: `bool`

Class-level property.

**Returns**

*True* if caching of renderer’s results makes any sense and *False* otherwise.

**property** `is_format_allowed`: `bool`**Returns**

Nothing to apply → nothing to allow, thus the returned value is always *False*.

**render**(*string*, *fmt=None*)

Return the *string* argument untouched, don’t mind the *fmt*.

**Parameters**

- **string** (*str*) – String to format ignore.
- **fmt** (*Optional[pytermor.style.FT]*) – Style or color to appl discard.

**Return type**

`str`

**clone()**

Make a copy of the renderer with the same setup.

**Return type**

`self`

**class** `pytermor.renderer.HtmlRenderer`

Bases: [IRenderer](#)

Translate *Styles* attributes into a rudimentary HTML markup. All the formatting is inlined into `style` attribute of the `<span>` elements. Can be optimized by extracting the common styles as CSS classes and referencing them by DOM elements instead.

```
>>> HtmlRenderer().render('text', Style(fg='red', bold=True))
'<span style="color: #800000; font-weight: 700">text</span>'
```

**property is\_caching\_allowed:** bool

Class-level property.

**Returns**

*True* if caching of renderer's results makes any sense and *False* otherwise.

**property is\_format\_allowed:** bool

**Returns**

Always *True*, because the capabilities of the terminal have nothing to do with HTML markup meant for web-browsers.

**render**(*string*, *fmt=None*)

Apply colors and attributes described in *fmt* argument to *string* and return the result. Output format depends on renderer's class, which defines the implementation.

**Parameters**

- **string** (*str*) – String to format.
- **fmt** (*Optional[pytermor.style.FT]*) – Style or color to apply. If *fmt* is a *IColor* instance, it is assumed to be a foreground color. See *FT*.

**Returns**

String with formatting applied, or without it, depending on renderer settings.

**Return type**

str

**clone()**

Make a copy of the renderer with the same setup.

**Return type**

self

**class** pytermor.renderer.**SgrDebugger**(*output\_mode=OutputMode.AUTO*)

Bases: *SgrRenderer*

Subclass of regular *SgrRenderer* with two differences – instead of rendering the proper ANSI escape sequences it renders them with ESC character replaced by “”, and encloses the whole sequence into ‘()’ for visual separation.

Can be used for debugging of assembled sequences, because such a transformation reliably converts a control sequence into a harmless piece of bytes completely ignored by the terminals.

```
>>> SgrDebugger(OutputMode.XTERM_16).render('text', Style(fg='red', bold=True))
'([1;31m)text([22;39m)'
```

**property is\_caching\_allowed:** bool

Class-level property.

**Returns**

*True* if caching of renderer's results makes any sense and *False* otherwise.

**property is\_format\_allowed:** `bool`

**Returns**

*True* if renderer is set up to use the formatting and will do it on invocation, and *False* otherwise.

**render**(*string*, *fmt=None*)

Apply colors and attributes described in *fmt* argument to *string* and return the result. Output format depends on renderer's class, which defines the implementation.

**Parameters**

- **string** (*str*) – String to format.
- **fmt** (*Optional*[*pytermor.style.FT*]) – Style or color to apply. If *fmt* is a *IColor* instance, it is assumed to be a foreground color. See [FT](#).

**Returns**

String with formatting applied, or without it, depending on renderer settings.

**Return type**

`str`

**clone()**

Make a copy of the renderer with the same setup.

**Return type**

`self`

**set\_format\_always()**

Force all control sequences to be present in the output.

**set\_format\_auto()**

Reset the force formatting flag and let the renderer decide by itself (see [SgrRenderer](#) docs for the details).

**set\_format\_never()**

Force disabling of all output formatting.

## 2.7 pytermor.style

---

**Todo:** S

---

### Module Attributes

---

*FT*

FT (Format type) is a style descriptor.

*NOOP\_STYLE*

Special style passing the text through without any modifications.

---

## Functions

<code>make_style([fmt])</code>	General <i>Style</i> constructor.
<code>merge_styles([base, fallbacks, overwrites])</code>	Bulk style merging method.

## Classes

<code>Style([fallback, fg, bg, blink, bold, ...])</code>	Create new text render descriptor.
<code>Styles()</code>	Some ready-to-use styles.

### pytermor.style.FT

FT is a style descriptor. Used as a shortcut precursor for actual styles. Primary handler is `make_style()`.

alias of `TypeVar('FT', int, str, ~pytermor.color.IColor, Style, None)`

**class** `pytermor.style.Style(fallback=None, fg=None, bg=None, *, blink=None, bold=None, crosslined=None, dim=None, double_underlined=None, inversed=None, italic=None, overlined=None, underlined=None, class_name=None)`

Create new text render descriptor.

Both `fg` and `bg` can be specified as existing `IColor` instance as well as plain *str* or *int* (for the details see `resolve_color()`).

```
>>> Style(fg='green', bold=True)
<Style[green:NOP +BOLD]>
>>> Style(bg=0x0000ff)
<Style[NOP:0000FF]>
>>> Style(fg='DeepSkyBlue1', bg='gray3')
<Style[X39[00AFFF]:X232[080808]]>
```

Attribute merging from `fallback` works this way:

- If constructor argument is *not* empty (`True`, `False`, `IColor` etc.), keep it as attribute value.
- If constructor argument is empty (`None`), take the value from `fallback`'s corresponding attribute.

See `merge_fallback()` and `merge_overwrite()` methods and take the differences into account. The method used in the constructor is the first one.

**Note:** Both empty (i.e., `None`) attributes of type `IColor` after initialization will be replaced with special constant `NOOP_COLOR`, which behaves like there was no color defined, and at the same time makes it safer to work with nullable color-type variables. Merge methods are aware of this and treat `NOOP_COLOR` as `None`.

**Note:** All arguments except `fallback`, `fg` and `bg` are *kwonly*-type args.

### Parameters

- **fallback** (*Style*) – Copy unset attributes from specified fallback style. See `merge_fallback()`.
- **fg** (*CDT* | *IColor*) – Foreground (i.e., text) color.

- **bg** (*CDT* / *IColor*) – Background color.
- **blink** (*bool*) – Blinking effect; *supported by limited amount of Renderers*.
- **bold** (*bool*) – Bold or increased intensity.
- **crosslined** (*bool*) – Strikethrough.
- **dim** (*bool*) – Faint, decreased intensity.
- **double\_underlined** (*bool*) – Faint, decreased intensity.
- **inversed** (*bool*) – Swap foreground and background colors.
- **italic** (*bool*) – Italic.
- **overlined** (*bool*) – Overline.
- **underlined** (*bool*) – Underline.
- **class\_name** (*str*) – Arbitrary string used by some `_get_renderers`, e.g. by `HtmlRenderer`.

#### **autopick\_fg()**

Pick `fg_color` depending on `bg_color`. Set `fg_color` to either 3% gray (almost black) if background is bright, or to 80% gray (bright gray) if it is dark. If background is `None`, do nothing.

---

**Todo:** check if there is a better algorithm, because current thinks text on #000080 should be black

---

#### **Returns**

`self`

#### **Return type**

`Style`

#### **flip()**

Swap foreground color and background color.

#### **Returns**

`self`

#### **Return type**

`Style`

#### **clone()**

#### **Returns**

`self`

#### **Return type**

`Style`

#### **merge\_fallback(fallback)**

Merge current style with specified `fallback` `style`, following the rules:

1. `self` attribute value is in priority, i.e. when both `self` and `fallback` attributes are defined, keep `self` value.
2. If `self` attribute is `None`, take the value from `fallback`'s corresponding attribute, and vice versa.
3. If both attribute values are `None`, keep the `None`.

All attributes corresponding to constructor arguments except `fallback` are subject to merging. `NOOP_COLOR` is treated like `None` (default for `fg` and `bg`).

Modifies the instance in-place and returns it as well (for chained calls).

Listing 1: Merging different values in fallback mode

	FALLBACK	BASE(SELF)	RESULT	
	+-----+	+-----+	+-----+	
ATTR-1	False --∅	True ==>	True	BASE val <b>is in</b> priority
ATTR-2	True -----	None  -->	True	no BASE val, taking FALLBACK val
ATTR-3	None	True ==>	True	BASE val <b>is in</b> priority
ATTR-4	None	None	None	no vals, keeping unset
	+-----+	+-----+	+-----+	

See also:

[merge\\_styles](#) for the examples.

#### Parameters

**fallback** ([Style](#)) – Style to merge the attributes with.

#### Returns

self

#### Return type

[Style](#)

#### `merge_overwrite(overwrite)`

Merge current style with specified `overwrite` [style](#), following the rules:

1. `overwrite` attribute value is in priority, i.e. when both `self` and `overwrite` attributes are defined, replace `self` value with `overwrite` one (in contrast to [merge\\_fallback\(\)](#), which works the opposite way).
2. If `self` attribute is `None`, take the value from `overwrite`'s corresponding attribute, and vice versa.
3. If both attribute values are `None`, keep the `None`.

All attributes corresponding to constructor arguments except `fallback` are subject to merging. `NOOP_COLOR` is treated like `None` (default for `fg` and `bg`).

Modifies the instance in-place and returns it as well (for chained calls).

Listing 2: Merging different values in overwrite mode

	BASE(SELF)	OVERWRITE	RESULT	
	+-----+	+-----+	+-----+	
ATTR-1	True ==∅	False ---->	False	OVERWRITE val <b>is in</b> priority
ATTR-2	None	True ---->	True	OVERWRITE val <b>is in</b> priority
ATTR-3	True ===	None  ==>	True	no OVERWRITE val, keeping BASE val
ATTR-4	None	None	None	no vals, keeping unset
	+-----+	+-----+	+-----+	

See also:

[merge\\_styles](#) for the examples.

#### Parameters

**overwrite** ([Style](#)) – Style to merge the attributes with.

**Returns**

self

`pytermor.style.NOOP_STYLE = <_NoOpStyle[NOP]>`

Special style passing the text through without any modifications.

---

**Important:** This class is immutable, i.e. `LogicError` will be raised upon an attempt to modify any of its attributes, which can lead to schrödinbugs:

`st1.merge_fallback(Style(bold=True), [Style(italic=False)])`

If `st1` is a regular style instance, the statement above will always work (and pass the tests), but if it happens to be a `NOOP_STYLE`, this will result in an exception. To protect from this outcome one could merge styles via frontend method `merge_styles` only, which always makes a copy of base argument and thus cannot lead to such behaviour.

---

**class** `pytermor.style.Styles`

Some ready-to-use styles. Can be used as examples.

`WARNING = <Style[yellow:NOP]>``WARNING_LABEL = <Style[yellow:NOP +BOLD]>``WARNING_ACCENT = <Style[hi-yellow:NOP]>``ERROR = <Style[red:NOP]>``ERROR_LABEL = <Style[red:NOP +BOLD]>``ERROR_ACCENT = <Style[hi-red:NOP]>``CRITICAL = <Style[hi-white:X160[D70000]]>``CRITICAL_LABEL = <Style[hi-white:X160[D70000] +BOLD]>``CRITICAL_ACCENT = <Style[hi-white:X160[D70000] +BOLD +BLINK]>``pytermor.style.make_style(fmt=None)`General `Style` constructor. Accepts a variety of argument types:

- **CDT** (*str* or *int*)  
This argument type implies the creation of basic `Style` with the only attribute set being `fg` (i.e., text color). For the details on color resolving see `resolve_color()`.
- **Style**  
Existing style instance. Return it as is.
- **None**  
Return `NOOP_STYLE`.

**Parameters****fmt** (*FT*) – See *FT*.**Return type**`Style`




`pytermor.style.merge_styles(base=<_NoOpStyle[NOP]>, *, fallbacks=(), overwrites=())`

Bulk style merging method. First merge `fallbacks` *styles* with the base in the same order they are iterated, using `merge_fallback()` algorithm; then do the same for `overwrites` styles, but using `merge_overwrite()` merge method.

The original `base` is left untouched, as all the operations are performed on its clone.

Listing 3: Dual mode merge diagram

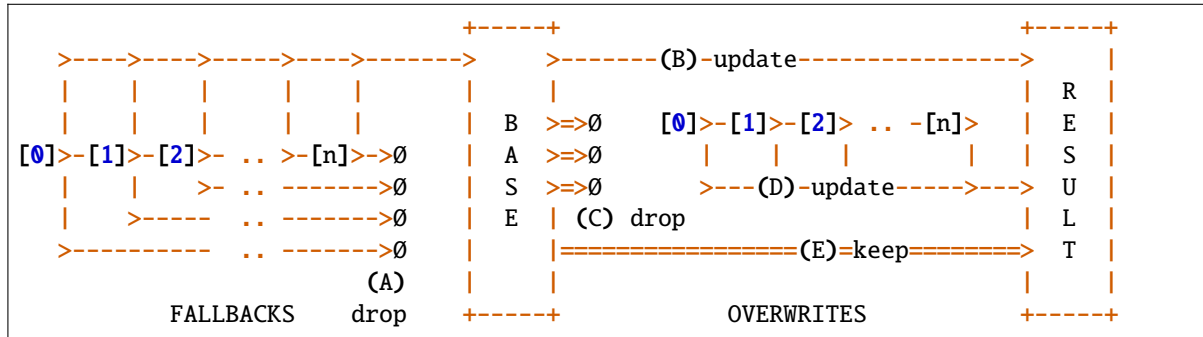

The key actions are marked with (A) to (E) letters. In reality the algorithm works in slightly different order, but the exact scheme would be less illustrative.

(A),(B)

Iterate fallback styles one by one; discard all the attributes of a current fallback style, that are already set in base style (i.e., that are not *Nones*). Update all base style empty attributes with corresponding fallback values, if they exist and are not empty. Repeat these steps for the next fallback in the list, until the list is empty.

Listing 4: Fallback merge algorithm example №1

```
>>> base = Style(fg='red')
>>> fallbacks = [Style(fg='blue'), Style(bold=True), Style(bold=False)]
>>> merge_styles(base, fallbacks=fallbacks)
<Style[red:NOP +BOLD]>
```

In the example above:

- the first fallback will be ignored, as `fg` is already set;
- the second fallback will be applied (base style will now have `bold` set to `True`;
- which will make the handler ignore third fallback completely; if third fallback was encountered earlier than the 2nd one, base `bold` attribute would have been set to `False`, but alas.

**Note:** Fallbacks allow to build complex style conditions, e.g. take a look into [Highlighter.colorize\(\)](#) method

```
int_st = merge_styles(st, fallbacks=[Style(bold=True)])
```

Instead of using `Style(st, bold=True)` the merging algorithm is invoked. This changes the logic of “bold” attribute application – if there is a necessity to explicitly forbid bold text at base/parent level, one could write:

```
STYLE_NUL = Style(STYLE_DEFAULT, cv.GRAY, bold=False)
STYLE_PRC = Style(STYLE_DEFAULT, cv.MAGENTA)
```

(continues on next page)

(continued from previous page)

```
STYLE_KIL = Style(STYLE_DEFAULT, cv.BLUE)
...
```

As you can see, resulting `int_st` will be bold for all styles other than `STYLE_NUL`.

Listing 5: Fallback merge algorithm example №2

```
>>> merge_styles(Style(fg=cv.BLUE), fallbacks=[Style(bold=True)])
<Style[blue:NOP +BOLD]>
>>> merge_styles(Style(fg=cv.GRAY, bold=False),
↳ fallbacks=[Style(bold=True)])
<Style[gray:NOP -BOLD]>
```

**(C),(D),(E)**

Iterate `overwrite` styles one by one; discard all the attributes of a `base` style that have a non-empty counterpart in `overwrite` style, and put corresponding `overwrite` attribute values instead of them. Keep `base` attribute values that have no counterpart in current `overwrite` style (i.e., if attribute value is `None`). Then pick next `overwrite` style from the input list and repeat all these steps.

Listing 6: Overwrite merge algorithm example

```
>>> base = Style(fg='red')
>>> overwrites = [Style(fg='blue'), Style(bold=True), Style(bold=False)]
>>> merge_styles(base, overwrites=overwrites)
<Style[blue:NOP -BOLD]>
```

In the example above all the `overwrites` will be applied in order they were put into `list`, and the result attribute values are equal to the last encountered non-empty values in `overwrites` list.

**Parameters**

- **base** (`Style`) – Basis style instance.
- **fallbacks** (`Iterable[Style]`) – List of styles to be used as a backup attribute storage, when there is no value set for the attribute in question. Uses `merge_fallback()` merging strategy.
- **overwrites** (`Iterable[Style]`) – List of styles to be used as attribute storage force override regardless of actual `base` attribute value.

**Returns**

Clone of `base` style with all specified styles merged into.

**Return type**

`Style`

## 2.8 pytermor.text

“Front-end” module of the library. Contains classes supporting high-level operations such as nesting-aware style application, concatenating and cropping of styled strings before the rendering, text alignment and wrapping, etc.

### Module Attributes

<i>RT</i>	RT (Renderable type) includes regular <i>strs</i> as well as <i>IRenderable</i> implementations.
-----------	--

### Functions

<i>distribute_padded()</i>	<b>param max_len</b>
<i>echo</i> ([string, fmt, renderer, ...])	.
<i>echoi</i> ([string, fmt, renderer, ...])	echo inline
<i>render</i> ([string, fmt, renderer, ...])	.
<i>wrap_sgr</i> (raw_input, width[, indent_first, ...])	A workaround to make standard library <code>textwrap.wrap()</code> more friendly to an SGR-formatted strings.

### Classes

<i>Fragment</i> ([string, fmt, close_this, close_prev])	<Immutable>
<i>FrozenText</i> ()	<b>param align</b> default is left
<i>IRenderable</i> (*args, **kws)	I
<i>SimpleTable</i> (*rows[, width, sep, border_st])	Table class with dynamic (not bound to each other) rows.
<i>TemplateEngine</i> ([custom_styles])	
<i>Text</i> ()	

#### pytermor.text.RT

RT includes regular *strs* as well as *IRenderable* implementations.

alias of `TypeVar('RT', str, IRenderable)`

**class** `pytermor.text.IRenderable(*args, **kws)`

Bases: `Sized`, `ABC`

I

```
abstract render(renderer=None)
```

```
    pass
```

```
        Return type
```

```
        str
```

```
abstract set_width(width)
```

```
    raise NotImplementedError
```

```
abstract property has_width: bool
```

```
    return self._width is not None
```

```
abstract property allows_width_setup: bool
```

```
    return False
```

```
class pytermor.text.Fragment(string="",fmt=None, *, close_this=True, close_prev=False)
```

```
    Bases: IRenderable
```

```
    <Immutable>
```

Can be formatted with f-strings. The text :s mode is required. Supported features:

- width [of the result];
- max length [of the content];
- alignment;
- filling.

```
>>> f"{Fragment('1234567890')}:^8.4s}"
'**1234**'
```

#### Parameters

- **string** (*str*) –
- **fmt** (*FT*) –
- **close\_this** (*bool*) –
- **close\_prev** (*bool*) –

```
property has_width: bool
```

```
    return self._width is not None
```

```
property allows_width_setup: bool
```

```
    return False
```

```
render(renderer=None)
```

```
    pass
```

```
        Return type
```

```
        str
```

```
set_width(width)
```

```
    raise NotImplementedError
```

```
class pytermor.text.FrozenText(string: str, fmt: pytermor.style.FT = NOOP_STYLE, *, width: int = None,
                                align: str | Align = None, fill: str = ' ', overflow: str = "", pad: int = 0,
                                pad_styled: bool = True)
```

```
class pytermor.text.FrozenText(*fragments: Fragment, width: int = None, align: str | Align = None, fill: str = ' ',
                                overflow: str = "", pad: int = 0, pad_styled: bool = True)
```

Bases: [IRenderable](#)

#### Parameters

**align** – default is left

**property allows\_width\_setup:** bool

return False

**property has\_width:** bool

return self.\_width is not None

**render**(*renderer=None*)

pass

#### Return type

str

**set\_width**(*width*)

raise NotImplementedError

```
class pytermor.text.Text(string: str, fmt: pytermor.style.FT = NOOP_STYLE, *, width: int = None, align: str
                          | Align = None, fill: str = ' ', overflow: str = "", pad: int = 0, pad_styled: bool =
                          True)
```

```
class pytermor.text.Text(*fragments: Fragment, width: int = None, align: str | Align = None, fill: str = ' ',
                          overflow: str = "", pad: int = 0, pad_styled: bool = True)
```

Bases: [FrozenText](#)

**set\_width**(*width*)

raise NotImplementedError

**property allows\_width\_setup:** bool

return False

**property has\_width:** bool

return self.\_width is not None

**render**(*renderer=None*)

pass

#### Return type

str

```
class pytermor.text.SimpleTable(*rows, width=None, sep=' ', border_st=<_NoOpStyle[NOP]>)
```

Bases: [IRenderable](#)

Table class with dynamic (not bound to each other) rows. By default expands to the maximum width (terminal size).

Allows 0 or 1 dynamic-width cell in each row, while all the others should be static, i.e., be instances of `FixedString`.

```
>>> echo(
...     SimpleTable(
...         [
...             Text("1", width=1),
...             Text("word", width=6, align='center'),
...             Text("smol string"),
...         ],
...         [
...             Text("2", width=1),
...             Text("padded word", width=6, align='center', pad=2),
...             Text("biiiiiiiiiiiiiiiiiiiiig string"),
...         ],
...         width=30,
...         sep="|"
...     ), file=sys.stdout)
|1| word |smol string      |
|2| padd |biiiiiiiiiiiiiiii|
```

Create

---

**Note:** All arguments except *\*rows* are *kwonly*-type args.

---

### Parameters

- **rows** –
- **width** – Table width, in characters. When omitted, equals to terminal size if applicable, and to fallback value (80) otherwise.
- **sep** –
- **border\_st** –

**property** `allows_width_setup`: bool

return False

**property** `has_width`: bool

return self.\_width is not None

**render**(*renderer=None*)

pass

**Return type**

str

**set\_width**(*width*)

raise NotImplementedError

`pytermor.text.render(string="", fnt=<_NoOpStyle[NOP]>, renderer=None, parse_template=False, *, no_log=False)`

.

### Parameters

- **string** (*RT* | *t.Iterable[RT]*) – 2

- **fmt** (*FT*) – 2
- **renderer** (*IRenderer*) – 2
- **parse\_template** (*bool*) – 2
- **no\_log** (*bool*) – 2

#### Returns

##### Return type

`str | t.List[str]`

```
pytermor.text.echo(string="", fmt=<_NoOpStyle[NOP]>, renderer=None, parse_template=False, *, nl=True,
                    file=<_io.TextIOWrapper name='<stdout>' mode='w' encoding='utf-8'>, flush=True,
                    wrap=False, indent_first=0, indent_subseq=0)
```

#### Parameters

- **string** (*RT | t.Iterable[RT]*) –
- **fmt** (*FT*) –
- **renderer** (*IRenderer*) –
- **parse\_template** (*bool*) –
- **nl** (*bool*) –
- **file** (*t.IO*) –
- **flush** (*bool*) –
- **wrap** (*bool | int*) –
- **indent\_first** (*int*) –
- **indent\_subseq** (*int*) –

```
pytermor.text.choi(string="", fmt=<_NoOpStyle[NOP]>, renderer=None, parse_template=False, *,
                    file=<_io.TextIOWrapper name='<stdout>' mode='w' encoding='utf-8'>, flush=True)
```

echo inline

#### Parameters

- **string** (*RT | t.Iterable[RT]*) –
- **fmt** (*FT*) –
- **renderer** (*IRenderer*) –
- **parse\_template** (*bool*) –
- **file** (*t.IO*) –
- **flush** (*bool*) –

#### Returns

```
pytermor.text.distribute_padded(max_len: int, *values: str, pad_left: int = 0, pad_right: int = 0) → str
pytermor.text.distribute_padded(max_len: int, *values: pytermor.text.RT, pad_left: int = 0, pad_right: int =
                                0) → Text
```

#### Parameters

- **max\_len** –

- **values** –
- **pad\_left** –
- **pad\_right** –

#### Returns

`pytermor.text.wrap_sgr(raw_input, width, indent_first=0, indent_subseq=0)`

A workaround to make standard library `textwrap.wrap()` more friendly to an SGR-formatted strings.

The main idea is

#### Parameters

- **raw\_input** (*str* | *list[str]*) –
- **width** (*int*) –
- **indent\_first** (*int*) –
- **indent\_subseq** (*int*) –

#### Return type

`str`

## 2.9 pytermor.utilmisc

A



## Functions

<code>confirm([attempts, default, keymap, prompt, ...])</code>	Ensure the next action is manually confirmed by user.
<code>get_char_width(char, block)</code>	General-purpose method for getting width of a character in terminal columns.
<code>guess_char_width(c)</code>	Determine how many columns are needed to display a character in a terminal.
<code>hex_to_hsv(hex_value)</code>	Transforms <code>hex_value</code> in <code>int</code> form into a tuple of three numbers corresponding to <b>hue</b> , <b>saturation</b> and <b>value</b> channel values respectively.
<code>hex_to_rgb(hex_value)</code>	Transforms <code>hex_value</code> in <code>int</code> format into a tuple of three integers corresponding to <b>red</b> , <b>blue</b> and <b>green</b> channel value respectively.
<code>hsv_to_hex(h, s, v)</code>	Transforms HSV value in three-floats form (where $0 \leq h < 360$ , $0 \leq s \leq 1$ , and $0 \leq v \leq 1$ ) into an one-integer form.
<code>hsv_to_rgb(h, s, v)</code>	Transforms HSV value in three-floats form (where $0 \leq h < 360$ , $0 \leq s \leq 1$ , and $0 \leq v \leq 1$ ) into RGB three-integer form ([0; 255], [0; 255], [0; 255]).
<code>lab_to_rgb(l_s, a_s, b_s)</code>	@TODO
<code>measure_char_width(char[, clear_after])</code>	Low-level function that returns the exact character width in terminal columns.
<code>rgb_to_hex(r, g, b)</code>	Transforms RGB value in a three-integers form ([0; 255], [0; 255], [0; 255]) to an one-integer form.
<code>rgb_to_hsv(r, g, b)</code>	Transforms RGB value in a three-integers form ([0; 255], [0; 255], [0; 255]) to an HSV in three-floats form such as ( $0 \leq h < 360$ , $0 \leq s \leq 1$ , and $0 \leq v \leq 1$ ).
<code>total_size(o[, handlers, verbose])</code>	Return the approximate memory footprint of an object and all of its contents.
<code>wait_key([block])</code>	Wait for a key press on the console and return it.

`pytermor.utilmisc.hex_to_rgb(hex_value)`

Transforms `hex_value` in `int` format into a tuple of three integers corresponding to **red**, **blue** and **green** channel value respectively. Values are within [0; 255] range.

```
>>> hex_to_rgb(0x80ff80)
(128, 255, 128)
```

### Parameters

**hex\_value** (`int`) – RGB value.

### Returns

R, G, B channel values correspondingly.

### Return type

`Tuple[int, int, int]`

`pytermor.utilmisc.rgb_to_hex(r, g, b)`

Transforms RGB value in a three-integers form ([0; 255], [0; 255], [0; 255]) to an one-integer form.

```
>>> hex(rgb_to_hex(0, 128, 0))
'0x8000'
```

**Parameters**

- **r** (*int*) – value of red channel.
- **g** (*int*) – value of green channel.
- **b** (*int*) – value of blue channel.

**Returns**

RGB value.

**Return type**

int

`pytermor.utilmisc.hsv_to_rgb(h, s, v)`

Transforms HSV value in three-floats form (where  $0 \leq h < 360$ ,  $0 \leq s \leq 1$ , and  $0 \leq v \leq 1$ ) into RGB three-integer form ([0; 255], [0; 255], [0; 255]).

```
>>> hsv_to_rgb(270, 2/3, 0.75)
(128, 64, 192)
```

**Parameters**

- **h** (*float*) – hue channel value.
- **s** (*float*) – saturation channel value.
- **v** (*float*) – value channel value.

**Returns**

R, G, B channel values correspondingly.

**Return type**

*Tuple*[int, int, int]

`pytermor.utilmisc.rgb_to_hsv(r, g, b)`

Transforms RGB value in a three-integers form ([0; 255], [0; 255], [0; 255]) to an HSV in three-floats form such as ( $0 \leq h < 360$ ,  $0 \leq s \leq 1$ , and  $0 \leq v \leq 1$ ).

```
>>> rgb_to_hsv(0, 0, 255)
(240.0, 1.0, 1.0)
```

**Parameters**

- **r** (*int*) – value of red channel.
- **g** (*int*) – value of green channel.
- **b** (*int*) – value of blue channel.

**Returns**

H, S, V channel values correspondingly.

**Return type**

*Tuple*[float, float, float]

`pytermor.utilmisc.hex_to_hsv(hex_value)`

Transforms `hex_value` in *int* form into a tuple of three numbers corresponding to **hue**, **saturation** and **value** channel values respectively. Hue is within [0, 359] range, both saturation and value are within [0; 1] range.

```
>>> hex_to_hsv(0x999999)
(0, 0.0, 0.6)
```

**Parameters**

**hex\_value** (*int*) – RGB value.

**Returns**

H, S, V channel values correspondingly.

**Return type**

*Tuple*[float, float, float]

pytermor.utilmisc.**hsv\_to\_hex**(*h*, *s*, *v*)

Transforms HSV value in three-floats form (where  $0 \leq h < 360$ ,  $0 \leq s \leq 1$ , and  $0 \leq v \leq 1$ ) into an one-integer form.

```
>>> hex(hsv_to_hex(90, 0.5, 0.5))
'0x608040'
```

**Parameters**

- **h** (*float*) – hue channel value.
- **s** (*float*) – saturation channel value.
- **v** (*float*) – value channel value.

**Returns**

RGB value.

**Return type**

int

pytermor.utilmisc.**lab\_to\_rgb**(*l\_s*, *a\_s*, *b\_s*)

@TODO

**Parameters**

- **l\_s** (*float*) –
- **a\_s** (*float*) –
- **b\_s** (*float*) –

**Returns****Return type**

*Tuple*[int, int, int]

pytermor.utilmisc.**wait\_key**(*block=True*)

Wait for a key press on the console and return it.

**Parameters**

**block** (*bool*) – Determines setup of O\_NONBLOCK flag.

**Return type**

t.AnyStr | None

```
pytermor.utilmisc.confirm(attempts=1, default=False, keymap=None, prompt=None, quiet=False,
                           required=False)
```

Ensure the next action is manually confirmed by user. Print the terminal prompt with `prompt` text and wait for a keypress. Return *True* if user pressed Y and *False* in all the other cases (by default).

Valid keys are Y and N (case insensitive), while all the other keys and combinations are considered invalid, and will trigger the return of the default value, which is *False* if not set otherwise. In other words, by default the user is expected to press either Y or N, and if that's not the case, the confirmation request will be automatically failed.

Ctrl+C instantly aborts the confirmation process regardless of attempts count and raises *UserAbort*.

Example keymap (default one):

```
keymap = {"y": True, "n": False}
```

### Parameters

- **attempts** (*int*) – Set how many times the user is allowed to perform the input before auto-cancellation (or auto-confirmation) will occur. 1 means there will be only one attempt, the first one. When set to -1, allows to repeat the input infinitely.
- **default** (*bool*) – Default value that will be returned when user presses invalid key (e.g. Backspace, Ctrl+Q etc.) and his attempts counter decreases to 0. Setting this to *True* effectively means that the user's only way to deny the request is to press N or Ctrl+C, while all the other keys are treated as Y.
- **keymap** (*Optional[Mapping[str, bool]]*) – Key to result mapping.
- **prompt** (*Optional[str]*) – String to display before each input attempt. Default is: "Press Y to continue, N to cancel, Ctrl+C to abort: "
- **quiet** (*bool*) – If set to *True*, suppress all messages to stdout and work silently.
- **required** (*bool*) – If set to *True*, raise *UserCancel* or *UserAbort* when user rejects to confirm current action. If set to *False*, do not raise any exceptions, just return *False*.

### Raises

- *UserAbort* – On corresponding event, if *required* is *True*.
- *UserCancel* – On corresponding event, if *required* is *True*.

### Returns

*True* if there was a confirmation by user's input or automatically, *False* otherwise.

### Return type

bool

```
pytermor.utilmisc.get_char_width(char, block)
```

General-purpose method for getting width of a character in terminal columns.

Uses *guess\_char\_width()* method based on *unicodedata* package, or/and QCP-RCP ANSI control sequence communication protocol.

### Parameters

- **char** (*str*) – Input char.
- **block** (*bool*) – Set to *True* if you prefer slow, but 100% accurate *measuring* (which **blocks** and requires an output tty), or *False* for a device-independent, deterministic and non-blocking

*guessing*, which works most of the time, although there could be rare cases when it is not precise enough.

#### Return type

int

`pytermor.utilmisc.measure_char_width(char, clear_after=True)`

Low-level function that returns the exact character width in terminal columns.

The main idea is to reset a cursor position to 1st column, print the required character and *QCP* control sequence; after that wait for the response and *parse* it. Normally it contains the cursor coordinates, which can tell the exact width of a character in question.

After reading the response clear it from the screen and reset the cursor to column 1 again.

---

**Important:** The stdout must be a tty. If it is not, consider using *guess\_char\_width()* instead, or `IOError` will be raised.

---

**Warning:** Invoking this method produces a bit of garbage in the output stream, which looks like this: `[3;2R`. By default, it is hidden using screen line clearing (see `clear_after`).

**Warning:** Invoking this method may **block** infinitely. Consider using a thread or set a timeout for the main thread using a signal if that is unwanted.

#### Parameters

- **char** (*str*) – Input char.
- **clear\_after** (*bool*) – Send *EL* control sequence after the terminal response to hide excessive utility information from the output if set to *True*, or leave it be otherwise.

#### Raises

**IOError** – If stdout is not a terminal emulator.

#### Return type

int

`pytermor.utilmisc.guess_char_width(c)`

Determine how many columns are needed to display a character in a terminal.

Returns -1 if the character is not printable. Returns 0, 1 or 2 for other characters.

Utilizes `unicodedata` table. A terminal emulator is unnecessary.

#### Parameters

**c** (*str*) –

#### Return type

int

`pytermor.utilmisc.total_size(o, handlers=None, verbose=False)`

Return the approximate memory footprint of an object and all of its contents.

Automatically finds the contents of the following builtin containers and their subclasses: *tuple*, *list*, *deque*, *dict*, *set* and *frozenset*. To search other containers, add handlers to iterate over their contents:

```
handlers = {ContainerClass: iter, ContainerClass2: ContainerClass2.get_elements}
```

**Parameters**

- **o** (*Any*) –
- **handlers** (*Optional[Dict[Any, Iterator]]*) –
- **verbose** (*bool*) –

**Return type**

int

## 2.10 pytermor.utilnum

utilnum

**Module Attributes**

---

*PREFIXES\_SI\_DEC*Prefix preset used by *format\_si()* and  
*format\_bytes\_human()*.

---

## Functions

<code>format_auto_float(val, req_len[, allow_exp_form])</code>	Dynamically adjust decimal digit amount and format to fill up the output string with as many significant digits as possible, and keep the output length strictly equal to <code>req_len</code> at the same time.
<code>format_bytes_human(val[, auto_color])</code>	Invoke special case of fixed-length SI formatter optimized for processing byte-based values.
<code>format_si(val[, unit, auto_color])</code>	Invoke fixed-length decimal SI formatter; format value as a unitless value with SI-prefixes; a unit can be provided as an argument of <code>format()</code> method.
<code>format_si_binary(val[, unit, auto_color])</code>	Invoke fixed-length binary SI formatter which formats value as binary size ("KiB", "MiB") with base 1024.
<code>format_thousand_sep(val[, separator])</code>	Returns input <code>val</code> with integer part split into groups of three digits, joined then with <code>separator</code> string.
<code>format_time(val_sec[, auto_color])</code>	Invoke dynamic-length general-purpose time formatter, which supports a wide range of output units, including seconds, minutes, hours, days, weeks, months, years, milliseconds, microseconds, nanoseconds etc.
<code>format_time_delta(val_sec[, max_len, auto_color])</code>	Format time interval using the most suitable format with one or two time units, depending on <code>max_len</code> argument.
<code>format_time_delta_longest(val_sec[, auto_color])</code>	Wrapper around <code>format_time_delta()</code> with pre-set longest formatter.
<code>format_time_delta_shortest(val_sec[, auto_color])</code>	Wrapper around <code>format_time_delta()</code> with pre-set shortest formatter.
<code>format_time_ms(value_ms[, auto_color])</code>	Invoke a variation of <code>formatter_time</code> specifically configured to format small time intervals.
<code>format_time_ns(value_ns[, auto_color])</code>	Wrapper for <code>format_time_ms()</code> expecting input value as nanoseconds.
<code>highlight(string)</code>	

## Classes

<code>BaseUnit(oom[, unit, prefix, _integer])</code>	
<code>DualBaseUnit(name[, in_next, ...])</code>	TU
<code>DualFormatter([fallback, units, auto_color, ...])</code>	Formatter designed for time intervals.
<code>DualFormatterRegistry()</code>	Simple <code>DualFormatter</code> registry for storing formatters and selecting the suitable one by max output length.
<code>DynamicFormatter([fallback, units, ...])</code>	A simplified version of static formatter for cases, when length of the result string doesn't matter too much (e.g., for log output), and you don't have intention to customize the output (too much).
<code>Highlighter([dim_units])</code>	S
<code>NumFormatter(auto_color, highlighter)</code>	
<code>StaticFormatter([fallback, max_value_len, ...])</code>	Format value using settings passed to constructor.
<code>SupportsFallback()</code>	

`pytermor.utilnum.PREFIXES_SI_DEC = ['q', 'r', 'y', 'z', 'a', 'f', 'p', 'n', 'μ', 'm', None, 'k', 'M', 'G', 'T', 'P', 'E', 'Z', 'Y', 'R', 'Q']`

Prefix preset used by `format_si()` and `format_bytes_human()`. Covers values from  $10^{-30}$  to  $10^{32}$ . Note lower-cased ‘k’ prefix.

**class** `pytermor.utilnum.Highlighter(dim_units=True)`

S

**colorize**(*string*)

parse and highlight

**Parameters**

**string** (*str*) –

**Returns**

**Return type**

`Text`

**apply**(*intp, frac, sep, pfx, unit*)

highlight already parsed

**Parameters**

• **intp** (*str*) –

• **frac** (*str*) –

• **sep** (*str*) –

• **pfx** (*str*) –

• **unit** (*str*) –

**Returns**

**Return type**

`List[Fragment]`

**class** `pytermor.utilnum.StaticFormatter(fallback=None, *, max_value_len=None, auto_color=None, allow_negative=None, allow_fractional=None, discrete_input=None, unit=None, unit_separator=None, mcoef=None, pad=None, legacy_rounding=None, prefixes=None, prefix_refpoint_shift=None, value_mapping=None, highlighter=None)`

Bases: `NumFormatter`

Format value using settings passed to constructor. The purpose of this class is to fit into specified string length as much significant digits as it’s theoretically possible by using multipliers and unit prefixes. Designed for metric systems with bases 1000 or 1024.

The key property of this formatter is maximum length – the output will not excess specified amount of characters no matter what (that’s what is “static” for).

You can create your own formatters if you need fine tuning of the output and customization. If that’s not the case, there are facade methods `format_si()`, `format_si_binary()` and `format_bytes_human()`, which will invoke predefined formatters and doesn’t require setting up.

---

**Note:** All arguments except `fallback` are *kwonly*-type arguments.

---



## Parameters

- **fallback** (`StaticFormatter`) – Take missing (i.e., *None*) attribute values from this instance.
- **max\_value\_len** (`int`) – [default: 4] Target string length. Must be at least **3**, because it's a minimum requirement for formatting values from 0 to 999. Next number to 999 is 1000, which will be formatted as “1k”.

Setting `allow_negative` to *True* increases lower bound to **4** because the values now can be less than 0, and minus sign also occupies one char in the output.

Setting `mcoef` to anything other than 1000.0 also increases the minimum by 1, to **5**. The reason is that non-decimal coefficients like 1024 require additional char to render as switching to the next prefix happens later: “999 b”, “1000 b”, “1001 b”, ... “1023 b”, “1 Kb”.

- **auto\_color** (`bool`) – [default: *False*] Enable automatic colorizing of the result. Color depends on order of magnitude of the value, and always the same, e.g.: blue color for numbers in  $[1000; 10^6)$  and  $[10^{-3}; 1)$  ranges (prefixes nearest to 1, kilo- and milli-); cyan for values in  $[10^6; 10^9)$  and  $[10^{-6}; 10^{-3})$  ranges (next ones, mega-/micro-), etc. The values from  $[1; 999]$  are colored in neutral gray. See [Highlighter](#).
- **allow\_negative** (`bool`) – [default: *True*] Allow negative numbers handling, or (if set to *False*) ignore the sign and round all of them to 0.0. This option effectively increases lower limit of `max_value_len` by 1 (when enabled).
- **allow\_fractional** (`bool`) – [default: *True*] Allows the usage of fractional values in the output. If set to *False*, the results will be rounded. Does not affect lower limit of `max_value_len`.
- **discrete\_input** (`bool`) – [default: *False*] If set to *True*, truncate the fractional part off the input and do not use floating-point format for *base output*, i.e., without prefix and multiplying coefficient. Useful when the values are originally discrete (e.g., bytes). Note that the same effect could be achieved by setting `allow_fractional` to *False*, except that it will influence prefixed output as well (“1.08 kB” -> “1kB”).
- **unit** (`str`) – [default: empty *str*] Unit to apply prefix to (e.g., “m”, “B”). Can be empty.
- **unit\_separator** (`str`) – [default: a space] String to place in between the value and the (prefixed) unit. Can be empty.
- **mcoef** (`float`) – [default: 1000.0] Multiplying coefficient applied to the value:

$$V_{out} = V_{in} * b^{(-m/3)},$$

where:  $V_{in}$  is an input value,  $V_{out}$  is a numeric part of the output,  $b$  is `mcoef` (base), and  $m$  is the order of magnitude corresponding to a selected unit prefix. For example, in case of default (decimal) formatter and input value equal to 17345989 the selected prefix will be “M” with the order of magnitude = 6:

$$V_{out} = 17345989 * 1000^{(-6/3)} = 17345989 * 10^{-6} = 17.346.$$

- **pad** (`bool`) – [default: *False*]
- **legacy\_rounding** (`bool`) – [default: *False*]
- **prefixes** (`list[str|None]`) – [default: `PREFIXES_SI_DEC`] Prefix list from min power to max. Reference point (with zero-power multiplier, or 1.0) is determined by searching for *None* in the list provided, therefore it's a requirement for the argument to have at least one *None* value. Prefix list for a formatter without fractional values support could look like this:

`[None, "k", "M", "G", "T"]`

Prefix step is fixed to  $\log_{10}1000 = 3$ , as specified for metric prefixes.

- **prefix\_refpoint\_shift** (*int*) – [default: 0] Should be set to a non-zero number if input represents already prefixed value; e.g. to correctly format a variable, which stores the frequency in MHz, set prefix shift to 2; the formatter then will render 2333 as “2.33 GHz” instead of incorrect “2.33 kHz”.
- **value\_mapping** (*t.Dict[float, RT] | t.Callable[[float], RT]*) – @TODO
- **highlighter** (*Highlighter*) – ...

**get\_max\_len**(*unit=None*)

**Parameters**

**unit** (*Optional[str]*) – Unit override. Set to *None* to use formatter default.

**Returns**

Maximum length of the result. Note that constructor argument is `max_value_len`, which is a different parameter.

**Return type**

*int*

**format**(*val, unit=None, auto\_color=None*)

**Parameters**

- **val** (*float*) – Input value.
- **unit** (*Optional[str]*) – Unit override. Set to *None* to use formatter default.
- **auto\_color** (*Optional[bool]*) – Color mode, *bool* to enable/disable auto-colorizing, *None* to use formatter default value.

**Returns**

Formatted value, *Text* if colorizing is on, *str* otherwise.

**Return type**

`pytermor.text.RT`

```
class pytermor.utilnum.DynamicFormatter(fallback=None, units=None, *, auto_color=None,
                                         allow_fractional=None, unit_separator=None,
                                         oom_shift=None, highlighter=None)
```

Bases: `NumFormatter`

A simplified version of static formatter for cases, when length of the result string doesn't matter too much (e.g., for log output), and you don't have intention to customize the output (too much).

---

**Note:** All arguments except `fallback` and `units` are *kwonly*-type arguments.

---

**format**(*val, auto\_color=False, oom\_shift=None*)

,,, :param val: :param oom\_shift: :param auto\_color: :return:

**Return type**

`pytermor.text.RT`

```
class pytermor.utilnum.BaseUnit(oom: 'float', unit: 'str' = "", prefix: 'str' = "", _integer: 'bool' = None)
```

```
class pytermor.utilnum.DualFormatter(fallback=None, units=None, *, auto_color=None,
                                     allow_negative=None, allow_fractional=None,
                                     unit_separator=None, pad=None, plural_suffix=None,
                                     overflow_msg=None, highlighter=None)
```

Bases: NumFormatter

Formatter designed for time intervals. Key feature of this formatter is ability to combine two units and display them simultaneously, e.g. return “3h 48min” instead of “228 mins” or “3 hours”, etc.

It is possible to create custom formatters if fine tuning of the output and customization is necessary; otherwise use a facade method `format_time_delta()`, which selects appropriate formatter by specified max length from a preset list.

Example output:

```
"10 secs", "5 mins", "4h 15min", "5d 22h"
```

#### Parameters

- **fallback** (DualFormatter) –
- **units** (t.List [DualBaseUnit]) –
- **auto\_color** (bool) – If *True*, the result will be colorized depending on unit type.
- **allow\_negative** (bool) –
- **allow\_fractional** (bool) –
- **unit\_separator** (str) –
- **pad** (bool) – Set to *True* to pad the value with spaces on the left side and ensure it’s length is equal to `max_len`, or to *False* to allow shorter result strings.
- **plural\_suffix** (str) –
- **overflow\_msg** (str) –
- **highlighter** (Highlighter) –

**property max\_len: int**

This property cannot be set manually, it is computed on initialization automatically.

#### Returns

Maximum possible output string length.

**format** (val\_sec, auto\_color=None)

Pretty-print difference between two moments in time. If input value is too big for the current formatter to handle, return “OVERFLOW” string (or a part of it, depending on `max_len`).

#### Parameters

- **val\_sec** (float) – Input value in seconds.
- **auto\_color** (Optional [bool]) – Color mode, *bool* to enable/disable colorizing, *None* to use formatter default value.

#### Returns

Formatted time delta, *Text* if colorizing is on, *str* otherwise.

**Return type**

pytermor.text.RT

**format\_base**(*val\_sec*, *auto\_color=None*)

Pretty-print difference between two moments in time. If input value is too big for the current formatter to handle, return *None*.

**Parameters**

- **val\_sec** (*float*) – Input value in seconds.
- **auto\_color** (*bool*) – Color mode, *bool* to enable/disable colorizing, *None* to use formatter default value.

**Returns**

Formatted value as *Text* if colorizing is on; as *str* otherwise. Returns *None* on overflow.

**Return type**

RT | None

```
class pytermor.utilnum.DualBaseUnit(name, in_next=None, overflow_after=None, custom_short=None, collapsible_after=None)
```

TU

---

**Important:** *in\_next* and *overflow\_after* are mutually exclusive, and either of them is required.

---

**Parameters**

- **name** (*str*) – A unit name to display.
- **in\_next** (*int*) – The base – how many current units the next (single) unit contains, e.g., for an hour in context of days:

CustomBaseUnit("hour", 24)

- **overflow\_after** (*int*) – Value upper limit.
- **custom\_short** (*str*) – Use specified short form instead of first letter of name when operating in double-value mode.
- **collapsible\_after** (*int*) – Min threshold for double output to become a regular one.

```
class pytermor.utilnum.DualFormatterRegistry
```

Simple DualFormatter registry for storing formatters and selecting the suitable one by max output length.

```
register(*formatters)
```

```
...
```

```
find_matching(max_len)
```

```
...
```

**Return type***DualFormatter* | None

```
get_by_max_len(max_len)
```

```
...
```

**Return type***DualFormatter* | None**get\_shortest()**

...

**Return type***DualFormatter* | None**get\_longest()**

...

**Return type***DualFormatter* | Nonepytermor.utilnum.**highlight**(*string*)

---

**Todo:** @TODO

---

**Max output len***same as input***Parameters****string** (*str*) – input text**Return type**

pytermor.text.RT

pytermor.utilnum.**format\_thousand\_sep**(*val*, *separator*='')Returns input *val* with integer part split into groups of three digits, joined then with *separator* string.

```
>>> format_thousand_sep(260341)
'260 341'
>>> format_thousand_sep(-9123123123.55, ',')
'-9,123,123,123.55'
```

**Max output len** $(L + \max(0, \text{floor}(M/3)))$ ,where *L* is *val* length, and *M* is order of magnitude of *val***Parameters**

- **val** (*int* | *float*) – value to format
- **separator** (*str*) – character(s) to use as thousand separators

**Return type**

str

pytermor.utilnum.**format\_auto\_float**(*val*, *req\_len*, *allow\_exp\_form*=True)Dynamically adjust decimal digit amount and format to fill up the output string with as many significant digits as possible, and keep the output length strictly equal to *req\_len* at the same time.For values impossible to fit into a string of required length and when rounding doesn't help (e.g. 12 500 000 and 5 chars) algorithm switches to scientific notation, and the result looks like '1.2e7'. If this feature is explicitly disabled with *allow\_exp\_form* = False, then:

- 1) if absolute value is less than 1, zeros will be returned ('0.0000');
- 2) if value is a big number (like  $10^9$ ), `ValueError` will be raised instead.

```
>>> format_auto_float(0.012345678, 5)
'0.012'
>>> format_auto_float(0.123456789, 5)
'0.123'
>>> format_auto_float(1.234567891, 5)
'1.235'
>>> format_auto_float(12.34567891, 5)
'12.35'
>>> format_auto_float(123.4567891, 5)
'123.5'
>>> format_auto_float(1234.567891, 5)
' 1235'
>>> format_auto_float(12345.67891, 5)
'12346'
```

**Max output len***adjustable***Parameters**

- **val** (*float*) – Value to format.
- **req\_len** (*int*) – Required output string length.
- **allow\_exp\_form** (*bool*) – Allow scientific notation usage when that's the only way of fitting the value into a string of required length.

**Raises**

**ValueError** – When value is too long and `allow_exp_form` is *False*.

**Return type***str*

`pytermor.utilnum.format_si(val, unit=None, auto_color=None)`

Invoke fixed-length decimal SI formatter; format `value` as a unitless value with SI-prefixes; a unit can be provided as an argument of `format()` method. Suitable for formatting any SI unit with values from  $10^{-30}$  to  $10^{32}$ .

Total maximum length is `max_value_len` + 2, which is **6** by default (4 from value + 1 from separator and + 1 from prefix). If the unit is defined and is a non-empty string, the maximum output length increases by length of that unit.

Listing 7: Extending the formatter

```
my_formatter = StaticFormatter(formatter_si)
```

```
>>> format_si(1010, 'm²')
'1.01 km²'
>>> format_si(0.223, 'g')
'223 mg'
>>> format_si(1213531546, 'W') # great scott
'1.21 GW'
>>> format_si(1.22e28, 'eV') # the Planck energy
'12.2 ReV'
```

**Max output len**

6

**Parameters**

- **val** (*float*) – Input value (unitless).
- **unit** (*Optional[str]*) – A unit override [default unit is an empty string].
- **auto\_color** (*Optional[bool]*) – Color mode override, *bool* to enable/disable colorizing depending on unit type, *None* to use formatters’ setting value [*False* by default].

**Returns**Formatted value, *Text* if colorizing is on, *str* otherwise.**Return type**

pytermor.text.RT

pytermor.utilnum.**format\_si\_binary**(*val*, *unit=None*, *auto\_color=False*)

Invoke fixed-length binary SI formatter which formats *value* as binary size (“KiB”, “MiB”) with base 1024. Unit can be customized. Covers values from 0 to  $10^{32}$ .

While being similar to `formatter_si`, this formatter differs in one aspect. Given a variable with default value = 995, formatting it results in “995 B”. After increasing it by 20 it equals to 1015, which is still not enough to become a kilobyte – so returned value will be “1015 B”. Only after one more increase (at 1024 and more) the value will morph into “1.00 KiB” form.

That’s why the initial `max_value_len` should be at least 5 – because it is a minimum requirement for formatting values from 1023 to -1023. However, The negative values for this formatter are disabled by default and rendered as 0, which decreases the `max_value_len` minimum value back to 4.

Total maximum length of the result is `max_value_len + 4 = 8` (base + 1 from separator + 1 from unit + 2 from prefix, assuming all of them have default values defined in `formatter_si_binary`).

Listing 8: Extending the formatter

```
my_formatter = StaticFormatter(formatter_si_binary)
```

```
>>> format_si_binary(1010) # 1010 b < 1 kb
'1010 B'
>>> format_si_binary(1080)
'1.05 KiB'
>>> format_si_binary(45200)
'44.1 KiB'
>>> format_si_binary(1.258 * pow(10, 6), 'b')
'1.20 Mib'
```

**Max output len**

8

**Parameters**

- **val** (*float*) – Input value in bytes.
- **unit** (*Optional[str]*) – A unit override [default unit is “B”].
- **auto\_color** (*bool*) – Color mode override, *bool* to enable/disable colorizing depending on unit type, *None* to use formatters’ setting value [*False* by default].

**Returns**

Formatted value, *Text* if colorizing is on, *str* otherwise.

**Return type**

pytermor.text.RT

`pytermor.utilnum.format_bytes_human(val, auto_color=False)`

Invoke special case of fixed-length SI formatter optimized for processing byte-based values. Inspired by default stats formatting used in [htop](#). Comprises traits of both preset SI formatters, the key ones being:

- expecting integer inputs;
- prohibiting negative inputs;
- operating in decimal mode with the base of 1000 (not 1024);
- the absence of units and value-unit separators in the output, while prefixes are still present;
- (if colors allowed) utilizing *Highlighter* with a bit customized setup, as detailed below.

Total maximum length is `max_value_len + 1`, which is **5** by default (4 from value + 1 from prefix).

**Highlighting options**

Default highlighter for this formatter does not render units (as well as prefixes) dimmed. The main reason for that is the absence of actual unit in the output of this formatter, while prefixes are still there; this allows to format the fractional output this way: 1.57k, where underline indicates brighter colors.

This format is acceptable because only essential info gets highlighted; however, in case of other formatters with actual units in the output this approach leads to complex and mixed-up formatting; furthermore, it doesn't matter if the highlighting affects the prefix part only or both prefix and unit parts – in either case it's just too much formatting on a unit of surface: 1.53 KiB (looks patchworky).

Table 1: Default formatters comparison

Value	SI(unit='B')	SI_BINARY	BYTES_HUMAN
1568	'1.57 kB'	'1.53 KiB'	'1.57k'
218371331	'218 MB'	'208 MiB'	'218M'
0.25	'250 mB' <sup>1</sup>	'0 B'	'0'
-1218371331232	'-1.2 TB'	'0 B'	'0'

Listing 9: Extending the formatter

```
my_formatter = StaticFormatter(formatter_bytes_human, unit_separator=" ")
```

```
>>> format_bytes_human(990)
'990'
>>> format_bytes_human(1010)
'1.01k'
>>> format_bytes_human(45200)
'45.2k'
>>> format_bytes_human(1.258 * pow(10, 6))
'1.26M'
```

<sup>1</sup> 250 millibytes is not something you would see every day



**Max output len**

5

**Parameters**

- **val** (*int*) – Input value in bytes.
- **auto\_color** (*bool*) – Color mode override, *bool* to enable/disable colorizing depending on unit type, *None* to use formatters' setting value [*False* by default].

**Returns**Formatted value, *Text* if colorizing is on, *str* otherwise.**Return type**

pytermor.text.RT

pytermor.utilnum.**format\_time**(*val\_sec*, *auto\_color=None*)

Invoke dynamic-length general-purpose time formatter, which supports a wide range of output units, including seconds, minutes, hours, days, weeks, months, years, milliseconds, microseconds, nanoseconds etc.

Listing 10: Extending the formatter

```
my_formatter = DynamicFormatter(formatter_time, unit_separator=" ")
```

```
>>> format_time(12)
'12.0 s'
>>> format_time(65536)
'18 h'
>>> format_time(0.00324)
'3.2 ms'
```

**Max output len***varying***Parameters**

- **val\_sec** (*float*) – Input value in seconds.
- **auto\_color** (*Optional[bool]*) – Color mode override, *bool* to enable/disable colorizing depending on unit type, *None* to use formatters' setting value [*False* by default].

**Return type**

pytermor.text.RT

pytermor.utilnum.**format\_time\_ms**(*value\_ms*, *auto\_color=None*)

Invoke a variation of `formatter_time` specifically configured to format small time intervals.

Listing 11: Extending the formatter

```
my_formatter = DynamicFormatter(formatter_time_ms, unit_separator=" ")
```

```
>>> format_time_ms(1)
'1ms'
>>> format_time_ms(344)
'344ms'
>>> format_time_ms(0.967)
'967μs'
```

**Parameters**

- **value\_ms** (*float*) – Input value in milliseconds.
- **auto\_color** (*Optional [bool]*) – Color mode override, *bool* to enable/disable colorizing depending on unit type, *None* to use formatters’ setting value [*False* by default].

**Returns****Return type**

pytermor.text.RT

pytermor.utilnum.**format\_time\_ns**(*value\_ns*, *auto\_color=None*)Wrapper for [format\\_time\\_ms\(\)](#) expecting input value as nanoseconds.

```
>>> format_time_ns(1003000)
'1ms'
>>> format_time_ns(3232332224)
'3s'
>>> format_time_ns(9932248284343.32)
'2h'
```

**Parameters**

- **value\_ns** (*float*) – Input value in nanoseconds.
- **auto\_color** (*Optional [bool]*) – Color mode override, *bool* to enable/disable colorizing depending on unit type, *None* to use formatters’ setting value [*False* by default].

**Returns****Return type**

pytermor.text.RT

pytermor.utilnum.**format\_time\_delta**(*val\_sec*, *max\_len=None*, *auto\_color=None*)

Format time interval using the most suitable format with one or two time units, depending on *max\_len* argument. Key feature of this formatter is an ability to combine two units and display them simultaneously, e.g. return “3h 48min” instead of “228 mins” or “3 hours”, and on top of that – fixed-length output.

There are predefined formatters with output lengths of **3**, **4**, **5**, **6** and **10** characters. Therefore, you can pass in any value from 3 inclusive and it’s guaranteed that result’s length will be less or equal to required length. If *max\_len* is omitted, longest registered formatter will be used.

---

**Note:** Negative values are supported by formatters 5 and 10 only.

---

```
>>> format_time_delta(10, 3)
'10s'
>>> format_time_delta(10, 6)
'10.0s'
>>> format_time_delta(15350, 4)
'4 h'
>>> format_time_delta(15350)
'4h 15min'
```

**Max output len**

3, 4, 5, 6, 10

**Parameters**

- **val\_sec** (*float*) – Input value in seconds.
- **max\_len** (*Optional[int]*) – Maximum output string length (total).
- **auto\_color** (*Optional[bool]*) – Color mode override, *bool* to enable/disable colorizing depending on unit type, *None* to use formatters' setting value [*False* by default].

**Return type**

pytermor.text.RT

pytermor.utilnum.**format\_time\_delta\_shortest**(*val\_sec*, *auto\_color=None*)

Wrapper around [format\\_time\\_delta\(\)](#) with pre-set shortest formatter.

**Max output len**

3

**Parameters**

- **val\_sec** (*float*) – Input value in seconds.
- **auto\_color** (*Optional[bool]*) – Color mode override, *bool* to enable/disable colorizing depending on unit type, *None* to use formatters' setting value [*False* by default].

**Return type**

pytermor.text.RT

pytermor.utilnum.**format\_time\_delta\_longest**(*val\_sec*, *auto\_color=None*)

Wrapper around [format\\_time\\_delta\(\)](#) with pre-set longest formatter.

**Max output len**

10

**Parameters**

- **val\_sec** (*float*) – Input value in seconds.
- **auto\_color** (*Optional[bool]*) – Color mode override, *bool* to enable/disable colorizing depending on unit type, *None* to use formatters' setting value [*False* by default].

**Return type**

pytermor.text.RT

## 2.11 pytermor.utilstr

Formatters for prettier output and utility classes to avoid writing boilerplate code when dealing with escape sequences. Also includes several Python Standard Library methods rewritten for correct work with strings containing control sequences.

## Module Attributes

<i>ESCAPE_SEQ_REGEX</i>	s
<i>SGR_SEQ_REGEX</i>	s
<i>CSI_SEQ_REGEX</i>	sssss
<i>CONTROL_CHARS</i>	s
<i>WHITESPACE_CHARS</i>	s
<i>PRINTABLE_CHARS</i>	s
<i>NON_ASCII_CHARS</i>	s
<i>IT</i>	input-type
<i>OT</i>	output-type
<i>PTT</i>	pattern type
<i>RPT</i>	replacer type
<i>MPT</i>	# map

## Functions

<i>apply_filters</i> (inp, *args)	Method for applying dynamic filter list to a target string/bytes.
<i>center_sgr</i> (s, width[, fillchar, actual_len])	SGR-formatting-aware implementation of <code>str.center</code> .
<i>dump</i> (data[, label, max_len_shift])	
<i>ljust_sgr</i> (s, width[, fillchar, actual_len])	SGR-formatting-aware implementation of <code>str.ljust</code> .
<i>pad</i> (n)	
<i>padv</i> (n)	
<i>rjust_sgr</i> (s, width[, fillchar, actual_len])	SGR-formatting-aware implementation of <code>str.rjust</code> .

## Classes

<i>AbstractStringTracer</i> (char_per_line)	
<i>AbstractTracer</i> (char_per_line)	
<i>BytesTracer</i> ([char_per_line])	str/bytes as byte hex codes, grouped by 4
<i>CsiStringReplacer</i> ([repl])	Find all <i>CSI</i> seqs (i.e., starting with ESC [) and replace with given string.
<i>EscSeqStringReplacer</i> ([repl])	
<i>IFilter</i> (*args, **kwds)	Main idea is to provide a common interface for string filtering, that can make possible working with filters like with objects rather than with functions/lambdas.
<i>NonPrintsOmniVisualizer</i> ([override])	Input type: <i>str</i> , <i>bytes</i> .
<i>NonPrintsStringVisualizer</i> ([keep_newlines])	Input type: <i>str</i> . Replace every whitespace character with ".", except
<i>NoopFilter</i> (*args, **kwds)	
<i>OmniDecoder</i> (*args, **kwds)	
<i>OmniEncoder</i> (*args, **kwds)	
<i>OmniMapper</i> ([override])	Input type: <i>str</i> , <i>bytes</i> .
<i>OmniSanitizer</i> ([repl])	Input type: <i>str</i> , <i>bytes</i> .
<i>SgrStringReplacer</i> ([repl])	Find all <i>SGR</i> seqs (e.g., ESC [1;4m) and replace with given string.
<i>StringAligner</i> (align, width, *[, sgr_aware])	
<i>StringLinearizer</i> ([repl])	Filter transforms all whitespace sequences in the input string into a single space character, or into a specified string.
<i>StringMapper</i> ([override])	a
<i>StringReplacer</i> (pattern, repl)	.
<i>StringTracer</i> ([char_per_line])	str as byte hex codes (UTF-8), grouped by characters
<i>StringUcpTracer</i> ([char_per_line])	str as Unicode codepoints
<i>TracerExtra</i> (label)	
<i>WhitespaceRemover</i> ()	Special case of <i>StringLinearizer</i> .

`pytermor.utilstr.ljust_sgr(s, width, fillchar=' ', actual_len=None)`

SGR-formatting-aware implementation of `str.ljust`.

Return a left-justified string of length `width`. Padding is done using the specified fill character (default is a space).

### Return type

str

`pytermor.utilstr.rjust_sgr(s, width, fillchar=' ', actual_len=None)`

SGR-formatting-aware implementation of `str.rjust`.

Return a right-justified string of length `width`. Padding is done using the specified fill character (default is a space).

**Return type**

str

`pytermor.utilstr.center_sgr(s, width, fillchar=' ', actual_len=None)`

SGR-formatting-aware implementation of `str.center`.

Return a centered string of length `width`. Padding is done using the specified fill character (default is a space).

---

**Todo:**      (.)    -    f-

---

**Return type**

str

`pytermor.utilstr.ESCAPE_SEQ_REGEX = re.compile('\n (?P<escape_char>\\x1b)\n (?P<data>\n (?P<nf_class_seq>\n (?P<nf_interm>[\\x20-\\x2f]+)\n (?P<nf_final>[\\x30-\\x7e])\n )|\n (?P<fp_class_seq>\n (?P<fp_cla, re.VERBOSE)`

s

`pytermor.utilstr.SGR_SEQ_REGEX = re.compile('(\x1b)(\[\]([0-9;]*) (m)')`

s

`pytermor.utilstr.CSI_SEQ_REGEX = re.compile('(\x1b)(\[\](([0-9;:<=>?])*) ([@A-Za-z]))')`

sssss

`pytermor.utilstr.CONTROL_CHARS = [0, 1, 2, 3, 4, 5, 6, 7, 8, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 127]`

s

`pytermor.utilstr.WHITESPACE_CHARS = [9, 10, 11, 12, 13, 32]`

s

`pytermor.utilstr.PRINTABLE_CHARS = [33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 55, 56, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 67, 68, 69, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100, 101, 102, 103, 104, 105, 106, 107, 108, 109, 110, 111, 112, 113, 114, 115, 116, 117, 118, 119, 120, 121, 122, 123, 124, 125, 126]`

s

`pytermor.utilstr.NON_ASCII_CHARS = [128, 129, 130, 131, 132, 133, 134, 135, 136, 137, 138, 139, 140, 141, 142, 143, 144, 145, 146, 147, 148, 149, 150, 151, 152, 153, 154, 155, 156, 157, 158, 159, 160, 161, 162, 163, 164, 165, 166, 167, 168, 169, 170, 171, 172, 173, 174, 175, 176, 177, 178, 179, 180, 181, 182, 183, 184, 185, 186, 187, 188, 189, 190, 191, 192, 193, 194, 195, 196, 197, 198, 199, 200, 201, 202, 203, 204, 205, 206, 207, 208, 209, 210, 211, 212, 213, 214, 215, 216, 217, 218, 219, 220, 221, 222, 223, 224, 225, 226, 227, 228, 229, 230, 231, 232, 233, 234, 235, 236, 237, 238, 239, 240, 241, 242, 243, 244, 245, 246, 247, 248, 249, 250, 251, 252, 253, 254, 255]`

s

`pytermor.utilstr.IT`

input-type

alias of `TypeVar('IT', str, bytes)`

`pytermor.utilstr.OT`

output-type

alias of `TypeVar('OT', str, bytes)`

`pytermor.utilstr.PTT`

pattern type

alias of `Union[IT, Pattern[IT]]`

`pytermor.utilstr.RPT`

replacer type

alias of `Union[OT, Callable[[Match[OT]], OT]]`

`pytermor.utilstr.MPT`

# map

alias of `Dict[int, IT]`

**class** `pytermor.utilstr.IFilter(*args, **kws)`

Bases: `Generic[IT, OT]`

Main idea is to provide a common interface for string filtering, that can make possible working with filters like with objects rather than with functions/lambdas.

**abstract** `apply(inp, extra=None)`

Apply the filter to input *str* or *bytes*.

#### Parameters

- **inp** (`pytermor.utilstr.IT`) – input string
- **extra** (`Optional[Any]`) – additional options

#### Returns

transformed string; the type can match the input type, as well as be different – that depends on filter type.

#### Return type

`pytermor.utilstr.OT`

**class** `pytermor.utilstr.StringAligner(align, width, *, sgr_aware=True)`

Bases: `IFilter[str, str]`

---

**Note:** `sgr_aware` is *kwonly*-type arg.

---

#### Parameters

- **align** –
- **width** –
- **sgr\_aware** –

**apply**(*inp*, *extra=None*)

Apply the filter to input *str* or *bytes*.

#### Parameters

- **inp** (*str*) – input string

- **extra** (*Optional*[*Any*]) – additional options

**Returns**

transformed string; the type can match the input type, as well as be different – that depends on filter type.

**Return type**

str

```
class pytermor.utilstr.AbstractTracer(char_per_line)
```

Bases: *IFilter*[*IT*, str]

```
apply(inp, extra=None)
```

Apply the filter to input *str* or *bytes*.

**Parameters**

- **inp** (*pytermor.utilstr.IT*) – input string
- **extra** (*Optional*[*TracerExtra*]) – additional options

**Returns**

transformed string; the type can match the input type, as well as be different – that depends on filter type.

**Return type**

str

```
class pytermor.utilstr.BytesTracer(char_per_line=32)
```

Bases: *AbstractTracer*[bytes]

str/bytes as byte hex codes, grouped by 4

Listing 12: Example output

0000	0A 20 32 31 36 20 20 20	E2 94 82 20 20 75 70 6C	a
0010	20 20 20 20 20 20 20 20	20 20 20 20 20 20 20 20	a

```
apply(inp, extra=None)
```

Apply the filter to input *str* or *bytes*.

**Parameters**

- **inp** (*pytermor.utilstr.IT*) – input string
- **extra** (*Optional*[*TracerExtra*]) – additional options

**Returns**

transformed string; the type can match the input type, as well as be different – that depends on filter type.

**Return type**

str

```
class pytermor.utilstr.AbstractStringTracer(char_per_line)
```

Bases: *AbstractTracer*[str]

```
apply(inp, extra=None)
```

Apply the filter to input *str* or *bytes*.

**Parameters**

- **inp** (*pytermor.utilstr.IT*) – input string



- **extra** (*Optional*[TracerExtra]) – additional options

## Returns

transformed string; the type can match the input type, as well as be different – that depends on filter type.

### Return type

str

```
class pytermor.utilstr.StringTracer(char_per_line=16)
```

Bases: *AbstractStringTracer*

str as byte hex codes (UTF-8), grouped by characters

Listing 13: Example output

0056	45	4D	20	43	50	55	20	4F	56	48	20	4E	45	3E	0A	20	E
0072	20	20	20	20	20	20	E29482	20	20	20	20	20	20	20	20	20	_
0088	20	20	20	20	37	20	2B	30	20	20	20	20	CE94	20	32	68	_
0104	20	33	33	6D	20	20	20	EFAA8F	20	2D	35	20	C2B0	43	20	20	_

```
apply(inp, extra=None)
```

Apply the filter to input *str* or *bytes*.

## Parameters

- **inp** (*pytermor.utilstr.IT*) – input string
- **extra** (*Optional[TracerExtra]*) – additional options

## Returns

transformed string; the type can match the input type, as well as be different – that depends on filter type.

### Return type

str

```
class pytermor.utilstr.StringUcpTracer(char_per_line=16)
```

Bases: *AbstractStringTracer*

str as Unicode codepoints

**Todo:** venv/lib/python3.8/site-packages/pygments/lexers/hexdump.py

Listing 14: Example output

56	U+	45	4d	20	43	50	55	20	4f	56	48	20	4e	45	3e	0a	20		EM_CPU_OVH_NE>_
72	U+	20	20	20	20	20	20	2502	20	20	20	20	20	20	20	20	20		_____ _____
88	U+	20	20	20	20	37	20	2b	30	20	20	20	20	394	20	32	68		_____7_+0_____2h
104	U+	20	33	33	6d	20	20	20	fa8f	20	2d	35	20	b0	43	20	20		_____33m_____5_°C_____

```
apply(inp, extra=None)
```

Apply the filter to input *str* or *bytes*.

## Parameters

- **inp** (*pytermor.utilstr.IT*) – input string
- **extra** (*Optional[TracerExtra]*) – additional options

**Returns**

transformed string; the type can match the input type, as well as be different – that depends on filter type.

**Return type**

str

```
class pytermor.utilstr.TracerExtra(label: 'str')
```

```
class pytermor.utilstr.StringReplacer(pattern, repl)
```

Bases: [IFilter](#)[str, str]

.

```
apply(inp, extra=None)
```

Apply the filter to input *str* or *bytes*.

**Parameters**

- **inp** (*str*) – input string
- **extra** (*Optional* [*Any*]) – additional options

**Returns**

transformed string; the type can match the input type, as well as be different – that depends on filter type.

**Return type**

str

```
class pytermor.utilstr.SgrStringReplacer(repl="")
```

Bases: [StringReplacer](#)

Find all *SGR* seqs (e.g., ESC [1;4m) and replace with given string. More specific version of *CsiReplacer*.

**Parameters**

**repl** – Replacement, can contain regexp groups (see [apply\\_filters\(\)](#)).

```
apply(inp, extra=None)
```

Apply the filter to input *str* or *bytes*.

**Parameters**

- **inp** (*str*) – input string
- **extra** (*Optional* [*Any*]) – additional options

**Returns**

transformed string; the type can match the input type, as well as be different – that depends on filter type.

**Return type**

str

```
class pytermor.utilstr.CsiStringReplacer(repl="")
```

Bases: [StringReplacer](#)

Find all *CSI* seqs (i.e., starting with ESC [) and replace with given string. Less specific version of *SgrReplacer*, as CSI consists of SGR and many other sequence subtypes.

**Parameters**

**repl** – Replacement, can contain regexp groups (see [apply\\_filters\(\)](#)).

**apply**(*inp*, *extra*=None)

Apply the filter to input *str* or *bytes*.

**Parameters**

- **inp** (*str*) – input string
- **extra** (*Optional* [*Any*]) – additional options

**Returns**

transformed string; the type can match the input type, as well as be different – that depends on filter type.

**Return type**

str

**class** pytermor.utilstr.**StringLinearizer**(*repl*=' ')

Bases: [\*StringReplacer\*](#)

Filter transforms all whitespace sequences in the input string into a single space character, or into a specified string. Most obvious application is pre-formatting strings for log output in order to keep the messages one-lined.

**Parameters**

**repl** – Replacement character(s).

**apply**(*inp*, *extra*=None)

Apply the filter to input *str* or *bytes*.

**Parameters**

- **inp** (*str*) – input string
- **extra** (*Optional* [*Any*]) – additional options

**Returns**

transformed string; the type can match the input type, as well as be different – that depends on filter type.

**Return type**

str

**class** pytermor.utilstr.**WhitespaceRemover**

Bases: [\*StringLinearizer\*](#)

Special case of [\*StringLinearizer\*](#). Removes all the whitespaces from the input string.

**apply**(*inp*, *extra*=None)

Apply the filter to input *str* or *bytes*.

**Parameters**

- **inp** (*str*) – input string
- **extra** (*Optional* [*Any*]) – additional options

**Returns**

transformed string; the type can match the input type, as well as be different – that depends on filter type.

**Return type**

str

**class** pytermor.utilstr.OmniMapper(override=None)

Bases: [IFilter](#)[[IT](#), [IT](#)]

Input type: *str*, *bytes*. Abstract mapper. Replaces every character found in map keys to corresponding map value. Map should be a dictionary of this type: `dict[int, str|bytes|None]`; moreover, length of *str/bytes* must be strictly 1 character (ASCII codepage). If there is a necessity to map Unicode characters, [StringMapper](#) should be used instead.

```
>>> OmniMapper({0x20: ' '}).apply(b'abc def ghi')
b'abc.def.ghi'
```

For mass mapping it is better to subclass [OmniMapper](#) and override two methods – `_get_default_keys` and `_get_default_replacer`. In this case you don't have to manually compose a replacement map with every character you want to replace.

#### Parameters

**override** – a dictionary with mappings: keys must be *ints*, values must be either a single-char *strs* or *bytes*, or *None*.

#### See

[NonPrintsOmniVisualizer](#)

**apply**(*inp*, *extra*=None)

Apply the filter to input *str* or *bytes*.

#### Parameters

- **inp** (*pytermor.utilstr.IT*) – input string
- **extra** (*Optional[Any]*) – additional options

#### Returns

transformed string; the type can match the input type, as well as be different – that depends on filter type.

#### Return type

*pytermor.utilstr.IT*

**class** pytermor.utilstr.StringMapper(override=None)

Bases: [OmniMapper](#)[*str*]

a

**apply**(*inp*, *extra*=None)

Apply the filter to input *str* or *bytes*.

#### Parameters

- **inp** (*str*) – input string
- **extra** (*Optional[Any]*) – additional options

#### Returns

transformed string; the type can match the input type, as well as be different – that depends on filter type.

#### Return type

*str*

**class** pytermor.utilstr.NonPrintsOmniVisualizer(override=None)

Bases: [OmniMapper](#)

Input type: *str*, *bytes*. Replace every whitespace character with ..

**apply**(*inp*, *extra=None*)

Apply the filter to input *str* or *bytes*.

**Parameters**

- **inp** (*pytermor.utilstr.IT*) – input string
- **extra** (*Optional[Any]*) – additional options

**Returns**

transformed string; the type can match the input type, as well as be different – that depends on filter type.

**Return type**

*pytermor.utilstr.IT*

**class** *pytermor.utilstr.NonPrintsStringVisualizer*(*keep\_newlines=True*)

Bases: *StringMapper*

Input type: *str*. Replace every whitespace character with “.”, except newlines. Newlines are kept and get prepended with same char by default, but this behaviour can be disabled with *keep\_newlines = False*.

```
>>> NonPrintsStringVisualizer(keep_newlines=False).apply("S"+os.linesep+"K")
'SK'
>>> apply_filters('1. D'+os.linesep+'2. L ', NonPrintsStringVisualizer())
'1.└D'
```

Block quote ends without a blank line; unexpected unindent.

2.└L└

**param keep\_newlines**

When *True*, transform newline characters into “\n”, or into just “” otherwise.

**apply**(*inp*, *extra=None*)

Apply the filter to input *str* or *bytes*.

**Parameters**

- **inp** (*str*) – input string
- **extra** (*Optional[Any]*) – additional options

**Returns**

transformed string; the type can match the input type, as well as be different – that depends on filter type.

**Return type**

*str*

**class** *pytermor.utilstr.OmniSanitizer*(*repl=b'.'*)

Bases: *OmniMapper*

Input type: *str*, *bytes*. Replace every control character and every non-ASCII character (0x80-0xFF) with “.”, or with specified char. Note that the replacement should be a single ASCII character, because *Omni-* filters are designed to work with *str* inputs and *bytes* inputs on equal terms.

**Parameters**

**repl** – Value to replace control/non-ascii characters with. Should be strictly 1 character long.

**apply**(inp, extra=None)

Apply the filter to input *str* or *bytes*.

**Parameters**

- **inp** (*pytermor.utilstr.IT*) – input string
- **extra** (*Optional[Any]*) – additional options

**Returns**

transformed string; the type can match the input type, as well as be different – that depends on filter type.

**Return type**

*pytermor.utilstr.IT*

*pytermor.utilstr*.**apply\_filters**(inp, \*args)

Method for applying dynamic filter list to a target string/bytes.

Example (will replace all ESC control characters to E and thus make SGR params visible):

```
>>> from pytermor import SeqIndex
>>> test_str = f'{SeqIndex.RED}test{SeqIndex.COLOR_OFF}'
>>> apply_filters(test_str, SgrStringReplacer('E\2\3\4'))
'E[31mtestE[39m'

>>> apply_filters('[31mtest[39m', OmniSanitizer)
'.[31mtest.[39m'
```

Note that type of *inp* argument must be same as filter parameterized input type (*IT*), i.e. *StringReplacer* is *IFilter[str, str]* type, so you can apply it only to *str*-type inputs.

**Parameters**

- **inp** (*pytermor.utilstr.IT*) – String/bytes to filter.
- **args** (*Union[IFilter, Type[IFilter]]*) – Instance(s) implementing *IFilter* or their type(s).

**Return type**

*pytermor.utilstr.OT*

*pytermor.utilstr*.**dump**(data, label=None, max\_len\_shift=None)

---

**Todo:**

- format selection
  - special handling of one-line input
  - squash repeating lines
- 

**Return type**

*str* | *None*

## CHANGELOG

### 3.1 Releases

This project uses Semantic Versioning – <https://semver.org> (starting from v2.0)

#### 3.1.1 pending

- [DOCS] updated changelog
- [FIX] debug logging
- [FIX] bug in *SimpleTable* renderer when row is wider than a terminal
- [NEW] *lab\_to\_rgb()*
- [FIX] *measure\_char\_width* and *get\_char\_width* internal logic
- [UPDATE] README
- [FIX] *StaticFormatter* padding
- [NEW] Highlighter from static methods to real class
- [REFACTOR] edited highlighter styles
- [NEW] *format\_time*, *format\_time\_ms*, *format\_time\_ns*
- [REFACTOR] naming:
  - CustomBaseUnit -> *DualBaseUnit*
  - DynamicBaseFormatter -> *DynamicFormatter*
  - StaticBaseFormatter -> *StaticFormatter*
- [NEW] numeric formatters fallback mechanics
- [TESTS] numeric formatters colorizing
- [REFACTOR] *utilnum.\_TDF\_REGISTRY* -> *TDF\_REGISTRY*
- [REFACTOR] *TDF\_REGISTRY* -> *dual\_registry*- ``*FORMATTER\_*`` constants from top-level imports
- [FIX] *AbstractTracer* failure on empty input

### 3.1.2 v2.40-dev

Feb 23

- [DOCS] changelog update
- [DOCS] *utilnum* module
- [DOCS] rethinking of references style
- [FIX] parse method of TemplateEngine
- [FIX] *Highlighter*
- [FIX] critical *Styles* color
- 2023 copytight update
- [NEW] coveralls.io integration
- [NEW] *echoi*, *flatten*, *flatten1* methods; *SimpleTable* class
- [NEW] *StringLinearizer*, *WhitespaceRemover*
- [NEW] *text* Fragments validation
- [NEW] *Config* class
- [NEW] hex rst text role
- [NEW] *utilnum.format\_bytes\_human()*
- [NEW] add es7s C45/Kalm to rgb colors list
- [NEW] methods *percentile* and *median* ; *render\_benchmark* example
- [REFACTOR] *IRenderable* rewrite
- [REFACTOR] *distribute\_padded* overloads
- [REFACTOR] attempt to break cyclic dependency of *util.\** modules
- [REFACTOR] moved color transformations and type vars from *\_commons*
- [TESTS] additional coverage for *utilnum*

### 3.1.3 v2.32-dev

Jan 23

- [DOCS] *utilnum* update
- [DOCS] docstrings, typing
- [DOCS] *utilnum* module
- [FIX] *format\_prefixed* and *format\_auto\_float* inaccuracies
- [FIX] *Text.prepend* typing
- [FIX] *TmuxRenderer* RGB output
- [NEW] *Color256* aliases “colorNN”
- [NEW] *Highlighter* from es7s, colorizing options of *utilnum* helpers
- [NEW] *IRenderable* result caching



- [NEW] `pad`, `padv` helpers
- [NEW] `prefix_refpoint_shift` argument of `PrefixedUnitFormatter`
- [NEW] `PrefixedUnitFormatter` inheritance
- [NEW] `String` and `FixedString` base renderables
- [NEW] `style.merge_styles()`
- [NEW] `Renderable` `__eq__` methods
- [NEW] `StyledString`
- [NEW] `utilmisc` `get_char_width()`, `guess_char_width()`, `measure_char_width()`
- [NEW] style merging strategies: `merge_fallback()`, `merge_overwrite`
- [NEW] subsecond delta support for `TimeDeltaFormatter`
- [TESTS] `utilnum` update
- [TESTS] integrated in-code doctests into `pytest`

### 3.1.4 v2.23-dev

- [FIX] `OmniHexPrinter` missed out newlines
- [NEW] `dump` printer caching
- [NEW] `Printers` and `Mappers`
- [NEW] `SgrRenderer` now supports non-default IO stream specifying
- [NEW] `utilstr.StringHexPrinter` and `utilstr.StringUcpPrinter`
- [NEW] add missing `hsv_to_rgb` function
- [NEW] extracted `resolve`, `approximate`, `find_closest` from `Color` class to module level, as well as color transform functions
- [NEW] split `Text` to `Text` and `FrozenText`

### 3.1.5 v2.18-dev

- [FIX] Disabled automatic rendering of `echo()` and `render()`.
- [NEW] `ArgCountError` migrated from `es7s/core`.
- [NEW] `black` code style.
- [NEW] `cval` autobuild.
- [NEW] Add `OmniHexPrinter` and `chunk()` helper.
- [NEW] Typehinting.

### 3.1.6 v2.14-dev

Dec 22

- [DOCS] Docs design fixes.
- [NEW] `confirm()` helper command.
- [NEW] `EscapeSequenceStringReplacer` filter.
- [NEW] `examples/terminal_benchmark` script.
- [NEW] `StringFilter` and `OmniFilter` classes.
- [NEW] Minor core improvements.
- [NEW] RGB and variations full support.
- [TESTS] Tests for `color` module.

### 3.1.7 v2.6-dev

Nov 22

- [NEW] `TemplateEngine` implementation.
- [NEW] `Text` nesting.
- [REFACTOR] Changes in `ConfigurableRenderer.force_styles` logic.
- [REFACTOR] Got rid of `Span` class.
- [REFACTOR] Package reorganizing.
- [REFACTOR] Rewrite of `color` module.

### 3.1.8 v2.2-dev

Oct 22

- [NEW] `TmuxRenderer`
- [NEW] `wait_key()` input helper.
- [NEW] Color config.
- [NEW] `IRenderable`` interface.
- [NEW] Named colors list.

### 3.1.9 v2.1-dev

Aug 22

- [NEW] Color presets.
- [TESTS] More unit tests for formatters.

### 3.1.10 v2.0-dev

Jul 22

- [REWORK] Complete library rewrite.
- [DOCS] sphinx and readthedocs integraton.
- [NEW] High-level abstractions `Color`, *Renderer* and *Style*.
- [TESTS] pytest and coverage integration.
- [TESTS] Unit tests for formatters and new modules.

### 3.1.11 v1.8

Jun 22

- [NEW] `format_prefixed_unit` extended for working with decimal and binary metric prefixes.
- [NEW] `sequence.NOOP` SGR sequence and `span.NOOP` format.
- [NEW] *format\_time\_delta* extended with new settings.
- [NEW] Added 3 formatters: `format_prefixed_unit`, *format\_time\_delta*, *format\_auto\_float*.
- [NEW] Max decimal points for `auto_float` extended from (2) to (max-2).
- [REFACTOR] Utility classes reorganization.
- [REFACTOR] Value rounding transferred from *format\_auto\_float* to `format_prefixed_unit`.
- [TESTS] Unit tests output formatting.

### 3.1.12 v1.7

May 22

- [FIX] Print reset sequence as `\e[m` instead of `\e[0m`.
- [NEW] `Span` constructor can be called without arguments.
- [NEW] Added `span.BG_BLACK` format.
- [NEW] Added *ljust\_sgr*, *rjust\_sgr*, *center\_sgr* util functions to align strings with SGRs correctly.
- [NEW] Added SGR code lists.

### 3.1.13 v1.6

- [REFACTOR] Renamed `code` module to `sgr` because of conflicts in PyCharm debugger (`pydevd_console_integration.py`).
- [REFACTOR] Ridded of `EmptyFormat` and `AbstractFormat` classes.
- [TESTS] Excluded `tests` dir from distribution package.

### 3.1.14 v1.5

- [REFACTOR] Removed excessive `EmptySequenceSGR` – default `SGR` class was specifically implemented to print out as empty string instead of `\e[m` if constructed without params.

### 3.1.15 v1.4

- [NEW] `Span.wrap()` now accepts any type of argument, not only *str*.
- [NEW] Added equality methods for *SequenceSGR* and `Span` classes/subclasses.
- [REFACTOR] Rebuilt `Sequence` inheritance tree.
- [TESTS] Added some tests for `fmt.*` and `seq.*` classes.

### 3.1.16 v1.3

- [NEW] Added `span.GRAY` and `span.BG_GRAY` format presets.
- [REFACTOR] Interface revisioning.

### 3.1.17 v1.2

- [NEW] `EmptySequenceSGR` and `EmptyFormat` classes.
- [NEW] `opening_seq` and `closing_seq` properties for `Span` class.

### 3.1.18 v1.1

Apr 22

- [NEW] Autoformat feature.

### 3.1.19 v1.0

- First public version.

### 3.1.20 v0.90

Mar 22

- First commit.

## LICENSE

GNU GENERAL PUBLIC LICENSE  
Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<https://fsf.org/>>  
Everyone is permitted to copy and distribute verbatim copies  
of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for  
software and other kinds of works.

The licenses for most software and other practical works are designed  
to take away your freedom to share and change the works. By contrast,  
the GNU General Public License is intended to guarantee your freedom to  
share and change all versions of a program--to make sure it remains free  
software for all its users. We, the Free Software Foundation, use the  
GNU General Public License for most of our software; it applies also to  
any other work released this way by its authors. You can apply it to  
your programs, too.

When we speak of free software, we are referring to freedom, not  
price. Our General Public Licenses are designed to make sure that you  
have the freedom to distribute copies of free software (and charge for  
them if you wish), that you receive source code or can get it if you  
want it, that you can change the software or use pieces of it in new  
free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you  
these rights or asking you to surrender the rights. Therefore, you have  
certain responsibilities if you distribute copies of the software, or if  
you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether  
gratis or for a fee, you must pass on to the recipients the same  
freedoms that you received. You must make sure that they, too, receive  
or can get the source code. And you must show them these terms so they  
know their rights.

Developers that use the GNU GPL protect your rights with two steps:

(continues on next page)

(continued from previous page)

(1) assert copyright on the software, and (2) offer you this License giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains that there is no warranty for this free software. For both users' and authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those products. If such problems arise substantially in other domains, we stand ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

#### TERMS AND CONDITIONS

##### 0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this License. Each licensee is addressed as "you". "Licensees" and "recipients" may be individuals or organizations.

To "modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based on the Program.

To "propagate" a work means to do anything with it that, without

(continues on next page)

(continued from previous page)

permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays "Appropriate Legal Notices" to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2) tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

#### 1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The "System Libraries" of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's System Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those

(continues on next page)

(continued from previous page)

subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that same work.

## 2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a covered work is covered by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed; section 10 makes it unnecessary.

## 3. Protecting Users' Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article 11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

## 4. Conveying Verbatim Copies.

(continues on next page)



(continued from previous page)

You may convey verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice; keep intact all notices stating that this License and any non-permissive terms added in accord with section 7 apply to the code; keep intact all notices of the absence of any warranty; and give all recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

#### 5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

a) The work must carry prominent notices stating that you modified it, and giving a relevant date.

b) The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to "keep intact all notices".

c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.

d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your work need not make them do so.

A compilation of a covered work with other separate and independent works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation's users beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other parts of the aggregate.

#### 6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the

(continues on next page)

(continued from previous page)

machine-readable Corresponding Source under the terms of this License, in one of these ways:

- a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.
- b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years and valid for as long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.
- c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.
- d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge. You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.
- e) Convey the object code using peer-to-peer transmission, provided you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source as a System Library, need not be included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product,

(continues on next page)

(continued from previous page)

doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

"Installation Information" for a User Product means any methods, procedures, authorization keys, or other information required to install and execute modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

## 7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this License by making exceptions from one or more of its conditions. Additional permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

(continues on next page)

(continued from previous page)

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a) Disclaiming warranty or limiting liability differently from the terms of sections 15 and 16 of this License; or
- b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or
- c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or
- d) Limiting the use for publicity purposes of names of licensors or authors of the material; or
- e) Declining to grant rights under trademark law for use of some trade names, trademarks, or service marks; or
- f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions;

(continues on next page)

(continued from previous page)

the above requirements apply either way.

#### 8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

#### 9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

#### 10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that

(continues on next page)

(continued from previous page)

transaction who receives a copy of the work also receives whatever licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

#### 11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, "control" includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the

(continues on next page)

(continued from previous page)

covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

#### 12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

#### 13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the

(continues on next page)

(continued from previous page)

combination as such.

#### 14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

#### 15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

#### 16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

#### 17. Interpretation of Sections 15 and 16.

(continues on next page)



(continued from previous page)

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

#### END OF TERMS AND CONDITIONS

#### How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively state the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>
Copyright (C) <year> <name of author>
```

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see [<https://www.gnu.org/licenses/>](https://www.gnu.org/licenses/).

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short notice like this when it starts in an interactive mode:

```
<program> Copyright (C) <year> <name of author>
This program comes with ABSOLUTELY NO WARRANTY; for details type `show w'.
This is free software, and you are welcome to redistribute it
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, your program's commands might be different; for a GUI interface, you would use an "about box".

You should also get your employer (if you work as a programmer) or school,

(continues on next page)

(continued from previous page)

if any, to sign a "copyright disclaimer" for the program, if necessary.  
For more information on this, and how to apply and follow the GNU GPL, see  
<<https://www.gnu.org/licenses/>>.

The GNU General Public License does not permit incorporating your program  
into proprietary programs. If your program is a subroutine library, you  
may consider it more useful to permit linking proprietary applications with  
the library. If this is what you want to do, use the GNU Lesser General  
Public License instead of this License. But first, please read  
<<https://www.gnu.org/licenses/why-not-lgpl.html>>.

## PYTHON MODULE INDEX

### p

- `pytermor`, [29](#)
- `pytermor.ansi`, [30](#)
- `pytermor.color`, [41](#)
- `pytermor.common`, [52](#)
- `pytermor.config`, [56](#)
- `pytermor.cval`, [57](#)
- `pytermor.renderer`, [57](#)
- `pytermor.style`, [64](#)
- `pytermor.text`, [71](#)
- `pytermor.utilmisc`, [76](#)
- `pytermor.utilnum`, [82](#)
- `pytermor.utilstr`, [95](#)



## A

AbstractStringTracer (class in `pytermor.utilstr`), 100  
 AbstractTracer (class in `pytermor.utilstr`), 100  
 Align (class in `pytermor.common`), 53  
 ALIGN\_CENTER (in module `pytermor.common`), 53  
 ALIGN\_LEFT (in module `pytermor.common`), 53  
 ALIGN\_RIGHT (in module `pytermor.common`), 53  
 allows\_width\_setup (`pytermor.text.Fragment` property), 72  
 allows\_width\_setup (`pytermor.text.FrozenText` property), 73  
 allows\_width\_setup (`pytermor.text.IRenderable` property), 72  
 allows\_width\_setup (`pytermor.text.SimpleTable` property), 74  
 allows\_width\_setup (`pytermor.text.Text` property), 73  
 apply() (`pytermor.utilnum.Highlighter` method), 84  
 apply() (`pytermor.utilstr.AbstractStringTracer` method), 100  
 apply() (`pytermor.utilstr.AbstractTracer` method), 100  
 apply() (`pytermor.utilstr.BytesTracer` method), 100  
 apply() (`pytermor.utilstr.CsiStringReplacer` method), 102  
 apply() (`pytermor.utilstr.IFilter` method), 99  
 apply() (`pytermor.utilstr.NonPrintsOmniVisualizer` method), 104  
 apply() (`pytermor.utilstr.NonPrintsStringVisualizer` method), 105  
 apply() (`pytermor.utilstr.OmniMapper` method), 104  
 apply() (`pytermor.utilstr.OmniSanitizer` method), 105  
 apply() (`pytermor.utilstr.SgrStringReplacer` method), 102  
 apply() (`pytermor.utilstr.StringAligner` method), 99  
 apply() (`pytermor.utilstr.StringLinearizer` method), 103  
 apply() (`pytermor.utilstr.StringMapper` method), 104  
 apply() (`pytermor.utilstr.StringReplacer` method), 102  
 apply() (`pytermor.utilstr.StringTracer` method), 101  
 apply() (`pytermor.utilstr.StringUcpTracer` method), 101  
 apply() (`pytermor.utilstr.WhitespaceRemover` method), 103  
 apply\_filters() (in module `pytermor.utilstr`), 106  
 approximate() (in module `pytermor.color`), 51

approximate() (`pytermor.color.Color16` class method), 43  
 approximate() (`pytermor.color.Color256` class method), 46  
 approximate() (`pytermor.color.ColorRGB` class method), 48  
 ApxResult (class in `pytermor.color`), 42  
 assemble() (`pytermor.ansi.ISequence` method), 32  
 assemble() (`pytermor.ansi.ISequenceFe` method), 32  
 assemble() (`pytermor.ansi.SequenceCSI` method), 33  
 assemble() (`pytermor.ansi.SequenceOSC` method), 32  
 assemble() (`pytermor.ansi.SequenceSGR` method), 34  
 assemble() (`pytermor.ansi.SequenceST` method), 32  
 assemble\_hyperlink() (in module `pytermor.ansi`), 40  
 AUTO (`pytermor.renderer.OutputMode` attribute), 60  
 autopick\_fg() (`pytermor.style.Style` method), 66

## B

base (`pytermor.color.ColorRGB` property), 48  
 BaseUnit (class in `pytermor.utilnum`), 86  
 BG\_BLACK (`pytermor.ansi.SeqIndex` attribute), 37  
 BG\_BLUE (`pytermor.ansi.SeqIndex` attribute), 37  
 BG\_COLOR\_OFF (`pytermor.ansi.SeqIndex` attribute), 37  
 BG\_CYAN (`pytermor.ansi.SeqIndex` attribute), 37  
 BG\_GRAY (`pytermor.ansi.SeqIndex` attribute), 37  
 BG\_GREEN (`pytermor.ansi.SeqIndex` attribute), 37  
 BG\_HI\_BLUE (`pytermor.ansi.SeqIndex` attribute), 38  
 BG\_HI\_CYAN (`pytermor.ansi.SeqIndex` attribute), 38  
 BG\_HI\_GREEN (`pytermor.ansi.SeqIndex` attribute), 38  
 BG\_HI\_MAGENTA (`pytermor.ansi.SeqIndex` attribute), 38  
 BG\_HI\_RED (`pytermor.ansi.SeqIndex` attribute), 37  
 BG\_HI\_WHITE (`pytermor.ansi.SeqIndex` attribute), 38  
 BG\_HI\_YELLOW (`pytermor.ansi.SeqIndex` attribute), 38  
 BG\_MAGENTA (`pytermor.ansi.SeqIndex` attribute), 37  
 BG\_RED (`pytermor.ansi.SeqIndex` attribute), 37  
 BG\_WHITE (`pytermor.ansi.SeqIndex` attribute), 37  
 BG\_YELLOW (`pytermor.ansi.SeqIndex` attribute), 37  
 BLACK (`pytermor.ansi.SeqIndex` attribute), 36  
 BLINK\_FAST (`pytermor.ansi.SeqIndex` attribute), 35  
 BLINK\_OFF (`pytermor.ansi.SeqIndex` attribute), 36  
 BLINK\_SLOW (`pytermor.ansi.SeqIndex` attribute), 35  
 BLUE (`pytermor.ansi.SeqIndex` attribute), 36

BOLD (*pytermor.ansi.SeqIndex* attribute), 35  
BOLD\_DIM\_OFF (*pytermor.ansi.SeqIndex* attribute), 36  
BytesTracer (*class in pytermor.utilstr*), 100

## C

CDT (*in module pytermor.color*), 42  
center\_sgr() (*in module pytermor.utilstr*), 98  
chunk() (*in module pytermor.common*), 54  
clone() (*pytermor.renderer.HtmlRenderer* method), 63  
clone() (*pytermor.renderer.IRenderer* method), 59  
clone() (*pytermor.renderer.NoOpRenderer* method), 62  
clone() (*pytermor.renderer.SgrDebugger* method), 64  
clone() (*pytermor.renderer.SgrRenderer* method), 61  
clone() (*pytermor.renderer.TmuxRenderer* method), 62  
clone() (*pytermor.style.Style* method), 66  
code (*pytermor.color.Color256* property), 45  
code\_bg (*pytermor.color.Color16* property), 43  
code\_fg (*pytermor.color.Color16* property), 43  
color (*pytermor.color.ApxResult* attribute), 42  
Color16 (*class in pytermor.color*), 42  
Color256 (*class in pytermor.color*), 44  
COLOR\_OFF (*pytermor.ansi.SeqIndex* attribute), 36  
ColorCodeConflictError, 51  
colorize() (*pytermor.utilnum.Highlighter* method), 84  
ColorNameConflictError, 51  
ColorRGB (*class in pytermor.color*), 47  
Config (*class in pytermor.config*), 56  
confirm() (*in module pytermor.utilmisc*), 79  
ConflictError, 53  
CONTROL\_CHARS (*in module pytermor.utilstr*), 98  
CRITICAL (*pytermor.style.Styles* attribute), 68  
CRITICAL\_ACCENT (*pytermor.style.Styles* attribute), 68  
CRITICAL\_LABEL (*pytermor.style.Styles* attribute), 68  
CROSSLINED (*pytermor.ansi.SeqIndex* attribute), 35  
CROSSLINED\_OFF (*pytermor.ansi.SeqIndex* attribute), 36  
CSI\_SEQ\_REGEX (*in module pytermor.utilstr*), 98  
CsiStringReplacer (*class in pytermor.utilstr*), 102  
CT (*in module pytermor.color*), 42  
cv (*in module pytermor*), 29  
CVAL (*class in pytermor.cval*), 57  
CYAN (*pytermor.ansi.SeqIndex* attribute), 36

## D

decompose\_request\_cursor\_position() (*in module pytermor.ansi*), 39  
DEFAULT\_COLOR (*in module pytermor.color*), 49  
DIM (*pytermor.ansi.SeqIndex* attribute), 35  
distance (*pytermor.color.ApxResult* attribute), 42  
distance\_real (*pytermor.color.ApxResult* property), 42  
distribute\_padded() (*in module pytermor.text*), 75  
DOUBLE\_UNDERLINED (*pytermor.ansi.SeqIndex* attribute), 36  
DualBaseUnit (*class in pytermor.utilnum*), 88  
DualFormatter (*class in pytermor.utilnum*), 87

DualFormatterRegistry (*class in pytermor.utilnum*), 88  
dump() (*in module pytermor.utilstr*), 106  
DynamicFormatter (*class in pytermor.utilnum*), 86

## E

echo() (*in module pytermor.text*), 75  
echoi() (*in module pytermor.text*), 75  
enclose() (*in module pytermor.ansi*), 38  
ERROR (*pytermor.style.Styles* attribute), 68  
ERROR\_ACCENT (*pytermor.style.Styles* attribute), 68  
ERROR\_LABEL (*pytermor.style.Styles* attribute), 68  
ESCAPE\_SEQ\_REGEX (*in module pytermor.utilstr*), 98  
ExtendedEnum (*class in pytermor.common*), 53

## F

find\_closest() (*in module pytermor.color*), 50  
find\_closest() (*pytermor.color.Color16* class method), 44  
find\_closest() (*pytermor.color.Color256* class method), 46  
find\_closest() (*pytermor.color.ColorRGB* class method), 48  
find\_matching() (*pytermor.utilnum.DualFormatterRegistry* method), 88  
flatten() (*in module pytermor.common*), 55  
flatten1() (*in module pytermor.common*), 55  
flip() (*pytermor.style.Style* method), 66  
format() (*pytermor.utilnum.DualFormatter* method), 87  
format() (*pytermor.utilnum.DynamicFormatter* method), 86  
format() (*pytermor.utilnum.StaticFormatter* method), 86  
format\_auto\_float() (*in module pytermor.utilnum*), 89  
format\_base() (*pytermor.utilnum.DualFormatter* method), 88  
format\_bytes\_human() (*in module pytermor.utilnum*), 92  
format\_si() (*in module pytermor.utilnum*), 90  
format\_si\_binary() (*in module pytermor.utilnum*), 91  
format\_thousand\_sep() (*in module pytermor.utilnum*), 89  
format\_time() (*in module pytermor.utilnum*), 93  
format\_time\_delta() (*in module pytermor.utilnum*), 94  
format\_time\_delta\_longest() (*in module pytermor.utilnum*), 95  
format\_time\_delta\_shortest() (*in module pytermor.utilnum*), 95  
format\_time\_ms() (*in module pytermor.utilnum*), 93  
format\_time\_ns() (*in module pytermor.utilnum*), 94  
format\_value() (*pytermor.color.Color16* method), 44

`format_value()` (*pytermor.color.Color256* method), 46  
`format_value()` (*pytermor.color.ColorRGB* method), 48

`Fragment` (class in *pytermor.text*), 72  
`FrozenText` (class in *pytermor.text*), 72  
`FT` (in module *pytermor.style*), 65

## G

`get_by_code()` (*pytermor.color.Color16* class method), 43  
`get_by_code()` (*pytermor.color.Color256* class method), 46  
`get_by_max_len()` (*pytermor.utilnum.DualFormatterRegistry* method), 88  
`get_char_width()` (in module *pytermor.utilmisc*), 80  
`get_closing_seq()` (in module *pytermor.ansi*), 38  
`get_config()` (in module *pytermor.config*), 56  
`get_default()` (*pytermor.renderer.RendererManager* class method), 59  
`get_longest()` (*pytermor.utilnum.DualFormatterRegistry* method), 89  
`get_max_len()` (*pytermor.utilnum.StaticFormatter* method), 86  
`get_preferable_wrap_width()` (in module *pytermor.common*), 54  
`get_qname()` (in module *pytermor.common*), 54  
`get_shortest()` (*pytermor.utilnum.DualFormatterRegistry* method), 89  
`get_terminal_width()` (in module *pytermor.common*), 54  
`GRAY` (*pytermor.ansi.SeqIndex* attribute), 37  
`GREEN` (*pytermor.ansi.SeqIndex* attribute), 36  
`guess_char_width()` (in module *pytermor.utilmisc*), 81

## H

`has_width` (*pytermor.text.Fragment* property), 72  
`has_width` (*pytermor.text.FrozenText* property), 73  
`has_width` (*pytermor.text.IRenderable* property), 72  
`has_width` (*pytermor.text.SimpleTable* property), 74  
`has_width` (*pytermor.text.Text* property), 73  
`hex_to_hsv()` (in module *pytermor.utilmisc*), 78  
`hex_to_rgb()` (in module *pytermor.utilmisc*), 77  
`hex_value` (*pytermor.color.Color16* property), 44  
`hex_value` (*pytermor.color.Color256* property), 46  
`hex_value` (*pytermor.color.ColorRGB* property), 48  
`HI_BLUE` (*pytermor.ansi.SeqIndex* attribute), 37  
`HI_CYAN` (*pytermor.ansi.SeqIndex* attribute), 37  
`HI_GREEN` (*pytermor.ansi.SeqIndex* attribute), 37  
`HI_MAGENTA` (*pytermor.ansi.SeqIndex* attribute), 37  
`HI_RED` (*pytermor.ansi.SeqIndex* attribute), 37  
`HI_WHITE` (*pytermor.ansi.SeqIndex* attribute), 37

`HI_YELLOW` (*pytermor.ansi.SeqIndex* attribute), 37  
`HIDDEN` (*pytermor.ansi.SeqIndex* attribute), 35  
`HIDDEN_OFF` (*pytermor.ansi.SeqIndex* attribute), 36  
`highlight()` (in module *pytermor.utilnum*), 89  
`Highlighter` (class in *pytermor.utilnum*), 84  
`hsv_to_hex()` (in module *pytermor.utilmisc*), 79  
`hsv_to_rgb()` (in module *pytermor.utilmisc*), 78  
`HtmlRenderer` (class in *pytermor.renderer*), 62  
`HYPERLINK` (*pytermor.ansi.SeqIndex* attribute), 38

## I

`IFilter` (class in *pytermor.utilstr*), 99  
`init_config()` (in module *pytermor.config*), 57  
`IntCode` (class in *pytermor.ansi*), 35  
`INVERSED` (*pytermor.ansi.SeqIndex* attribute), 35  
`INVERSED_OFF` (*pytermor.ansi.SeqIndex* attribute), 36  
`IRenderable` (class in *pytermor.text*), 71  
`IRenderer` (class in *pytermor.renderer*), 59  
`is_caching_allowed` (*pytermor.renderer.HtmlRenderer* property), 63  
`is_caching_allowed` (*pytermor.renderer.IRenderer* property), 59  
`is_caching_allowed` (*pytermor.renderer.NoOpRenderer* property), 62  
`is_caching_allowed` (*pytermor.renderer.SgrDebugger* property), 63  
`is_caching_allowed` (*pytermor.renderer.SgrRenderer* property), 61  
`is_caching_allowed` (*pytermor.renderer.TmuxRenderer* property), 61  
`is_format_allowed` (*pytermor.renderer.HtmlRenderer* property), 63  
`is_format_allowed` (*pytermor.renderer.IRenderer* property), 59  
`is_format_allowed` (*pytermor.renderer.NoOpRenderer* property), 62  
`is_format_allowed` (*pytermor.renderer.SgrDebugger* property), 64  
`is_format_allowed` (*pytermor.renderer.SgrRenderer* property), 61  
`is_format_allowed` (*pytermor.renderer.TmuxRenderer* property), 61  
`ISequence` (class in *pytermor.ansi*), 31  
`ISequenceFe` (class in *pytermor.ansi*), 32  
`IT` (in module *pytermor.utilstr*), 98  
`ITALIC` (*pytermor.ansi.SeqIndex* attribute), 35  
`ITALIC_OFF` (*pytermor.ansi.SeqIndex* attribute), 36

## L

`lab_to_rgb()` (in module *pytermor.utilmisc*), 79  
`ljust_sgr()` (in module *pytermor.utilstr*), 97  
`LogicError`, 53

## M

MAGENTA (*pytermor.ansi.SeqIndex* attribute), 36  
make\_color\_256() (*in module pytermor.ansi*), 39  
make\_color\_rgb() (*in module pytermor.ansi*), 40  
make\_erase\_in\_line() (*in module pytermor.ansi*), 38  
make\_hyperlink\_part() (*in module pytermor.ansi*), 40  
make\_query\_cursor\_position() (*in module pytermor.ansi*), 39  
make\_set\_cursor\_x\_abs() (*in module pytermor.ansi*), 38  
make\_style() (*in module pytermor.style*), 68  
max\_len (*pytermor.utilnum.DualFormatter* property), 87  
measure() (*in module pytermor.common*), 54  
measure\_char\_width() (*in module pytermor.utilmisc*), 81  
median() (*in module pytermor.common*), 55  
merge\_fallback() (*pytermor.style.Style* method), 66  
merge\_overwrite() (*pytermor.style.Style* method), 67  
merge\_styles() (*in module pytermor.style*), 68  
module  
    pytermor, 29  
    pytermor.ansi, 30  
    pytermor.color, 41  
    pytermor.common, 52  
    pytermor.config, 56  
    pytermor.cval, 57  
    pytermor.renderer, 57  
    pytermor.style, 64  
    pytermor.text, 71  
    pytermor.utilmisc, 76  
    pytermor.utilnum, 82  
    pytermor.utilstr, 95  
MPT (*in module pytermor.utilstr*), 99

## N

name (*pytermor.color.Color16* property), 44  
name (*pytermor.color.Color256* property), 46  
name (*pytermor.color.ColorRGB* property), 48  
NO\_ANSI (*pytermor.renderer.OutputMode* attribute), 59  
NON\_ASCII\_CHARS (*in module pytermor.utilstr*), 98  
NonPrintsOmniVisualizer (*class in pytermor.utilstr*), 104  
NonPrintsStringVisualizer (*class in pytermor.utilstr*), 105  
NOOP\_COLOR (*in module pytermor.color*), 49  
NOOP\_SEQ (*in module pytermor.ansi*), 34  
NOOP\_STYLE (*in module pytermor.style*), 68  
NoOpRenderer (*class in pytermor.renderer*), 62

## O

OmniMapper (*class in pytermor.utilstr*), 103  
OmniSanitizer (*class in pytermor.utilstr*), 105  
OT (*in module pytermor.utilstr*), 98

OutputMode (*class in pytermor.renderer*), 59  
OVERLINED (*pytermor.ansi.SeqIndex* attribute), 36  
OVERLINED\_OFF (*pytermor.ansi.SeqIndex* attribute), 36

## P

params (*pytermor.ansi.ISequence* property), 32  
params (*pytermor.ansi.ISequenceFe* property), 32  
params (*pytermor.ansi.SequenceCSI* property), 33  
params (*pytermor.ansi.SequenceOSC* property), 33  
params (*pytermor.ansi.SequenceSGR* property), 34  
params (*pytermor.ansi.SequenceST* property), 32  
percentile() (*in module pytermor.common*), 55  
PREFIXES\_SI\_DEC (*in module pytermor.utilnum*), 83  
PRINTABLE\_CHARS (*in module pytermor.utilstr*), 98  
PTT (*in module pytermor.utilstr*), 99  
pytermor  
    module, 29  
pytermor.ansi  
    module, 30  
pytermor.color  
    module, 41  
pytermor.common  
    module, 52  
pytermor.config  
    module, 56  
pytermor.cval  
    module, 57  
pytermor.renderer  
    module, 57  
pytermor.style  
    module, 64  
pytermor.text  
    module, 71  
pytermor.utilmisc  
    module, 76  
pytermor.utilnum  
    module, 82  
pytermor.utilstr  
    module, 95

## R

RED (*pytermor.ansi.SeqIndex* attribute), 36  
register() (*pytermor.utilnum.DualFormatterRegistry* method), 88  
render() (*in module pytermor.text*), 74  
render() (*pytermor.renderer.HtmlRenderer* method), 63  
render() (*pytermor.renderer.IRenderer* method), 59  
render() (*pytermor.renderer.NoOpRenderer* method), 62  
render() (*pytermor.renderer.SgrDebugger* method), 64  
render() (*pytermor.renderer.SgrRenderer* method), 61  
render() (*pytermor.renderer.TmuxRenderer* method), 61  
render() (*pytermor.text.Fragment* method), 72  
render() (*pytermor.text.FrozenText* method), 73



render() (*pytermor.text.IRenderable* method), 71  
 render() (*pytermor.text.SimpleTable* method), 74  
 render() (*pytermor.text.Text* method), 73  
 RendererManager (*class in pytermor.renderer*), 58  
 replace\_config() (*in module pytermor.config*), 57  
 RESET (*pytermor.ansi.SeqIndex* attribute), 35  
 resolve() (*pytermor.ansi.IntCode* class method), 35  
 resolve() (*pytermor.color.Color16* class method), 44  
 resolve() (*pytermor.color.Color256* class method), 46  
 resolve() (*pytermor.color.ColorRGB* class method), 49  
 resolve\_color() (*in module pytermor.color*), 49  
 rgb\_to\_hex() (*in module pytermor.utilmisc*), 77  
 rgb\_to\_hsv() (*in module pytermor.utilmisc*), 78  
 rjust\_sgr() (*in module pytermor.utilstr*), 97  
 RPT (*in module pytermor.utilstr*), 99  
 RT (*in module pytermor.text*), 71

## S

SeqIndex (*class in pytermor.ansi*), 35  
 SequenceCSI (*class in pytermor.ansi*), 33  
 SequenceOSC (*class in pytermor.ansi*), 32  
 SequenceSGR (*class in pytermor.ansi*), 33  
 SequenceST (*class in pytermor.ansi*), 32  
 set\_default() (*pytermor.renderer.RendererManager* class method), 58  
 set\_default\_format\_always() (*pytermor.renderer.RendererManager* class method), 59  
 set\_default\_format\_never() (*pytermor.renderer.RendererManager* class method), 59  
 set\_format\_always() (*pytermor.renderer.SgrDebugger* method), 64  
 set\_format\_auto() (*pytermor.renderer.SgrDebugger* method), 64  
 set\_format\_never() (*pytermor.renderer.SgrDebugger* method), 64  
 set\_width() (*pytermor.text.Fragment* method), 72  
 set\_width() (*pytermor.text.FrozenText* method), 73  
 set\_width() (*pytermor.text.IRenderable* method), 72  
 set\_width() (*pytermor.text.SimpleTable* method), 74  
 set\_width() (*pytermor.text.Text* method), 73  
 SGR\_SEQ\_REGEX (*in module pytermor.utilstr*), 98  
 SgrDebugger (*class in pytermor.renderer*), 63  
 SgrRenderer (*class in pytermor.renderer*), 60  
 SgrStringReplacer (*class in pytermor.utilstr*), 102  
 SimpleTable (*class in pytermor.text*), 73  
 StaticFormatter (*class in pytermor.utilnum*), 84  
 StringAligner (*class in pytermor.utilstr*), 99  
 StringLinearizer (*class in pytermor.utilstr*), 103  
 StringMapper (*class in pytermor.utilstr*), 104  
 StringReplacer (*class in pytermor.utilstr*), 102  
 StringTracer (*class in pytermor.utilstr*), 101  
 StringUcpTracer (*class in pytermor.utilstr*), 101

Style (*class in pytermor.style*), 65  
 Styles (*class in pytermor.style*), 68

## T

Text (*class in pytermor.text*), 73  
 TmuxRenderer (*class in pytermor.renderer*), 61  
 to\_hsv() (*pytermor.color.Color16* method), 44  
 to\_hsv() (*pytermor.color.Color256* method), 47  
 to\_hsv() (*pytermor.color.ColorRGB* method), 49  
 to\_rgb() (*pytermor.color.Color16* method), 44  
 to\_rgb() (*pytermor.color.Color256* method), 47  
 to\_rgb() (*pytermor.color.ColorRGB* method), 49  
 to\_sgr() (*pytermor.color.Color16* method), 43  
 to\_sgr() (*pytermor.color.Color256* method), 45  
 to\_sgr() (*pytermor.color.ColorRGB* method), 47  
 to\_tmux() (*pytermor.color.Color16* method), 43  
 to\_tmux() (*pytermor.color.Color256* method), 45  
 to\_tmux() (*pytermor.color.ColorRGB* method), 48  
 total\_size() (*in module pytermor.utilmisc*), 81  
 trace() (*in module pytermor.common*), 54  
 TracerExtra (*class in pytermor.utilstr*), 102  
 TRUE\_COLOR (*pytermor.renderer.OutputMode* attribute), 60

## U

UNDERLINED (*pytermor.ansi.SeqIndex* attribute), 35  
 UNDERLINED\_OFF (*pytermor.ansi.SeqIndex* attribute), 36  
 UserAbort, 53  
 UserCancel, 53

## V

variations (*pytermor.color.ColorRGB* property), 48

## W

wait\_key() (*in module pytermor.utilmisc*), 79  
 WARNING (*pytermor.style.Styles* attribute), 68  
 WARNING\_ACCENT (*pytermor.style.Styles* attribute), 68  
 WARNING\_LABEL (*pytermor.style.Styles* attribute), 68  
 WHITE (*pytermor.ansi.SeqIndex* attribute), 36  
 WHITESPACE\_CHARS (*in module pytermor.utilstr*), 98  
 WhitespaceRemover (*class in pytermor.utilstr*), 103  
 with\_traceback() (*pytermor.color.ColorCodeConflictError* method), 51  
 with\_traceback() (*pytermor.color.ColorNameConflictError* method), 51  
 with\_traceback() (*pytermor.common.ConflictError* method), 53  
 with\_traceback() (*pytermor.common.LogicError* method), 53  
 with\_traceback() (*pytermor.common.UserAbort* method), 53

`with_traceback()` (*pytermor.common.UserCancel*  
*method*), [53](#)

`wrap_sgr()` (*in module pytermor.text*), [76](#)

## X

`XTERM_16` (*pytermor.renderer.OutputMode* attribute), [60](#)

`XTERM_256` (*pytermor.renderer.OutputMode* attribute),  
[60](#)

## Y

`YELLOW` (*pytermor.ansi.SeqIndex* attribute), [36](#)