tint: Tint is not Tufte

build passing | license GPL-3 | CRAN 0.1.3 | dependencies 3/18 | downloads 753/month | last commit last saturday

Motivation

The (html and pdf) styles provided by the tufte package make it very easy and convenient to create documents in the celebrated style of Edward Tufte.

The clear layout, focused use of white space and unparalleled use of the margin for complementary information, including graphs, offer a novel and very valuable resource for typesetting.

Yet at the same time, not everybody is a fan of the yellow tint, and the fonts. I had been looking for a while for an alternative, and somewhat recently came across envisioned css by Jef Lippiat. It gets a few things very right: use of the beautiful Roboto font along with a closer-to-white background. So I 'mixed this' with the code framework provided by JJ and Yihui to make it an RMarkdown template you can use just by installing this package. Among the small changes I made were the removal of *italics* in subheaders and the title.

Similarly, LaTeX styles exists and the tufte supports both pdf handouts and a book format. We first supported the pdf handout output only, and added support for a pdf book format in release 0.1.0.

Example

HTML

A quick screenshot of the html variant is below:

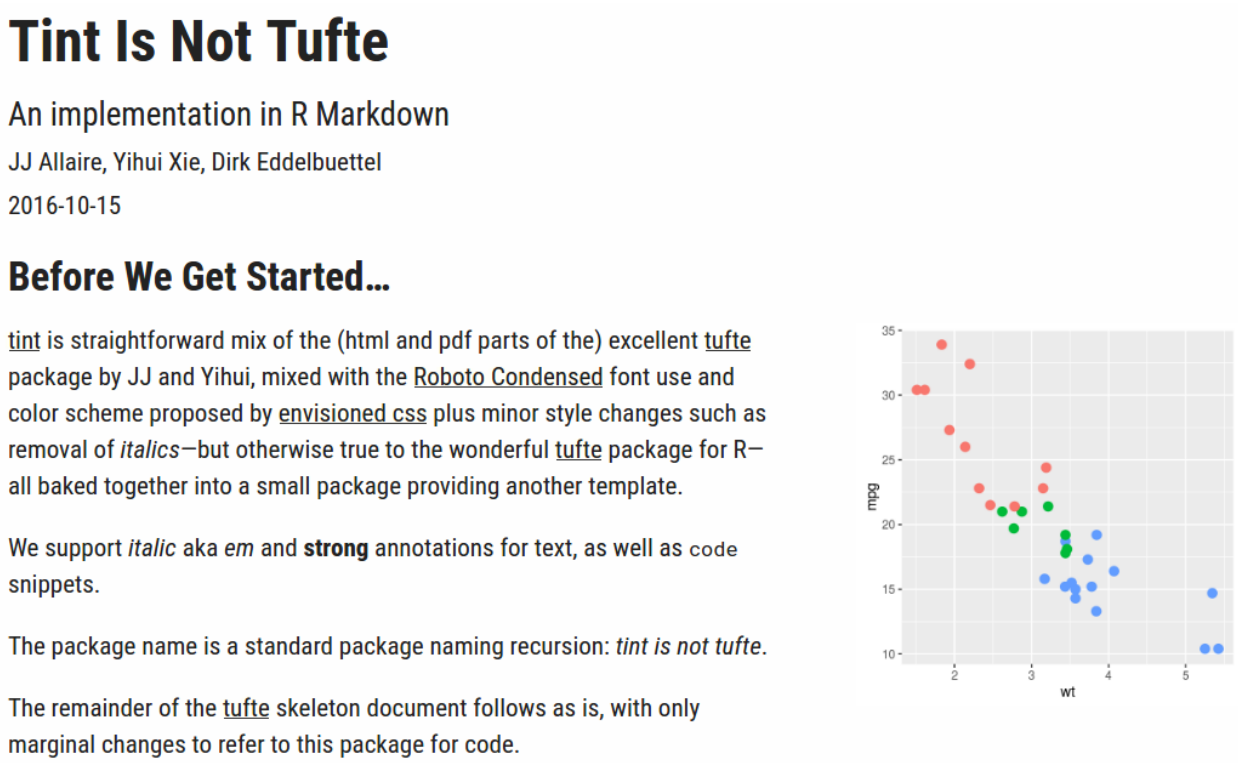

and the full underlying document is available too. Its sources are included in the packages as html/skeleton.Rmd.

PDF

Another screenshot shows the pdf variant:

Tint Is Not Tufte

JJ Allaire, Yihui Xie, Dirk Eddelbuettel

2016-10-15

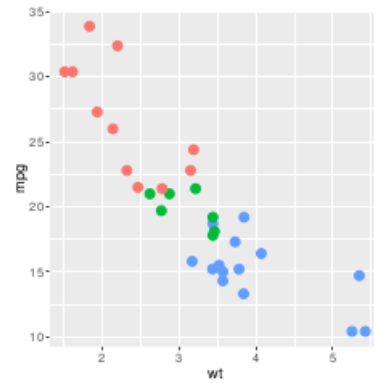

Before We Get Started...

tint is straightforward mix of the (html and pdf parts of the) excellent tufte package by JJ and Yihui, mixed with the Roboto Condensed font use and color scheme proposed by envisioned css plus minor style changes such as removal of *italics*—but otherwise true to the wonderful tufte package for R—all baked together into a small package providing another template.

We support *italic* aka *em* and **strong** annotations for text, as well as `code` snippets.

The package name is a standard package naming recursion: *tint is not tufte*.

The remainder of the tufte skeleton document follows as is, with only marginal changes to refer to this package for code.

and its underlying sources are included as pdf/skeleton.Rmd.

Here is a screenshot of the book format (which was added with release 0.1.0), showing a chapter-opening page on the left:

Figures

Margin Figures

Images and graphics play an integral role in Tufte's work. To place figures in the margin you can use the **knitr** chunk option `fig.margin = TRUE`. For example:

```
library(ggplot2)
mtcars2 <- mtcars
mtcars2$am <- factor(
  mtcars$am, labels = c('automatic', 'manual')
)
ggplot(mtcars2, aes(hp, mpg, color = am)) +
  geom_point() + geom_smooth() +
  theme(legend.position = 'bottom')
```

```
## `geom_smooth()` using method = 'loess'
```

Note the use of the `fig.cap` chunk option to provide a figure caption. You can adjust the proportions of figures using the `fig.width` and `fig.height` chunk options. These are specified in inches, and will be automatically scaled down to fit within the handout margin.

Figure 1: MPG vs horsepower, colored by transmission.

Arbitrary Margin Content

In fact, you can include anything in the margin using the **knitr** engine named `marginfigure`. Unlike R code chunks ```{r}, you write a chunk starting with ```{marginfigure} instead, then put the content in the chunk. See an example on the right about the first fundamental theorem of calculus.

For the sake of portability between LaTeX and HTML, you should keep the margin content as simple as possible (syntax-wise) in the `marginfigure` blocks. You may use simple Markdown syntax like `**bold**` and `_italic_` text, but please refrain from using footnotes, citations, or block-level elements (e.g. blockquotes and lists) there.

We know from *the first fundamental theorem of calculus* that for x in $[a, b]$:

$$\frac{d}{dx}\left(\int_a^x f(u)\,du\right) = f(x).$$

10 Tint Is Not Tufte

Full Width Figures

You can arrange for figures to span across the entire page by using the chunk option `fig.fullwidth = TRUE`.

```
ggplot(diamonds, aes(carat, price)) + geom_smooth() +
  facet_grid(~ cut)
```

```
## `geom_smooth()` using method = 'gam'
```

Figure 2: A full width figure.

Other chunk options related to figures can still be used, such as `fig.width`, `fig.cap`, `out.width`, and so on. For full width figures, usually `fig.width` is large and `fig.height` is small. In the above example, the plot size is 10×2.

Main Column Figures

Besides margin and full width figures, you can of course also include figures constrained to the main column. This is the default type of figures in the LaTeX/HTML output.

```
ggplot(diamonds, aes(cut, price)) + geom_boxplot()
```

PDF Font Variants

Since release 0.1.1 additional fonts can be specified in the YAML header. Using the following lines in the YAML header

```
latexfonts:
  - package: newtxmath
    options:
      - cmintegrals
      - cmbraces
  - package: ebgaramond-maths
  - package: nimbusmononarrow
```

yields output as in the following screenshot of the first two vignette pages:

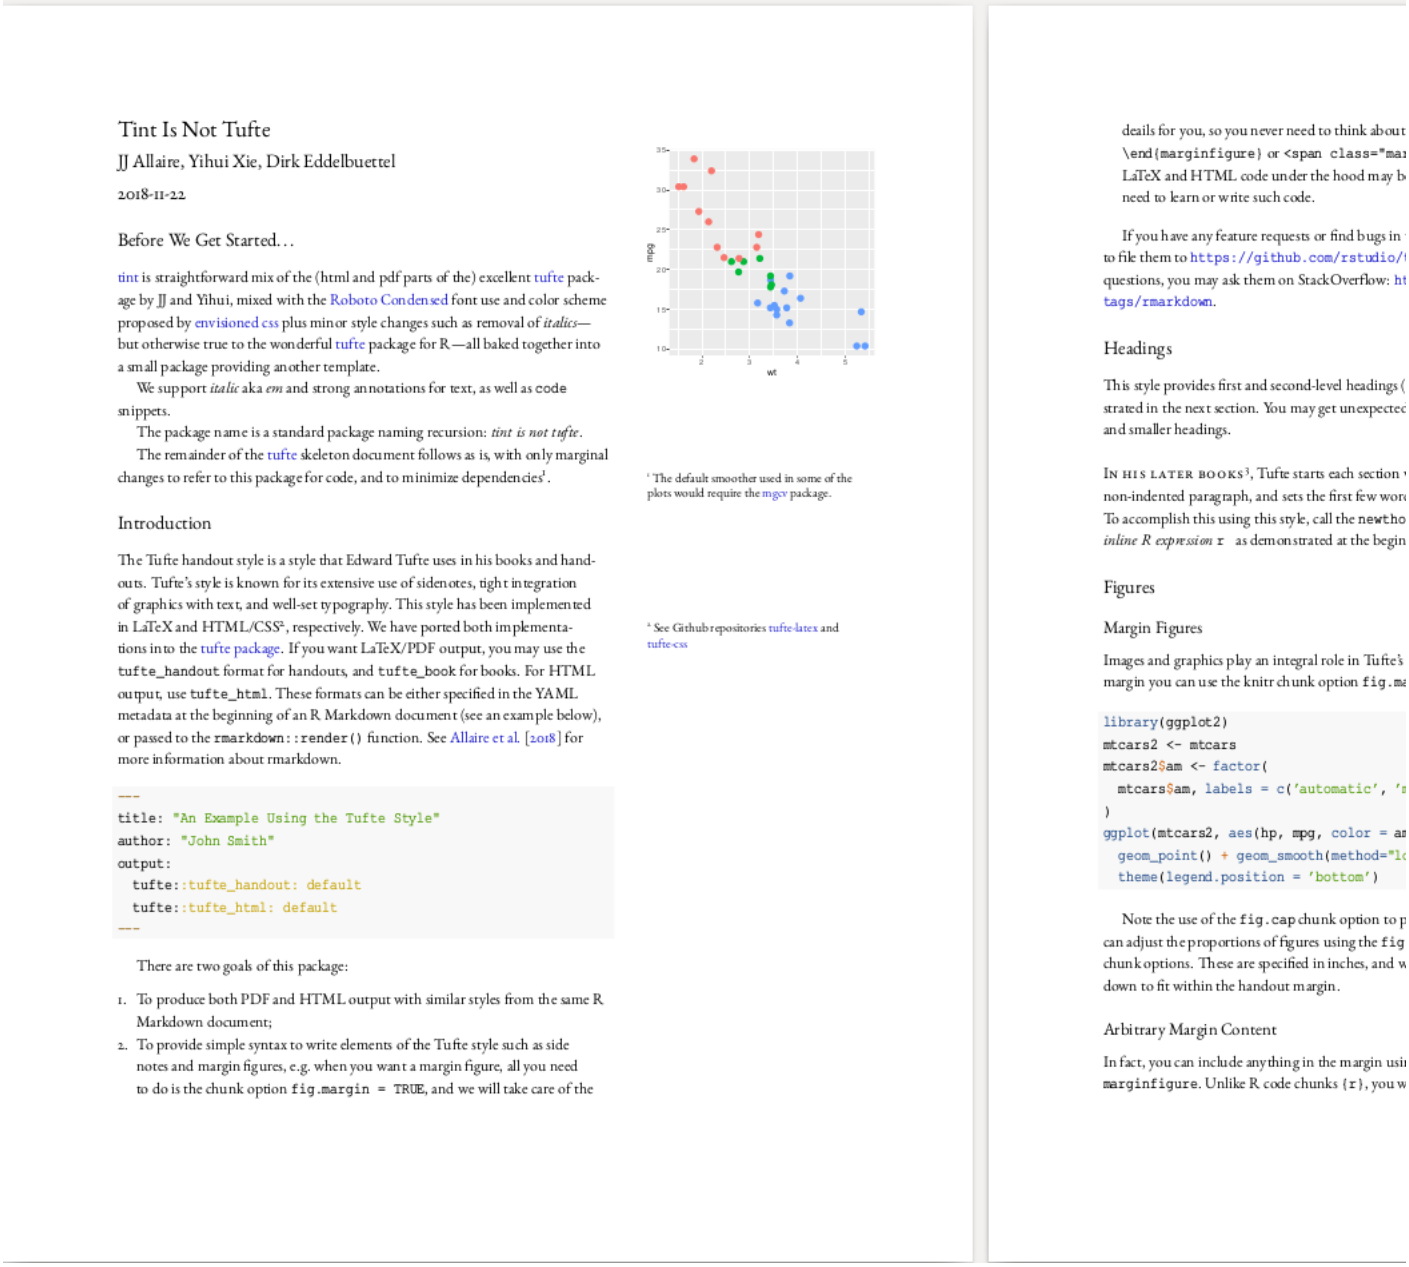

Tint Is Not Tufte

JJ Allaire, Yihui Xie, Dirk Eddelbuettel

2018-11-22

Before We Get Started…

tint is straightforward mix of the (html and pdf parts of the) excellent tufte package by JJ and Yihui, mixed with the Roboto Condensed font use and color scheme proposed by envisioned css plus minor style changes such as removal of *italics*—but otherwise true to the wonderful tufte package for R—all baked together into a small package providing another template.

We support *italic* aka *em* and strong annotations for text, as well as code snippets.

The package name is a standard package naming recursion: *tint is not tufte*.

The remainder of the tufte skeleton document follows as is, with only marginal changes to refer to this package for code, and to minimize dependencies[1].

Introduction

The Tufte handout style is a style that Edward Tufte uses in his books and handouts. Tufte's style is known for its extensive use of sidenotes, tight integration of graphics with text, and well-set typography. This style has been implemented in LaTeX and HTML/CSS[2], respectively. We have ported both implementations into the tufte package. If you want LaTeX/PDF output, you may use the `tufte_handout` format for handouts, and `tufte_book` for books. For HTML output, use `tufte_html`. These formats can be either specified in the YAML metadata at the beginning of an R Markdown document (see an example below), or passed to the `rmarkdown::render()` function. See Allaire et al. [2018] for more information about rmarkdown.

```
---
title: "An Example Using the Tufte Style"
author: "John Smith"
output:
  tufte::tufte_handout: default
  tufte::tufte_html: default
---
```

There are two goals of this package:

1. To produce both PDF and HTML output with similar styles from the same R Markdown document;
2. To provide simple syntax to write elements of the Tufte style such as side notes and margin figures, e.g. when you want a margin figure, all you need to do is the chunk option `fig.margin = TRUE`, and we will take care of the

[1] The default smoother used in some of the plots would require the mgcv package.

[2] See Github repositories tufte-latex and tufte-css

deails for you, so you never need to think about
\end{marginfigure} or <span class="mar
LaTeX and HTML code under the hood may b
need to learn or write such code.

If you have any feature requests or find bugs in
to file them to https://github.com/rstudio/
questions, you may ask them on StackOverflow: ht
tags/rmarkdown.

Headings

This style provides first and second-level headings (
strated in the next section. You may get unexpectec
and smaller headings.

In his later books[3], Tufte starts each section
non-indented paragraph, and sets the first few wor
To accomplish this using this style, call the newtho
inline R expression `r` as demonstrated at the begin

Figures

Margin Figures

Images and graphics play an integral role in Tufte's
margin you can use the knitr chunk option fig.ma

```
library(ggplot2)
mtcars2 <- mtcars
mtcars2$am <- factor(
  mtcars$am, labels = c('automatic', '
)
ggplot(mtcars2, aes(hp, mpg, color = a
  geom_point() + geom_smooth(method="l
  theme(legend.position = 'bottom')
```

Note the use of the `fig.cap` chunk option to
can adjust the proportions of figures using the fig
chunk options. These are specified in inches, and
down to fit within the handout margin.

Arbitrary Margin Content

In fact, you can include anything in the margin usi
`marginfigure`. Unlike R code chunks `{r}`, you w

A second example is using

```
latexfonts:
  - package: lato
    options: default
  - package: FiraMono
linkcolor: "0.3,0.3,0.6"
```

which also show the `linkcolor` option resulting in

Tint Is Not Tufte

JJ Allaire, Yihui Xie, Dirk Eddelbuettel

2018-11-22

Before We Get Started…

tint is straightforward mix of the (html and pdf parts of the) excellent tufte package by JJ and Yihui, mixed with the Roboto Condensed font use and color scheme proposed by envisioned css plus minor style changes such as removal of *italics*—but otherwise true to the wonderful tufte package for R—all baked together into a small package providing another template.

We support *italic* aka *em* and **strong** annotations for text, as well as code snippets.

The package name is a standard package naming recursion: *tint is not tufte*.

The remainder of the tufte skeleton document follows as is, with only marginal changes to refer to this package for code, and to minimize dependencies[1].

Introduction

The Tufte handout style is a style that Edward Tufte uses in his books and handouts. Tufte's style is known for its extensive use of sidenotes, tight integration of graphics with text, and well-set typography. This style has been implemented in LaTeX and HTML/CSS[2], respectively. We have ported both implementations into the **tufte** package. If you want LaTeX/PDF output, you may use the `tufte_handout` format for handouts, and `tufte_book` for books. For HTML output, use `tufte_html`. These formats can be either specified in the YAML metadata at the beginning of an R Markdown document (see an example below), or passed to the `rmarkdown::render()` function. See Allaire et al. [2018] for more information about **rmarkdown**.

```
---
title: "An Example Using the Tufte Style"
author: "John Smith"
output:
  tufte::tufte_handout: default
  tufte::tufte_html: default
---
```

There are two goals of this package:

[1] The default smoother used in some of the plots would require the mgcv package.

[2] See Github repositories tufte-latex and tufte-css

1. To produce both PDF and HTML output same R Markdown document;
2. To provide simple syntax to write elemer as side notes and margin figures, e.g. whe all you need to do is the chunk option fig we will take care of the deails for you, so about `\begin{marginfigure} \end{` `class="marginfigure"> </span>`; tl under the hood may be complicated, but write such code.

If you have any feature requests or find b hesitate to file them to `https://github.` `issues`. For general questions, you may ask `http://stackoverflow.com/tags/rma`

Headings

This style provides first and second-level he demonstrated in the next section. You may you try to use ### and smaller headings.

In his later books[3], Tufte starts each sectic space, a non-indented paragraph, and sets t sentence in small caps. To accomplish this u `newthought()` function in **tufte** in an *inlin* strated at the beginning of this paragraph.[4]

Figures

Margin Figures

Images and graphics play an integral role in figures in the margin you can use the **knitr** c = TRUE. For example:

```
library(ggplot2)
mtcars2 <- mtcars
mtcars2$am <- factor(
  mtcars$am, labels = c('automat
)
ggplot(mtcars2, aes(hp, mpg, col
  geom_point() + geom_smooth(met
  theme(legend.position = 'botto
```

Status

The package is now on CRAN and supports both pdf and html output for handouts, as well as pdf format for book-length documents. This latter style can be used with `rmarkdown` or `bookdown`.

Usage

Install from CRAN as any other package via

```
R> install.packages("tint")
```

and then use as a Markdown template via RStudio, or call `rmarkdown::render()` directly. We have also used the book-length format via `bookdown::render_book()`.

Requirements

Beyond the R package dependencies a working `pandoc` binary is needed. RStudio installs its own copy, otherwise do what is needed on your OS (*i.e.* something like `sudo apt-get install pandoc pandoc-citeproc`).

The pdf mode requires a fairly complete LaTeX installation. On Debian/Ubuntu, the following packages should provide working set:

```
texlive-base
texlive-binaries
```

```
texlive-fonts-extra
texlive-fonts-recommended
texlive-generic-recommended
texlive-humanities
texlive-latex-base
texlive-latex-extra
texlive-latex-recommended
texlive-pictures
```

See Also

- binb: Binb is not Beamer: Stylish pdf Presentations from RMarkdown
- linl: Linl is not Letter: LaTeX letters from RMarkdown
- pinp: Pinp is not PNAS: Snazzy one-or two column short papers or vignettes

and the minm package installing all of them.

Authors

Dirk Eddelbuettel and Jonathan Gilligan, borrowing heavily from JJ and Yihui in tufte, Dave Liepman in the underlying tufte-css, Jef Lippiat in envisioned css and also relying on the work of the Tufte-LaTeX authors.

License

GPL-3 for my parts and the code from tufte, mostly MIT for what comes from Dave Liepman and Jef Lippiat.

Initially created: Sat Sep 24 17:54:31 CDT 2016

Last modified: Sat May 30 08:26:35 CDT 2020