

Voronoi Homogeneity Analysis of Categorical Data

Jan de Leeuw

June 8, 2026

TBD

Table of contents

1	Introduction	3
1.1	Homogeneity Analysis	3
1.2	Voronoi Analysis	5
2	Algorithm	8
2.1	Initial Configuration	8
2.2	Monotone Regression	8
2.3	Majorization	9
3	Constraints	10
3.1	Regression Constraints	10
3.2	Configuration Constraints	10
3.2.1	Column-Centering	10
3.2.2	Orthogonality	11
3.2.3	Rank Constraints	11
3.2.4	Centroid	11
4	Software	13
4.1	Main	13
4.2	Subroutines	14
4.3	Plots	14

5	Examples	15
5.1	Small Example	15
5.2	GALO	15
5.3	Cetacea	21
6	Appendix A: Normalized Monotone Regression	30
7	Appendix B: Majorized Alternating Least Squares (MALS)	31
8	Appendix C: Cetacea	33
	References	34

Note: This is a working manuscript which will be expanded/updated frequently. All suggestions for improvement are welcome. All Rmd, tex, html, pdf, R, and C files are in the public domain. Attribution will be appreciated, but is not required. The files can be found at <https://github.com/deleeuw/voronoi>

1 Introduction

1.1 Homogeneity Analysis

Homogeneity Analysis (HGA), a.k.a. *Multiple Correspondence Analysis (MCA)*, can be introduced and implemented in many different ways¹. We refer to Guttman (1941), Tenenhaus and Young (1985), Bekker and De Leeuw (1988), Gifi (1990), Greenacre and Blasius (2006), Le Roux and Rouanet (2010), Husson et al. (2016), and De Leeuw (2023) for a bouquet of discussions and interpretations of the equations and algorithms defining the HGA technique.

A *variable* is a function that maps on a (finite or infinite) domain of *objects* into a (finite or infinite) codomain of *values*. In HGA the data are the values of m variables on the same *carrier*, a finite subset the domain consisting of n objects. Each variable j has a finite number k_j of *categories*. The categories constitute the *range* of the variable for the n objects in the carrier. Note that all variables have the same carrier. Each object maps into a unique category, and each category contains a subset of objects from the carrier. We also say that a category has a number of objects that “belong to” the category.

Here is a small example with $n = 10$ and $m = 3$, taken from Gifi (1990), page 65. In the github voronoi repository these data are in data/small.R.

	[,1]	[,2]	[,3]
[1,]	"a"	"p"	"u"
[2,]	"b"	"q"	"v"
[3,]	"a"	"r"	"v"
[4,]	"a"	"p"	"u"
[5,]	"b"	"p"	"v"
[6,]	"c"	"p"	"v"
[7,]	"a"	"p"	"u"
[8,]	"a"	"p"	"v"
[9,]	"c"	"p"	"v"
[10,]	"a"	"p"	"v"

The key mathematical object in HGA is the *indicator matrix*, a classical way to code categorical data². For a variable j with k_j categories it is an $n \times k_j$ binary matrix G_j in which each row i contains a single element equal to one, indicating into which category the object i maps for variable j . The cross product $D_j := G_j' G_j$ is diagonal, with the *marginal frequencies* of the categories on the diagonal. For two different variables the crossproduct $C_{j\ell} = G_j' G_\ell$ is the

¹Since PCA and MCA have three-letter acronyms I added the G of Gifi to the HA of Homogeneity Analysis.

²Since the indicator matrix is the core of the Gifi system we avoid the irreverent alternative “dummy coding”.

$k_j \times k_\ell$ cross table or contingency table of the two variables. Here are the three indicator matrices of our small example, next to each other.

	a	b	c	p	q	r	u	v
[1,]	1	0	0	1	0	0	1	0
[2,]	0	1	0	0	1	0	0	1
[3,]	1	0	0	0	0	1	0	1
[4,]	1	0	0	1	0	0	1	0
[5,]	0	1	0	1	0	0	0	1
[6,]	0	0	1	1	0	0	0	1
[7,]	1	0	0	1	0	0	1	0
[8,]	1	0	0	1	0	0	0	1
[9,]	0	0	1	1	0	0	0	1
[10,]	1	0	0	1	0	0	0	1

We now deviate from the usual Gifi and French approaches (Husson et al. (2016)) and define HGA as a form of non-metric multidimensional scaling, using the *stress* loss function (Kruskal (1964a), Kruskal (1964b)). Define³

$$\sigma(X, Y_1, \dots, Y_m, \Delta_1, \dots, \Delta_m) := \sum_{j=1}^m \sum_{i=1}^n \sum_{\ell=1}^{k_j} (\delta_{i\ell}^j - d(x_i, y_\ell^j))^2, \quad (1)$$

with $d(x_i, y_\ell^j)$ the Euclidean distance between row i of X and row ℓ of Y_j .

HGA minimizes (1) over all $n \times p$ configurations X satisfying $X'X = I$, over all Y_j , and over all Δ_j that satisfy $\delta_{i\ell}^j = 0$ whenever $g_{i\ell}^j = 1$. All other elements of the Δ_j are only constrained to be non-negative.

geometry, disparities

If

$$\sigma_\star(X, Y_1, \dots, Y_m) := \min_{\Delta_1, \dots, \Delta_m} \sigma(X, Y_1, \dots, Y_m, \Delta_1, \dots, \Delta_m), \quad (2)$$

then

$$\sigma_\star(X, Y_1, \dots, Y_m) = \sum_{j=1}^m \sum_{i=1}^n \sum_{\ell=1}^{k_j} g_{i\ell}^j d^2(x_i, y_\ell^j). \quad (3)$$


Next define

$$\sigma_{\star\star}(X) := \min_{Y_1, \dots, Y_m} \sigma_\star(X; Y_1, \dots, Y_m). \quad (4)$$

³The symbol $:=$ is used for definitions

The minimum of (3) over the Y_j is attained at the centroids $\hat{Y}_j := D_j^{-1}G_j'X$, and if we substitute these optimal $\hat{Y}_j$ in (3) we see that $\sigma_{**}(X)$ is indeed equal to the sum of squares of all lines defining the stars. Minimizing $\sigma_{**}(X)$ over $X'X = I$, and thus minimizing (1) over (X, Y_j, Δ_j) , defines HGA. Actually computing the solution turns out to be a straightforward eigenvalue-eigenvector problem. The details are in the publications we referenced at the beginning of this section.

A HGA in two dimensions produces of our small example the following three star plots. Objects are numbered and in BLUE, categories have bigger labels and are in RED. Note that there are ten objects, but the sets of objects (1, 4, 7), (8, 10), and (6, 9) have the same *profile* and consequently get mapped into the same object-point. Thus there are at most six different object-points. The analysis minimizes the sum of squares of the length of all black lines in the three plots, under the condition that the matrix of object scores is column-centered and orthonormal. We can think of the results as a form of *graph drawing*, where the graph is the union of the m bipartite graphs of all m “belonging to” relations (De Leeuw and Michailidis (2000), Michailidis and De Leeuw (2001)).

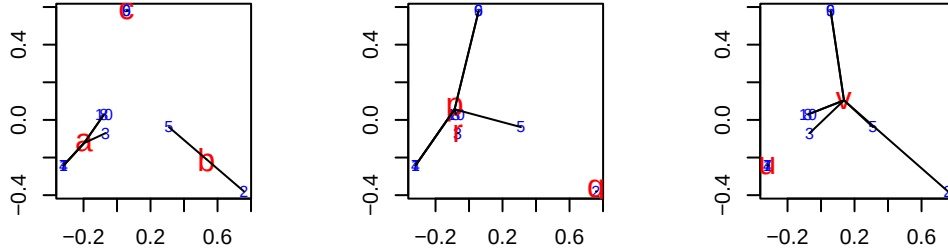

1.2 Voronoi Analysis

Although using loss function (1) makes HGA a form of non-metric multidimensional scaling there are some important differences with the more familiar MDS versions minimizing stress. There is no local minima problem in HGA, because it turns out to be a symmetric eigenvalue problem. In HGA, unlike in MDS, we impose the constraint $X'X = I$. Also, and perhaps most importantly, in HGA we do not really expect the minimum loss function value to be zero, or even close to zero. The loss function measures deviations from a very unrealistic “model”. Zero loss would imply all object-points coincide with all category-points they belong to. This can only be realized, except in trivial cases, if all object and category-points map into a single point, which is prohibited by the orthonormality constraint on the object scores. Thus we get a perfectly determinate and stable solution, at low computational cost, but by imposing strong constraints on the disparities and a rather arbitrary normalization. We can get around this seemingly unfortunate situation by admitting we are not fitting or testing a “model”, but we are creating “best” drawings of the bipartite graphs that constitute the data.

The lack of a realistic model makes it interesting to continue use the more general loss function

$$\sigma(X, Y_1, \dots, Y_m, \Delta_1, \dots, \Delta_m) := \sum_{j=1}^m \sum_{i=1}^n \sum_{\ell=1}^{k_j} w_{i\ell}^j (\delta_{i\ell}^j - d(x_i, y_\ell^j))^2, \quad (5)$$

with the constraints that if $g_{i\ell}^j = 1$ then merely $\delta_{i\ell}^j \leq \delta_{i\nu}^j$ for all $\nu = 1, \dots, k_j$. This is significantly weaker than the HGA constraints, which require the mn disparities $\delta_{i\ell}^j$ to be zero. If object i belongs to category ℓ of variable j we do no longer require the object-point to coincide with the category-point, but we merely require that the object-point is at least as close to category-point ℓ as to any of the other $k_j - 1$ category-points of that variable.

Voronoi Homogeneity Analysis (VHA) of categorical data minimizes loss function (1) over X , over the Y_j and over the Δ_j satisfying the relaxed ordinal constraints. It is consequently another form of non-metric (ordinal) multidimensional scaling. To be more precise, we have m linked non-metric multidimensional unfolding problems for the binary matrices G_j , which are “linked” because they share the same X .

Because of the different ordinal constraints on the disparities, the plots corresponding with this analysis are different. As in HGA there is a plot for each variable j with both n object-points and k_j category-points. The k_j category-points are the *generators* of k_j *Voronoi regions* that partition the space. Voronoi region $\mathcal{V}_\ell^j$ is the region of space where the points are at least as close to generator y_ℓ^j as to any of the other generators of variable j . And loss (4) is zero (for a variable) if all object-points are in the “correct” Voronoi region, i.e. in the Voronoi region of the generator corresponding with the category they belong to.

One (inefficient, but conceptually easy) way of constructing Voronoi regions in the plane is to draw the perpendicular bisectors of the (hypothetical) lines connecting all pairs of category-points of a variable. In higher dimensions $p > 2$ the bisectors are planes of dimension $p - 1$. The convex polyhedral regions thus formed, some bounded and some unbounded, define the Voronoi regions⁴. The literature on properties and computation of Voronoi regions is large, and we refer to the textbooks of Okabe et al. (2000) and Aurenhammer et al. (2013).

Since the category-point itself is obviously in its own Voronoi region and since Voronoi regions are convex it follows that if we make stars by connecting category-points with object points as in HGA then we actually require each star to be in its Voronoi region. It is no longer true that a category-point is the centroid of points of the objects belonging to the category. The category-point can even be outside the convex hull of the object-points belonging to the category.

The constraint $X'X = I$ from HGA is no longer imposed directly, but we somehow have to deal with the fact that in VHA the minimum of loss function (1) is always zero. The trivial

⁴In the plane a Voronoi region is unbounded if and only if its generator is on the boundary of the convex hull of all generators.

solution, in which all points and regions collapse into a single point and all Δ_j are zero, is always available and not excluded by the constraints. But, perhaps more urgently, we have to deal with the types of degenerate solutions familiar from multidimensional unfolding (Heiser (1981), De Leeuw (1983), Busing (2010)). For example, we can collapse all category-points of a variable into a single point and put all object-points on a sphere with the category-point at its center. Then all distances between category and object-points are the same and we can choose all disparities equal to that distance value and obtain loss zero.

We will use some constraints that tend to counteract degeneracy. Also, we always start our iterations with the HGA analysis, which in most cases already has small loss. Then we perform iterations until either the distances do not change from one iteration to the next (up to some epsilon) or the loss becomes zero (up to some epsilon) or we have reached the maximum number of iterations allowed.

2 Algorithm

We use an *Alternating Least Squares* or *ALS* algorithm, similar to the approach used in many other non-metric scaling methods, to minimize loss (??). For context, see Borg and Groenen (2005). We alternate minimization over $\Delta_1, \dots, \Delta_m$ for given X and $Y_1 \dots Y_m$ with minimization over X and $Y_1 \dots Y_m$ for given $\Delta_1, \dots, \Delta_m$. Using superscript (μ) for the iteration index we can write for an ALS iteration

$$(\Delta_1^{(\mu)}, \dots, \Delta_m^{(\mu)}) = \underset{\Delta_1, \dots, \Delta_m}{\operatorname{argmin}} \sigma(X^{(\mu)}, Y_1^{(\mu)}, \dots, Y_m^{(\mu)}, \Delta_1, \dots, \Delta_m), \quad (6a)$$

$$(X^{(\mu+1)}, Y_1^{(\mu+1)}, \dots, Y_m^{(\mu+1)}) = \underset{X, Y_1, \dots, Y_m}{\operatorname{argmin}} \sigma(X, Y_1, \dots, Y_m, \Delta_1^{(\mu)}, \dots, \Delta_m^{(\mu)}). \quad (6b)$$

The first substep (6a) of iteration (μ) solves a monotone regression problem for a simple partial order, in which one of k_j elements must be smaller than the other $k_j - 1$ elements. The second substep (6b) solves a metric multidimensional scaling problem. This second subproblem cannot be solved completely, because it would need an infinite iterative process by itself. Thus the second substep (6b) consists of a finite number of *inner iterations* within the second substep of a single ALS *outer iteration*.

2.1 Initial Configuration

In all our analysis we use HGA as the initial configuration for both object-scores and category-scores. The algorithm for HGA is the ALS method used in Gifi (1990) to compute the truncated SVD. The repository includes mca.R

2.2 Monotone Regression

The nm monotone regressions are applied for each object i and each variable j . Forgetting about all these indices for the moment we need to minimize the sum of squares $\|\delta - d\|^2$ over δ , where one of the elements, say δ_ν , must be smaller than or equal to all others.

This can be solved by using monotone regression with the primary approach to ties (Kruskal (1964b), De Leeuw (1977b)), treating all δ_ℓ with $\ell \neq \nu$ as ties.

2.3 Majorization

For the inner iterations we use *smacof* majorization steps (De Leeuw ([1977a](#))). Because of the structure of the problem it is advantageous to decompose a majorization step into two substeps: updating X for Y_j fixed at its current values and updating the Y_j for X fixed at its current value. This could be called *Alternating Majorization*. Details are in Appendix B.

3 Constraints

3.1 Regression Constraints

In this paper we use the constraints

$$\sum_{\ell=1}^{k_j} w_{i\ell}^j (\delta_{i\ell}^j - \bar{\delta}_{ij}^j)^2 = w_{i\star}^j, \quad (7)$$

for all I and j , with $\bar{\delta}_{ij}^j$ the weighted mean of the $\delta_{i\ell}^j$. In addition, of course, the $\delta_{i\ell}^j$ must satisfy the ordinal constraints. Constraint (7) explicitly excludes the possibility that the $\delta_{i\ell}^j$ for given i and j are equal for all ℓ .

3.2 Configuration Constraints

Separation

3.2.1 Column-Centering

If we require $X'W_re = 0$ then the stationary equations are $W_r(X - \bar{X}) = W_re\lambda'$ and thus $X = \bar{X} + e\lambda'$ with $\lambda' = -e'W_r\bar{X}/e'W_re$ or

$$X = (I - \frac{ee'W_r}{e'W_re})\bar{X}$$

This is different from updating X as $J_n\tilde{X}$ and Y as $\tilde{Y} - n^{-1}ee'\tilde{X}$. With this alternative update, in which we subtract the column-means of $\tilde{X}$ from both $\tilde{X}$ and $\tilde{Y}$, the distances are the same before and after centering. Thus the distances in all iterations, and consequently the loss function values, are the same with or without this type of centering.

In general it is advantageous to require $e'X = 0$ because the third term in equation (??) becomes independent of X , and thus the (X, Y) minimization step is separable (can be solved for X and Y separately).

3.2.2 Orthogonality

If we require $X'W_rX = I$ we have the stationary equations $\bar{X} = XM$, with M a symmetric matrix of Lagrange multipliers. Thus

$$X = \text{procrustus}(\bar{X}) := \bar{X}(\bar{X}'W_r\bar{X})^{-\frac{1}{2}}$$

. If we require both $X'W_rX = I$ and $X'W_re = 0$ we have

$$X = \text{procrustus}\left(\left(I - \frac{ee'W_r}{e'W_re}\right)\bar{X}\right)$$

3.2.3 Rank Constraints

One of the main themes in Gifi (1990) is that the $k_j \times p$ matrices of category-scores can be constrained to be of rank $r < p$. We will restrict ourselves in this paper to $r = 1$, which defines what Gifi calls *single quantifications*. If all variables are restricted to have single quantifications then a HGA becomes equivalent to a PCA of the transformed variables.

In VHA the Voronoi regions of single variables become parallel strips. The category-points of a variable are on a line through the origin, and the Voronoi lines or planes are parallel and perpendicular to the line with the category-points.

$$\text{tr}(Y - za')'W_c(Y - za') = -2z'W_cYa + z'W_cz.a'a$$

So rank one approximation of $\tilde{Y} + n^{-1}ee'(X - \tilde{X})$. If X is column-centered then of course $\tilde{Y} - ee'\tilde{X}$.

3.2.4 Centroid

A more complicated restriction is $Y = D^{-1}G'X$, possibly together with $X'X = I$ and $e'X = 0$. The *centroid constraints* effectively eliminate the Y_j from the optimization problem. We have to adapt the majorization method to take the constraints into account.

Consider a single variable j and the corresponding $n \times k_j$ distance matrix $D_j(X)$. We have $d_{i\ell}(X) = \|t\|$, where $t := X'r$ and $r := e_i - d_i^{-1}g_i$. Now

$$d_{i\ell} = \sqrt{t't} \geq \frac{1}{\sqrt{\tilde{t}'\tilde{t}}} \tilde{t}'t = \frac{1}{\sqrt{\tilde{t}'\tilde{t}}} \tilde{t}'X'r = \text{tr } X' \frac{r\tilde{t}'}{\sqrt{\tilde{t}'\tilde{t}}}, \quad (8a)$$

$$d_{i\ell}^2 = t't = \text{tr } X'rr'X, \quad (8b)$$

with $\tilde{t} := \tilde{X}'r$.

The loss component for the variable is

$$\sigma_j(X) = \sum_{i=1}^n \sum_{\ell=1}^{k_j} w_{i\ell} (\delta_{i\ell} - d_{ij}(X))^2$$

4 Software

4.1 Main

The main program `voronoiHomogeneityAnalysis()`, aliased as `vha()`, has the following arguments (with default values).

```
voronoiHomogeneityAnalysis <- function(theData, # n x m matrix with categorical variables
                                       ndim = 2, # dimensionality
                                       wght = NULL,
                                       dnorm = FALSE,
                                       xcent = FALSE,
                                       xnorm = FALSE,
                                       yrank = ndim,
                                       itmax = 1000,
                                       eps = 1e-6,
                                       aps = 1e-6,
                                       verbose = TRUE)
```

- *theData* is an $n \times m$ matrix with n observations on m categorical variables.
- *ndim* is the number of dimensions of the solution.
- *wght* is either NULL or a list of $n \times k_j$ matrices. If *wght* is NULL all weights are one.
- *dnorm* if TRUE the monotone regression is normalized.
- *xcent* if TRUE object scores are W-centered.
- *xnorm* if TRUE object scores are W-orthonormal.
- *yrank* rank restrictions on category-scores. If the length of *yrank* is one it is expanded to a vector of length m .
- *itmax* is the maximum number of iterations.
- *eps* is the cutoff for the change in distances from one iteration to another.
- *aps* is the cutoff for the loss function value. If loss is smaller than *aps* the program stops.
- *verbose* if TRUE iteration information is printed to stdout.

The value returned by the program is a list.

```
return(
  list(
    xmat = xnew,
    ymat = ynew,
    dmat = dnew,
    dhat = dhat,
```

```

    xini = xini,
    yini = yini,
    itel = itel,
    loss = sneu,
    indi = indi,
    ncat = ncat,
    wght = wght
)
)

```

- *xmat* object scores, an $n \times p$ matrix, with p equal to $ndim$.
- *ymat* category-scores, a list of m matrices of dimension $k_j \times p$.
- *dmat* distances, a list of m matrices of dimension $n \times k_j$.
- *dhat* disparities, a list of m matrices of dimension $n \times k_j$.
- *xini* the HGA solution for the object scores,
- *yini* the HGA solution for the category-scores,
- *itel* number of iterations.
- *loss* final value of stress.
- *indi* indicators, a list of m matrices of dimension $n \times k_j$.
- *ncat* number of categories of the m variables.
- *wght* weights, a list of m matrices of dimension $n \times k_j$.


4.2 Subroutines

4.3 Plots


5 Examples

5.1 Small Example

We start with the small example we used before to illustrate HGA.

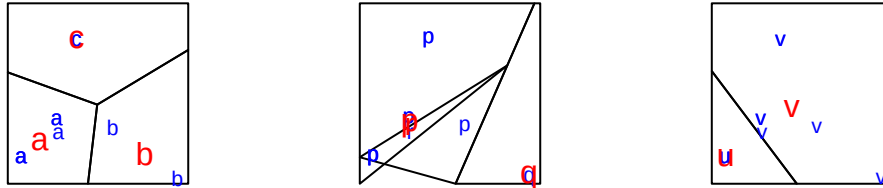

Loss is 0.0000000000 after 443 iterations. If we compare the plots from the Voronoi analysis with the star plots from the initial HGA for this example we see that the algorithm did not have to change much to obtain perfect fit. One thing that does change is that the iterations moves the category-points “p” and “r” for variable 2 very close to each other. At the point where we stop the iterations they are still distinguishable, and thus their perpendicular bisector is still a line in the Voronoi plot. If we would continue iterating “p” and “r” would coincide and there would only be two Voronoi regions: one containing category-point “q” and object-point 2, and one containing all other points. one containing all other.



5.2 GALO

Our next example use the GALO data from Peschar (1975). In the github voronoi repository the data are in data/galo.R. Subjects are 1290 children who in 1959/1960 were in sixth grade of primary school in the city of Groningen. Variables are SEX, IQ (in nine ordered categories), ADV (sixth grade teachers advice on the form of secondary education appropriate for the student), and SES. The categories of ADV are as follows (alphabetically).

- *Agr* Agricultural.
- *Ext* Extended primary (like middle school).
- *Gen* General (like high school).
- *Grls* Extended primary for girls (like middle school).
- *Man* Vocational, including housekeeping.
- *None* No secondary education.

The categories of SES are as follows (again alphabetically).

- *LowWC* Lower white collar.
- *MidWC* Middle white collar.
- *Prof* Professional.
- *Shop* Shopkeepers.
- *Skil* Skilled manual.
- *Unsk* Unskilled Manual.

We start with an HGA of the galo data. The initial value of the loss function is 0.3158339145. The loss function value is computed by using

$$\sigma_{\star}(X, Y_1, \dots, Y_m) := \min_{\Delta_1, \dots, \Delta_m} \sigma(X, Y_1, \dots, Y_m, \Delta_1, \dots, \Delta_m), \quad (9)$$

where X and the Y_j are the HGA solution, and where the minimum over the Δ_j is computed by requiring that $\delta_{i\nu}^j \leq \delta_{i\ell}^j$ if $g_{i\nu}^j = 1$. This is *not* the HGA loss function (5), in which the minimum over the Δ_j is computed by requiring that $\delta_{i\ell}^j = 0$ whenever $g_{i\ell}^j = 1$. Thus we evaluate the HGA solution using the VGA loss function.

For any HGA or VGA solution we can compute a Shepard diagram by plotting the distances and disparities, pooled over all objects (individuals) and variables. The weak regression requirements imply that many disparities will be equal to the corresponding distances. This is illustrated by the diagonal of Figure 1.

The HGA solution can also be used to produce Voronoi plots, which are given in Figure 2 for IQ. We see the familiar horseshoe shape of the object score cloud (the Guttman effect, see De Leeuw (2023)). The category-scores are largely in order along the horseshoe, and as a consequence the Voronoi regions are unbounded and emanate from a point inside the horseshoe. There are some relatively minor deviations from that pattern. Specifically category 1 does not fit the pattern, but that is not too serious because there are only five individuals in that category. There are quite a few misclassifications, i.e. objects in the “wrong” Voronoi region.

The VHA solution has loss equal to 0.0000822448 after 1000 iterations. The voronoi function stopped because the maximum number of iterations was reached. The $d - \hat{d}$ plot in Figure 3 shows a near-perfect fit.

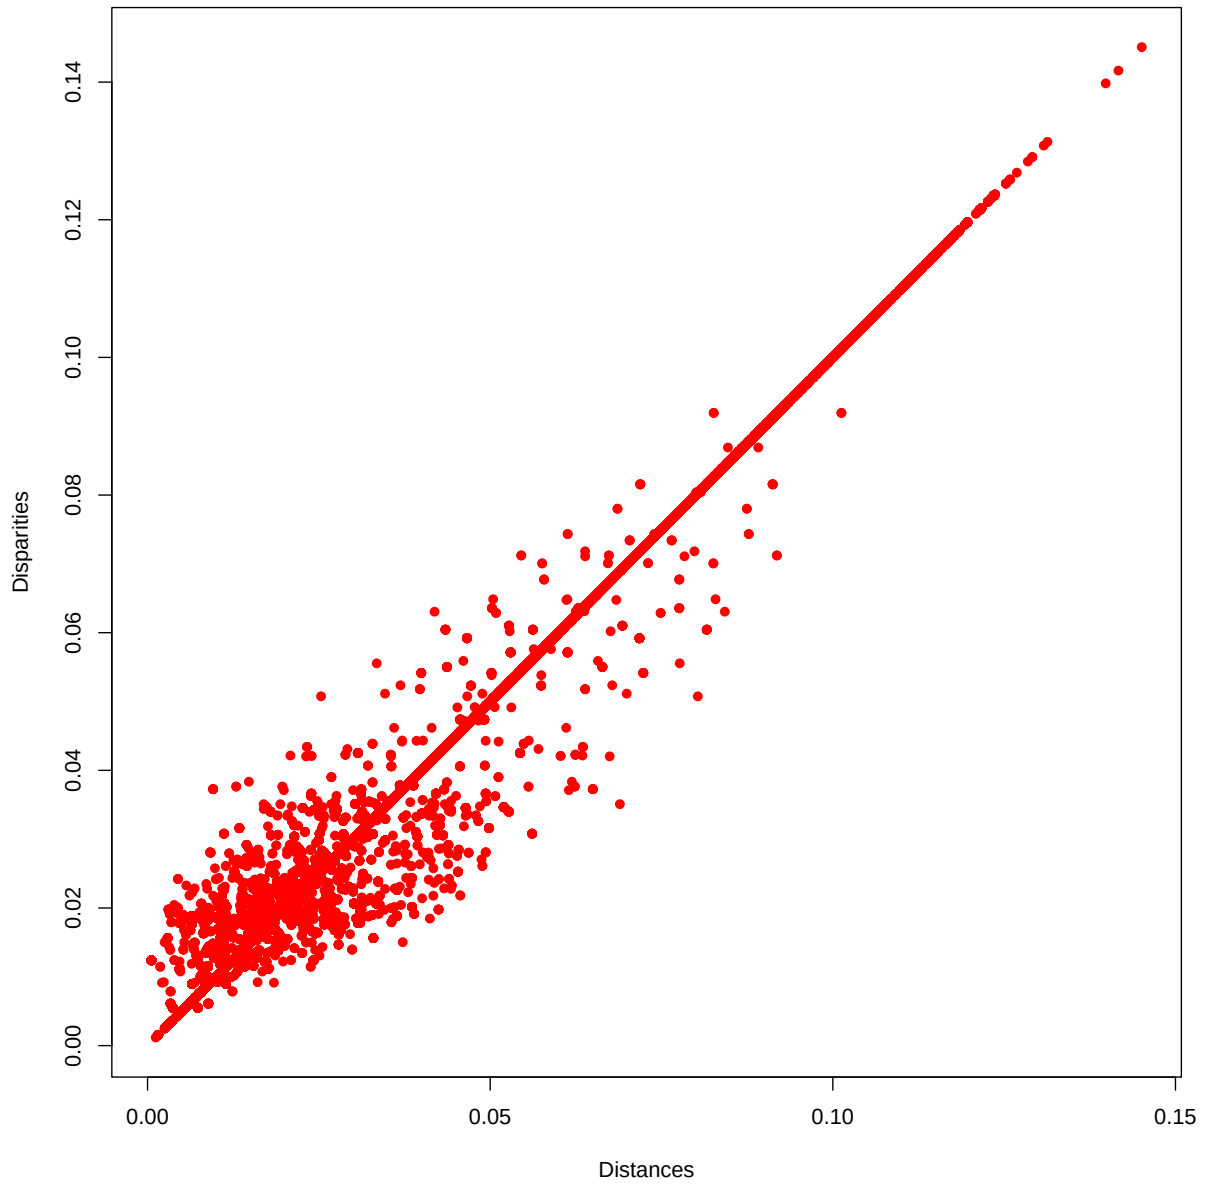


Figure 1: Galo D-Dhat Plot HGA

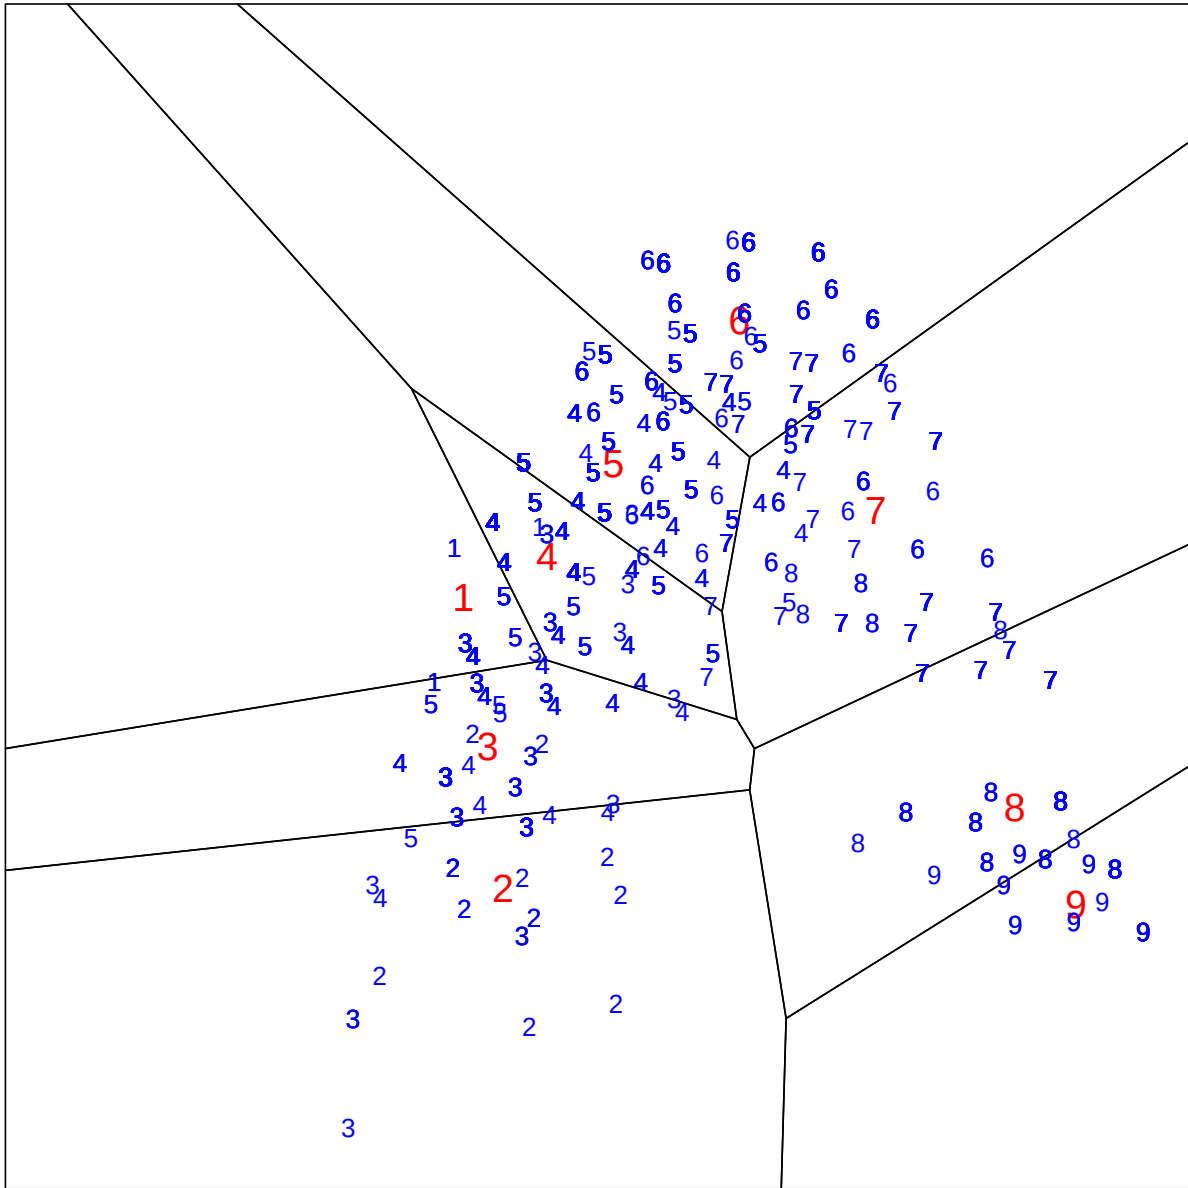


Figure 2: Galo IQ HGA

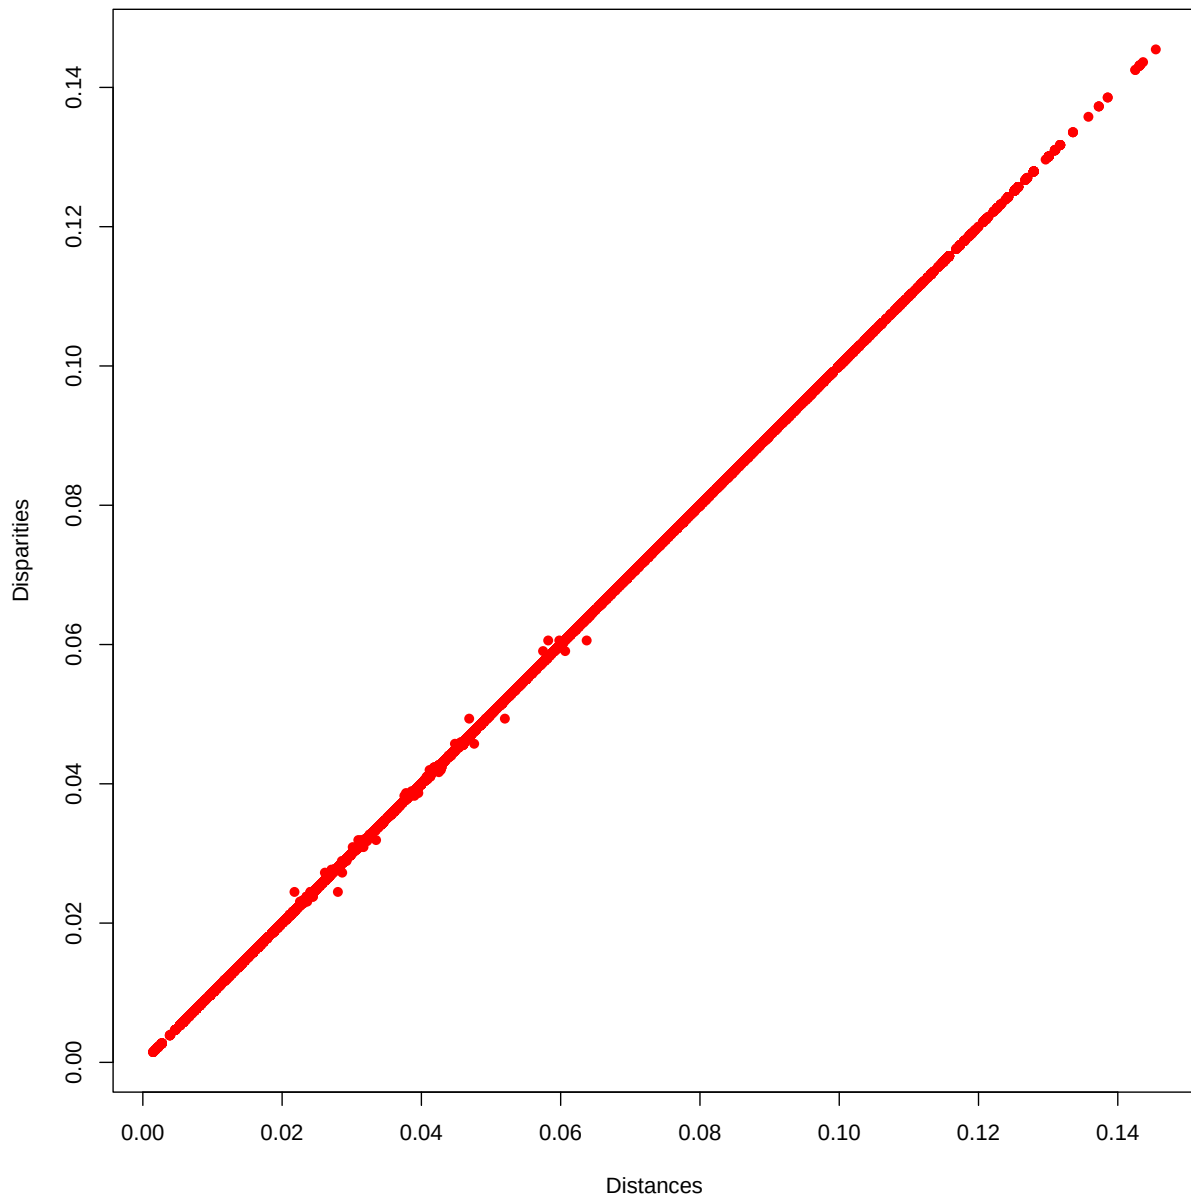


Figure 3: Galo D-Dhat Plot VHA

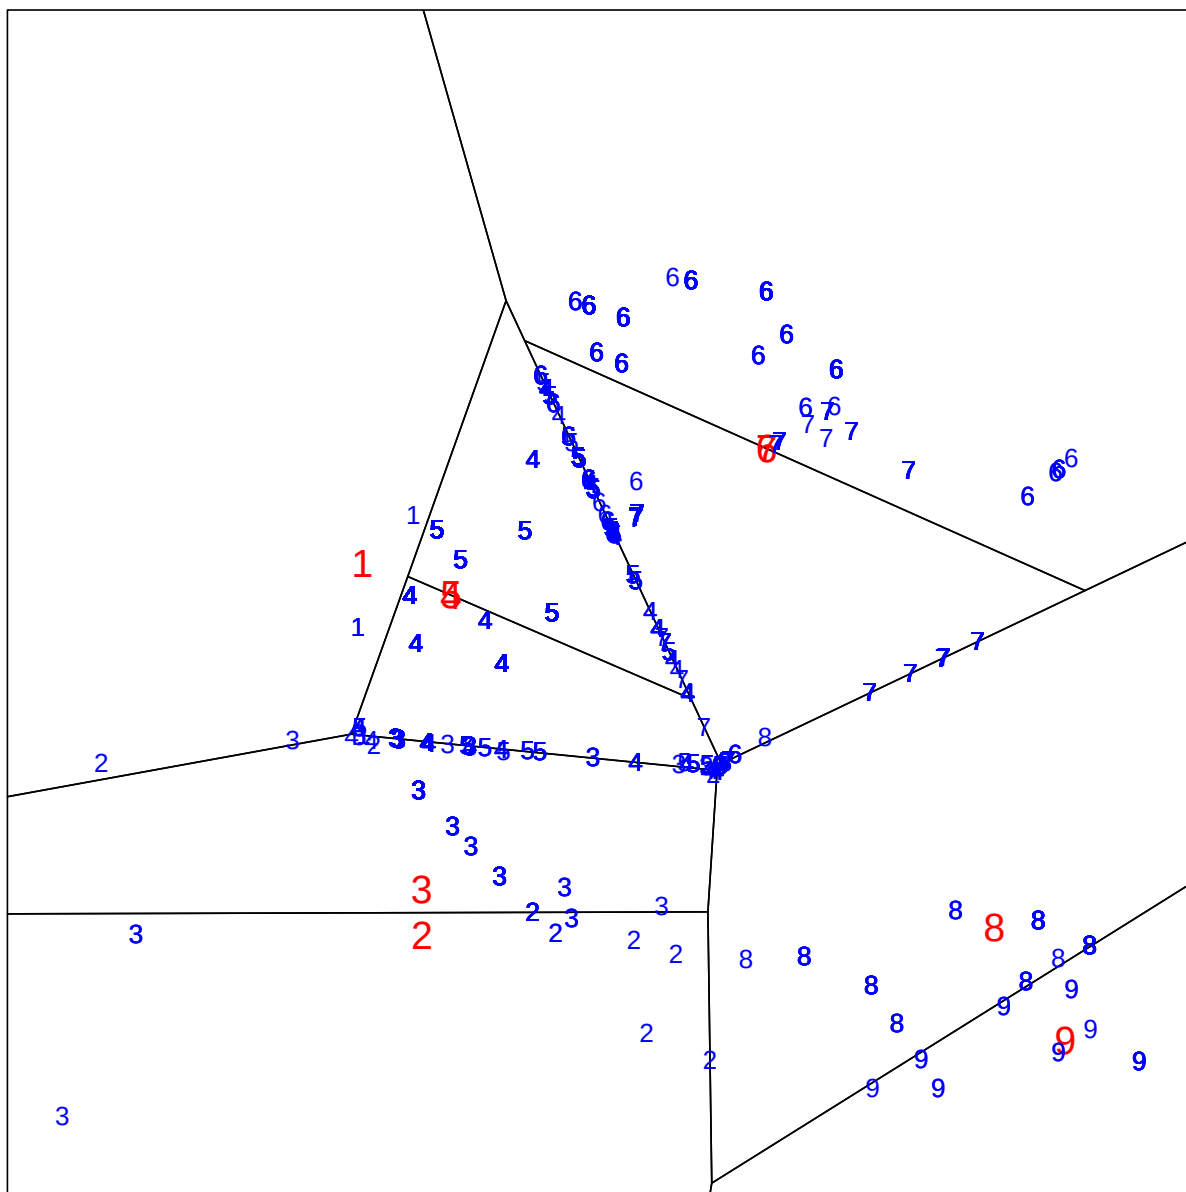


Figure 4: Galo IQ VHA

Figure 4 shows some characteristic properties of Voronoi plots. If the objects in two categories are not well separated the object-points will be on the perpendicular bisector of the category pair. This is partial degeneracy due to requiring weak monotonicity. The algorithm cannot impose strict monotonicity by placing an object in the interior of its Voronoi region, and compromises by putting it on the boundary. Thus the VHA plot will show object-points on lines. Some category scores are very close, which makes the Voronoi diagram unstable. The solution for the category-scores for IQ is

	dim1	dim2	freq
1	-0.03553755	0.0038880529	5
2	-0.02705019	-0.0491979056	17
3	-0.02706852	-0.0427161338	121
4	-0.02290325	-0.0006407936	234
5	-0.02289331	-0.0006177531	390
6	0.02214891	0.0203047004	244
7	0.02214960	0.0203062636	197
8	0.05468076	-0.0480389282	63
9	0.06483530	-0.0642790174	19

We see that categories 2 and 3 map into basically the same point. The same is true for categories 4 and 5, and for categories 6 and 7. So instead of nine points there are really only six. We can clean up the Voronoi diagram by using only those six categories. Note that we do not recode the data and redo the analysis, we just use the same plot with the same object-scores and just change the diagram. The result is in Figure 5.

5.3 Cetacea

The data in Vescia (1985) describe 36 whales, porpoises and dolphins using 15 categorical variables. In the github voronoi repository the data are in data/cetacea.R. Appendix C gives the common names of the 36 species and the names of the variables.

The variables are mostly physical characteristics, but they also include habitat and feeding. The average number of categories per variable is about four, and almost all variables are “nominal” (i.e. not “ordinal” and not “numerical”). In the same book Van der Burg (1985) presents a secondary analysis of the data with HGA and Guttman (1985) applies his MSA-I technique (which uses HGA as an initial configuration for its iterations).

We start with an HGA of the cetacea data. The initial value of the loss function ... is 0.9945577132.

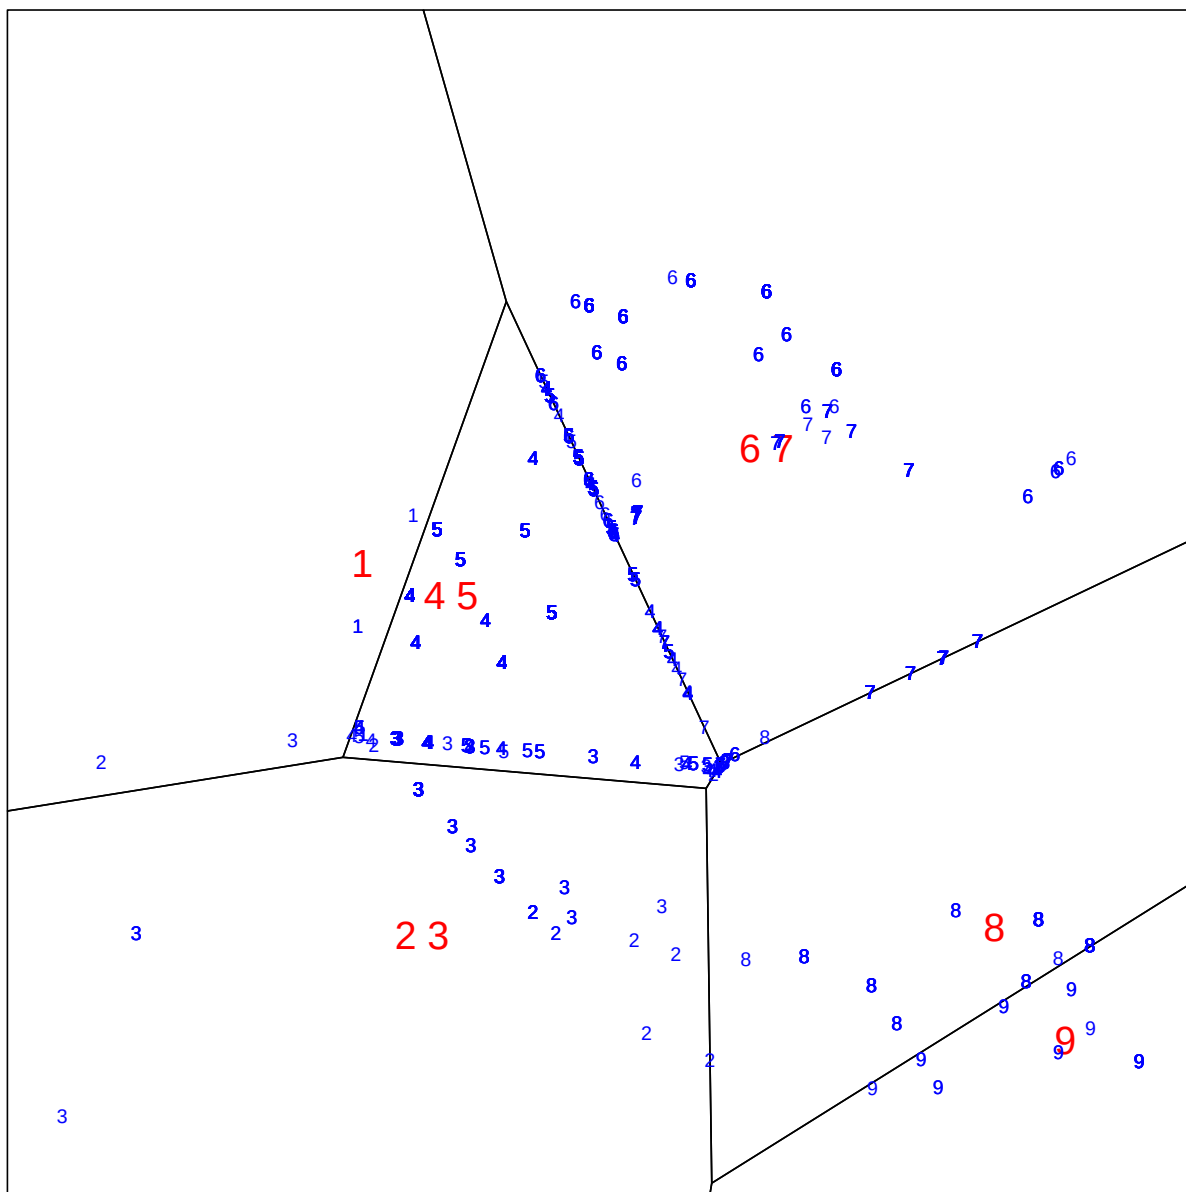


Figure 5: Galo IQ Corrected VHA

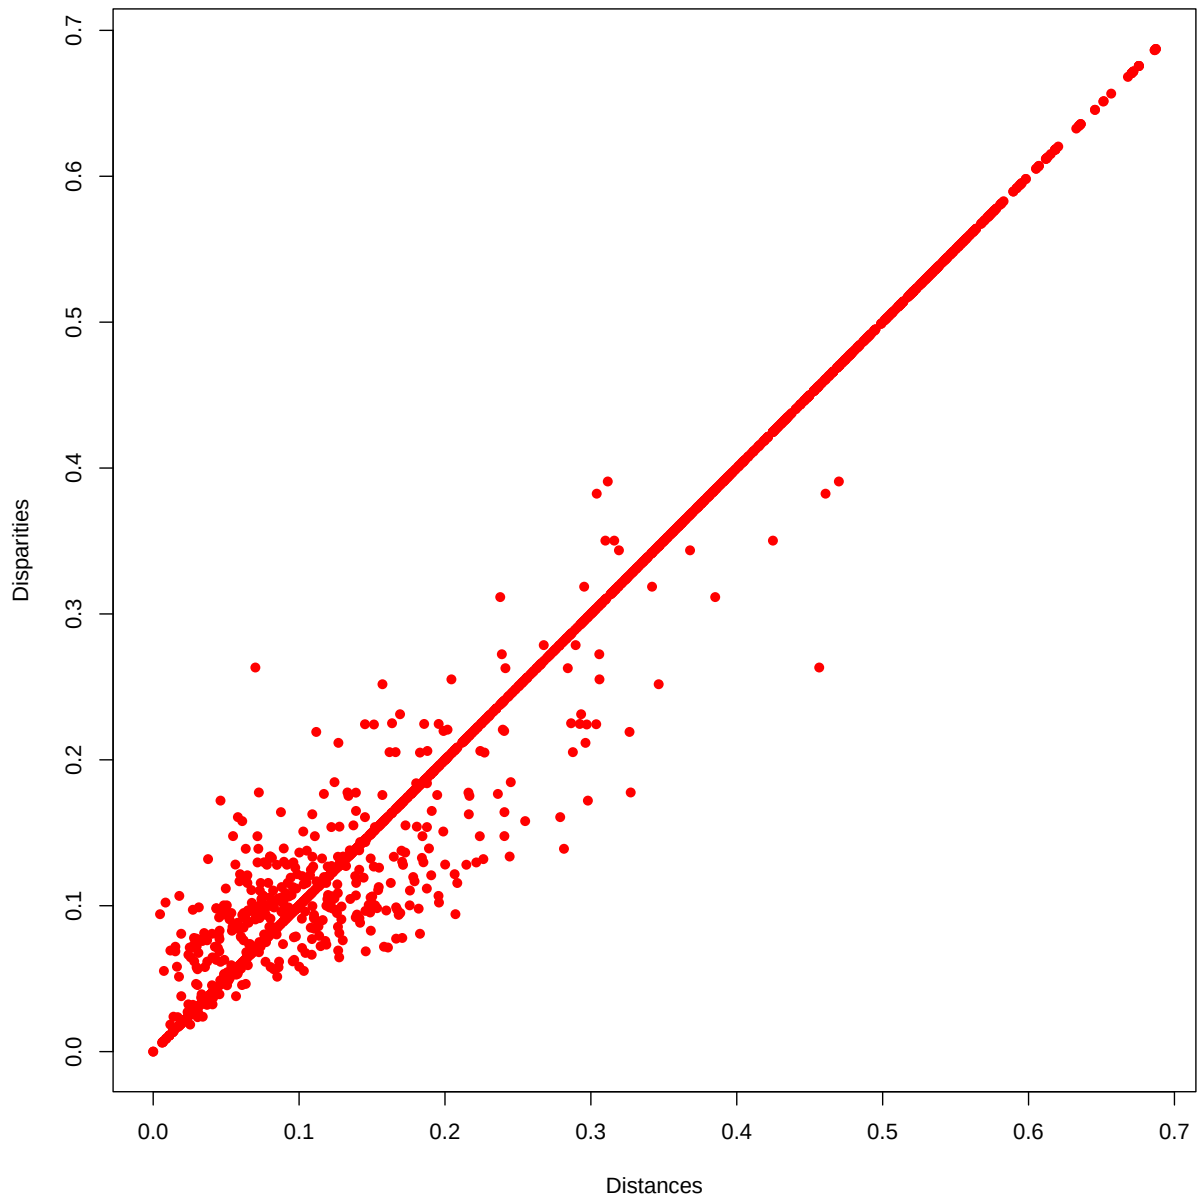


Figure 6: Cetacea D-Dhat Plot HGA

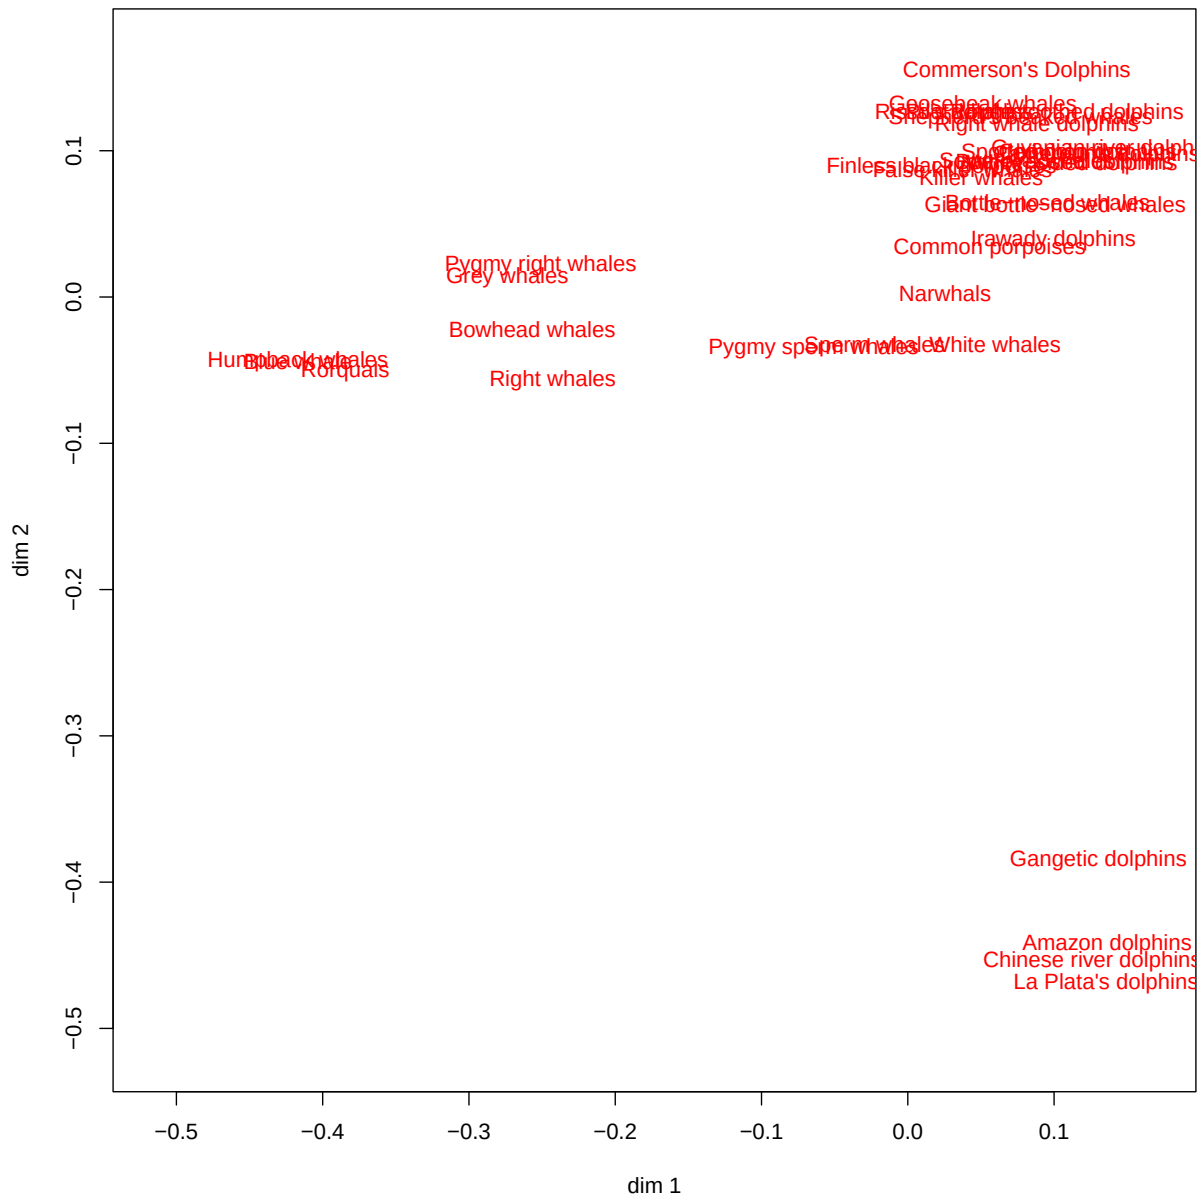


Figure 7: Cetacea Object Scores HGA

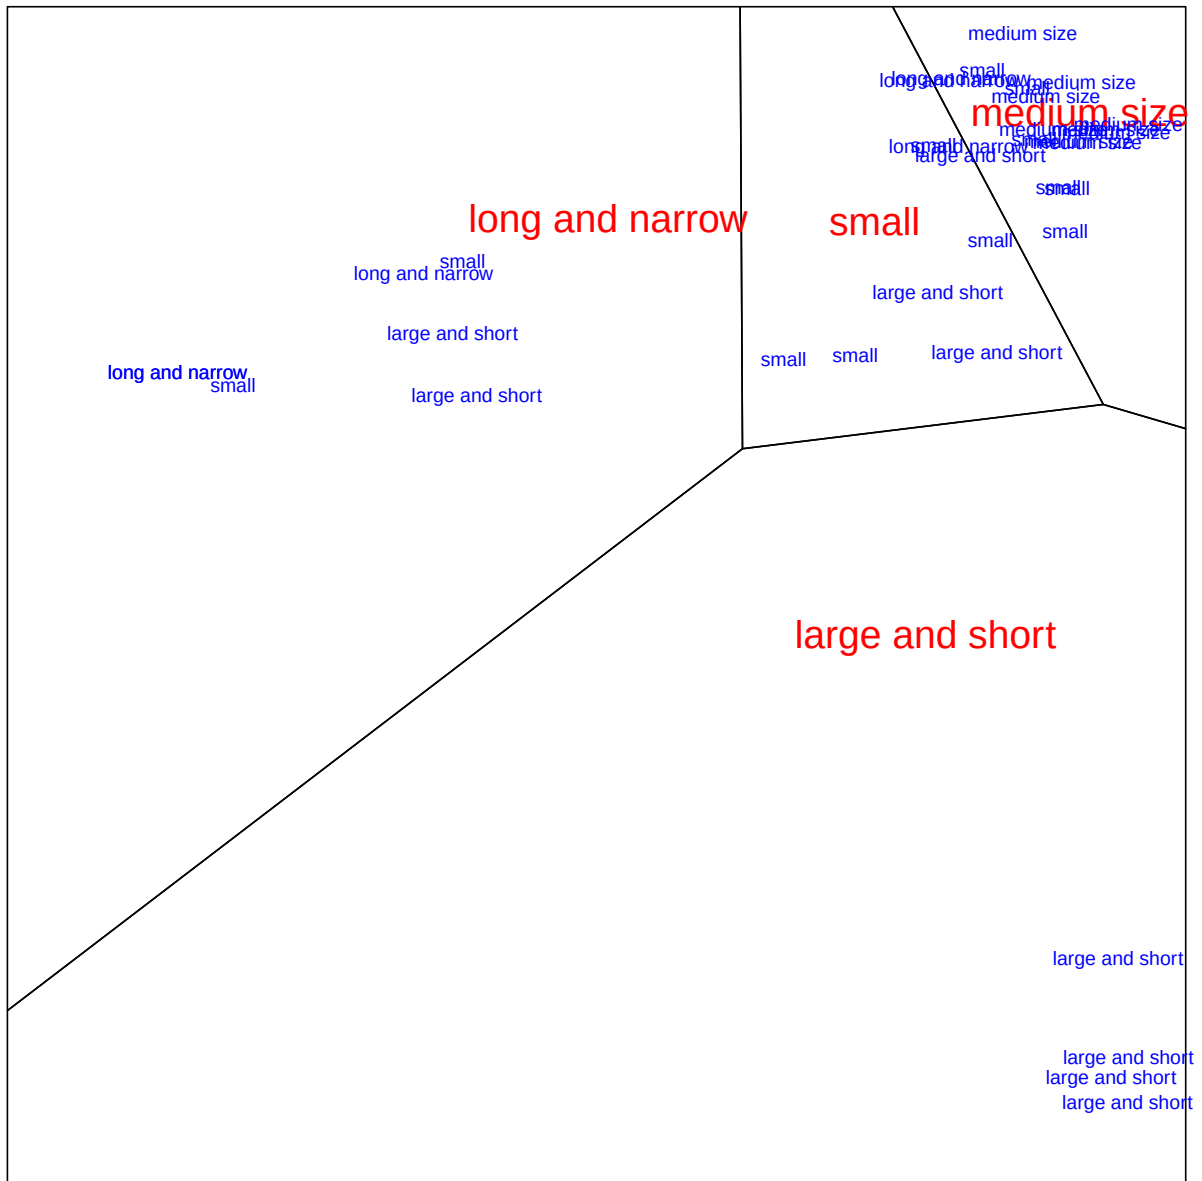


Figure 8: Cetacea Flippers HGA

Loss is 0.0000964845 after 1000 iterations.

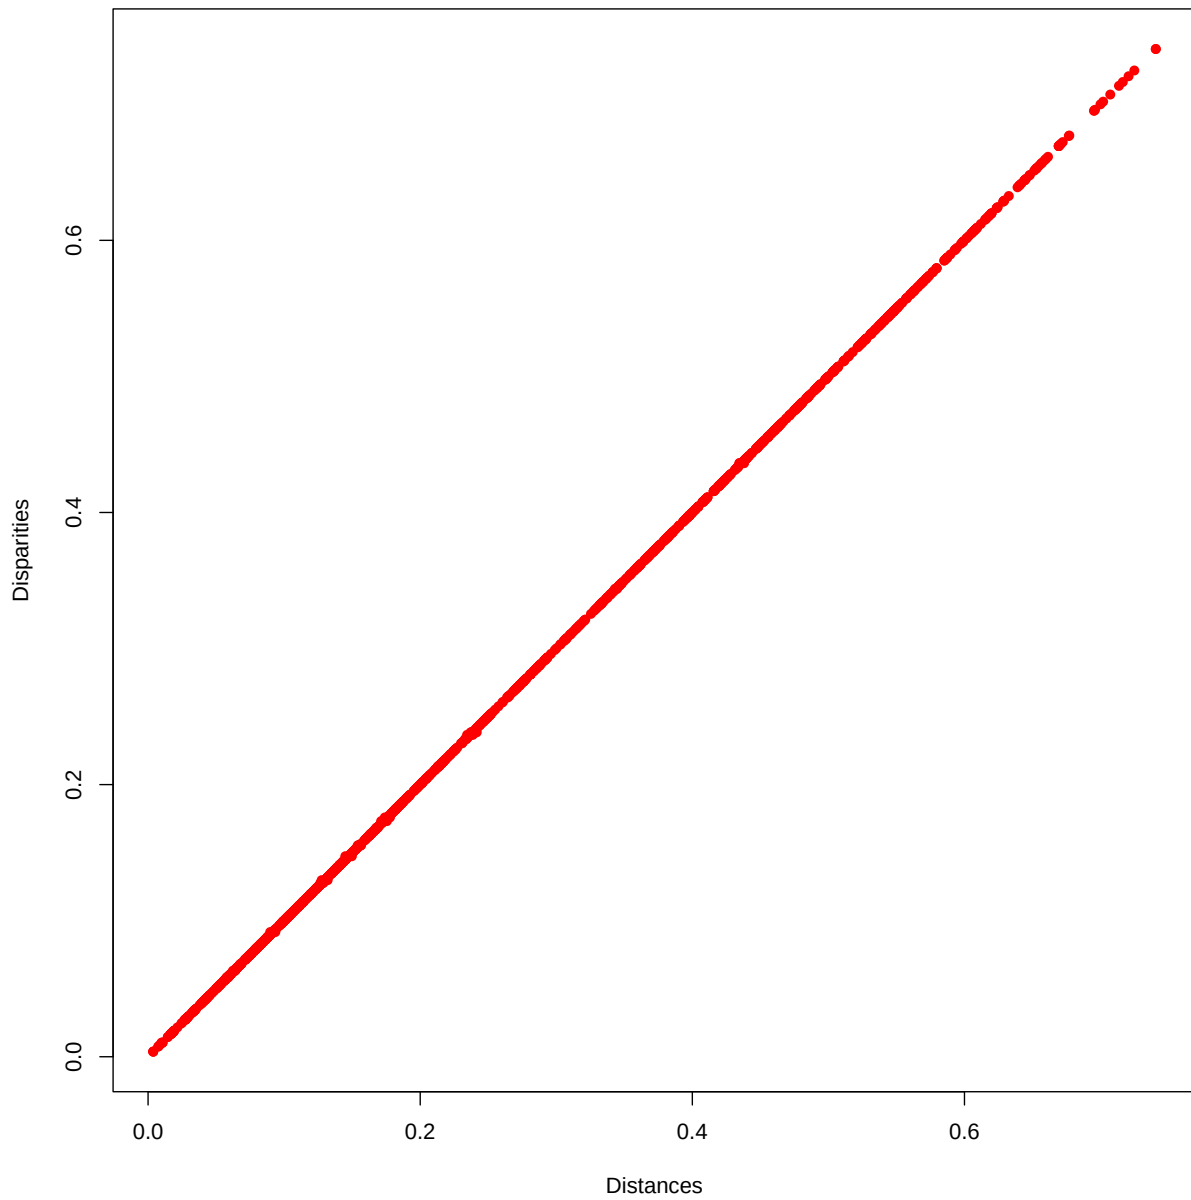


Figure 9: Cetacea D-Dhat Plot VHA

	dim1	dim2	freq
small	-0.03818545	-0.01751669	12
large and short	-0.03733595	-0.03078537	9
medium size	0.18051318	0.15150860	9
long and narrow	-0.08505451	0.10776396	6

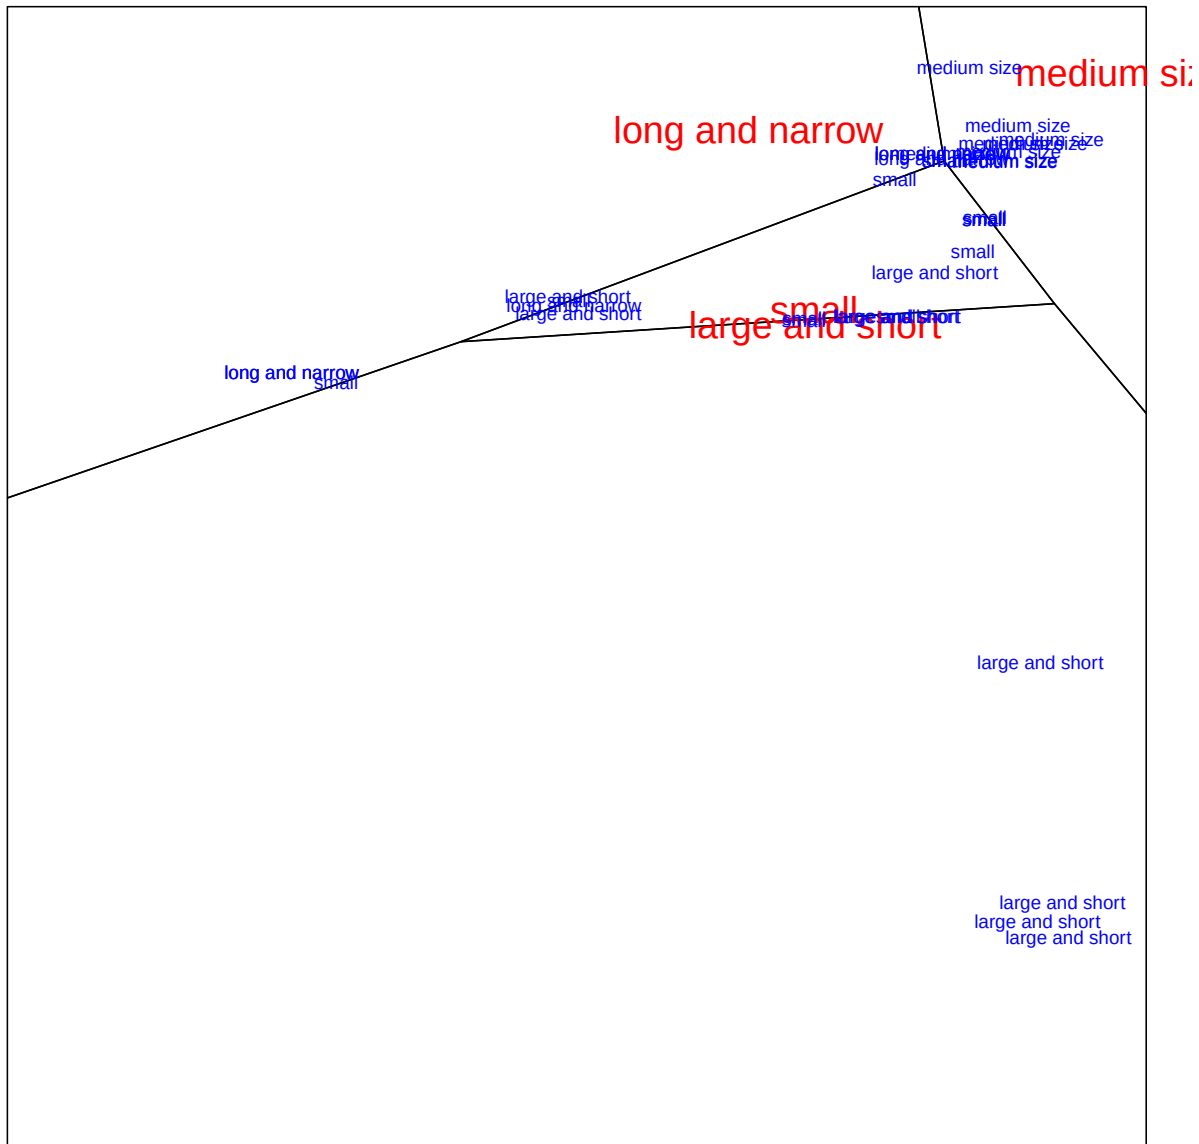


Figure 10: Cetacea Flippers

Loss is 0.0003024927 after 1000 iterations.

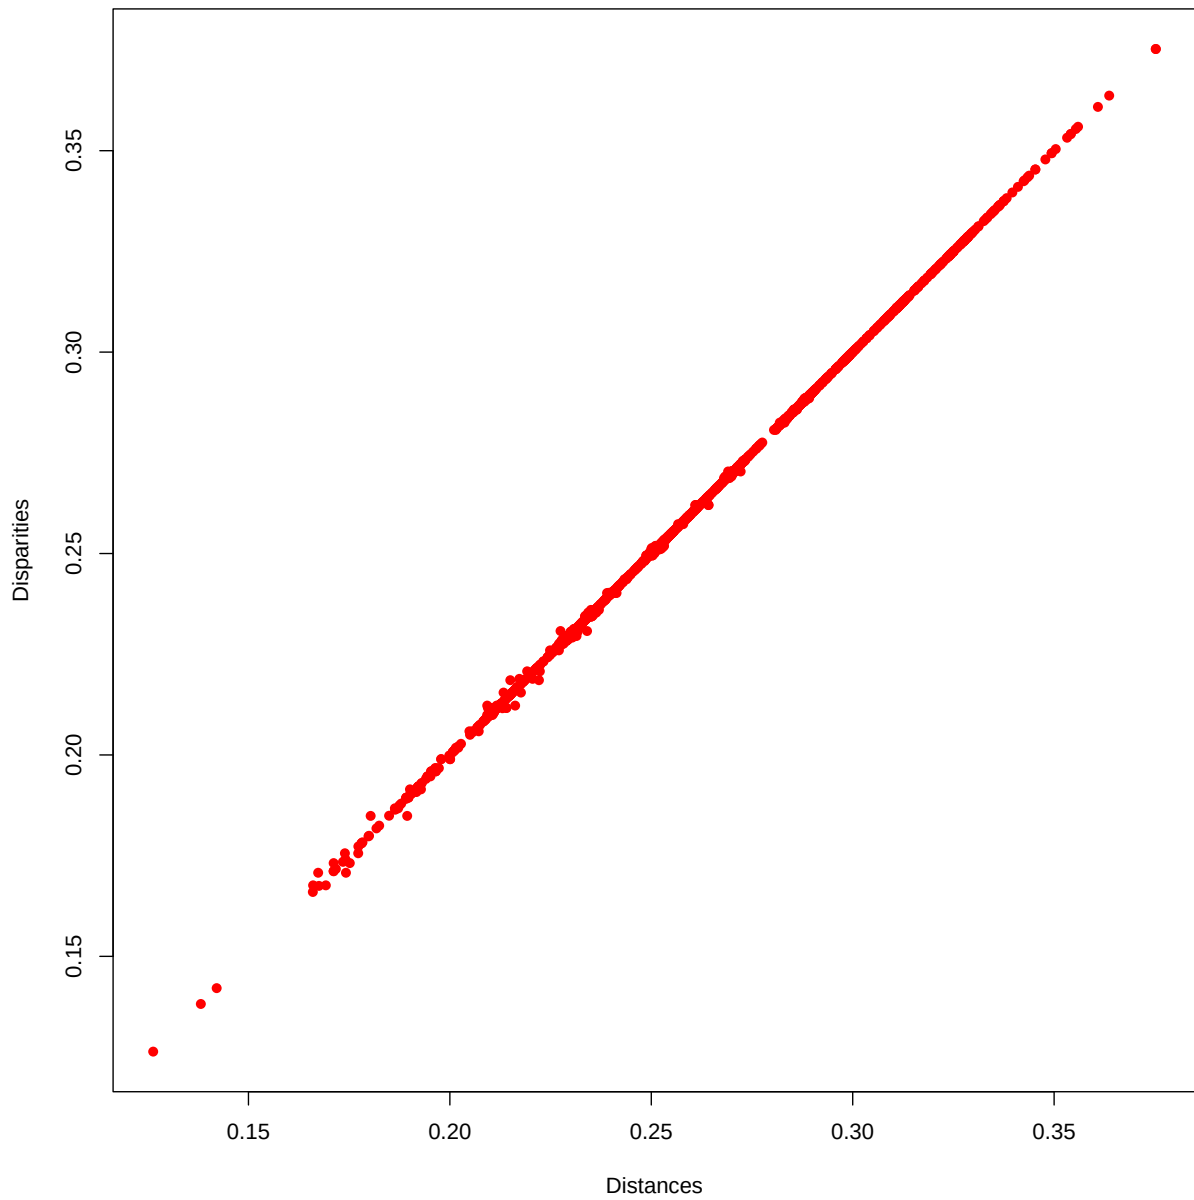


Figure 11: Cetacea D-Dhat Plot VHA XX

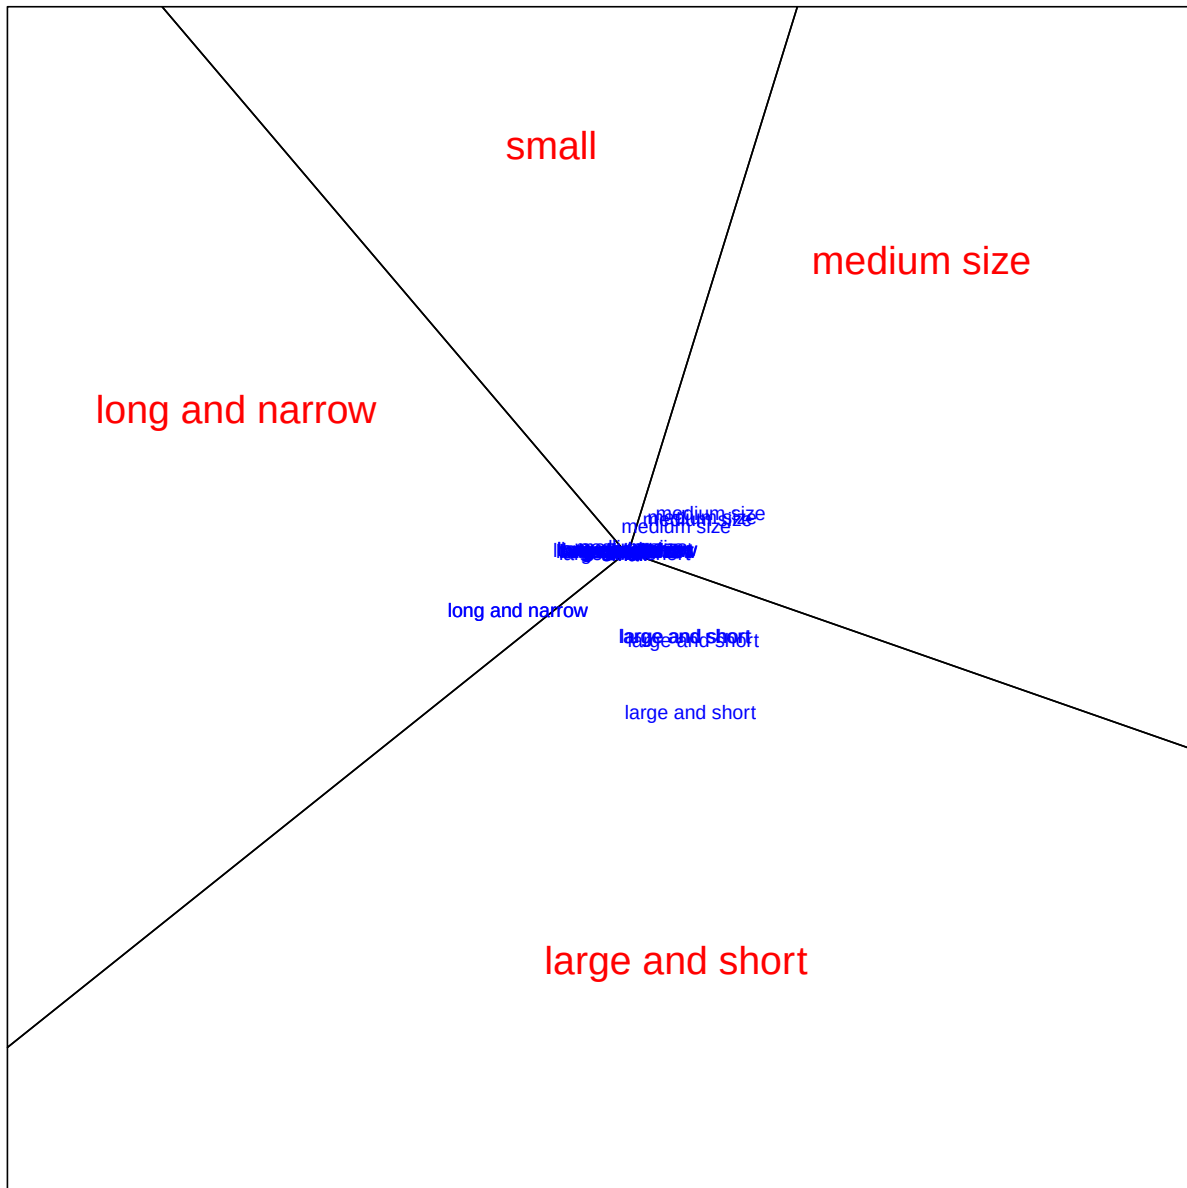


Figure 12: Cetacea Flippers VHA XX

6 Appendix A: Normalized Monotone Regression

Suppose y is a vector with n elements. The problem we study is to minimize the sum of squares $\sigma(x) := \|x - y\|^2$ over $x \in K$ and $x'Jx$ is equal to some constant c . Here

- K is the cone of vectors with $x_1 \leq x_2 \leq \dots \leq x_n$,
- J is the centering matrix $J := I - n^{-1}ee'$, where
- e is the vector with all n elements equal to one.

Change variables to $\tilde{x} = Jx$. Then $x'Jx = \tilde{x}'\tilde{x}$ and $x \in K$ if and only if $\tilde{x} \in K$. Also $\tilde{x} = Jx$ if and only if $x = \tilde{x} + \beta e$. So the transformed problem is to minimize $\|\tilde{x} + \beta e - y\|^2$ over β and $\tilde{x} \in K$, with $e'\tilde{x} = 0$ and $\tilde{x}'\tilde{x} = n$. The minimizer for β is $\bar{y} := n^{-1}e'y$, and thus the equivalent “reduced” problem becomes minimizing $\|\tilde{x} - Jy\|^2$ over $\tilde{x} \in K$, $\tilde{x}'\tilde{x} = c$, and $e'\tilde{x} = 0$.

Forget about the constraint $e'\tilde{x} = 0$ for now. If M is the monotone regression operator it follows that the solution for $\tilde{x}$ is $\sqrt{c}M(Jy)/\|M(Jy)\|$, which automatically satisfies $e'\tilde{x} = 0$ (Bauschke et al. (2018)). Thus the solution of our original problem is

$$\hat{x} = \sqrt{c} \frac{M(y - \bar{y}e)}{\|M(y - \bar{y}e)\|} + \bar{y}e.$$

This can be rewritten in a perhaps more revealing way. Now $M(y - \bar{y}e) = M(y) - \bar{y}e$ and $e'M(y) = e'y = n\bar{y}$. Thus $\|M(y - \bar{y}e)\|^2 = \|M(y)\|^2 - n\bar{y}^2$ so that

$$\hat{x} = \frac{M(y) - \bar{y}e}{\|M(y) - \bar{y}e\|} + \bar{y}e = \frac{1}{\|M(y) - \bar{y}e\|} M(y) + \left\{ 1 - \frac{1}{\|M(y) - \bar{y}e\|} \right\} \bar{y}e$$

7 Appendix B: Majorized Alternating Least Squares (MALs)

Consider the following problem: minimize the loss function

$$\sigma(X, Y) := \sum_{i=1}^n \sum_{j=1}^m w_{ij} (\delta_{ij} - d(x_i, y_j))^2 \quad (10)$$

over X in a subset $\mathcal{X}$ of $\mathbb{R}^{n \times p}$ and Y in a subset $\mathcal{Y}$ of $\mathbb{R}^{m \times p}$. Here $d(x_i, y_j)$ is the Euclidean distance between row i of X and row j of Y . The weights w_{ij} and the dissimilarities δ_{ij} are given non-negative numbers.

Heiser and De Leeuw (1979)

The algorithm we propose in this appendix alternates between decreasing loss by modifying X for fixed Y and decreasing loss by modifying Y for fixed X . This is the alternating least squares (ALS) component of our algorithm. Majorization is applied to both the function of X minimized in the first ALS step and to the function of Y minimized in the second ALS step.

We derive the update formula for X , the one for Y follows by symmetry. First expand stress

$$\sigma(X, Y) = C - 2 \sum_{i=1}^n \sum_{j=1}^m w_{ij} \delta_{ij} d(x_i, y_j) + \sum_{i=1}^n \sum_{j=1}^m w_{ij} d_{ij}^2(x_i, y_j) \quad (11)$$

Here C is used as a generic term that does not depend on X . So C can mean different things in different formulas.

Suppose $\tilde{X}$ and $\tilde{Y}$ are our current values of X and Y . Then by the CS-inequality

$$d(x_i, \tilde{y}_j) \geq \frac{1}{d(\tilde{x}_i, \tilde{y}_j)} (x_i - \tilde{y}_j)(\tilde{x}_i - \tilde{y}_j) \quad (12)$$

Define

$$\tilde{b}_{ij} := w_{ij} \frac{\delta_{ij}}{d(x_i, y_j)} \quad (13)$$

Then

$$\sigma(X, \tilde{Y}) \leq \eta(X, \tilde{X}, \tilde{Y}) \quad (14a)$$

with

$$\eta(X, \tilde{X}, \tilde{Y}) := C - 2 \sum_{i=1}^n \sum_{j=1}^m \tilde{b}_{ij} (x_i - \tilde{y}_j)' (\tilde{x}_i - \tilde{y}_j) + \sum_{i=1}^n \sum_{j=1}^m w_{ij} (x_i - \tilde{y}_j)' (x_i - \tilde{y}_j) \quad (14b)$$

Now

$$\sum_{i=1}^n x_i' \sum_{j=1}^m \tilde{b}_{ij} (\tilde{x}_i - \tilde{y}_j) = \text{tr } X' (\tilde{B}_r \tilde{X} - \tilde{B} \tilde{Y}) + C$$

with $\tilde{B}_r$ the diagonal matrix of row sums of $\tilde{B}$. Also

$$\sum_{i=1}^n \sum_{j=1}^m w_{ij} (x_i - \tilde{y}_j)' (x_i - \tilde{y}_j) = \text{tr } X' W_r X - 2 \text{tr } X' W \tilde{Y} + C$$

with W_r the diagonal matrix of row sums of W . Gathering terms gives

$$\eta(X, \tilde{X}, \tilde{Y}) = \text{tr } (X - \bar{X})' W_r (X - \bar{X}) + C$$

with

$$\bar{X} = W_r^{-1} (\tilde{B}_r \tilde{X} - (\tilde{B} - W) \tilde{Y})$$

By symmetry

$$\eta(Y, \tilde{X}, \tilde{Y}) = \text{tr } (Y - \bar{Y})' W_c (Y - \bar{Y}) + C \quad (15a)$$

with

$$\bar{Y} = W_c^{-1} (\tilde{B}_c \tilde{Y} - (\tilde{B} - W)' \tilde{X}) \quad (15b)$$

using the diagonal matrices W_c and B_c of column sums.

The algorithm to minimize stress is thus as follows. Our current best values in iteration k are $X^{(k)}$ and $Y^{(k)}$.

$$X^{(k+1)} = \text{proj}_r (W_r^{-1} (\tilde{B}_r^{(k,k)} X^{(k)} - (B^{(k,k)} - W) Y^{(k)}))$$

$$Y^{(k+1)} = \text{proj}_c (W_c^{-1} (\tilde{B}_c^{(k+1,k)} Y^{(k)} - (B^{(k+1,k)} - W)' X^{(k+1)}))$$

8 Appendix C: Cetacea

[1]	Bowhead whales	Rorquals
[3]	Blue whale	Giant bottle-nosed whales
[5]	Commerson's Dolphins	White whales
[7]	Common dolphins	Grey whales
[9]	Right whales	Pilot whales
[11]	Risso's dolphins	Bottle-nosed whales
[13]	Amazon dolphins	Pygmy sperm whales
[15]	White-sided dolphins	Chinese river dolphins
[17]	Right whale dolphins	Humpback whales
[19]	Sowerby's whales	Narwhals
[21]	Pygmy right whales	Finless black porpoises
[23]	Irawady dolphins	Killer whales
[25]	Common porpoises	Sperm whales
[27]	Gangetic dolphins	False killer whales
[29]	Guyanian river dolphins	Cameroun's dolphins
[31]	Spotted dolphins	Rough toothed dolphins
[33]	La Plata's dolphins	Shepherd's beaked whales
[35]	Bottle-nosed dolphins	Goosebeak whales

[1]	NECK	FORM OF THE HEAD
[3]	SIZE OF THE HEAD	BEAK
[5]	DORSAL FIN	FLIPPERS
[7]	SET OF TEETH	FEEDING
[9]	BLOW HOLE	COLOR
[11]	CERVICAL VERTEBRAE	LACRYMAL AND JUGAL BONES
[13]	HABITAT	LONGITUDINAL FURROWS ON THE THROAT
[15]	HEAD BONES	

References

- Aurenhammer, Franz, Rolf Klein, and Der-Tsai Lee. 2013. *Voronoi Diagrams and Delaunay Triangulations*. World Scientific Publishing Co.
- Bauschke, Heinz H., Minh N. Bui, and Xianfu Wang. 2018. “Projecting onto the Intersection of a Cone and a Sphere.” *SIAM Journal on Optimization* 28: 2158–88.
- Bekker, Paul, and Jan De Leeuw. 1988. “Relation Between Variants of Nonlinear Principal Component Analysis.” Chap. 1 in *Component and Correspondence Analysis*, edited by Jan L. A. Van Rijkevorsel and Jan De Leeuw. Wiley Series in Probability and Mathematical Statistics. Wiley.
- Borg, Ingwer, and Patrick J. F. Groenen. 2005. *Modern Multidimensional Scaling*. Second Edition. Springer.
- Busing, Frank M. T. A. 2010. “Advances in Multidimensional Unfolding.” PhD thesis, Leiden University. <https://scholarlypublications.universiteitleiden.nl/access/item%3A2837800/view>.
- De Leeuw, Jan. 1977a. “Applications of Convex Analysis to Multidimensional Scaling.” In *Recent Developments in Statistics*, edited by J. R. Barra, F. Brodeau, G. Romier, and B. Van Cutsem. North Holland Publishing Company.
- De Leeuw, Jan. 1977b. “Correctness of Kruskal’s Algorithms for Monotone Regression with Ties.” *Psychometrika* 42: 141–44.
- De Leeuw, Jan. 1983. *On Degenerate Multidimensional Unfolding Solutions*. Research Report. Department of Data Theory FSW/RUL. <https://jansweb.netlify.app/publication/deleeuw-r-06-a/deleeuw-r-06-a.pdf>.
- De Leeuw, Jan. 2023. “Deconstructing Multiple Correspondence Analysis.” Chap. 22 in *Analysis of Categorical Data from Historical Perspectives. Essays in Honour of Shizuhiko Nishisato*, edited by Eric J. Beh, Rosaria Lombardo, and Jose G. Clavel. Springer.
- De Leeuw, Jan, and George Michailidis. 2000. “Graph Layout Techniques and Multidimensional Data Analysis.” In *Game Theory. Optimal Stopping, Probability and Statistics*, edited by F. T. Bruss and L. LeCam. Lecture Notes – Monographs 35. Institute of Mathematical Statistics.

- Gifi, Albert. 1990. *Nonlinear Multivariate Analysis*. Wiley.
- Greenacre, Michael J., and Jorg Blasius. 2006. *Multiple Correspondence Analysis and Related Methods*. Chapman; Hall.
- Guttman, Louis. 1941. "The Quantification of a Class of Attributes: A Theory and Method of Scale Construction." In *The Prediction of Personal Adjustment*, edited by Paul Horst. Social Science Research Council.
- Guttman, Louis. 1985. "Multidimensional Structuple Analysis (MSA-I) for the Classification of Cetacea: Whales, Porpoises and Dolphins." In *Data Analysis in Real Life Environment: Ins and Outs of Solving Problems*, edited by J.-F. Marcotorchino, J. M. Proth, and J. Janssen. North-Holland.
- Heiser, Willem J. 1981. "Unfolding Analysis of Proximity Data." PhD thesis, Leiden University.
- Heiser, Willem J., and Jan De Leeuw. 1979. "Metric Multidimensional Unfolding." *Methoden en Data Nieuwsbrief SWS/VVS* 4: 26–50. <https://jansweb.netlify.app/publication/heiser-deleeuw-a-79/heiser-deleeuw-a-79.pdf>.
- Husson, François, Julie Josse, and Gilbert Saporta. 2016. "Jan de Leeuw and the French School of Data Analysis." *Journal of Statistical Software* 73 (6): 1–14. <https://www.jstatsoft.org/article/view/v073i06>.
- Kruskal, Joseph B. 1964a. "Multidimensional Scaling by Optimizing Goodness of Fit to a Nonmetric Hypothesis." *Psychometrika* 29: 1–27.
- Kruskal, Joseph B. 1964b. "Nonmetric Multidimensional Scaling: a Numerical Method." *Psychometrika* 29: 115–29.
- Le Roux, Brigitte, and Henry Rouanet. 2010. *Multiple Correspondence Analysis*. Sage.
- Michailidis, George, and Jan De Leeuw. 2001. "Data Visualization through Graph Drawing." *Computational Statistics* 16: 435–50.
- Okabe, Atsuyuki, Barry Boots, Kokichi Sugihara, and Chiu Sung-Nok. 2000. *Spatial Tessellations: Concepts and Applications of Voronoi Diagrams*. Second Edition. Wiley.
- Peschar, Julien L. 1975. *School, Milieu, Beroep*. Tjeek Willink. <https://pure.rug.nl/ws/portalfiles/portal/14528340/peschar.PDF>.

- Tenenhaus, Michel, and Forest W. Young. 1985. "An Analysis and Synthesis of Multiple Correspondence Analysis, Optimal Scaling, Dual Scaling, Homogeneity Analysis and Other Methods for Quantifying Categorical Multivariate Data." *Psychometrika* 50: 91–119.
- Van der Burg, E. 1985. "HOMALS Classification of Whales, Porpoises and Dolphins." In *Data Analysis in Real Life Environment: Ins and Outs of Solving Problems*, edited by J.-F. Marcotorchino, J. M. Proth, and J. Janssen. North-Holland.
- Vescia, G. 1985. "Descriptive Classification of Cetacea: Whales, Porpoises and Dolphins." In *Data Analysis in Real Life Environment: Ins and Outs of Solving Problems*, edited by J.-F. Marcotorchino, J. M. Proth, and J. Janssen. North-Holland.