

Xchecklist Reference Manual

Michal & Bill

April 15, 2023

1.51



Contents

1	History	3
2	Feature List	3
3	Installation Instructions	4
4	Xchecklist Setup	5
5	X-Plane 10 Joystick buttons setup	7
6	X-Plane 10 Keystrokes setup	9
7	X-Plane 11 Joystick buttons setup	11
8	X-Plane 11 Keystrokes setup	12
9	Checklist files	13
10	Checklist file structure	13
10.1	sw_item	13
10.2	Dateref expressions	14
10.2.1	Basic building blocks	14
10.2.2	The right side	15
10.2.3	Available functions	16
10.2.4	Compound dateref expressions	16
10.3	sw_iteminfo	16
10.4	sw_itemvoid	16
10.5	sw_remark	17
10.6	sw_show	17
10.7	sw_continue	17
10.7.1	New in 1.26	18
10.8	sw_rcolsize	18
11	Additions to the Xchecklist dateref expressions syntax	19
12	closer_than function examples	20
13	Coloured Text	21
14	Number of Lines Per Page	22

15 Checker	23
16 Create Dictionary	24
17 Troubleshooting	24

1 History

Xchecklist started out as a Linux checklist program to fill a void that was there in fall of 2010. Michal and I worked on it and initially was only in the forums and then it was in the download section. It looks like there is another void as there is no 64 bit checklist program.

In the beginning of August 2013 I contacted Michal and told him I would like to port our Xchecklist to be multi-platform and 32/64 bit. He was on board and now we have a version that does work on all three platforms and is 32/64bit.

2 Feature List

- Drop-in replacement for snailpup's checklister plugin
- Win/Mac/Lin 64 bit
- Features speaking "copilot" saying checklist items for you
- Features native speech for each platform to allow more options
- Copilot may also check some actions for you as you perform them
- Actions (Check, Prev, Next, Hide, Reload) can be mapped to key/joystick button of choice
- Enforces strictly sequential checklist flow
- Allow colored text for some items in a checklist
- Support popping out windows to second monitor using X-Plane 11.30r2+

3 Installation Instructions

Unpack the archive and place the folder Xchecklist to '.../Resources/plugins' then fire up XPlane and if the plane you fly has a checklist, you should see it..

If you are using a version previous to 1.34 please delete the ../Resources/plugins/Xchecklist folder and install the new one as the folder structure has changed with this version.

The checklist file is called clist.txt and should be put in the aircraft folder which is the same place the *.acf file resides.

You may also have a checklist file named aircraftname_clist.txt which will be searched for first then it will search for clist.txt. The default Cessna would be Cessna_172SP_clist.txt. This allows you to have multiple aircraft in one folder like a float and a wheeled version.

Also in the archive is a folder called Xchecklist/Checker that has test programs for your platform and bitsize.

Command paths are bgood/xchecklist/check_item, bgood/xchecklist/next_checklist, bgood/xchecklist/prev_checklist, bgood/xchecklist/toggle_checklist, bgood/xchecklist/reload_checklist and bgood/xchecklist/move_checklist.

If you are using VR then the Show GUI checkbox must be checked for the checklist to be displayed.

If you have any ideas, comments or bug reports, don't hesitate and let us know...

Kind regards,

Michal & Bill

4 Xchecklist Setup



The "Xchecklist Setup" dialog box will be explained first and can be found by clicking on the Plugins menu item and selecting Xchecklist from the drop down list.

Translucent Window when checked makes the checklist translucent.

Unchecked the checklist is solid.

Show Checklist if Checklist exist when checked if there is a clist.txt for the aircraft loaded it will display the checklist.

Unchecked it will not display the checklist.

Turn Copilot On when checked will automatically check in order items that have data refs in the clist.txt. These items are marked with a + sign in front of the check box.

Unchecked you have to check each item yourself.

Voice Prompt when checked will speak a prompt for the upcoming item.

Unchecked it is quiet.

Auto Hide when checked will automatically hide the checklist after it is complete and a small delay.

Unchecked it will not hide.

Show Widget when checked shows the older widget checklist.


Show GUI when checked shows the new GUI checklist that can be scaled and popped to a second display. It is also the checklist widow type that is used in VR but in VR it has a transparent background.

Move Checklist Window Down will move the checklist window down so you can grab it with the mouse if it is up under the top menu bar.

Save Settings will save your settings including the window position of the checklist in a preference file. Before saving the window position it will make sure that what is saved is within the current screen. As a side benefit if you changed screen resolution and part of the checklist is outside the current screen pressing this button will put it back inside the screen.

5 X-Plane 10 Joystick buttons setup

Joystick buttons are setup using Buttons : Adv pane in the Joystick & Equipment window, that is accessible through Settings / Joystick, Keys & Equipment menu.

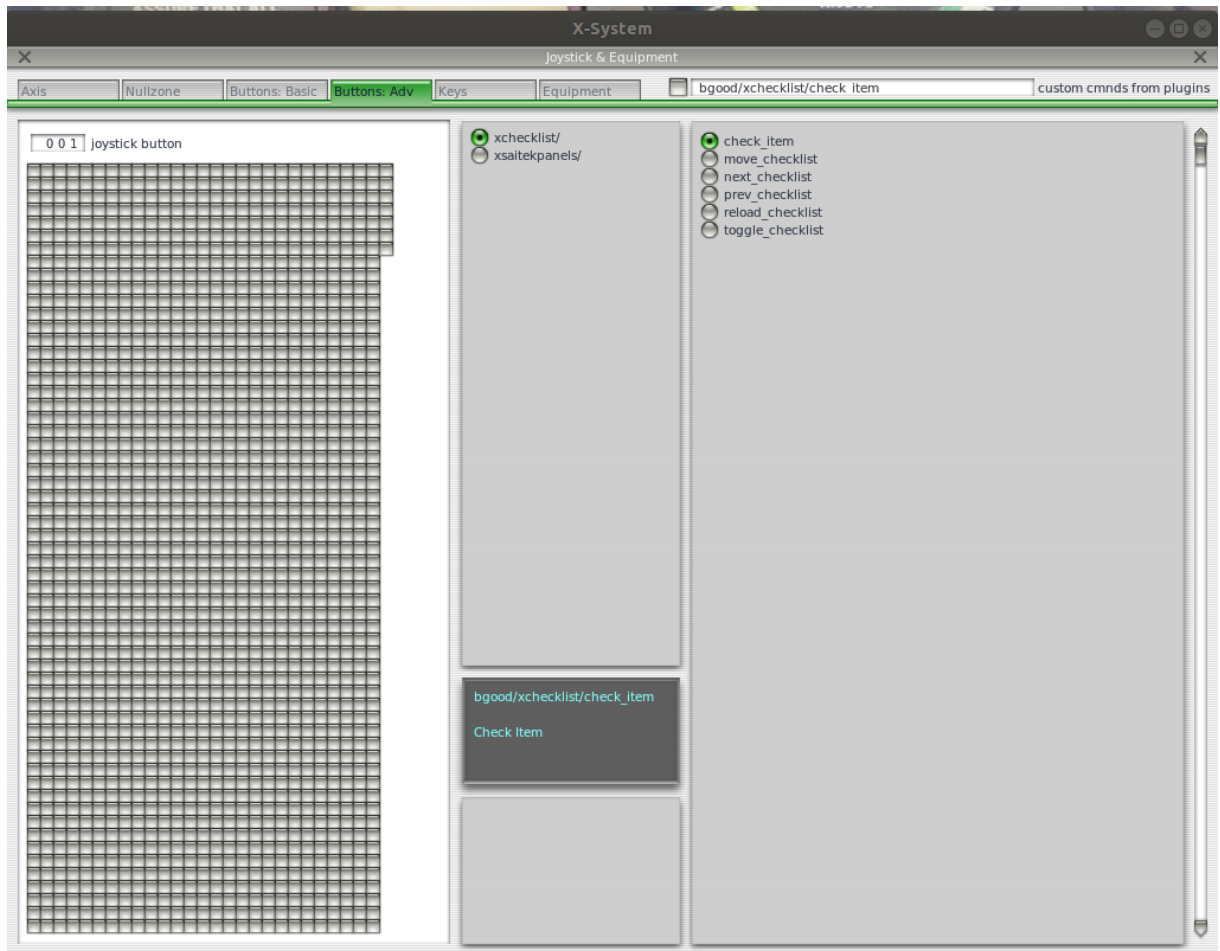

Please note the four items in the right box - these are the four actions, that allow you to control the Xcheckboxlist.

Now just press the desired joystick button, in the upper middle box select xcheckboxlist/ and in the right box select the appropriate action.

Repeat those steps and when done, just close the window and the new bindings should be active. First item is 'check_item' that checks a item.

Next item is 'next_checklist' that moves to the next page of the checklist. If the checklist is hidden it will also un hide it without moving to the next page.


Next item is 'prev_checklist' that moves to the prev page of the checklist.

Next item is 'hide_checklist' as it says hides the checklist.

Reload item is 'reload_checklist' as it says reloads the checklist.

6 X-Plane 10 Keystrokes setup

Keystrokes are setup using Keys pane in the Joystick & Equipment window, that is accessible through Settings / Joystick, Keys & Equipment menu.

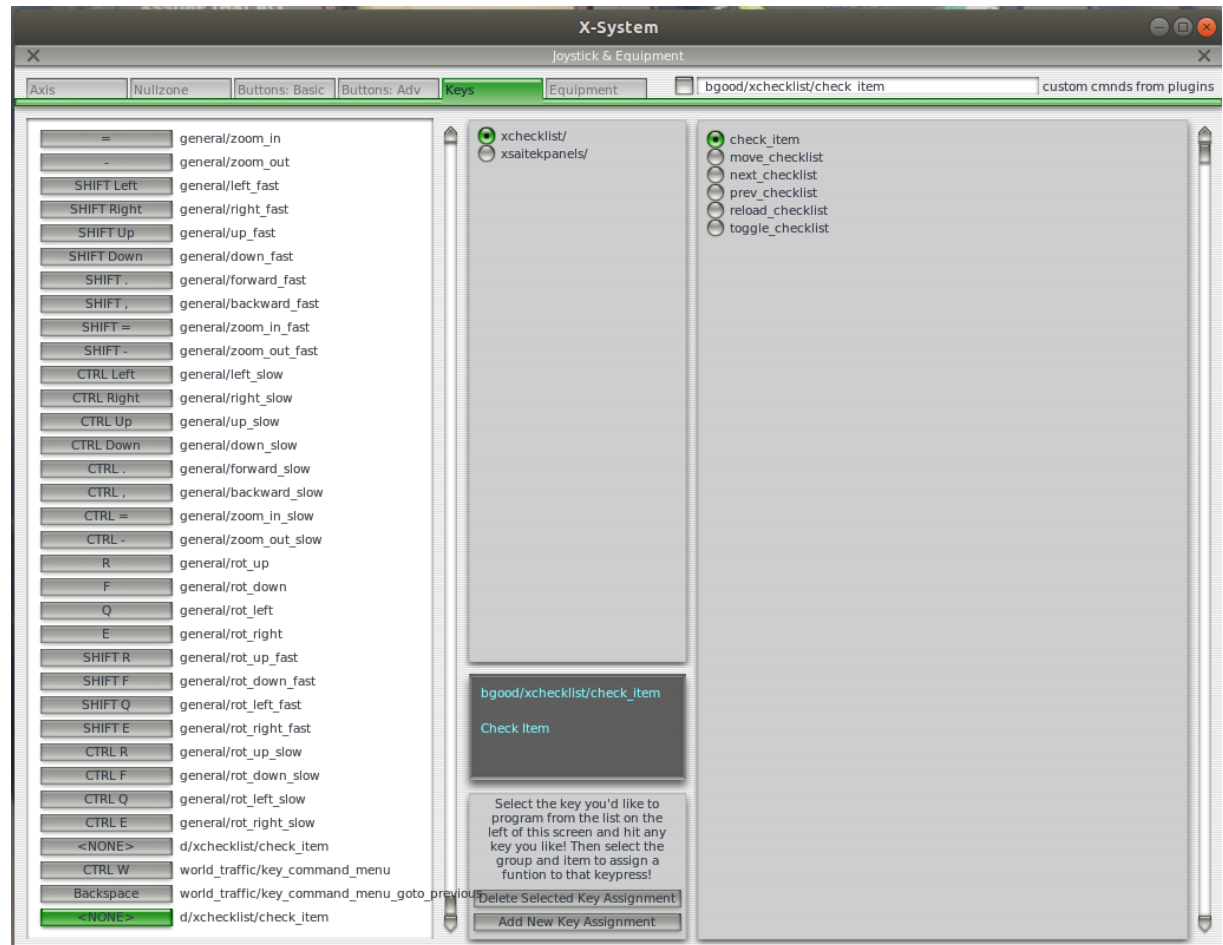

Please note the four items in the right box - these are the four actions, that allow you to control the Xcheckboxlist.

Now just press the desired keystroke, in the left box select xcheckboxlist/ and in the right box select the appropriate action.

Repeat those steps and when done, just close the window and the new bindings should be active.

First item is 'check_item' that checks a item.

Next item is 'next_checklist' that moves to the next page of the checklist. If the checklist is hidden it will also un hide it without moving to the next page.


Next item is 'prev_checklist' that moves to the next page of the checklist.

Next item is 'hide_checklist' as it says hides the checklist.

Last item is 'reload_checklist' as it says reloads the checklist.

7 X-Plane 11 Joystick buttons setup

Joystick buttons are setup using Settings dialog window which can be accessed through the Settings button on the first screen. Use the Joystick menu.

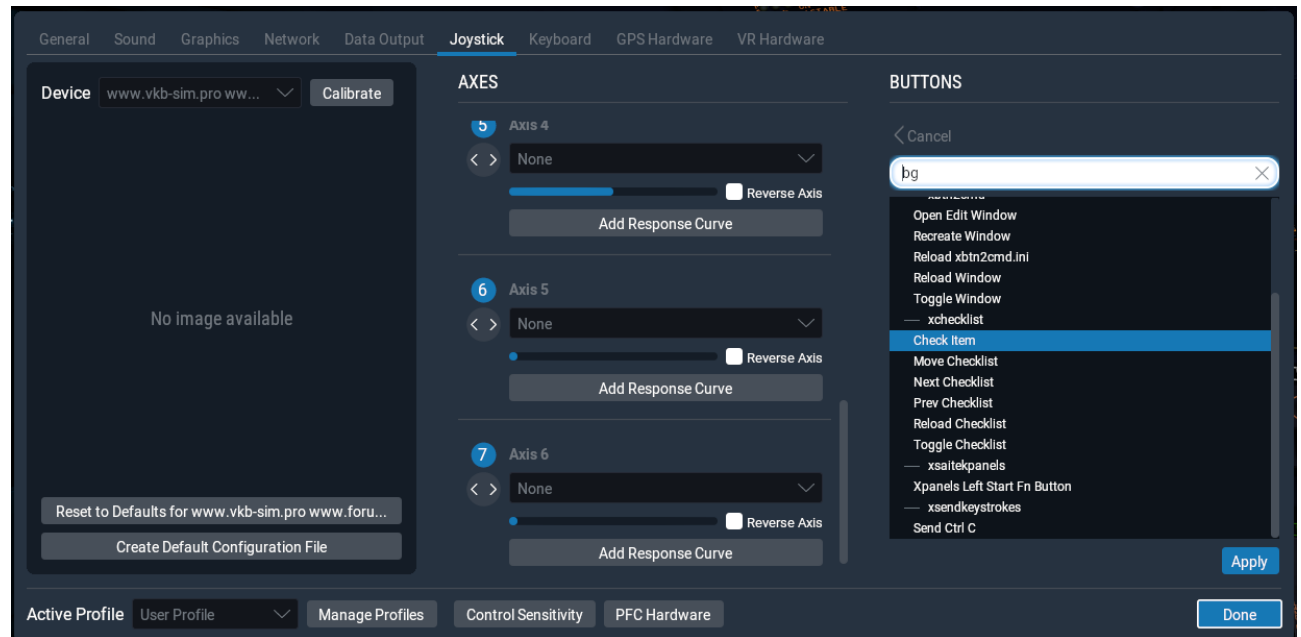

Please note the four items in the right box - these are the four actions, that allow you to control the Xchecklist.

Now just press the desired joystick button, on the right hand side you will see the button hi light. Click on the Edit button and type bg in the search box. Select the action you want to map and then click on the Apply button. Repeat these steps for the remaining actions. When you are done press the Done button.

First item is 'check_item' that checks a item.

Next item is 'next_checklist' that moves to the next page of the checklist. If the checklist is hidden it will also un hide it without moving to the next page.


Next item is 'prev_checklist' that moves to the prev page of the checklist.

Next item is 'hide_checklist' as it says hides the checklist.

Reload item is 'reload_checklist' as it says reloads the checklist.

8 X-Plane 11 Keystrokes setup

Keystrokes are setup using Settings dialog window which can be accessed through the Settings button on the first screen. Use the Keyboard menu.

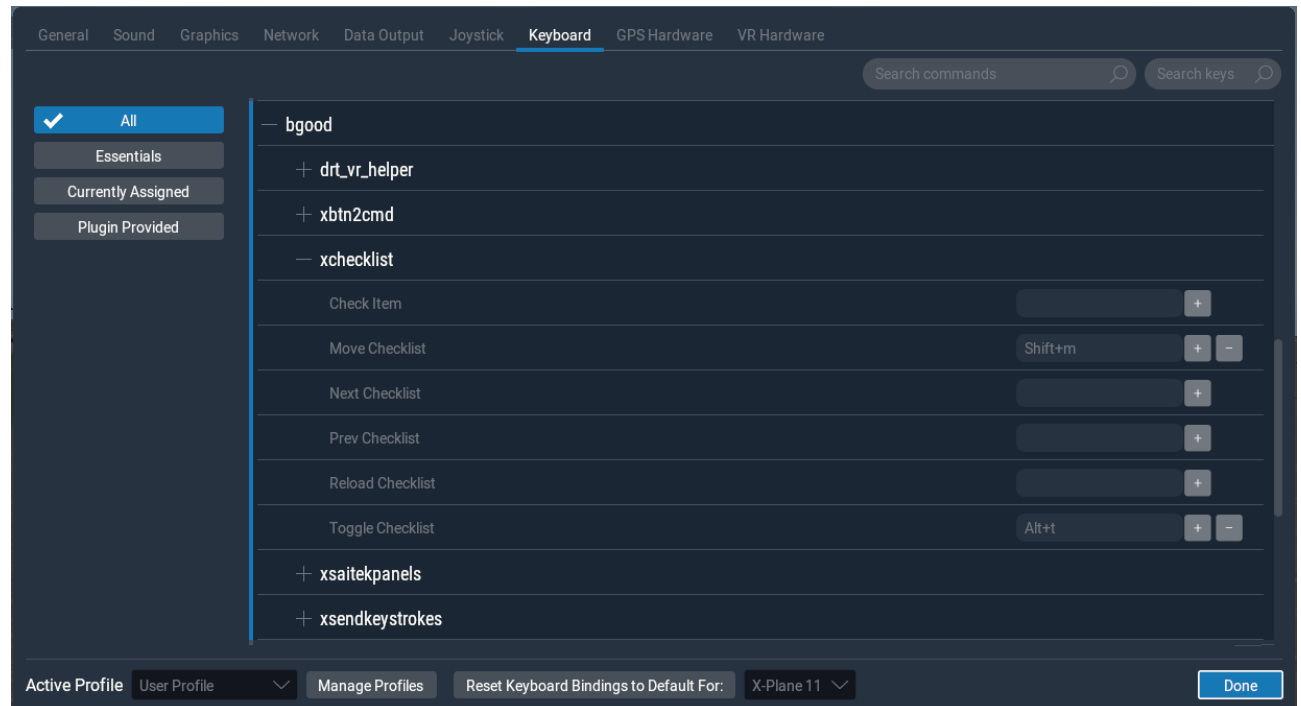

After typing bg in the search box you should see the items you can map to Xcheckboxlist.

Now just click on the gray box to the left of the + sign of the item you want to map. When you do this the gray box will turn white and will say “Record keystroke(s)”. Record your keystrokes and the box will turn gray again with your recorded keystrokes in the gray box. You will now also see a + sign and a – sign.

Repeat those steps and when done, press the done button.

First item is 'check_item' that checks a item.

Next item is 'next_checklist' that moves to the next page of the checklist. If the checklist is hidden it will also un hide it without moving to the next page.

Next item is 'prev_checklist' that moves to the next page of the checklist.

Next item is 'hide_checklist' as it says hides the checklist.

Last item is 'reload_checklist' as it says reloads the checklist.

9 Checklist files

When the X-Plane loads a plane, Xchecklist looks to the airplane's directory and tries to load the acf specific checklist first (acfName_clist.txt), and if not found, the generic clist.txt is loaded.

10 Checklist file structure

The checklist file contains series of checklists for the given aircraft.

Each checklist starts with the **sw_checklist**. This statement specifies the title of the checklist, and optionally the name, under which it appears in the XChecklist's menu (when the optional part is missing, the menu item is not created). This way the "entry points" of multi-page checklists are accessible via menu, without cluttering the menu with the interim pages.

```
sw_checklist:Checklist name
```

```
textstyleSourceTextsw_checklist:Checklist name:Menu name
```

The checklist itself can contain several types of statements:

- **sw_item** - normal checklist item - spoken by copilot, checkable both manually and automatically
- **sw_iteminfo** - checklist item, checkable only by fulfilling the condition
- **sw_itemvoid** - noncheckable checklist item; ignored by copilot
- **sw_remark** - remarks spoken by copilot (no condition, non-checkable)
- **sw_show** - when no checklist is displayed and a condition is fulfilled, the checklist pops up
- **sw_continue** - designates which checklist should come next, when the current one finishes
- **sw_rcolsize** - specifies the size of the "right column" of the checklist

10.1 sw_item

This is the most used checklist item. There are several forms of this item:

```
sw_item:Item text
```

```
sw_item:Item text|Checked text
```

This form displays a checkbox with the "Item text" caption; if the text contains a colon character,

the text following it is displayed on the right side, otherwise the text "CHECK" is used.

The checkbox must be checked by the pilot.

sw_item:Item text:dataref expression

This form allows the "copilot" check the item for you based on the dataref expression

10.2 Dataref expressions

Dataref expressions allows the "copilot" to check the checklist item or pop up a checklist based on the conditions/pilot actions. The expression can range for simple dataref value equality test to fairly complex expressions.

10.2.1 Basic building blocks

test/dataref:1

test/dataref:=1

true when the dataref "test/dataref" equals to 1

test/dataref:!1

true when the dataref "test/dataref" is not equal to 1

test/dataref:<1

true when the dataref "test/dataref" is lower than 1

test/dataref:>1

true when the dataref "test/dataref" is greater than 1

test/dataref:<=1

true when the dataref "test/dataref" is lower than or equal to 1

test/dataref:>=1

true when the dataref "test/dataref" is greater than or equal to 1

test/dataref:+>1

true when the dataref "test/dataref" grows more than 1 after the item is activated

test/dataref:-<1

true when the dataref "test/dataref" shrinks more than 1 after the item is activated

test/dataref:><1

true when the dataref "test/dataref" changes by more than 1 after the item is activated

test/dataref:10|20

true when the "test/dataref" is in the interval of 10 to 20.

test/dataref:10:20

true when the "test/dataref" changes from lower than 10 to higher than 20. If the dataref's

value is not lower than 10 when the check is activated, it has to get below 10 first.

10.2.2 The right side

The right side of the dataref expression can be a simple number, or it can involve arithmetic, datarefs and several functions.

test/dataref:((1+2)*3)**4

Valid operations are addition, subtraction, multiplication, division and power (**). Also

parentheses can be used to enforce different priority.

test/dataref:{test/other_dataref}+1

Expression can contain datarefs too

test/dataref:(float)1

Datarefs type can be explicitly stated in case the dataref exists in more than one variant.

Available types are int, float and double

test/dataref:round({test/other_dataref})

Expressions can call one of several functions (round, step, closer_than)

10.2.3 Available functions

`round(value)`

rounds the value to the nearest integer

`step(value)`

equals to 1 when `value >= 0`, 0 otherwise

`closer_than(value1, value2, epsilon)`

returns 1.0 when `value1` and `value2` differ by less than `epsilon`, 0.0 otherwise

Should you need more, please contact the developers.

10.2.4 Compound dataref expressions

Several dataref expressions can be combined using boolean operations.

`(expression1)&&(expression2)`

true when both expressions are true

`(expression1)|| (expression2)`

true when either one(or both) of the expressions are true

All of the above can be combined together to form very elaborate constructions. With that said, try to avoid the "when the tool I have is a hammer, then every problem looks like a nail" problem. Sometimes it might be good to consider to use some other methods (lua helper plugin computing those expressions and publishing the results in datarefs) to keep the complexity in reasonable limits. It will help with the overall readability and maintainability of the checklist.

10.3 `sw_iteminfo`

This item behaves mostly like the `sw_item`, with one distinction - user can't check it manually. That means that it has to have the dataref expression specified.

`sw_iteminfo:Item label|Check label:test/dataref:1`

10.4 `sw_itemvoid`

This item is usefull for adding delimiters, welcome messages and other parts of checklist, that are just displayed. Also they aren't read by the speech synthesizer.

`sw_itemvoid:Item label|Check label`

10.5 sw_remark

This item is somewhat similar to the sw_itemvoid, with the only distinction that it is read by the speech synthesizer. It can be used for example to compliment the pilot...

```
sw_remark:You did nicely!
```

10.6 sw_show

This item doesn't show up on the checklist, but allows a checklist to pop up when a specified condition is fulfilled. The sw_show conditions aren't checked when another checklist is being displayed (so it doesn't interrupt it).

Disclaimer: The following paragraphs are just a view of one of the authors, so think about it and feel free to ignore it if you see fit...

sw_show seem like a very convenient feature, which allows construction of very clever checklists. It might for example pop up after take off checklist when you reach certain altitude, or pop up a relevant checklist when a fire alarm sounds, ... Unfortunately there seems to be a downside to this kind of automation - in my view the pilot should know when a certain checklist is due and he should open it by himself - that way his memory is exercised and I think it also adds to the realism of the simulation (checklists don't pop up automatically in real plane either)... Also inflight emergencies might be a good example of this view - the pilot should be able to identify the source of the problem, while if the correct emergency checklist pops up by itself, it is a sort of giveaway...

On the other hand, some people might argue that when a checklist pops up automatically, it reminds the pilot to perform it, so when in the real plane, he/she will remember to perform the checklist. _

So feel free to use sw_show, just think whether it will really help pilots learning...

```
sw_show:sim/cockpit/electrical/battery_on:0:0
```

10.7 sw_continue

This is another item that doesn't show on the checklist, but it allows creation of "seamless" multipage checklists. If this statement is specified for a given checklist, then when the said checklist is finished, the checklist specified by the sw_continue is opened up automatically. When no label is specified, next checklist is used, otherwise a checklist with a given label (first field of sw_checklist) is displayed.

```
sw_continue
```

```
sw_continue:Checklist name
```

10.7.1 New in 1.26

Since 1.26 there is a possibility to attach a dataref condition to the sw_continue and several sw_continue statements can be attached to a checklist. This allows you to create a conditional "detours" in the checklist flow - for example when some equipment is used optionally, you can add a checklist page that reflects its usage.

The sw_continue statement conditions are analyzed from the top to the bottom and the first one whose condition is true (or without a condition) is followed. Since the conditions are checked only at the moment the checklist is finished, dataref conditions analyzing dataref evolution in time (">", "<", "><", ...) can't be used, as they always evaluate false when checked for the first time.

```
sw_continue:Start with GPU:sim/cockpit/electrical/gpu_on:1
```

```
sw_continue:Start without GPU
```

10.8 sw_rcolsize

Checklist window width is determined automatically from the length of items displayed. Item sw_rcolsize explicitly specifies width of the right side field, which helps to keep checklist from changing width when different pages are displayed.

```
sw_rcolsize : 150
```

```
#
```

Any line starting with a # will be treated like a comment and not processed.

11 Additions to the Xchecklist dataref expressions syntax

Basic Xchecklist syntax for dataref expressions is somewhat limiting and some of the resulting constructs are a bit cumbersome. For this reason we tried to extend the syntax to make those expressions more readable and flexible, while maintaining the backward compatibility.

The old syntax used the following system for the dataref expressions:

sw_item:text:**dataref_expression**:value

The **dataref_expression** can be either a dataref name or an expression combining several conditions using logical operators. For example:

sw_item:text:(sim/dataref1:1) && ((sim/dataref2:2) || (sim/dataref3:3))

The **value** field could contain expressions combining numbers, datarefs and even some functions to compute the actual value. For example:

sw_item:text:sim/dataref1:round(1+{sim/dataref2})

The first addition to the syntax is the possibility to use a constant instead of the **dataref_expression**. This makes it possible to compare a dataref expression (which can be only in the value part) to a constant. For example:

sw_item:text:1:closer_than({sim/dataref1}, {sim/dataref2}, 10)

The second addition is an extension of the syntax of the **value** part; now it can contain complete "tests". For example:

sw_item:text:({sim/dataref1} == 1) && ({sim/dataref2} != 2)

Note the double colon (effectively the **dataref_expression** part is missing) - that enables the new expression syntax! Also note that to avoid confusion concerning the priorities of the arithmetic vs. logical operators, the operands of the logical operators must be enclosed in the parentheses.

You can use usual comparison operators: == for equality, != for inequality, > for greater than, < for lower than, >= for greater or equal, <= lower or equal. Only bear in mind, that testing floating point values for equality or inequality can give you unexpected results! For comparing floating point values preferably use the **closer_than** construct.

Hopefully these new possibilities will make the dataref expressions much more readable.

To silence a line, just prepend it with the '@' sign and nothing will be spoken...

12 closer_than function examples

sw_item:Sync Altimeter|SYNCED:1:closer_than({sim/cockpit/misc/barometer_setting}, {sim/weather/barometer_sealevel_inhg}, 0.03)

sw_item:Sync HSI|SYNCED:1:closer_than({round(sim/cockpit2/radios/indicators/hsi_relative_heading_vacuum_deg_pilot)}, {round(sim/cockpit2/gauges/indicators/compass_heading_deg_mag)}, 0.03)

sw_item:Fuel Contents|CHECK equal L & R levels:1:closer_than({sim/flightmodel/weight/m_fuel1}, {sim/flightmodel/weight/m_fuel2}, 0.01)

sw_item: Fuel Contents|CHECK equal L & R levels:sim/flightmodel/weight/m_fuel_total:
{sim/flightmodel/weight/m_fuel_total}*closer_than({sim/flightmodel/weight/m_fuel1}, {sim/flightmodel/weight/m_fuel2}, 0.03)

Here is a example provided by user per0ni that shows how he is using the closer_than function in his checklist.

sw_item:Sync Altimeter|SYNCED:sim/cockpit/misc/barometer_setting:{sim/cockpit/misc/barometer_setting}
}*closer_than({sim/cockpit/misc/barometer_setting}, {sim/weather/barometer_sealevel_inhg},
0.03)

13 Coloured Text

Starting with version 1.34 we can now have some items in a checklist use coloured text. The first two items to use this feature will be a new item called `sw_item_c` and `sw_itemvoid_c` which will be in addition to the original item `sw_item` and `sw_itemvoid`.

For this to work you need to first define some colours using the new item called `sw_define_colour` that you can define any RGB colour you want using the following format.

```
sw_define_colour:red:1.0,0.0,0.0
sw_define_colour:green:0.0,1.0,0.0
sw_define_colour:yellow:1.0,1.0,0.0
sw_define_colour:darkorange:1.0,0.54,0.0
```

This will define a variable called 'red' that you have given it the correct RGB values. You can have as many as you need in your checklist and can be put before any other checklist items. Here is a example of you to use in a checklist.

```
sw_item_c:\red\Red item\green\Green item
```

```
sw_itemvoid_c:\yellow\Yellow item\darkorange\Darkorange item
```

X-Plane 12 has a issue where the measured text string is returning a length of 30 percent greater than it did in XP11. This means that if you put two different colors in the same line there will be extra spaces depending on how big the previous string was. I have filed a Bug Report about this issue.

14 Number of Lines Per Page

For all checklist authors please follow these recommendations unless you do not care about crash to desktop or corruption of the Xchecklist_Setup items.

As Xchecklist supports 2d and VR please limit your number of lines per page to 29 so your checklist can be used by both type of users. When I am talking about lines this is all lines displayed blank or not.

15 Checker

Checker is a command line program that allows you to make sure your clist.txt has the proper syntax so it will work correctly with Xchecklist. This is a stand alone program so it can be run anywhere you like. It comes in three versions to match the platform and bit size you are running.

On 64 bit Linux the syntax would be “lin_checker_64bit clist.txt 1”

The first argument is the name of the checklist you want to check.

With only the checklist name as a first argument and no second argument, the checker performs a simple syntax check with minimal output, most useful during checklist development.

The second argument is optional and is a number 1 – 4.

1 Will print out parser internal working (good for parser/lexer development).

2 Will evaluate expressions.

3 Will do both 1 & 2.

4 Will do regression testing. Look in regres_test1.txt for explanation and examples.

The way I have been using the checker is I have a folder called Xchecklist_Checker where the checker and a dataref dictionary or dictionaries reside.

A dataref dictionary is a text file starting with clist_dict_ that is a list of datarefs like DataRefTool's drt_last_run_datarefs.txt found in X-Plane Output/preferences. In this case the dictionary would be named clist_dict_drt_last_run_datarefs.txt and put in a folder named Xchecklist_Checker.

To execute properly, you need to set the active working directory to the directory where all the files (checker, checklist and dictionary) are located. The following procedure simplifies the process:

Open terminal window and type CD, followed by a space. Then drag the Xchecklist_Checker folder into the terminal window. Press enter. You have just set the active directory

Next drag the checker file into the terminal window. This will type the checker command with its pathname for you.

Next drag the checklist name which can be from anywhere you are going to test into the terminal and press enter.

16 Create Dictionary

Checker uses a dictionary to help make sure that all the datarefs are correct. To help with this there is a menu selection “Plugins/Xchecklist/Create Dictionary” that will automatically create a custom dictionary that will match the aircraft you are creating a checklist for.

Since this tool uses a file created by DataRefTool it will need to be installed and can be found at <https://github.com/leebaker/datareftool/releases> When X-Plane starts DataRefTool runs and parses many files to find default and custom datarefs and creates a file of datarefs called `Output/preferences/drt_last_run_datarefs.txt`

When you click on “Create Dictionary” it reads the `drt_last_run_datarefs.txt` file line by line. If it finds a non array dataref it will write that dataref to the dictionary file. If it finds a array dataref it will find the length and then create the proper datarefs needed for the dictionary to work corectly.

The dictionary will be called `Resources/plugins/Xchecklist/clist_dict_drt_last_run.txt`

17 Troubleshooting

In writing Xchecklist we tried to mimic checklister so most `clist.txt` checklists should work but if the one you are trying to use did not follow the syntax of checklister there may issues. We will be trying to improve the parsing to remove many of these but in the meanwhile please use the following information to help you resolve them yourself.

If you are having a issue please look in your `Log.txt` file and search for Xchecklist: to find any errors that might have been logged.

Errors about "unexpected TOKEN_ITEM, expecting TOKEN_STRING" mean that there is some issue with the syntax so look at the line it is pointing to and compare it to the examples of syntax in the section above.

Remove extraneous text that is obviously not part of the script. To quickly do this you can put a `#` as the first character on a line and that line will not be processed.