



Example

des BTFV e.V.

Stand: 07.03.2026





Inhaltsverzeichnis

1	h1 Heading 8-)	3
1.1	h2 Heading	3
1.1.1	h3 Heading	3
1.2	Horizontal Rules	4
1.3	Typographic replacements	4
1.4	Emphasis	4
1.5	Blockquotes	4
1.6	Lists	4
1.7	Code	5
1.8	Tables	5
1.9	Links	5
1.10	Images	7
1.11	Plugins	8
1.11.1	Emojies	8
1.11.2	Subscript / Superscript	8
1.11.3	<ins>	8
1.11.4	<mark>	8
1.11.5	Footnotes	8
1.11.6	Definition lists	8
1.11.7	Abbreviations	10
1.11.8	Custom containers	10





Advertisement

:)

- **pica**

- high
qual-
ity
and
fast
im-
age
re-
size
in
browser.

- **ba-
belfish**

- devel-
oper
friendly
i18n
with
plu-
rals
sup-
port
and
easy
syn-
tax.
You
will
like
those
projects!

1 h1 Heading 8-)

1.1 h2 Heading

1.1.1 h3 Heading

1.1.1.1 h4 Heading

1.1.1.1.1 h5 Heading h6 Heading





1.2 Horizontal Rules

1.3 Typographic replacements

Enable typographer option to see result.

(c) (C) (r) (R) (tm) (TM) (p) (P) +-

test.. test... test..... test?..... test!....

!!!!!! ????? „ – —

“Smartypants, double quotes” and ‘single quotes’

1.4 Emphasis

This is bold text

This is bold text

This is italic text

This is italic text

~~Strikethrough~~

1.5 Blockquotes

Blockquotes can also be nested... > ...by using additional greater-than signs right next to each other... > > ...or with spaces between arrows.

1.6 Lists

Unordered

- Create a list by starting a line with +, -, or *
- Sub-lists are made by indenting 2 spaces:
 - Marker character change forces new list start:
 - * Ac tristique libero volutpat at
 - * Facilisis in pretium nisl aliquet
 - * Nulla volutpat aliquam velit
- Very easy!

Ordered

1. Lorem ipsum dolor sit amet
2. Consectetur adipiscing elit
3. Integer molestie lorem at massa
4. You can use sequential numbers...





5. ...or keep all the numbers as 1.

Start numbering with offset:

57. foo

58. bar

1.7 Code

Inline code

Indented code

```
// Some comments  
line 1 of code  
line 2 of code  
line 3 of code
```

Block code “fences”

Sample text here...

Syntax highlighting

```
var foo = function (bar) {  
  return bar++;  
};
```

```
console.log(foo(5));
```

1.8 Tables

Option	Description
data	path to data files to supply the data that will be passed into templates.
engine	engine to be used for processing templates. Handlebars is the default.
ext	extension to be used for dest files.

Right aligned columns

	Option	Description
	data	path to data files to supply the data that will be passed into templates.
	engine	engine to be used for processing templates. Handlebars is the default.
	ext	extension to be used for dest files.

1.9 Links

link text






link with title

Autoconverted link <https://github.com/nodeca/pica> (enable linkify to see)



1.10 Images

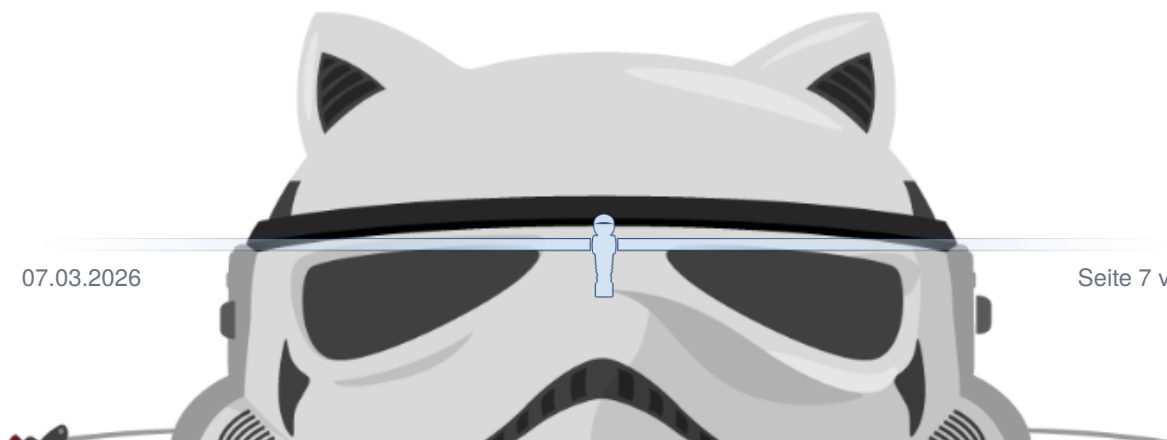



Like links, Images also have a footnote style syntax

With a reference later in the document defining the URL location:

1.11 Plugins

The killer feature of `markdown-it` is very effective support of syntax plugins.

1.11.1 Emojis

Classic markup: `:wink: :cry: :laughing: :yum:`

Shortcuts (emoticons): `:-) :-( 8-) ;)`

see how to change output with `twemoji`.

1.11.2 Subscript / Superscript

- 19th
- H₂O

1.11.3 `<ins>`

`++`Inserted text`++`

1.11.4 `<mark>`

`==`Marked text`==`

1.11.5 Footnotes

Footnote 1 link¹.

Footnote 2 link².

Inline footnote³ definition.

Duplicated footnote reference⁴.

1.11.6 Definition lists

Term 1 Definition 1 with lazy continuation.

Term 2 with *inline markup* Definition 2

`{ some code, part of Definition 2 }`

Third paragraph of definition 2.

Compact style:

¹Footnote **can have markup**
and multiple paragraphs.

²Footnote text.

³Text of inline footnote

⁴Footnote text.





Figure 1: Alt text



Term 1 Definition 1

Term 2 Definition 2a
Definition 2b

1.11.7 Abbreviations

This is HTML abbreviation example.

It converts “HTML”, but keep intact partial entries like “xxxHTMLyyy” and so on.

*[HTML]: Hyper Text Markup Language

1.11.8 Custom containers

here be dragons

