
Start: Mar 14, 10:49:19.825 AM End: Mar 14, 10:49:22.484 AM **Duration** : 2.659 s Scenarios **Features** Steps PASSED - 0 PASSED - 0 PASSED - 0 SKIPPED - 0 SKIPPED - 0 SKIPPED - 12 13 40 50 60 40 50 60 40 50 60 30 Pass % 70 30 Pass % 70 30 Pass % 70 20 80 20 20 80 80 90 90 100


| Feature | | Scenario | | | | Step | | | |
|---------------|----------|----------|---|---|---|------|---|---|----|
| Name | Duration | T | P | F | S | T | P | F | S |
| <u>US_006</u> | 2.659 s | 1 | 0 | 1 | 0 | 13 | 0 | 1 | 12 |

| Tag | Scenario | | | Feature | | | | |
|--------------------|----------|---|---|---------|---|---|---|---|
| Name | T | P | F | S | T | P | F | S |
| @US_006_End_to_end | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @US_006_TC_001_UI | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |

FEATURES SUMMARY

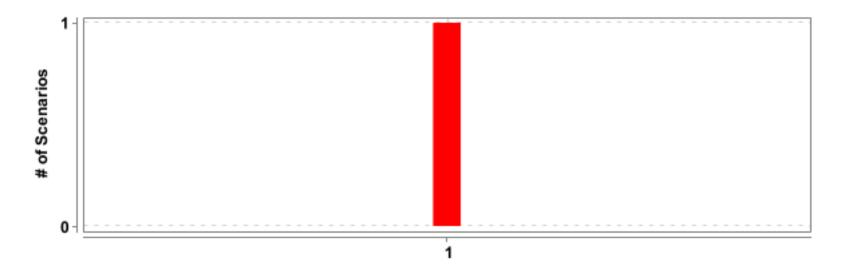


| 3 | # | Feature Name | T | P | F | S | Duration | |
|---|---|---------------|---|---|---|---|----------|--|
| | 1 | <u>US_006</u> | 1 | 0 | 1 | 0 | 2.659 s | |

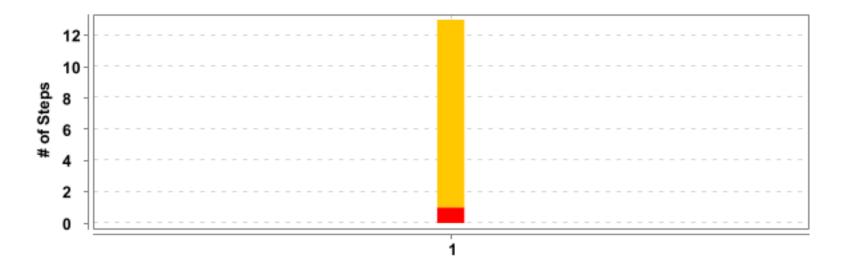


| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|---|---------------|---|----|---|---|----|----------|
| 1 | <u>US_006</u> | New patients should make appointment to be processed in | 13 | 0 | 1 | 12 | 2.650 s |
| | | <u>hospital</u> | | | | | |

DETAILED SECTION -- 6 --

US 006

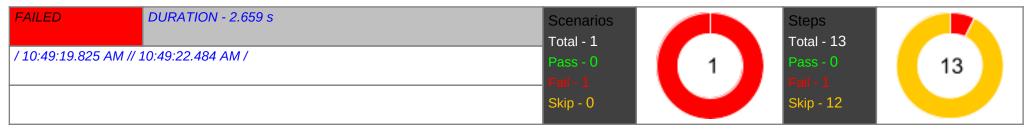

New patients should make appointment to be processed in hospital

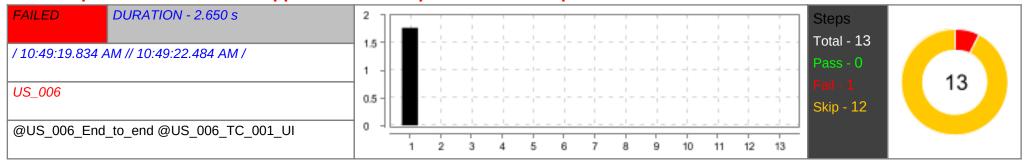

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given User goes to the "medunna_url" | FAILED | 1.767 s |
| | io.cucumber.core.exception.CucumberException: Failed to instantiate class stepdefinitions.ui.US_004_TC_001_UI at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.suncer.suncer.java:75) at io.cucumber.core.runner.Runner.suncer.sun | FAILED | 1.767 \$ |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) | | |
| | at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) | | |
| | at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) | | |
| | at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at org.junit.runner.JUnitCore.run(JUnitCore.java:137) | | |
| | at com.intellij.junit4.JUnit4IdeaTestRunner.startRunnerWithArgs(JUnit4IdeaTestRunner.java:69) | | |
| | at com.intellij.rt.junit.ldeaTestRunner\$Repeater\$1.execute(IdeaTestRunner.java:38) | | |
| | at com.intellij.rt.execution.junit.TestsRepeater.repeat(TestsRepeater.java:11) | | |
| | at com.intellij.rt.junit.IdeaTestRunner\$Repeater.startRunnerWithArgs(IdeaTestRunner.java:35) | | |
| | at com.intellij.rt.junit.JUnitStarter.prepareStreamsAndStart(JUnitStarter.java:235) | | |
| | at com.intellij.rt.junit.JUnitStarter.main(JUnitStarter.java:54) | | |
| | Caused by: java.lang.reflect.InvocationTargetException | | |
| | at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:79) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) | | |
| | at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) | | |
| | 46 more Caused by: org.openqa.selenium.remote.http.ConnectionFailedException: Unable to establish websocket connection to | | |
| | http://localhost:65179/devtools/browser/4dc16658-7867-43c7-a857-44bb054982f8 Build info: version: '4.7.2', revision: '4d4020c3b7' System | | |
| | info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '19.0.2' Driver info: driver.version: Driver | | |
| | at org.openqa.selenium.remote.http.netty.NettyWebSocket. <init>(NettyWebSocket.java:102)</init> | | |
| | at org.openqa.selenium.remote.http.netty.NettyWebSocket.lambda\$create\$3(NettyWebSocket.java:128) | | |

| # | Step / Hook Details | Status | Duration |
|----|---|---------|----------|
| | at org.openqa.selenium.remote.http.netty.NettyClient.openSocket(NettyClient.java:107) at org.openqa.selenium.devtools.Connection. <init>(Connection.java:78)</init> | | |
| | at org.openqa.selenium.chromium.ChromiumDriver.lambda\$new\$2(ChromiumDriver.java:116) | | |
| | at java.base/java.util.Optional.map(Optional.java:260) at org.openqa.selenium.chromium.ChromiumDriver. <init>(ChromiumDriver.java:114)</init> | | |
| | at org.openqa.selenium.chrome.ChromeDriver. <init>(ChromeDriver.java:114)</init> | | |
| | at org.openqa.selenium.chrome.ChromeDriver. <init>(ChromeDriver.java:50)</init> | | |
| | at utilities.Driver.getDriver(Driver.java:38) | | |
| | at pages.HomePage. <init>(HomePage.java:11)</init> | | |
| | at stepdefinitions.ui.US_004_TC_001_UI. <init>(US_004_TC_001_UI.java:18)</init> | | |
| | at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) | | |
| 2 | When User tries to log in | SKIPPED | 0.000 s |
| 3 | And User scrolls all the way down | SKIPPED | 0.000 s |
| 4 | And User enters valid first name "Leo" | SKIPPED | 0.000 s |
| 5 | And User enters valid last name "Caprio" | SKIPPED | 0.000 s |
| 6 | And User enters valid ssn "345-66-7346" | SKIPPED | 0.000 s |
| 7 | Then verify that ssn "345-66-7346" is matching with user's | SKIPPED | 0.001 s |
| 8 | And User enters valid email "leocaprioo@gmail.com" | SKIPPED | 0.000 s |
| 9 | And User enters valid phone number "953-433-7751" | SKIPPED | 0.001 s |
| 10 | And User enters valid date "26-02-2023" | SKIPPED | 0.000 s |
| 11 | And User clicks on Send an Appointment Request button | SKIPPED | 0.001 s |
| 12 | Then Verify that the appointment has been created | SKIPPED | 0.000 s |
| 13 | And close the application | SKIPPED | 0.000 s |
| | AFTER - hooks.Hooks.tearDownScenario(io.cucumber.java.Scenario) | FAILED | 0.860 s |
| | org.openqa.selenium.remote.http.ConnectionFailedException: Unable to establish websocket connection to http://localhost:65195/devtools/browser/81d4ac4a-cca8-452d-bcfa-d327eea5e391 Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os. arch: 'amd64', os.version: '10.0', java.version: '19.0.2' Driver info: driver.version: Driver at org.openqa.selenium.remote.http.netty.NettyWebSocket. kitp.netty.NettyWebSocket.sinit (NettyWebSocket.java:102) at org.openqa.selenium.remote.http.netty.NettyWebSocket.lambda\$create\$3(NettyWebSocket.java:128) | | |
| | at org.openqa.selenium.remote.http.netty.NettyClient.openSocket(NettyClient.java:107) at org.openqa.selenium.devtools.Connection. <init>(Connection.java:78)</init> | | |
| | at org.openqa.selenium.chromium.ChromiumDriver.lambda\$new\$2(ChromiumDriver.java:116) | | |
| | at java.base/java.util.Optional.map(Optional.java:260) | | |
| | at org.openqa.selenium.chromium.ChromiumDriver. <init>(ChromiumDriver.java:114)</init> | | |
| | at org.openqa.selenium.chrome.ChromeDriver. <init>(ChromeDriver.java:82)</init> | | |
| | at org.openqa.selenium.chrome.ChromeDriver. <init>(ChromeDriver.java:50)</init> | | |
| | at utilities.Driver.getDriver(Driver.java:38) | | |

DETAILED SECTION -- 9 --

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | at hooks.Hooks.tearDownScenario(Hooks.java:24) | | |