

Customer Churn Analytics Report


Dataset: customer_churn_sample(3).csv | 15 customer records | Analysis objective: churn rate, CLV, MRR loss, behavioral drivers, and recommendations.

1. Executive Summary

The baseline churn rate is **46.7%** (7 of 15 customers), implying a retention rate of **53.3%**. The average historical customer value (CLV proxy) is **\$2,088.48**, based on TotalCharges. Current monthly recurring revenue associated with churned customers is **\$409.93**, which is **32.3%** of the sample's total monthly charges.

Metric	Result
Baseline churn rate	46.7%
Retention rate	53.3%
Average CLV proxy	\$2,088.48
Median CLV proxy	\$1,099.78
Churned-customer MRR loss	\$409.93 / month


2. Churn by Contract Type

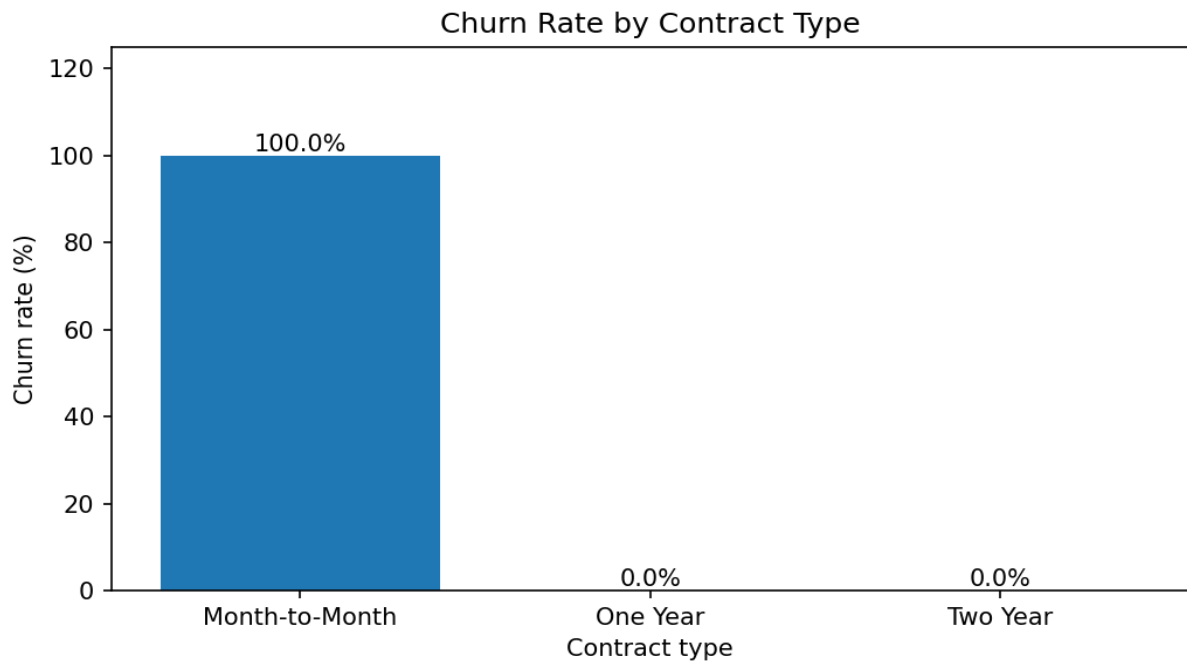

In this sample, Month-to-Month customers have a 100% churn rate, while One Year and Two Year customers have 0% churn. This is a descriptive pattern in a very small sample, not evidence of causation or a population-wide effect.

Contract	Customers	Churned	Churn Rate
Month-to-Month	7	7	100.0%
One Year	4	0	0.0%
Two Year	4	0	0.0%


3. Churn by Tenure

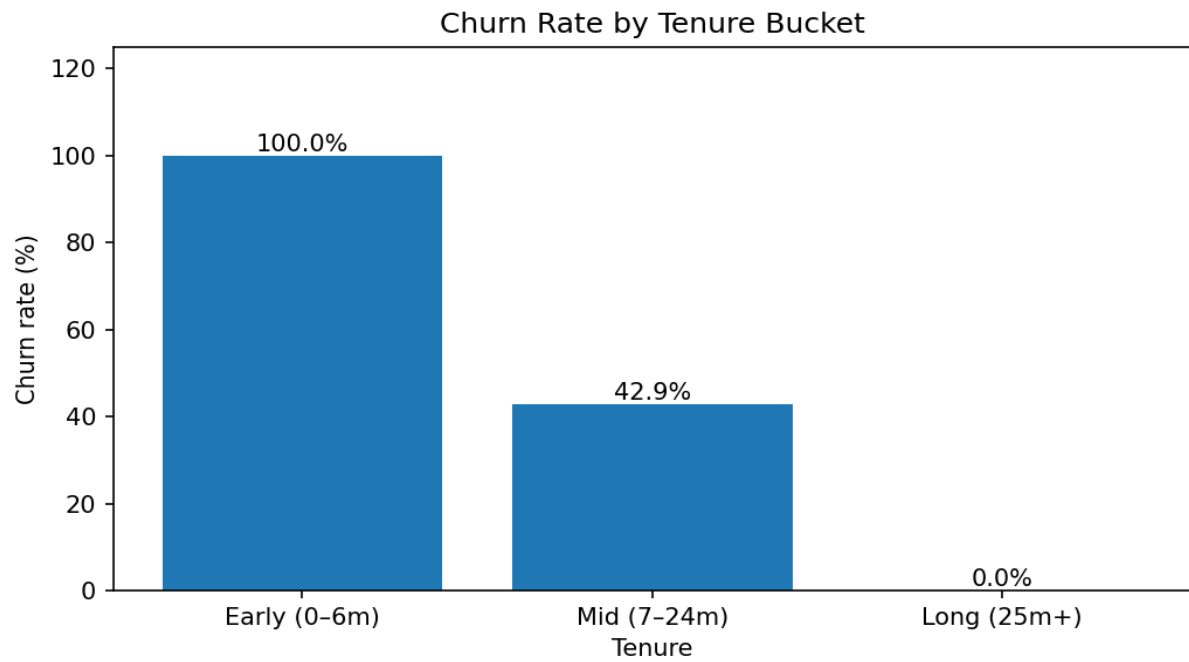

The early-tenure bucket (0–6 months) shows the highest churn in this sample. The mid-tenure and long-tenure groups show no churn. Because the dataset contains only 15 records, these rates should be treated as directional signals for further investigation.

Tenure	Customers	Churned	Churn Rate
Early (0–6m)	4	4	100.0%
Mid (7–24m)	7	3	42.9%
Long (25m+)	4	0	0.0%


4. Churn by Payment Method

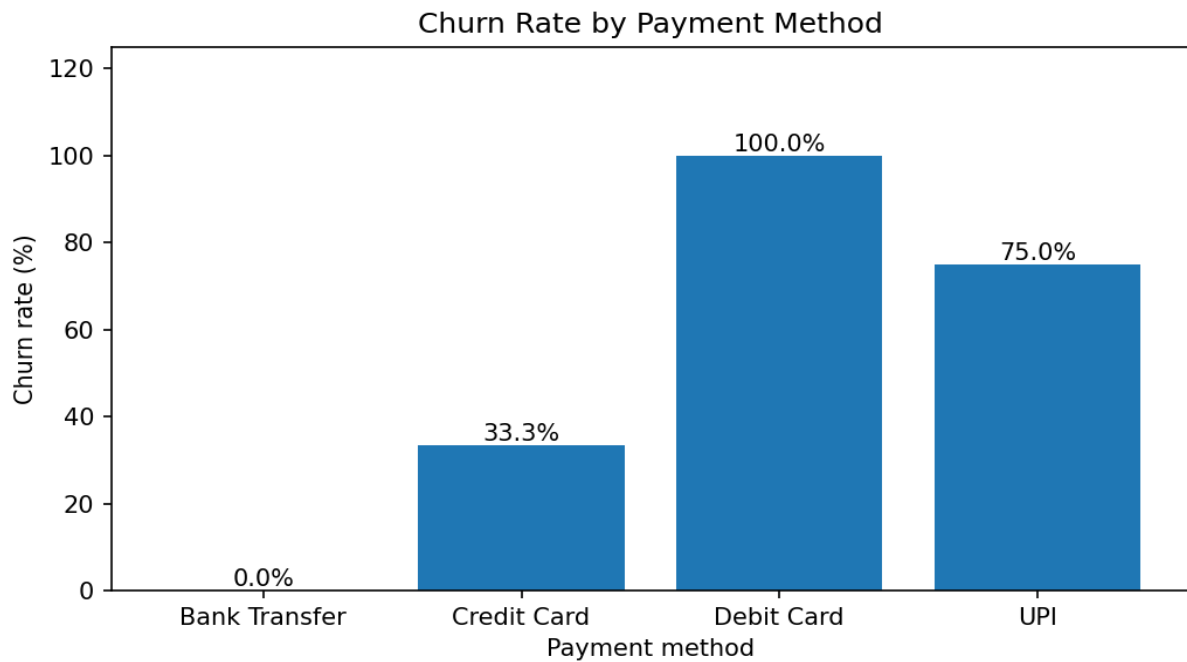

UPI has the highest observed churn rate in this sample, followed by Debit Card. Credit Card and Bank Transfer show lower observed churn. Payment method may be a useful segmentation variable, but the sample is too small to establish a causal relationship.


Payment Method	Customers	Churned	Churn Rate
Bank Transfer	3	0	0.0%
Credit Card	6	2	33.3%
Debit Card	2	2	100.0%
UPI	4	3	75.0%

5. Behavioral Driver: Support Tickets

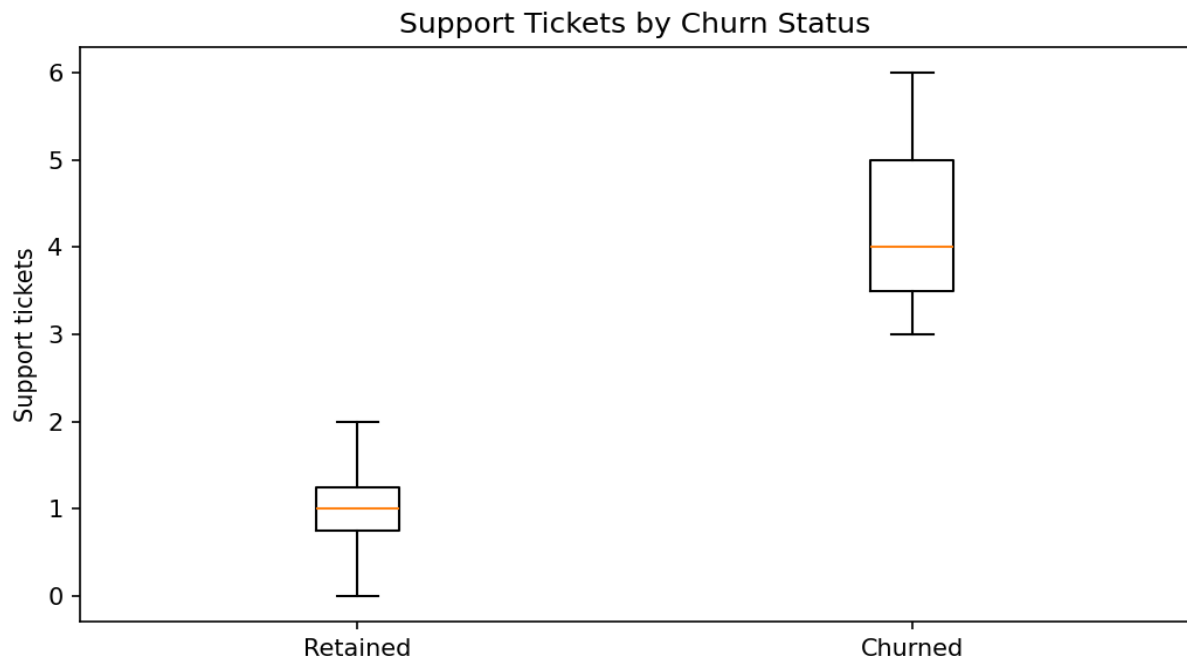

Average support tickets among retained customers are **1.0**, compared with **4.3** among churned customers. The difference suggests that higher support activity is a useful behavioral signal in this sample. It should be investigated as a possible early-warning indicator rather than treated as proof that support interactions cause churn.

6. Combined Segment View

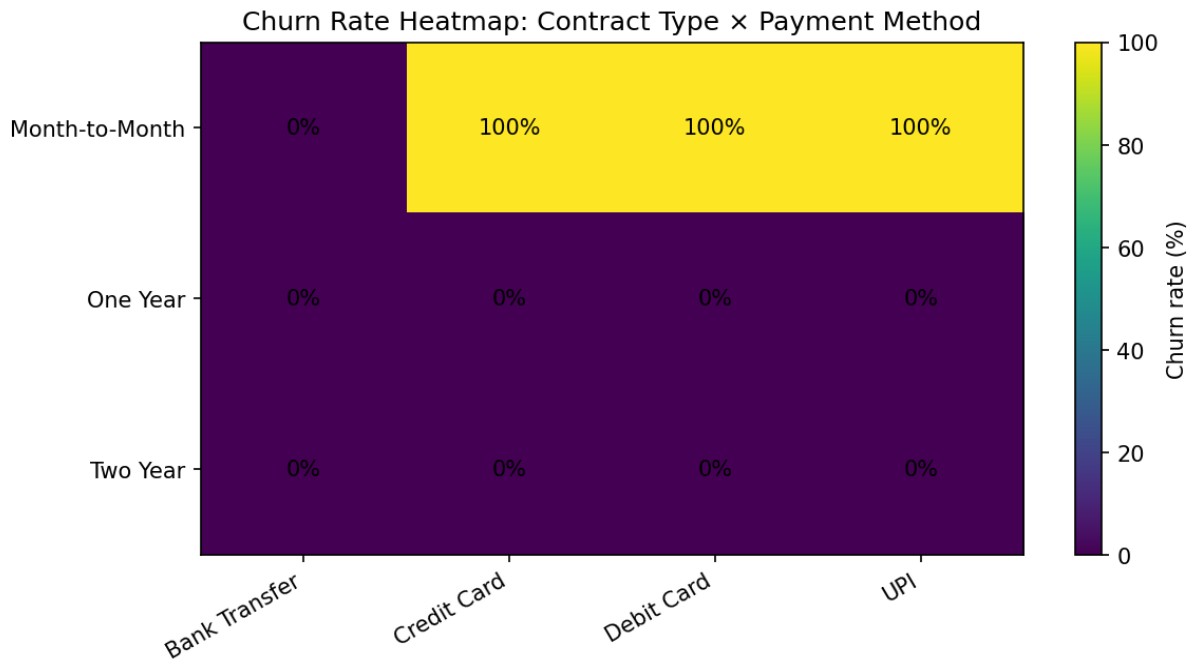

The heatmap combines contract and payment method. Sparse combinations should be interpreted carefully because some cells have few or no observations. The main practical use is to identify segments that deserve additional monitoring once a larger customer population is available.

7. Actionable Business Recommendations

- **Strengthen the first 6 months:** create onboarding checkpoints, product education, and proactive outreach for early-tenure customers.
- **Monitor support-ticket spikes:** flag customers with repeated support interactions for service recovery or proactive customer-success contact.
- **Investigate month-to-month churn:** review cancellation reasons, renewal friction, pricing perceptions, and upgrade/annual-plan offers before assuming contract type is causal.
- **Segment payment-method journeys:** examine failed payments, payment friction, and customer preferences by payment method, especially where observed churn is elevated.
- **Protect high-value customers:** use TotalCharges/tenure to identify valuable customers and prioritize retention interventions where the potential recurring-revenue impact is material.
- **Validate at scale:** repeat this analysis on a larger dataset and test statistical significance before making major pricing, contract, or product decisions.

8. Methodology & Caveats

CLV is reported here as a historical CLV proxy equal to TotalCharges because the supplied sample contains customer tenure and cumulative charges but no acquisition cost, gross margin, discount rate, or future retention assumptions. MRR loss is calculated as the sum of MonthlyCharges for currently churned customers. All segment rates are descriptive percentages from a 15-customer sample and should not be generalized without a larger dataset.