

SICK OLLIE

Classic | Studio v2

SICK OLLIE

NODE PACK

CLASSIC | STUDIO v2

WHAT'S NEW + HOW TO USE IT

A compact reference for the current v2 release.

AUGUST 2026

What's new

SHUFFLE

randomize, but no repeats until every eligible value has been used once.

CLASSIC UPDATES

- No-repeat Shuffle for main LoRAs, Prompt, Outfit A/B/C, and Scene.
- Prompt / outfit / scene indexes now show a searchable line preview plus usable line count.
- Outfit and Scene shuffle only consume a value when their token is actually used.
- Loader clean-name choices are delimiter-aware and main_folder exposes the active LoRA's immediate folder.
- Generation Core accepts optional positive / negative CONDITIONING inputs.
- Prompt metadata records only values that actually contributed to the resolved prompt.

STUDIO RELEASE

- New Studio versions of Loader, Prompt, Generation, Output, Preview, and Persist + Display.
- Black CMYKG dashboard UI with grouped controls and fewer visible sockets.
- Auto Context carries Loader + Prompt + Generation details into Studio Output automatically.
- Output can decode samples internally from samples + VAE, so a separate VAE Decode node is optional.
- New structured Sick Ollie metadata is embedded in saved images.
- New Image Metadata Core can inspect live workflow images or saved files standalone.

THE SHORT VERSION

Classic The familiar workflow, upgraded with the final testing and metadata features.

Studio The same workflow ideas with a purpose-built UI, less wiring, and automatic context.

Use Classic for existing workflows. Build new graphs with Studio when you want the cleaner system.

Classic updates

LOADER CORE

- Select After generate = shuffle for random order with full coverage.
- Shuffle respects folder scope, include subfolders, epoch filter, and Skip None.
- Use main_folder when you need the active LoRA's creator/project folder downstream.
- Clean-name candidates now handle more filename structures.

PROMPT CORE

- Prompt, Outfit A/B/C, and Scene each get their own no-repeat shuffle bag.
- Index selectors show index + line preview; blank lines do not count.
- Outfit / Scene entries are only consumed when their token is present in the source prompt.
- Usage-aware metadata stores only values that were actually used.

GENERATION CORE


- Connect positive_conditioning to override internal positive text encoding.
- Connect negative_conditioning to override the empty negative fallback.
- Leave them empty for the normal Classic text-prompt path.

OUTPUT CORE

- Classic keeps the explicit metadata/name/index wires for compatibility.
- Saved images now include richer structured Sick Ollie metadata in addition to normal Comfy/Civitai metadata.

Studio quick start

MINIMAL STUDIO GRAPH

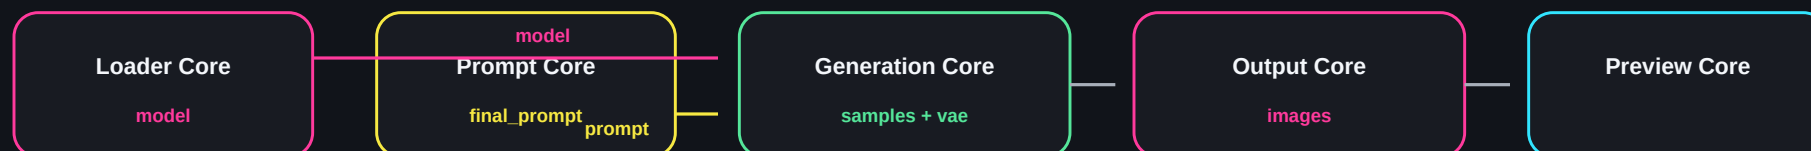



AUTO CONTEXT

- Studio Output automatically reads Loader, Prompt, and Generation context from the workflow.
- You do not need to wire clean name, raw stem, model name, seed, prompt indexes, log files, or applied LoRAs just to save metadata/names.
- Those details still appear in Output's Resolved Inputs and are embedded in image metadata.

SUPPORTING STUDIO NODES

- Preview Core keeps the fit / background preview controls and image passthrough.
- Persist + Display Resolved Prompt keeps a visible resolved prompt checkpoint when you want one in the graph.
- Image Metadata Core is optional in the generation graph and also works completely standalone.

Studio Loader Core

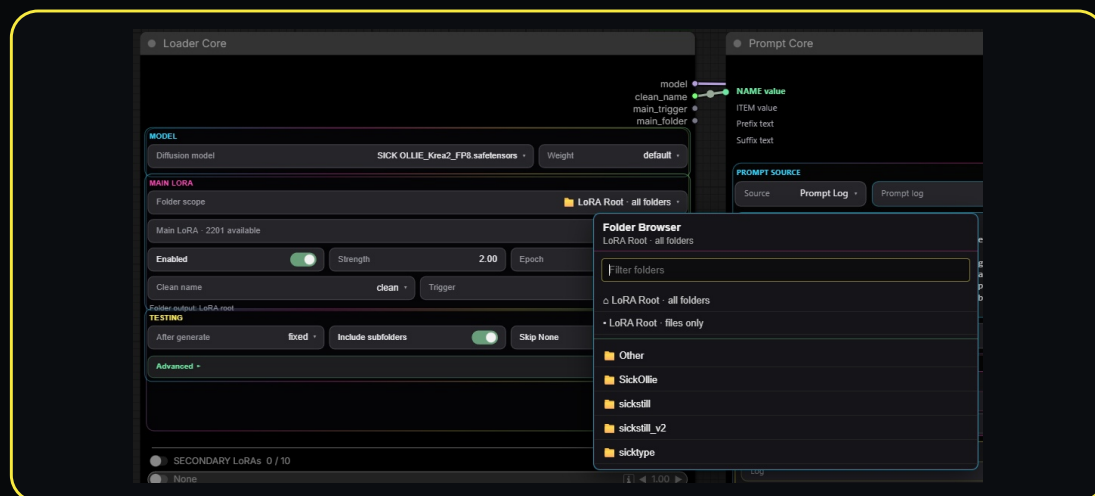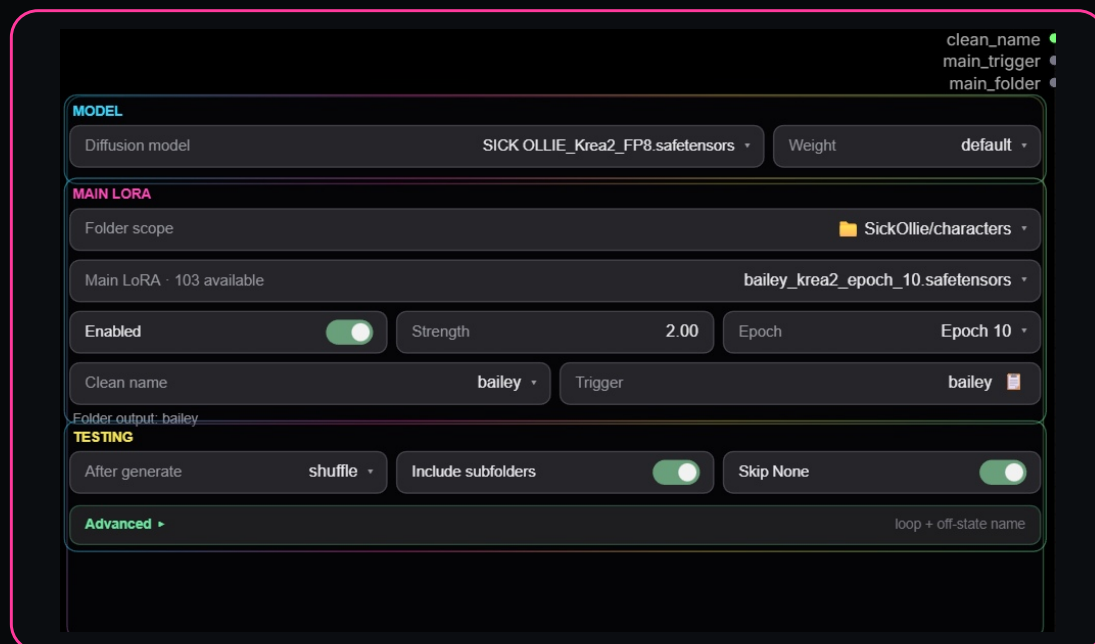




WHAT'S NEW

- Folder scope and Main LoRA selection are separate.
- Folder scope uses a hierarchical browser instead of one giant full-path list.
- Main LoRA is a searchable master list filtered by folder scope, subfolders, and epoch.
- The eligible LoRA count is shown directly in the selector.
- Clean Name + Trigger are visible resolved values; Trigger has copy feedback.
- Advanced holds lower-frequency loop / off-state behavior.
- Studio exposes only model, clean_name, main_trigger, and main_folder.

HOW TO USE IT

- 1 Choose a Folder scope. Leave it at LoRA Root to test everything, or browse to any parent/creator folder.
- 2 Turn Include subfolders on when the scope should include everything beneath it.
- 3 Choose an Epoch filter if needed. The Main LoRA count updates to the eligible pool.
- 4 Pick a LoRA manually, or set After generate to shuffle for a no-repeat testing pass.

Studio Prompt Core

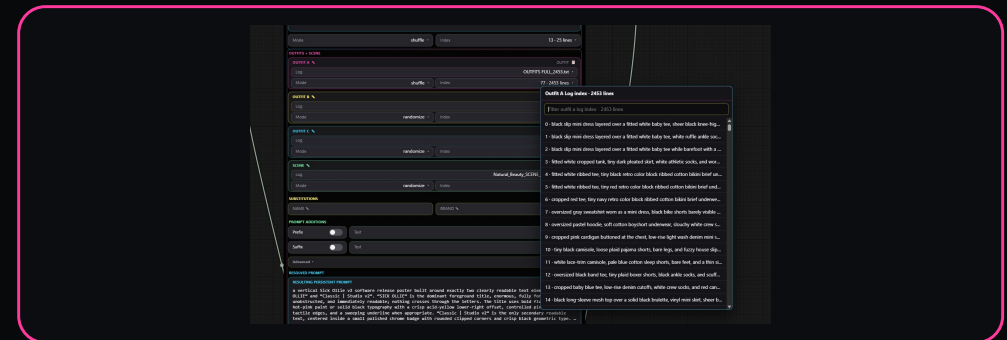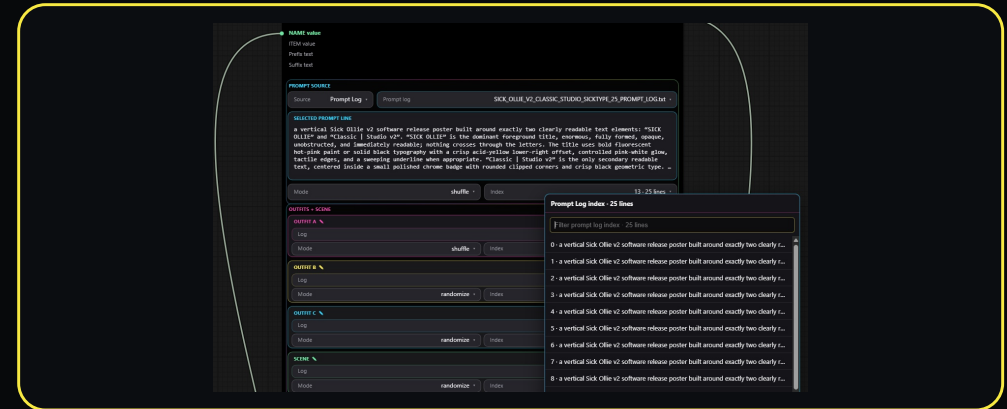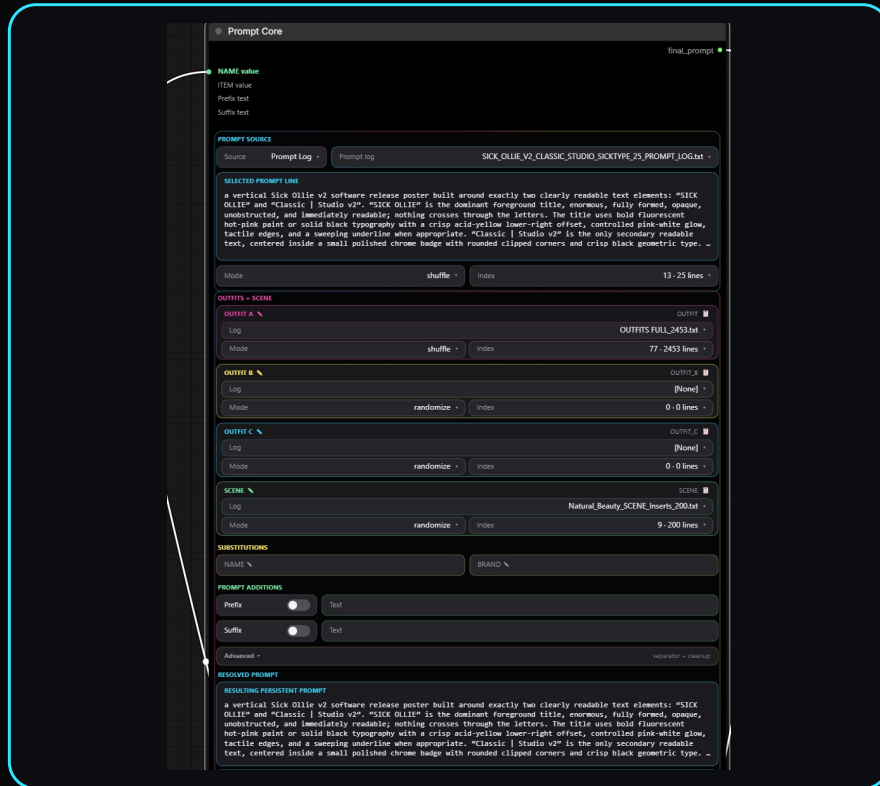


WHAT'S NEW

- Prompt Source cleanly switches between Manual and Prompt Log. Manual mode has one real editor.
- Prompt, Outfit A/B/C, and Scene each show log, mode, searchable index preview, and usable line count.
- Nested file browsing works with organized prompt/outfit/scene subfolders.
- NAME + ITEM are grouped under Substitutions; Prefix + Suffix are grouped under Prompt Additions.
- Only NAME value, ITEM value, Prefix text, and Suffix text remain as external input sockets. final_prompt is the only graph output.

USE

- 1 Choose Manual or Prompt Log.
- 2 Load any outfit/scene logs you need.
- 3 Use shuffle when you want every usable line once in random order.
- 4 Copy the resolved prompt from the bottom when needed.

Studio Generation Core

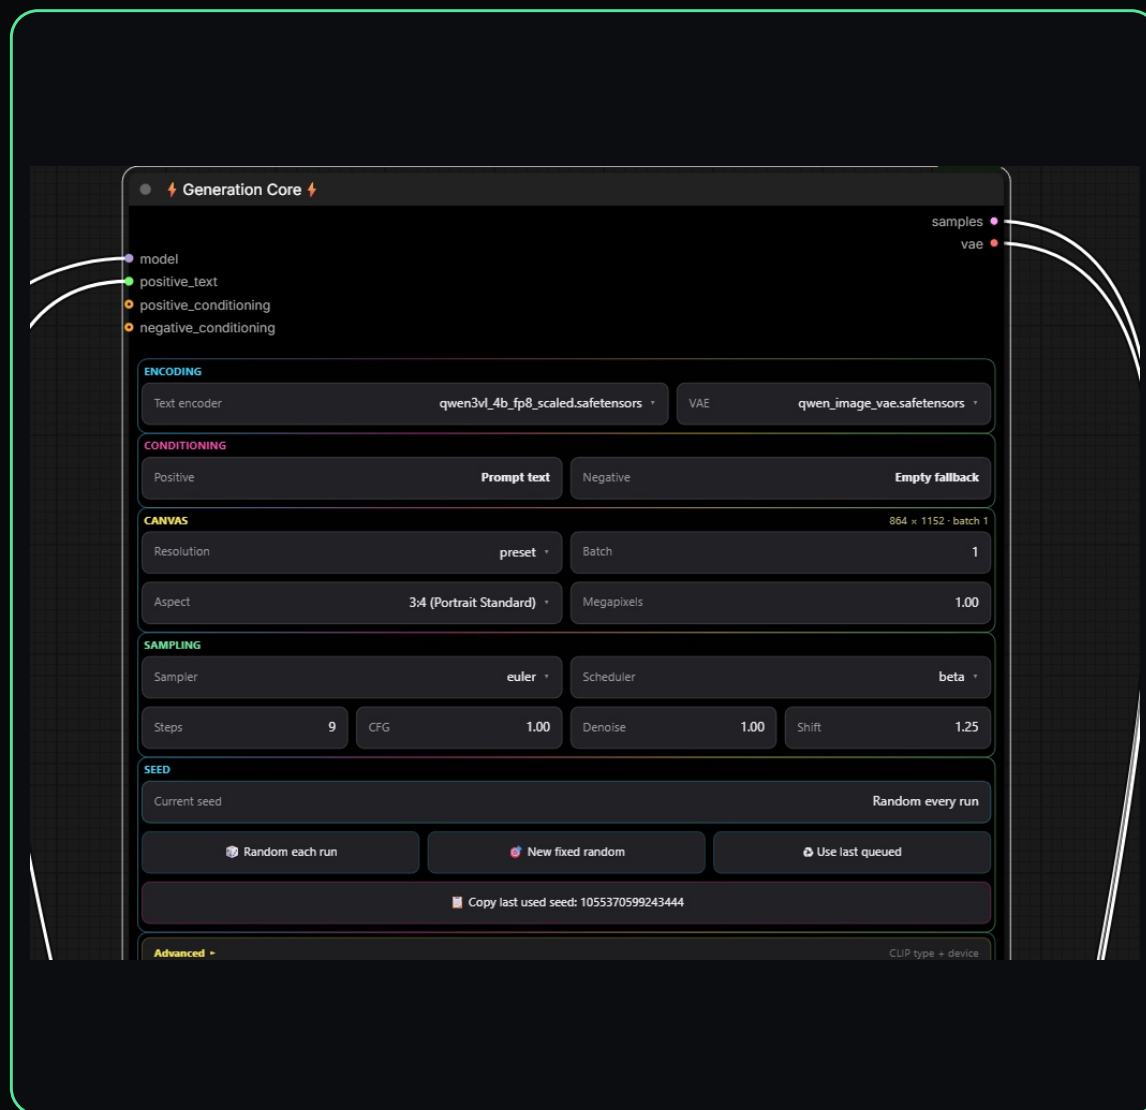

WHAT'S NEW

- Encoding, Conditioning, Canvas, Sampling, Seed, and Advanced are grouped into one console.
- Positive / Negative cards show whether the node is using prompt text / empty fallback or external conditioning.
- Canvas supports preset or custom resolution controls with the resolved size shown in the section.
- Seed controls: Random each run, New fixed random, Use last queued, and Copy last used seed.
- Studio Generation outputs only samples + vae. Generation details travel through Auto Context.

DEFAULT SETUP

- Preferred encoder: qwen3vl_4b_fp8_scaled.safetensors when installed.
- Preferred VAE: qwen_image_vae.safetensors when installed.
- 3:4 Portrait Standard • 1 MP • batch 1.
- Euler • beta • 9 steps • CFG 1 • denoise 1 • shift 1.25.
- Random every run.

USE

Connect model + final_prompt. Connect external CONDITIONING only when a workflow needs to override the built-in encoding path.

Studio Output Core

The interface is divided into several sections for configuring the output process:

- DESTINATION:** Output root is set to `_SickOllie_StudioNodes`.
- AUTO CONTEXT:** Loader + Prompt + Generation + Samples + VAE.
- SUBFOLDER RECIPE:**
 - Literal: `clean_name`
 - Delimiter: `-`
 - Vars: Var 1: `clean_name`, Var 2: `[None]`, Var 3: `[None]`, Var 4: `[None]`
 - Resolved recipe: `{clean_name}`
- FILENAME RECIPE:**
 - Literal: `raw_stem`
 - Delimiter: `-`
 - Vars: Var 1: `raw_stem`, Var 2: `model_name`, Var 3: `time_hhmmss`, Var 4: `[None]`, Var 5: `[None]`, Var 6: `[None]`
- FILE + METADATA:**
 - Format: `png`, Quality: `100`, Counter digits: `5`
 - Prompt metadata: ☒ Workflow metadata: ☒ Civitai metadata: ☒
- RESOLVED INPUTS:**
 - Clean name: `sicktype`, Raw stem: `sicktype_krea2_variant...`, LoRA folder: `sicktype`
 - Model: `SICK OLLIE_Krea2_FP8`, Seed: `1055370599243444`, Trigger: `sicktype`
 - Prompt index: `output\_SickOllie_Stud...`, Outfit index: `output\_SickOllie_Stud...`, Scene index: `output\_SickOllie_Stud...`
- LAST SAVE:** Find output path.


WHAT'S NEW

- Auto Context removes most metadata / naming wires.
- Connect either decoded images OR samples + vae. If both are connected, images take priority.
- samples + vae are decoded inside Output, so the separate VAE Decode node is optional.
- Subfolder Recipe and Filename Recipe show exactly what is being assembled.
- Resolved Inputs shows the context Output actually received; values can be copied.
- Last Save shows the final relative output path.
- Only images remains as an output socket.

HOW TO USE IT

- 1 Set Output root.
- 2 Build the subfolder recipe from literal text + variables.
- 3 Build the filename recipe the same way.
- 4 Choose format / quality / counter digits and metadata toggles.
- 5 Connect Output images to Preview or any downstream image node.

Image Metadata Core

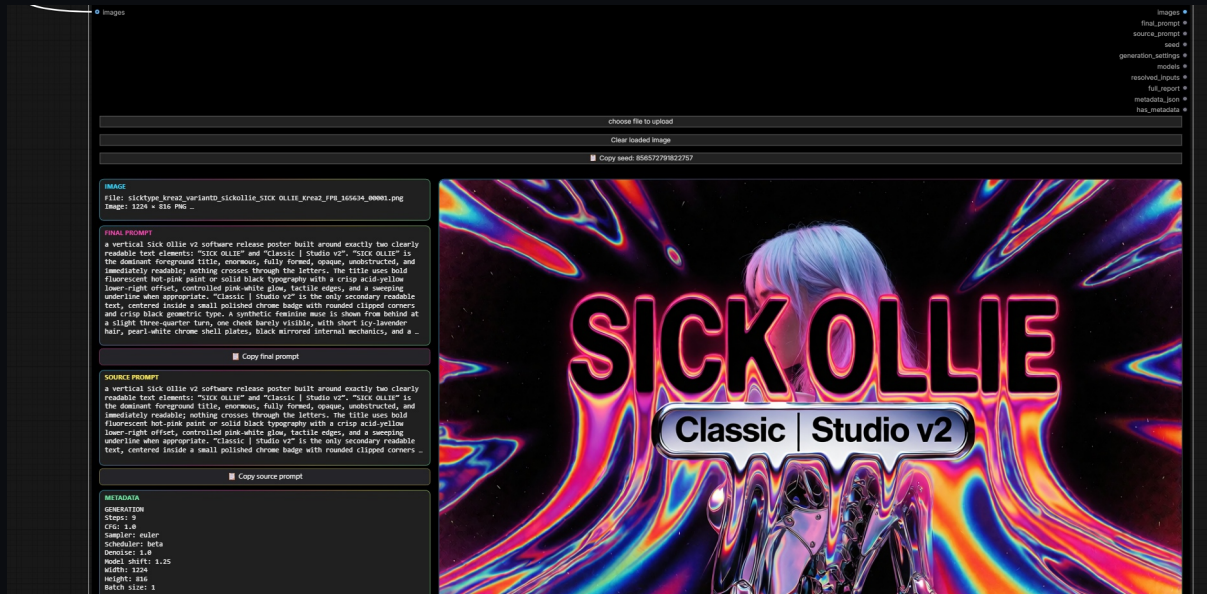

WHAT IT DOES

- Loads PNG, JPG, or WebP immediately, either standalone or from a live IMAGE connection.
- Shows the image beside Final Prompt, Source Prompt, Seed, and a full metadata report.
- Reads Sick Ollie structured/legacy metadata, Comfy prompt/workflow data, and standard parameters metadata.
- Filters loaded-but-unused Prompt Core values when enough information exists to determine they were not used.

HOW TO USE IT

- 1 Drop a saved image on the node or click choose file to upload.
- 2 Copy Seed, Final Prompt, Source Prompt, or Full Metadata Report as needed.
- 3 Clear when finished. Inspector uploads use temporary storage, not ComfyUI/input.
- 4 Connect IMAGE for live monitoring. Live input takes priority over a manually loaded file.

USEFUL OUTPUTS

images • final_prompt • source_prompt • seed • generation_settings • models • resolved_inputs • full_report • metadata_json • has_metadata

The richest report comes from v2 Sick Ollie images, but the node is useful even in unrelated Comfy workflows.

Studio supporting nodes

PREVIEW CORE

Simple on purpose.

- IMAGE in → IMAGE out.
- Fit mode controls how the image fills the preview area.
- Background mode and background color control the preview treatment.
- Use it as the final visual monitor after Output, or anywhere else an IMAGE preview is useful.
- It keeps its own Studio node identity so Studio and Classic workflow schemas stay separate.

PERSIST + DISPLAY RESOLVED PROMPT

A visible prompt checkpoint.

- Connect a resolved prompt when you want it visibly preserved in the graph.
- Useful for workflows where a human-readable prompt display matters even though structured metadata is already carried automatically.
- Studio uses a separate node identity from Classic for schema isolation.

WHEN TO USE THEM

Preview Core

Use whenever you want a dedicated, controllable image monitor.

Persist Prompt

Use when the resolved prompt itself should remain visible in the workflow.

Image Metadata

Use when you need to inspect, copy, or route metadata from the image itself.

All optional

None of these are required for Studio Output to save a fully metadata-aware image.

Reference card

TASK	CLASSIC	STUDIO
Choose / batch LoRAs	Flat native controls + folder filter	Folder Scope browser + filtered Main LoRA master list
Random test without repeats	After generate = shuffle	After generate = shuffle
Inspect prompt log line	Index + line preview dropdown	Index + line preview inside grouped Prompt UI
Prompt line count	Shown in preview selector	Shown in preview selector
Pass naming / metadata to Output	Explicit wires	Auto Context
Decode final samples	Separate VAE Decode	Output can decode samples + vae internally
Output sockets	Compatibility-oriented / explicit	Lean: only graph-useful sockets
Inspect saved image metadata	External / manual tools	Image Metadata Core
Existing v1 workflows	Use Classic	Build fresh Studio nodes

Classic = compatibility + upgraded testing. Studio = cleaner UI + automatic context + fewer wires.