Brief Article

The Author

 $January\ 14,\ 2014$

1 Context Knowledge

 $$\operatorname{OM-1}$$ Identifying knowledge-oriented problems and opportunities in the organization

Organization	Problems and Opportunities Worksheet OM-1			
Model				
Problems and op-	Difficulty for the travel agent in designing pesonalized itineraries,			
PORTUNITIES	due to customers lack of knowledge on the subject and great va-			
	riety of points of interest in a location. The process of building			
	personalized itinerary is time-consuming for the agent, and could			
	be subjected to multiple revisions or discarded altogether from the			
	client.			
Organizational	Mission, vision, goals: efficient itinerary design, customer satis-			
CONTEXT	faction, improving time schedule of the travel agent, increasing the			
	number of satisfied requests;			
	External factors: requirements of the client, client profile (age,			
	interests), set up of the destination, geographical topology of the			
	location;			
	Strategy: given a list of possible locations, assemble an itinerary			
	that best suits the customer's requirements;			
	4. Its value chain and the major value drivers			
SOLUTIONS	Automatization of the selection process for the locations and the			
	revision of compiled itinearies, leaving to the travel agent the task			
	of interacting with the client and proposing the drafts.			

 $$\operatorname{OM-2}$$ Description of organizational aspects that have an impact on and/or are affected by chosen knowledge solutions

Organization	Variant Aspects Worksheet OM-2			
Model				
STRUCTURE	See Figure 1			
Process	See Figure 2			
People	Single-customer Travel Agent			
RESOURCES	Database of locations containing all the available infomation.			
	Database of customers containing personal features and prefer-			
	ences.			
	Designing software capable of assembling the itinerary.			
Knowledge	Requirement rules: knowledge to choose a set of locations based			
	on the client features;			
	Preference rules: knowledge to favour a some location more than			
	others based on client expressed preferences;			
	Constraint rules: knowledge to exclude or include specific loca-			
	tions based on client explicit directives.			
Culture & Power	The opinion of the client is highly prioritized. Being a small agency			
	no particular power influence is noticeable between co-workers: the			
	hierarchical structure is vertical, with the president occupying the			
	highest position and in charge of all important decisions.			

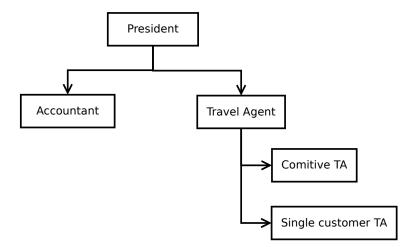


Figure 1: Organization structure

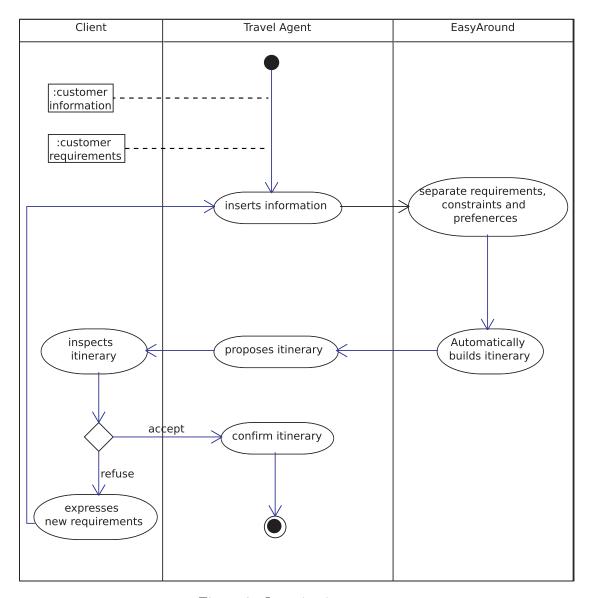


Figure 2: Organization process

 $$\operatorname{OM}\text{-}5$$ Checklist for the feasibility decision document

Organization	Checklist for Feasibility Decision Document: Worksheet			
Model	OM-5			
Business feasibil-	Benefits: the itinerary process is quicker, the client is more satisfied, travel agents can schedule their work time on a higher number of customers; Added value: the speed up should be quite significant, it is expected that the TA can satisfy a client surplus of 30% with the time he saved in building and reviewing degigns. Costs: the costs are a summation of the salary of the employees working on building the software (programmers, experts) and the time spent in integrating the licenced content into the automated system; Organizational Changes: the system is built to avoid organizational changes. Risks: the system could have difficulties in selecting the right locations based on customer's requests, not posing as an advantage			
	to the Travel Agent. In this case the workload would not decrease.			
TECHNICAL FEASI-BILITY	Complexity: the complexity level of the required reasoning is high, because it need the integration of a lot of informal knowledge into a formal system, and the handling of many constraints; Critical aspects: the solution must be developed correctly, otherwise the risk of losing clients grows. Furthermore, if the results are not as expected, the software could not be accepted or used inside the acency. Success Measures: if the design is coherent with the requirements, if there are no constraint violations, if it corresponds to the preferences of the client, and it is at least the same or better than a manual design done by the TA, then it is a success. User Interface: the UI can be constructed to be very simple and intuitive, requiring no additional knowledge about IT systems from the user. Additional Interactions: the only extern interaction is with the structured database of locations, which basic structure is fully impemented and documented in many shapes and programming languages. Further technological risks: there are no further risks;			

Project feasibil-			
ITY	them to save time for single-customer itinerary design, the president		
	is interested in employing new technologies to increment profit.		
	Resources : since the expertise is provided by the agency itself, the		
	necessary resources left are the ones needed for the programmers.		
	Being freelancers, their cost is relatively limited by the absence of		
	an organization that coordinates the work.		
	Knowledge : the knowledge is available since it's provided by the		
	agency itself, and it's largely available on public means such as the		
	web;		
	Expectations: the expectation are realistic;		
	Communication: the communication is efficient, both between		
	the programmers who have worked with each other previously, and		
	between the expert consultant and the team since they are acquain-		
	tances.		
Proposed actions	1. Focus: speed-up of the design process, increased number of cus-		
	tomers;		
	2. Target solution: Automatization of the design and revision pro-		
	cess;		
	3. Results, costs, and benefits: satisfaction of the client, saved work-		
	load and working time for the TA;		
	4. Project actions: building the Knowledge Model, create the De-		
	sign Model, create the Communication Model, implement the sys-		
	tem, embed the knowledge in the software, test the software and		
	collect results;		
	5. Risks: the system could have difficulties in selecting the right		
	locations based on customer's requests, not posing as an advantage		
	to the Travel Agent. In this case the workload would not decrease		
	1 ~ ~		

 $$\operatorname{TM}\text{-}1$$ Refined description of the tasks within the target process

Task Model	Task Analysis Worksheet TM-1		
Task	Automated Design		
ORGANIZATION	Task is controlled by the Travel Agent and executed by the appointed software. It is the product of non-human intervention.		
Goal and value	The goal is the design of an itinerary composed of multiple locations, based on the preferences and the requirements set by the customer.		
DEPENDENCY AND FLOW	Input tasks: Evaluate Request Output tasks: Propose Itinerary		
Objects handled	Input objects: requirements, preferences and constraints from the customer. Output objects: itinerary. Internal objects: database of locations.		
TIMING AND CONTROL	Frequency and duration: whenever a client asks for a custom-made itinerary, arbitrarily short duration. Control relation: (I) Preconditions: the request from the client must be organized in a set of requirements, constraints and preferences; (II) Postconditions: the itinerary must satisfy the request of the client.		
Agents	Travel Agent		
Knowledge and competence	Requirement rules, preference rules, constraint rules.		
RESOURCES	Database of exsting locations, automated software for itinerary design, Travel Agent for customer interaction; The duration of the interaction depends on the satisfaction of the client and he number of reviews requested on the itinerary. It should be in every occasion shorter than the duration of an interaction that does not include the automated system.		
QUALITY AND PER- FORMANCE	If the design is coherent with the requirements, if there are no constraint violations, if it corresponds to the preferences of the client, and it is at least the same or better than a manual design done by the TA, then it is of good quality.		

 $$\operatorname{TM-2}$$ Specification of the knowledge employed for a task, and possible bottlenecks and areas for improvement

Task Model	Knowledge Item Worksheet TM-2		
Name	Requirement R	ules	
Possessed by	Travel Agent		
USED IN	Automated Design.		
Domain	Travel Planning		
Nature of the know	·	Bottleneck / to be im-	
		proved?	
Formal, rigorous			
Empirical, quantita-	X	X	
tive			
Heuristic, rules of	X	X	
thumb			
Highly specialized,	X		
domain-specific			
Experience-based	X		
Action-based			
Incomplete			
Uncertain, may be	X	X	
incorrect			
Quickly changing			
Hard to verify	X	X	
Tacit, hard to trans-	X	X	
fer			
Form of the knowle	dge		
Mind	X		
Paper			
Electronic			
Action skill			
Other			
Availability of knowledge			
Limitations in time			
Limitations in space			
Limitations in access			
Limitations in qual-	X	X	
ity			
Limitations in form			

Task Model	Knowledge Item Worksheet TM-2			
Name	Preference Rule	es		
Possessed by	Travel Agent			
USED IN	Automated Design.			
Domain	Travel Planning			
Nature of the know	ledge	Bottleneck / to be im-		
		proved?		
Formal, rigorous				
Empirical, quantita-	X	X		
tive				
Heuristic, rules of	X	X		
thumb				
Highly specialized,	X			
domain-specific				
Experience-based				
Action-based				
Incomplete				
Uncertain, may be	X	X		
incorrect				
Quickly changing	X	X		
Hard to verify	X	X		
Tacit, hard to trans-	X	X		
fer				
Form of the knowle	$\overline{\mathrm{dge}}$			
Mind	X			
Paper				
Electronic				
Action skill				
Other				
Availability of knowledge				
Limitations in time	X	X		
Limitations in space				
Limitations in access				
Limitations in qual-	X X			
ity				
Limitations in form				

Task Model	Knowledge Item Worksheet TM-2		
Name	Constraint Rule	es	
Possessed by	Travel Agent		
USED IN	Automated Design.		
Domain	Travel Planning		
Nature of the knowle	edge	Bottleneck / to be im-	
		proved?	
Formal, rigorous	X		
Empirical, quantita-			
tive			
Heuristic, rules of			
thumb			
Highly specialized,	X		
domain-specific			
Experience-based			
Action-based			
Incomplete			
Uncertain, may be			
incorrect			
Quickly changing	X	X	
Hard to verify			
Tacit, hard to trans-			
fer			
Form of the knowled	lge		
Mind	X		
Paper			
Electronic			
Action skill			
Other			
Availability of knowledge			
Limitations in time	X	X	
Limitations in space			
Limitations in access			
Limitations in qual-			
ity			

 $$\operatorname{AM}\text{-}1$$ Agent specification according to the Common KADS agent model

Agent Model	Agent Worksheet AM-1	
Name	Single-customer Travel Agent	
Organization	Human, sub-category of the Travel Agent	
Involved in	Automated Design	
Communicates	Customer	
WITH		
Knowledge	Requirement rules, Preference rules, Constraint rules	
Other compe-	Social skills to interact with a customer	
TENCES		
Responsibilities	Collect the request from the client, and provide the customer's	
AND CONSTRAINTS	personal features to the software; supervise the automated pro-	
	cess of design and propose the itinerary to the customer; modify	
	the request in case of review of the proposed itinerary.	

2 Task Knowledge

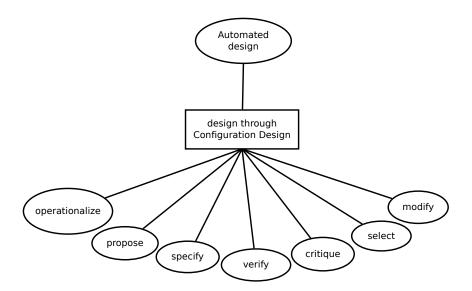


Figure 3: Task knowledge

TASK automated-design; ROLES: INPUT: requirements: "requirements for the design"; OUTPUT: itinerary: "the resulting design"; END TASK configuration-design; TASK-METHOD propose-and-revise; REALIZES: automated-design; DECOMPOSITION: INFERENCES: operationalize, propose, specify, verify, critique, select, modify; ROLES: INTERMEDIATE: preferences-and-requirements: "requirements and preferences to be preferably fulfilled"; constraints: "requirements that have to be fulfilled"; sketal-design: "set of slots to be filled"; proposal: "a possible compilation of the sketal-design"; customer-input: "set of new requirements or constraints"; violation: "new constraints violated by the current design";

```
truth-value: "boolean indicating the result of the
         verification";
      action-list: "ordered list of possible repair (fix)
         actions";
      action: "a single repair action";
      itinerary: "a new possible compilation of the sketal-
         design";
  CONTROL-STRUCTURE:
    operationalize (requirements -> preferences-and-requirements
        + constraints);
    specify(requirements -> sketal-design);
    propose(constraints + preferences-and-requirements + sketal
       -design -> proposal);
    itinerary := proposal ADD itinerary;
    WHILE verify (customer-input + itinerary -> truth-value +
       violation) IS truth-value == false DO
      critique (violation + itinerary -> action-list)
      select (action-list -> action)
      modify(itinerary + action -> itinerary)
      verify(itinerary + customer-input -> truth-value +
         violation);
    END WHILE
END TASK-METHOD propose-and-revise;
```

3 Inference Knowledge

As inference model we use a modified version of the Configuration design template, because given predefined components we need to find and assembly that satisfies the requirements. The inference model deriving from this task can be found in Figure 4.

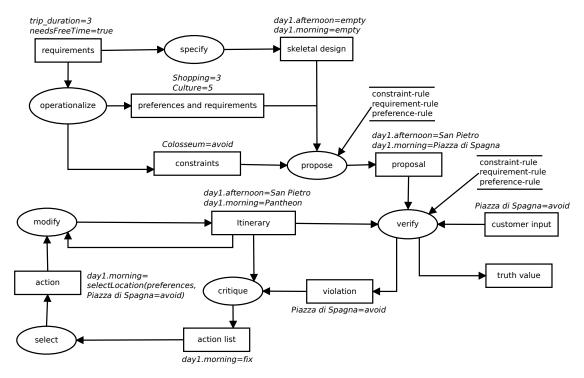


Figure 4: Inference structure

inference	Input	Output	Description
specify	requirements	sketal design	the function look- up the default ske- tal design: the ba- sic structure of a trip day (heavy ac- tivity during the morning, relaxing afternoon, evening and meal).
optionalize	needs of the customers	preferences, requirements, constraints	the needs and desires are translated into preferences ("I would like to have time for shopping and visit many cultural places. I am not interested so much in food places"), requirements ("I want a quiet trip") and contraints ("In Rome I want to visit the Colosseum and avoid Piazza di Spagna").
propose	preferences and requirements, sketal design slots	filled sketal design	fill the slots of the sketal design with locations that fits the preferences and requirements.

verify	contraints, extension design	the list of violated contraints	it checks with the help of the internal contraints and those sup- plied by the user whether the cur- rent configuration is internally con- sistent. If the verification fails, it produces the violated contraints as an additional output
select	fix actions list	fix action	It simply selects an action from the fix actions list generated by the critique function.
modify	itinerary design, fix actions list	fixed itinerary design	it applies the fix actions to the design.
critique	itinerary, violations, customer's inputs	fix actions list	it creates a series of actions which will fix the violations of the contraints, following also the customer's inputs. For example the contraint "I absolutely want to visit the Colosseum" will produce the action "Insert the Colosseum into the itinerary".

4 Domain knowledge

4.1 Domain schema

The domain schema can be found in Figure 5

This schema seems complicated, for this reason every model is explained in the following list:

Client

The client who goes to the travel agency. He could be a quite person who normally wants to visit a lot of things or very few (*dynamic*). The clients are categorized by their age because some locations are not suitable for a people category (ex: elderly people in a climbing location).

Preference

Each client needs to specify a list of preferences, valued from 1 to 5, where 1 is "I'm not so interested" and 5 is "I love to do it!". These preferences are related to the itinerary we want to create, consequently if the same clients wants to create another itinerary, it will specify again all the preferences he wants in this second trip.

Contraint

Each client needs to specify a list of contraints that have to be fulfilled. As for the *Preference*, they are related to the single itinerary.

Itinerary

This represents the itinerary we want to create. It is composed by a fixed number of Day and it is related to a Client who has specified his own list of Contraint and Preference. If there will be kids in the itinerary, the system needs to select some Location that could entertain them. This is a requirement as the needsFreeTime attribute, which specifies that the clients needs to have some not scheduled time in the arrival city.

The method *selectLocation* takes a list of *Preference* and produces a list of *Location* that could fit this preferences.

Day

This describes a day of the itinerary.

Timeslot

A timeslot is a fixed part of a day. The division of the day came from the expert interview.

Location

This model represents the point of interests that a customer could visit. The attribute rating describes the quality of this place, intensive describes if the place is not for quite people and excludedCategory specifies if a client category is not suitable for the location (ex: elderly people in a climbing location). The method distance takes two locations and returns the distance between them. It is useful in order to create the combination of locations to visit during a trip.

4.2 Rule types

Listing 2: Rules

```
RULE TYPE constraint-rule;
    DESCRIPTION: "rule stating the relation between client and
       the choice for a location in the itinerary, by means of
       defining strict boundaries that must be respected.";
ANTECEDENT: Client;
CONSEQUENT: Itinerary;
CONNECTION-SYMBOL: restricts;
END RULE-TYPE constraint-rule;
RULE TYPE requirement-rule;
    DESCRIPTION: "rule stating the relation between the client
       and the choice for a location in the itinerary, by means
        of defining boundaries that should be respected.";
ANTECEDENT: Client;
CONSEQUENT: Itinerary;
CONNECTION-SYMBOL: requires;
END RULE-TYPE requirement-rule;
RULE TYPE preference-rule;
    DESCRIPTION: "rule stating the relation between the client
       and the choice for a location in the itinerary, by means
        of defining preferences that could be satisfied with
       probability X (calculated on the input values) .";
ANTECEDENT: Client;
CONSEQUENT: Itinerary;
CONNECTION-SYMBOL: prefers-with-probability;
END RULE-TYPE preference-rule;
```

Here are presented also some example in order to better understand all the rule types.

Listing 3: The client wants to include a destination into the itinerary.

```
client.constraint.location.name=A AND client.constraint.type=
  include
RESTRICTS
```

∃itinerary.day.timeslot, timeslot.location.name=A;

Listing 4: The client is a quite person

```
\label{eq:client.needsFreeTime=true} \begin{split} & \text{client.needsFreeTime=true} \;, \;\; \text{client.active=1} \\ & \text{REQUIRES} \\ & \text{itinerary.day.timeslot.location} \;, \;\; \text{location.intensive=false} \;; \\ & \text{itinerary.day.timeslot} \;, \;\; \text{timeslot.location=NULL} \;; \\ & \sum_{i=1}^{n-1} \text{i.distance} \left( \text{i+1} \right) \; < \delta \;, \;\; \forall \text{i} \; \in \;\; \text{location} \;; \end{split}
```

Listing 5: The client expresses four preferences with four ranges (from 1 to 5). The method selectLocation will compose the itinerary selecting the locations that fits the preferences. For example it could select 3 shopping 1 gastronomy and 1 cultural locations.

```
Var A, B, C, D: client.preference;
Var E: client.constraint;
A.type=shopping AND A.range=x
B.type=cultural AND B.range=y
C.type=gastronomy AND C.range=w
D.type=nightlife AND D.range=z
E.type = avoid AND E.location = Coluseum
PREFERS-WITH-PROBABILITY
Vitinerary.day.timeslot, timeslot.location=selectLocation(A, B, C, D, E);
```

4.3 Knowledge Base

5 Scenarios

5.1 Scenario 1

Rose, a 76 years old lady would like to visit Rome for three days with her nephew John who is ten years old. She would like to have her trip planned but with the possibility to explore the city on her own.

Are you used to walk long distances?

Not at all, I usually don't walk a lot.

In a scale from one to five, how do you enjoy shopping?

I really love to do shopping, so five!

In a scale from one to five, how do you enjoy cultural places?

I am going to Rome, so four!

In a scale from one to five, how do you enjoy nightlife?

Have you looked at me? 1!

In a scale from one to five, how much would you like to try new restaurants? I guess... I don't know, 3?

Is there anything that you'd absolutely like to see?

Yes, I've never seen the Colosseum.

Is there anything that you have already seen or don't want to see?

Not really, everything is fine.

The travel agent while is interviewing the customer, inserts the acquired data into the system through graphic interface.

Listing 6: Domain instance of the data inserted into the system

```
REQUIREMENTS:
  client.quiet = true
  client.dynamic = 1
  itinerary.withKids = true
  itinerary.needsFreeTime = true
  VAR \ a, b, c: day;
  a.date = "14/05/2014"
  b.date = "15/05/2014"
  c.date = "16/05/2014"
PREFERENCES:
  VAR a,b,c,d : preference;
  a.type = shopping
  a.range = 5
  b.type = culture
  b.range = 4
  c.type = nightlife
  c.range = 1
  d.type = gastronomy
  d.range = 3
CONSTRAINTS:
  constraint.location.name = Colosseum
```

5.2 Scenario 2

Richard a 30 years old guy, would like to visit Rome for four days alone.

Would you consider yourself a quite person or ready to have some fun? Definitely have fun.

Are you used to walk long distances? Yeah.

constraint.type = include

In a scale from one to five, how do you enjoy shopping?

Not that much I only need to buy some souvenirs, 1.

In a scale from one to five, how do you enjoy cultural places? I am going to Rome, so four!

In a scale from one to five, how do you enjoy nightlife? I don't know... 5? In a scale from one to five, how much would you like to try new restaurants? I definitely like to eat, 5.

Is there anything that you'd absolutely like to see?

Yes, I've never seen the EUR.

Is there anything that you have already seen or don't want to see?

I'm not interested in San Pietro.

The travel agent while is interviewing the customer, inserts the acquired data into the system through graphic interface.

Listing 7: Domain instance of the data inserted into the system

```
REQUIREMENTS:
  client.quiet = false
  client.dynamic = 3
  itinerary.withKids = false
  itinerary.needsFreeTime = false
  VAR \ a, b, c, d: \ day;
  a. date = "14/05/2014"
  b. date = "15/05/2014"
  c.date = "16/05/2014"
  d.date = "17/05/2014"
PREFERENCES:
  VAR a,b,c,d : preference;
  a.type = shopping
  a.range = 1
  b.type = culture
  b.range = 4
  c.type = nightlife
  c.range = 5
  d.type = gastronomy
  d.range = 5
CONSTRAINTS:
  VAR a,b : constraint;
  a.location.name = EUR
  a.type = include
  a.location.name = San Pietro
  a.type = avoid
```

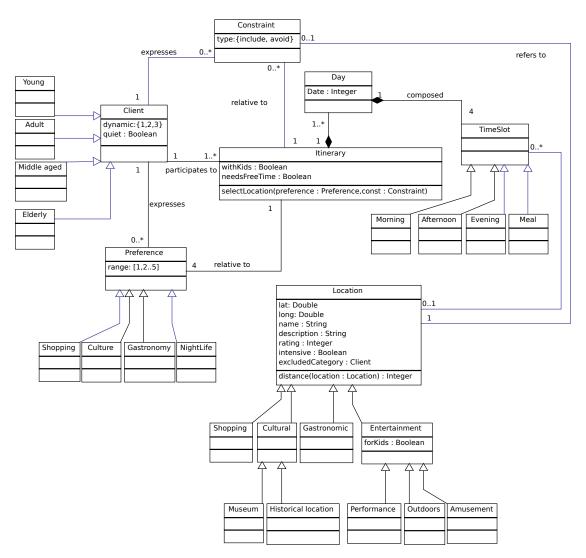


Figure 5: Domain schema

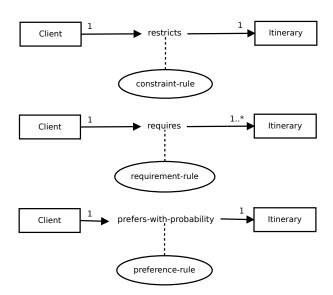


Figure 6: Knowledge base