

User Manual and Research Notebooks for CSP-Rules

Denis Berthier

**User Manual and Research Notebooks
for CSP-Rules**

Books by Denis Berthier:

Le Savoir et l'Ordinateur, Éditions L'Harmattan, Paris, November 2002.

Méditations sur le Réel et le Virtuel, Éditions L'Harmattan, Paris, May 2004.

The Hidden Logic of Sudoku (First Edition), Lulu Press, May 2007.

The Hidden Logic of Sudoku (Second Edition), Lulu Press, November 2007.

Constraint Resolution Theories, Lulu Press, November 2011.

Pattern-Based Constraint Satisfaction and Logic Puzzles (First Edition), Lulu Press, November 2012.

Pattern-Based Constraint Satisfaction and Logic Puzzles (Second Edition), Lulu Press, July 2015.

Basic User Manual for CSP-Rules-V2.1 (First Edition), Lulu Press, August 2020.

Basic User Manual for CSP-Rules-V2.1 (Second Edition), Lulu Press, November 2021.

Pattern-Based Constraint Satisfaction and Logic Puzzles (Third Edition), Lulu Press, November 2021.

Augmented User Manual for CSP-Rules-V2.1, Lulu Press, November 2022.

Keywords: Constraint Satisfaction, Artificial Intelligence, Knowledge Based Systems, Constructive Logic, simplest-first search, Logic Puzzles, Sudoku, Latin Squares, Futoshiki, Kakuro, Numbrix®, Hidato®, Slitherlink, Map Colouring.

This work is subject to copyright. All rights are reserved. This work may not be translated or copied in whole or in part without the prior written permission of the copyright owner, except for brief excerpts in connection with reviews or scholarly analysis. Use in connection with any form of information storage or retrieval, electronic adaptation, computer software, or by similar or dissimilar methods now known or hereafter developed, is forbidden.

9 8 7 6 5 4 3 2 1

Dépôt légal : July 2023

© 2023 Denis Berthier

All rights reserved

ISBN: 978-1-4475-2714-5



Table of Contents

Foreword.....	9
1. Introduction	11
1.1 What is CSP-Rules?	11
1.2 The contents of CSP-Rules.....	13
1.3 Scope of this Manual	13
1.4 Motivations for the [PBCS] approach (adapted from [PBCS]).....	15
1.5 Simplest-first search and the rating of instances (adapted from [PBCS])..	16
1.6 What can one do with CSP-Rules?.....	17
1.7 A quick graphical introduction to the most basic chain rules.....	19
1.8 General warnings.....	25
1.9 Selected generalities about CLIPS	26
PART ONE: GENERALITIES	29
2. Installing and launching CSP-Rules	31
2.1 Installing CSP-Rules (machine independent).....	31
2.2 Launching a CSP-Rules application	33
3. The generic resolution rules and functions present in CSP-Rules	35
3.1 Basic generic resolution rules.....	35
3.2 Ordinary generic resolution rules	35
3.3 A word on typed-chains.....	37
3.4 Oddagons	38
3.5 OR_k -forcing-whips, OR_k -contrad-whips and OR_k -whips (advanced)	38
3.6 Rules for simulating T&E (Trial and Error).....	43
3.7 Rules for simulating DFS (depth-first-search)	44
3.8 Rules for finding backdoors, anti-backdoors and anti-backdoor pairs	44
3.9 Rules for simulating Forcing-T&E and Forcing $\{3\}$ -T&E	45
3.10 Hooks for introducing new resolution rules	46
3.11 The most general generic functions in CSP-Rules	46
3.12 Generic global variables.....	47
3.13 Appendix 3A: The T&E-depth of a resolution rule.....	48

4. Simplest-first strategy, saliences, ratings.....	53
4.1 The simplest-first strategy	53
PART TWO: RUNNING SPECIFIC APPLICATIONS	57
5. General structure of the configuration files	59
5.1 The first part of the configuration file is for installation.....	59
5.2 The second part of the configuration file must not be changed	60
5.3 The third part of the configuration file is application specific.....	61
5.4 The fourth part of the configuration file defines the configuration	61
5.5 The final part of the configuration file must not be changed.....	72
6. SudoRules	75
6.1 Solving a puzzle given in the standard “line” (or “string”) format.....	76
6.2 Solving puzzles given in other formats.....	77
6.3 Solving collections of puzzles.....	82
6.4 For the readers of [HLS]	84
6.5 How different selections of rules change the resolution path	84
6.6 Goodies	91
*** The next sections of this chapter are for more advanced users ***	93
6.7 Bases for more elaborated functions and techniques	94
6.8 Solving a puzzle in stages; sets of preferences	98
6.9 Focusing on some candidates for eliminations	103
6.10 Eleven’s replacement technique.....	105
7. LatinRules.....	113
7.1 Latin Squares.....	113
7.2 Pandiagonal Latin Squares.....	114
8. FutoRules	121
8.1 The configuration file.....	121
8.2 The user functions	123
8.3 Some specific notations in the resolution path.....	126
9. KakuRules	127
9.1 The configuration file.....	128
9.2 The user functions	128
9.3 Typed-Chains in KakuRules	133
10. SlitherRules	137
10.1 The configuration file.....	138
10.2 The user functions	140

10.3 A lot of application-specific rules	141
10.4 An experience in assisted theorem proving	142
10.5 Isolated-HV-chains and Extended-Loops.....	142
11. HidatoRules (Numbrix and Hidato)	145
11.1 The configuration file	145
11.2 The user functions	145
12. MapRules	147
12.1 The configuration file	147
12.2 The user functions	147
PART THREE: ADVANCED TOPICS in SUDORULES	151
13. Requirements on the number of steps	153
13.1 Considering some rules as “no-step”	154
13.2 Finding backdoors, anti-backdoors or anti-backdoor-pairs	155
13.3 Looking for one-step solutions	157
13.4 Disabling and re-enabling rules in CSP-Rules	162
13.5 Two technical details	164
13.6 Looking for two-step solutions – 1 st part (first example)	166
13.7 Looking for two-step solutions – 2 nd part (second example).....	168
13.8 Looking for two-step solutions – 3 rd part (the method).....	170
13.9 Looking for two-step solutions – 4 th part (fully automated search)	173
13.10 Reducing the number of steps	176
13.11 Forcing T&E.....	185
14. Puzzles in T&E(3) and the Tridagon family of rules	187
14.1 The trivalued oddagon and the tridagon patterns	187
14.2 The Tridagon elimination rule.....	189
14.3 The complexity of the contradictory trivalued-oddagon pattern	194
14.4 Tridagon links.....	196
14.5 Tridagon-forcing-whips.....	198
14.6 Automating eleven’s method in the context of trivalued oddagons	204
14.7 General k-digit patterns	209
14.8 The anti-tridagon pattern and Mith’s 63,137 puzzles in T&E(3)	213
14.9 Tridagon-OR _k -forcing-whips.....	215
14.10 Tridagon-OR _k -contrad-whips	228
14.11 Tridagon-OR _k -whips	230
14.12 Resolution power of OR _k -chains	236
14.13 General remarks on OR _k -chains	241
14.14 Sets of preferences for OR _k -chains.....	242
14.15 OR _k -forcing-g-whips	242

14.16 OR_k -g-whips	246
14.17 Using OR_k -splitting rules	249
14.18 The part of the configuration file for OR_k -chains	255
14.19 Ultra-persistence of the OR_k -relations vs degeneracy	265
14.20 Update for a larger collection of T&E(3) puzzles	271
15. Dealing with large numbers of patterns	273
15.1 Motivations	273
15.2 Eliminating useless patterns	274
15.3 Elementary tools for analysing the patterns	275
15.4 Transforming all the patterns into rules asserting OR_k -relations	277
15.5 A rare example involving three impossible patterns (+ tridagon)	280
15.6 How to select the most useful patterns	285
15.7 Four levels of “usefulness” and how meaningful they are	287
15.8 A very rare example	288
15.9 A rare example with the five patterns of Imp630-Select1	292
15.10 Compared resolution power of the Select1 and Select2 sets of rules	298
15.11 Updated four levels of “usefulness” and how meaningful they are	301
15.12 The most useful patterns	302
15.13 How to use the associated OR_k -chain rules in SudoRules	313
15.14 Using CSP-Rules as a research tool	315
15.15 Exceptional cases of non-confluence in OR_k -whips	316
15.16 Comparing files	323
16. Miscellanea	325
16.1 Examples and large scale studies	325
16.2 Questions and answers	326
16.3 Reporting bugs	328
16.4 Improving CSP-Rules	328
16.5 CSP-Rules-V2.1 main updates	329
References	337
Books and articles	337
Websites	338
Software	339

Foreword

Part of this book started as a “Basic User Manual for CSP-Rules-V2.1” ([BUM1]) and was published in August 2020, together with the first public release of the CSP-Rules-V2.1 software. The first two parts of the present book fully retain this original purpose. They include many additions that make life easier for the users, including functionalities that were not or not easily available (not documented) in [BUM1], most of which were added to the second edition ([BUM2]). Such additions don’t fundamentally change the nature of what was already in the original text. The purpose was and remains to show how CSP-Rules can very easily be used to concretely solve various types of problems.

CSP-Rules is a *pattern-based* (or *rule-based*) solver of finite binary *Constraint Satisfaction Problems* (CSPs), typical cases of which are logic games such as Sudoku, Futoshiki, Kakuro, Numbrix, Hidato, Slitherlink, Graph Colouring... CSP-Rules is based on a small set of families of very powerful generic “resolution rules” (bivalue-chains, z-chains, t-whips, whips, g-whips, ...). “Generic” or “universal” means they don’t depend on the particular CSP or the particular instance of it under consideration. In CSP-Rules basic working mode, after selecting which families of rules he wants to try, the user proposes an instance of a CSP and *CSP-Rules provides of full mathematical proof of its solution, where each step uses one of the allowed resolution rules*. The logical foundations and the theories underlying CSP-Rules and its generic rules have been fully described in a series of books ([HLS], [CRT], [PBCS]).

[BUM1] and the CSP-Rules-V2.1 first public release were written with the purpose of making CSP-Rules easily usable by anyone with no programming knowledge. As a result, one side of CSP-Rules that was left aside in [BUM1] and [BUM2] was its usefulness as a research tool and this is what the last two chapters of the present book will focus on.

While developing the general theory, the above-mentioned series of books illustrated the main guidelines of our approach:

- set precise and safe logical foundations;
- find a few families of powerful generic resolution rules (instead of myriads of application-specific ones);
- study their mutual relations and their relations to application-specific rules (such as subsumption of Subsets by whips);
- also study their relation to a universal broad classification of CSP instances, their T&E-depth, formally introduced in [CRT 2011];

- based on these rules, define intrinsic, pure logic ratings (i.e. difficulty measures) of instances of a CSP;
- based on large sets of instances of various CSPs and on precise statistics, assess the resolution power of the rules;
- find typical examples or exceptional ones that may disprove some conjectures.

Note that CSP-Rules was written in parallel with the above books and it was thus first developed as a research tool; it was essential in turning the above general guidelines into real results; in particular, all the resolution rules and functions necessary for large scale analyses and statistics were part of the very first versions of CSP-Rules, which were used while writing the books. The research side of CSP-Rules was thus already implicitly illustrated in these books.

However, a major breakthrough occurred recently in the Sudoku community when “mith” created a puzzle (Loki) that required a very special impossible pattern (tridagon) to be solved. Because I had been checking for years the B_pB classification of the “potentially hardest” 9×9 Sudoku puzzles as soon as they were found, I quickly noticed that Loki was neither in B7B nor even in T&E(2), contrary to all the previously known puzzles. This resulted in:

- new techniques being used in the search for the potentially “hardest” puzzles and in an explosion of their number (mith’s work);
- my definition of new generic resolution rules (OR_k-chains, in line with the chains previously defined in the above-mentioned books) that can make use of application-specific OR_k-relations between candidates;
- detailed classification results for the large collections of known T&E(3) puzzles, based on the above OR_k-chains;
- the discovery of a large number (630) of impossible patterns by “eleven”, patterns that may be the basis for OR_k-relations between “guardian” candidates, intended to avoid contradictions (as in the tridagon case);
- my study of how to deal with such a large number of patterns and how to extract from them a small subset of “useful” ones.

This is the adventure that will be described in the last two chapters of the present book, following the same guidelines as above, in a style that makes them appear as more akin to research notebooks than to a typical “user manual”.

(Note that all the detailed classification results mentioned in these chapters are available on GitHub: see reference [TE3-CLASSIF].)

1. Introduction

1.1 What is CSP-Rules?

A finite binary Constraint Satisfaction Problem (CSP) is defined by a finite set of variables (hereafter called the CSP-Variables), each with a finite domain; the problem is to find a value in each of their domains, in such a way that these values satisfy a set of pre-defined binary contradictions (the constraints) between possible values.

CSP-Rules is a *pattern-based* (or *rule-based*) solver of finite binary CSPs. In the CSP-Rules approach, *a possible value of a CSP-Variable is called a candidate and binary constraints express in term of “links” all the direct contradictions between two candidates.*

CSP-Rules is inherently associated with the approach to CSP solving defined and largely illustrated in my book “Pattern-Based Constraint Satisfaction and Logic Puzzles” ([PBCS]). This approach can be traced back, in the particular Sudoku context, to my much older book “The Hidden Logic of Sudoku” ([HLS]). CSP-Rules is best considered as a companion to [PBCS] and [HLS]. The books provide the precise definitions and develop the theoretical part, while the software is the proof that the theories are widely applicable.

In the [PBCS] approach, pertaining to the very general “progressive domain restriction” family of CSP solving techniques, the domain of each CSP-Variable is represented by a monotonously decreasing set of candidates and the fundamental concept is that of a *resolution rule*, i.e. a rule of the form “pattern \Rightarrow elimination of a candidate” or (more rarely in practice) “pattern \Rightarrow assertion of a value for a CSP-Variable”. Here “pattern” must be a clearly defined set of logical conditions, based only on the given set of CSP-Variables, the given links (i.e. direct binary contradictions) between candidates and on the current situation (i.e. the remaining candidates for each variable). This pattern must be precisely defined so as to imply the conclusion in an otherwise context-independent way (i.e. in a way that does not depend on any particular CSP-Variable, link, candidate or value not explicitly mentioned in the pattern). The rule itself must be provable from the CSP axioms.

Considering this definition, an implementation in terms of rules of a forward-chaining inference engine seemed relevant (in spite of possible *a priori* performance issues). Both the oldest and the current implementations of CSP-Rules are therefore based on CLIPS, the most widely used (and tested) inference engine. CLIPS is written in C, is highly portable, has been public since 1996; it implements the RETE algorithm with drastic performance improvements – and it is open source and free.

One essential aspect of the [PBCS] approach is the introduction of additional CSP-Variables: the set of CSP-Variables is extended beyond the natural, originally given ones. As a simple illustration of this idea in the Sudoku case, in addition to the “natural” rc CSP-Variables (represented by the cells of the standard Sudoku grid), I introduced (in [HLS1]) new rn, cn and bn variables, represented by the cells of the three additional spaces of my “Extended Sudoku Board” (a copy of which is present in the “Publications” folder of CSP-Rules). This “super-symmetric” view allows to consider the three classical Sudoku constraints (only one instance in each row, each column, each block) the same way as the implicit one: only one value in each cell; and relations that were considered different (bivalue/bilocal) appear to be the same.

A priori, CSP-Rules can only deal with binary constraints, but the applications studied in [PBCS] and included in the CSP-Rules-V2.1 package – namely: solvers for Latin Squares (and its Pandiagonal variant), Sudoku, Futoshiki, Kakuro, Map Colouring, Numbrix, Hidato and Slithering – show that many types of non-binary constraints can be efficiently transformed into binary ones by adding problem-specific CSP-Variables, thus making them amenable to the CSP-Rules treatment.

Patterns in CSP-Rules can take many forms, but the most powerful generic ones are various kinds of chains (bivalue-chains, z-chains, t-whips, whips, g-whips...). *A chain is defined as a continuous sequence of candidates, where continuity means that each candidate is linked to the previous one.* In the context of logic puzzles, these chains can be considered as logical abstractions of the universal, spontaneous practice of human solvers wondering “can this candidate be true?” and checking for a possible contradiction implied by such a hypothesis; but they also suggest much more constrained and useful ways of proceeding. In particular, the continuity condition is a very strong guide for a human solver looking for chain patterns. More generally, *the absence of OR-branching in any of the CSP-Rules chain patterns means that each of them supports a single stream of reasoning.*

Instead of having zillions of application-specific rules (like e.g. most existing rule-based Sudoku solvers), the resolution backbone of CSP-Rules consists of only a few types of universal rules – though it remains perfectly compatible with the addition of any number of application-specific ones (see the Slitherlink chapter).

One more essential aspect of the CSP-Rules resolution paradigm is its insistence on using the “simplest-first strategy”. Indeed, much of my approach can be considered as a detailed study into possible meanings of “simplest-first search”. At each step of the resolution process, the simplest available rule is applied. Here, “simplest” is not to be understood as it is generally done in the world of “symbolic” AI, i.e. in an abstract pseudo-logical way that has never had any real application. “Simplest” is defined precisely in terms of the patterns making the conditions of the rules. In case of chains, simplicity is easy to define: a chain (of any type) is simpler than another chain (of any type) if it is shorter, where the length of a chain is defined

as the number of CSP-Variables its definition involves. For chains of same lengths but of different types, it is also easy to define their relative simplicity (see chapter 4). As a result, for each family of rules, an intrinsic rating of the difficulty of instances can be defined and, what's most remarkable, it can often be obtained at the end of *a single resolution path*. The simplest-first strategy is intimately related to the *confluence property* (see [PBCS]). Chapter 13 of this Manual will show that several alternative “advanced” strategies can be defined based on the same sets of rules, but simplest-first remains the central strategy.

1.2 The contents of CSP-Rules

CSP-Rules consists of a generic part (in the folder “CSP-Rules-Generic”) together with a few application-specific parts aimed at solving some familiar logic puzzles. The application-specific parts are integral members of CSP-Rules. They were chosen in order to illustrate how, by the proper choice of additional CSP-Variables, the generic concepts can be used in so different CSPs as the above-mentioned ones, including some non-binary ones.

The generic part consists of powerful generic resolution rules together with a general mechanism for managing the whole system, including the outputting of solutions in an easy-to-understand, universal notation. The generic part cannot be run alone. It requires an application-specific part to feed it with problem instances in the proper format.

Each application-specific part consists of a specific interfacing with the generic part of CSP-Rules, specific commands for launching the resolution process (they will be reviewed in the application-specific chapters in Part II of this Manual), plus a configuration file allowing the user to select general settings and which families of resolution rules he wants to apply. Often, it also contains application-specific resolution rules (a few of which may be rewritings of some basic generic rules, e.g. more focused forms of solution detection, for better performance).

1.3 Scope of this Manual

All the general ideas, the precise concepts and the generic resolution rules, plus the specific applications and associated specific rules that materialised into CSP-Rules were introduced many years ago in a series of books and articles starting with the first edition of [HLS] ([HLS1], May 2007) and ending (as of now) in the third edition of [PBCS] ([PBCS3], November 2021).

All my publications related to the pattern-based resolution of finite CSPs are an integral part of CSP-Rules. You can find them in the “Publications” folder, except for this Manual (which is in the Docs folder). At least some general understanding of

[PBCS] is a pre-requisite for a deep understanding of CSP-Rules and of this Manual; [PBCS] is also enough, in the sense that there is no other prerequisite.

It must thus be clear that *this book is designed as a supplement to [PBCS], although only a general understanding of [PBCS] is required*. It is a largely extended (and revised) version of the previous “Basic User Manual” ([BUM]) that it replaces.

“Basic” meant that it explained how to install CSP-Rules and how to use it for solving instances of the specific types of puzzles that are already part of CSP-Rules. It did not and still does not explain the CSP-Rules technical design, i.e. how the concepts introduced in [HLS] or [PBCS] are implemented in CSP-Rules, using the CLIPS language.

As I added new features to CSP-Rules, many of them being first applied to Sudoku, the SudoRules chapter grew too big in the updated versions of the [BUM], with parts that were no longer basic at all. That’s why I decided to split this chapter into the original one and a new Third Part for more advanced topics, leading to the “Augmented User Manual for CSP-Rules-V2.1” ([AUM]). The present book is again an extended version of the latter, with chapters on extreme Sudoku puzzles, OR_k-chains and large numbers of impossible patterns (see Part III).

V2.0 was the stable version of CSP-Rules used to solve all the puzzles presented in [PBCS2]. It has also solved millions of Sudoku puzzles and thousands of puzzles of each of the other types defined in [PBCS2]. No software can ever be claimed to be bug-free, but V2.0 was probably as bug-free as it could be (in particular, bugs in rules that would illegitimately eliminate a candidate are in general found after trying less than ten puzzles). This is no legal guarantee and there will be no reward other than eternal gratitude for reporting a bug :) Version V2.1 is the first public distribution and it is only a small variant of V2.0. It has an easier installation procedure; easier selection of rules in the configuration files; optionally, more compact output thanks to “blocked” variants of some existing rules; zero change in the existing rules themselves but addition of a few typed-chains in order to comply with continued requests from readers of [HLS] to re-introduce my older “2D-chains” (as special cases of the general chain rules); addition of “oddagons”. Recent updates have a few more additions: means for finding backdoors, anti-backdoors, anti-backdoor-pairs, 1-step, 2-step and fewer-steps solutions; Forcing-T&E; the recently discovered Tridagons. Recent internal changes also include simpler coding (especially for printing the solution), after I definitively gave up the compatibility with the Jess inference engine.

“Supplement” means that this Manual is not fully self-contained; it does not repeat the general resolution paradigm defined and explained in [PBCS]. Nor does it repeat the detailed definitions of the different patterns or their resolution power. General concepts of the resolution paradigm of whips, g-whips, braids, ... are defined in [PBCS] and that is where you should look for full information about them. However, in order to avoid any ambiguity about CSP-Rules, I repeat (in the next two

sections) the general motivations for the approach adopted in [PBCS] and some remarks about the rating of instances of a CSP. For an *informal* description of the main chain-pattern (whips...), I also give a graphico-symbolic representation of partial-whips, t-whips and whips in section 1.7, showing how they are related.

1.4 Motivations for the [PBCS] approach (adapted from [PBCS])

Since the 1970s, when it was identified as a class of problems with its own specificities, Constraint Satisfaction has quickly evolved into a major area of Artificial Intelligence (AI). Two broad families of very efficient algorithms (with many freely available implementations) have become widely used for solving its instances: general purpose structured search of the “problem space” (e.g. depth-first DFS, breadth-first BFS) and more specialised “constraint propagation” techniques (that must generally be combined with structured search according to various recipes). Many SAT solvers are also publicly available.

You may therefore wonder why you would want to use the computationally much harder techniques inherent in the approach introduced in [PBCS]. It should be clear from the start that there is no reason at all if speed is your first or only criterion. In particular, if your goal is to generate instances of a CSP (which requires a very fast solver), CSP-Rules is not a viable choice for its solver part.

But, instead of just wanting a final result obtained by any available and/or efficient method, you can easily imagine additional requirements of various types and you may thus be interested in *how* the solution was reached, i.e. in the *resolution path*. Whatever meaning is associated with the quoted words below, there are several inter-related families of requirements you can consider:

- the solution must be built by “constructive” methods, with no “guessing”;
- the solution must be obtained by “pure logic”;
- the solution must be “pattern-based”, “rule-based”;
- the solution must be “understandable”, “explainable”;
- the solution must be the “simplest” one satisfying the above requirements.

Vague as they may be, such requirements are quite natural for logic puzzles and in many other conceivable situations, e.g. when you want to ask explanations about the solution or parts of it.

Starting from the above vague requirements, Part I of [PBCS] (generalising the [HLS] approach) elaborated a formal interpretation of the first three, leading to a very general, pattern-based resolution paradigm belonging to the classical “progressive domain restriction” family and resting on the notions of a *resolution rule* and a *resolution theory* (i.e. a set of resolution rules).

Then, in relation with the last purpose of finding the “simplest” solution, [PBCS] introduced ideas that, if read in an algorithmic perspective, should be considered as defining a new kind of search, “*simplest-first search*” – indeed various versions of it, based on different notions of logical simplicity. However, instead of such an algorithmic view (or at least before it), a pure logic one was systematically adopted, because:

- it is consistent with the previous purposes,
- it conveys clear non-ambiguous semantics (and it therefore includes a unique complete specification for possibly multiple types of implementations),
- it allows a deeper understanding of the general idea of “simplest-first search”, in particular of how there can be various underlying concrete notions of logical simplicity and how these have to be defined by different kinds of resolution rules associated with different types of chain patterns.

1.5 Simplest-first search and the rating of instances (adapted from [PBCS])

In the [PBCS] context and in conjunction with the “simplest solution” requirement, there appeared the question of rating and/or classifying the instances of a (fixed size) CSP according to their “difficulty” – a much more difficult topic than just solving them. The main families of resolution rules introduced in [PBCS] are various kinds of chains with no OR-branching [which would amount to adding hidden levels of Trial-and-Error] and they go by couples, corresponding to two different linking properties, namely “T-whips” and “T-braids”, where the T parameter refers to the “elementary” patterns allowed to appear in the chain as its building blocks (i.e. mere candidates for whips, g-candidates for g-whips, Subsets for S-whips, inner whips for W-whips...). For each T, there are two ratings, defined in pure logic ways:

- one based on T-braids, allowing a smooth theoretical development and having good abstract computational properties; much time was devoted to prove the *confluence property* of all the T-braid resolution theories introduced in [PBCS] (when T itself has the confluence property), because it justifies a “*simplest-first*” *resolution strategy* (and the associated “simplest-first search” algorithms that may implement it) and it allows to find the “simplest” resolution path and the corresponding rating by *following only one resolution path*, a computationally noticeable advantage; the T-braid rating has the fundamental property of being invariant under CSP isomorphisms.
- one based on T-whips, providing in practice a good, much easier to compute approximation of the first when it is combined with the “simplest-first” strategy. (The quality of the approximation was studied in detail and precisely quantified in the Sudoku case, but it also appeared in intuitive form in all our other examples.)

[PBCS] explained in which restricted sense all the above ratings are compatible. But it also showed that each of them corresponds to a different legitimate “pure logic view” of simplicity – so that defining logical simplicity is not straightforward.

It must also be noted that all of the above ratings are ratings of the hardest-step. One might want to rate full resolution paths instead, but nobody has ever made any consistent proposal of how to approach such a problem. In particular, the number of “steps”, i.e. of rule applications, cannot be formulated in pure logic terms.

1.6 What can one do with CSP-Rules?

Basically, CSP-Rules can solve and rate instances of a finite CSP (provided that this type of CSP has been interfaced to the generic part of CSP-Rules) – with some mild restrictions on their complexity. It will display the full resolution path, in an easy-to-read formal syntax clearly stating the justification of each step.

In chapter 11 of [PBCS], the scope of various resolution rules was analysed in terms of a search procedure with no “guessing” – Trial-and-Error (T&E) – and of the T&E-depth necessary to solve an instance. In and of itself (and contrary e.g. to the maximum depth reached by a DFS procedure), *this T&E-depth defines a broad, intrinsic and universal classification of the difficulty of all the instances of any finite binary CSP of any size* (and a – slow – T&E simulator is therefore included in CSP-Rules).

For instances in T&E(1) and T&E(2) (i.e. requiring no more than one or two levels of Trial-and-Error), there are universal “pure logic” ratings based on two T-braids families, respectively the B and the B₇B ratings. [In the present case, universality must be understood in the sense that these two ratings assign a finite value to all of the corresponding instances, but not in the sense that they could provide a unique notion of simplicity.]

The above-mentioned universal T&E classification is an intrinsic property of all the instances of any finite binary CSP. CSP-Rules cannot be blamed for being unable to solve in “pure logic” ways some exceptionally hard instances that are intrinsically beyond the capabilities of its universal but relatively simple chain patterns.

Being in T&E(0) means being solvable by the most elementary resolution rules. Being in T&E(1) amounts to being solvable by braids (and very often by whips). Being in T&E(2) requires not only braids but also much more complex B-braids (not coded in CSP-Rules) or, alternatively, bi-braid contradictions and B*-Braids. However, at the lower end of T&E(2), there is a small layer of puzzles in gT&E(1) = T&E(whips[1], 1) that is worth mentioning. Being in T&E(n) for larger n requires still more complex tri-braid (quadri-braid...) contradictions and B*^{*****}-braids – unless some exotic pattern allows to reduce the puzzle to a lower T&E (see chapter 14).

As a result of this intrinsic T&E stratification, the solution of some exceptionally hard instances cannot be found if the resolution rules one has selected are not powerful enough. For the hardest instances, CSP-Rules may be able to find only a broad classification – e.g. membership in B_pB for instances in T&E(2) – instead of a pattern-

based solution or a more precise rating. This can nevertheless be very useful if one wants to check the power of a new resolution rule R and asks: can R simplify the problem enough to make it belong to a lower B_qB after being applied? In case a puzzle cannot be solved by the chain-patterns, CSP-Rules also includes a simulated DFS procedure (very slow for that kind of algorithm) that can solve almost anything (if you allow it enough time).

In order to give a general idea of the power of whips and braids, it has been found that only one minimal 9×9 Sudoku puzzle in about 70,000,000 is in T&E(2). This means that almost all of them are in T&E(0 or 1) and can therefore be solved by braids (and, most of the time, by whips).

A more intuitive way of considering the limits of CSP-Rules is as follows: the various degrees of difficulty of puzzles you can find in newspapers correspond to walking to your garden versus to your nearest neighbour's home. The most extreme known instances correspond to going to far-away galaxies at the boundaries of the visible universe. Without using T&E or DFS, CSP-Rules lets you travel this galaxy.

It may also be the case that some problem instance (considered as an ill-posed problem in the context of logic games) has several solutions. This is not a real problem for CSP-Rules. But as it can only do (constructive) pure logic deductions, it can only prove properties that are common to all the solutions (i.e. eliminate candidates that are false in all the solutions or find values that are true in all the solutions). Inconsistency of an instance is not a problem either: if it can be proven with the selected rules, CSP-Rules will prove it. Notice that proving inconsistency can be as hard as finding a solution, as shown in [PBCS].

Finally, remember that CSP-Rules was designed as a software tool for research, with the purpose of providing the “simplest” pattern-based solution as defined in [PBCS]. This is *per se* a much harder problem than just finding a solution and computation times cannot be expected to match those of the simpler problem (typically small fractions of a second). But I must also recall that my project was not a programming one, the only purpose of CSP-Rules was to validate the wide range of applicability and the resolution power of the rules defined in [PBCS] (plus alternative ones that I did not keep). Definitely, these rules could be implemented much more efficiently than they currently are; CLIPS has too many restrictions when it comes to using advanced data structures. Efficient programming has never been my purpose in writing CSP-Rules, even though I have done a few speed and memory optimisations within the Rete algorithm paradigm underlying CLIPS.

As for CSP-Rules being a research tool and for the “Research Notebooks” part in the new name of this book, see Part III for a detailed description of the recently added features and how it participated in the research about the newly found Tridagon pattern, the associated Sudoku puzzles in T&E(3) and how to deal with the large number of impossible 3-digit Sudoku patterns.

1.7 A quick graphical introduction to the most basic chain rules

This section is not intended to be a summary of [PBCS], but only a graphical introduction to the most elementary chain rules. The central pattern in CSP-Rules is that of a whip. Except possibly bivalued-chains (that can be better understood without any reference to whips), all the chain rules in CSP-Rules can be considered as variants (either special cases or generalisations) of whips. Whence the necessity to understand whips. Whips have a very important property: they are continuous sequences of candidates, where “continuous” means that each candidate is linked to the previous one in the sequence.

First, we shall need some graphical conventions:

- I represent a CSP-Variable as a thick vertical straight line with a subscripted name above it, starting with V , e.g. V_1, V_2, \dots . You must understand that this is a purely abstract representation, that I could as well decide to represent a CSP-Variable by an oval surface, and that it is not supposed to represent real lines (rows or columns) in puzzles residing in a square or rectangular grid. To be concrete, in Sudoku, such a thick vertical line can represent a CSP-Variable of any of the four types (rc, rn, cn, or bn). In other terms, if you prefer, it represents any of the 324 (rc, rn, cn, or bn) cells of the Extended Sudoku Board.
- I represent candidates for V_i as subscripted letters near this line (the first subscript being equal to the subscript of the CSP-Variable, i). Left-linking and right-linking candidates for V_i are named respectively L_i and R_i ; other candidates for V_i are named $C_{i,j}$. Note that the $C_{i,j}$'s are not part of the whip. Candidates in bold are part of the whip, while other candidates (the z - and t -candidates, named $C_{i,j}$) are not part of it and are represented in clearer grey. Z , the name I usually choose for the target of a chain, is a candidate for any CSP-Variable(s) other than the V_i 's.
- I represent any non-CSP link between two candidates as a thin line joining them. Remember that *a link means a direct contradiction between two candidates. It is a structural (“physical”) property of the CSP; it does not require any “inference”. A link pertains to the general background of the CSP and it is independent of any particular instance of this CSP (e.g. of any puzzle in Sudoku) or of any resolution state for it.*

Warning: one problem with the following representations is, they may be misleading. *The z and t candidates (the $C_{i,j}$'s in the graphics) are not part of the whip: they could disappear from the resolution state without making any damage to the whip (remember that only two things can happen to a candidate: disappear, i.e. be proven to be impossible, or be asserted as a value, in which case both the L_i candidate and therefore the whip itself will merely disappear). Moreover, when establishing the whip property in any particular instance of a whip, naturally proceeding from left to right, the $C_{i,j}$ candidates only need to be taken into account momentarily, at step i . Establishing this property at step i involves no logical reasoning, no “inference” ...; it only involves checking the presence of a structural link for each of the $C_{i,j}$'s. Once*

the whip property is established up to V_i , the C_{ij} 's for this i or the previous ones play no role in establishing the whip property in the next steps; they can be totally forgotten. This is why I represent them in lighter grey. Forgetting the C_{ij} 's and the associated links, a whip[4] can be represented graphically as a single continuous line going through $Z-L_1-R_1-L_2-R_2-L_3-R_3-L_4-$ and ending in no candidate (represented by a dot) and this is why only the left-linking and the right-linking candidates need be represented in the linear symbolic representations appearing in the CSP-Rules resolution paths. (The left-linking candidates *must* be represented as they ensure the continuity condition.)

1.7.1 Whips[1]

Simple as they may seem (they are the simplest pattern one can imagine, apart from Singles), whips[1] are an extremely powerful pattern. Whips[1] involve a single CSP-Variable.

Whips[1] can be considered as the first step of almost all the chain rules defined in [PBCS]. I strongly recommend that you look for whips[1] in different puzzles, not only in the most common one, Sudoku. The more examples you see from different perspectives, the more you will understand the magic of whips[1].

In Sudoku, rules called Intersections, Interactions, Alignments, or also Pointing and Claiming, were known much before I introduced whips[1] (indeed much before I ever heard of Sudoku). As I have proven in detail in [HLS] (with all the necessary graphics), it is easy to check that whips[1] are equivalent to these rules; i.e. they allow the same eliminations. (If you are not yet familiar with whips, I suggest that you prove this equivalence for yourself and you work on whips[1] as long as needed to understand them perfectly before trying to understand longer ones. A good test for this is whether you understand all of this section.)

However, there are three major differences between the usual viewpoint in Sudoku and the one introduced by whips[1]:

- whips[1] are defined in a universal way, meaningful for any binary CSP (and I have shown in [PBCS] that they are indeed very useful in many different types of CSPs, independently of having an underlying grid structure or not); try the various applications included in CSP-Rules to see how they appear in them;
- whips[1] make a strict difference between CSP-Variables and links (a difference totally blurred in Sudoku); but they treat all the types of CSP-Variables the same way and they treat all the kinds of links the same way; for instance, in Sudoku, they don't make any difference between numbers, rows, columns and blocks (more precisely, between CSP-Variables of types rc, rn, cn or bn);
- whips[1] can easily be generalised to longer chains, based on the same reasoning, as shown in the next subsection; it is therefore necessary to understand them

perfectly in the precise context of any specific application before looking for longer ones.

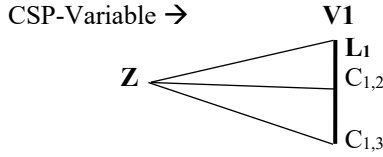


Figure 1.1. Symbolic representation of a whip[1]

The whip[1] rule: if a candidate Z is linked to all the remaining candidates for a CSP-Variable V_1 (which implies that Z is not a candidate for V_1), then Z can be deleted. The proof is obvious: if Z was True, V_1 could have no value.

The elimination described in the whip[1] rule will be written symbolically as: $V_1\{L_1 .\} \Rightarrow \text{not } Z$. Here, L_1 is called the left-linking candidate and $C_{1,2}$ or $C_{1,3}$ the z -candidates (because they are linked to Z); in the present case, their roles could be interchanged.

In practice, when there is an underlying rectangular grid, a more specific notation (the nrc notation) will be applied and the eliminations will appear in still a more readable form, such as: $r_3n_4\{c_5 .\} \Rightarrow r_2c_6 \neq 4$. Here CSP-Variable V_1 is r_3n_4 , it is supposed to have candidates only from the set $\{c_4, c_5, c_6\}$ (“in the intersection of row r_3 with block b_2 ”), which implies that any candidate “with” number 4 in block b_2 but not in row r_3 can be eliminated. This is the case for target $Z = n_4r_2c_6$.

1.7.2 A partial whip[1] and a whip[2]

It often happens that a candidate Z is linked to all the candidates for a CSP-Variable V_1 , except to one of them. In and of itself, this does not allow any elimination; but it can be used to build whips[2].

In Figure 1.2, CSP-Variable V_1 has four remaining candidates, the first three of which (the same $L_1, C_{1,2}, C_{1,3}$ as before in Figure 1.1) are linked to Z and the fourth of which (R_1) remains pending. This makes a pattern for what I called a partial-whip[1] in [PBCS], where R_1 is called a right-linking candidate. CSP-Variable V_2 (different from V_1) is supposed to have three remaining candidates ($L_2, C_{2,2}$ and $C_{2,3}$), the first two of which are linked to R_1 and the last of which is linked to Z .

It is easy to see that if Z was True, V_1 would have only one remaining possible value (R_1), which would imply that L_2 and $C_{2,2}$ would be eliminated, leaving $C_{2,3}$ as the only possible value for V_2 . But $C_{2,3}$ is made impossible by Z . This proves that

candidate Z is impossible and can be eliminated. This can be written symbolically as: $\text{whip}[2]: V_1\{L_1 R_1\} \text{ --- } V_2\{L_2 \cdot\} \Rightarrow \text{not } Z$, where L_2 is chosen as the second left-linking candidate. $C_{2,2}$ is called a t-candidate, because it is linked to a previous right-linking candidate. In this case, the roles of L_2 and $C_{2,2}$ could be interchanged. *The dot in the final cell represents the impossibility for this cell to have a value.*

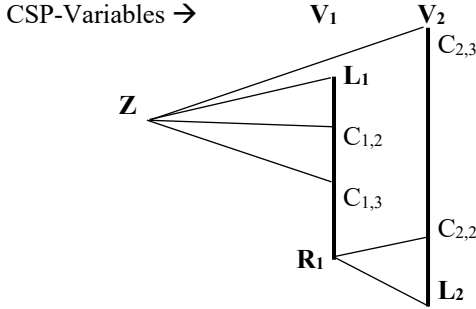


Figure 1.2. Symbolic representation of a $\text{whip}[2]$. A partial- $\text{whip}[2]$ would have in addition one pending candidate for V_2 : R_2 (as in Figure 1.3)

This is exactly what the $\text{whip}[2]$ pattern is: a simple extension of the $\text{whip}[1]$.

1.7.3 A partial- $\text{whip}[2]$ and a $\text{whip}[3]$

It's now easy to generalise this to longer whips.

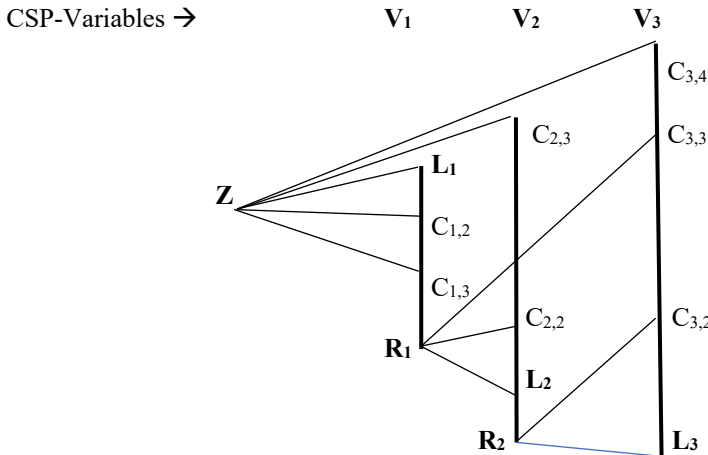


Figure 1.3. Symbolic representation of a $\text{whip}[3]$

Consider first the partial-whip[2] obtained from Figure 1.2 by adding a pending candidate R_2 to its last CSP-Variable, V_2 . Figure 1.3 gives a symbolic representation for a whip[3]. A new CSP-Variable is added to the right and all its candidates are linked either to Z or to the right-linking candidates for the previous CSP-Variables, i.e. to R_1 or to R_2 . L_3 is chosen as the left-linking candidate (linked to R_2), $C_{3,2}$ and $C_{3,3}$ are t-candidates (linked to a previous right-linking one). $C_{3,4}$ is a z-candidate (linked to the target Z). There are none in this graphics, but V_2 could also have z-candidates and V_3 could have more than one. It might also be the case that the last CSP-Variable V_3 has no candidate linked to Z , if all its candidates are linked to a previous right-linking candidate.

The whip[3] in Figure 1.3 can be written symbolically as:
 whip[3]: $V_1\{L_1 R_1\} - V_2\{L_2 R_2\} - V_3\{L_3 .\} \Rightarrow \text{not } Z$
 and this can be seen as a symbolic representation of a first order formula (precisely written in [PBCS]) involving only the mentioned CSP-Variables and candidates.

1.7.4 A partial-whip[2] and a t-whip[3]

There is a second way a partial-whip[n-1] can be used for eliminations. The first way we have seen in section 1.7.3 is by extending its tail so as to obtain a whip[n]. The other way is by adding it a head so as to turn it into a t-whip[3]; and the head has to be a partial-whip[1].

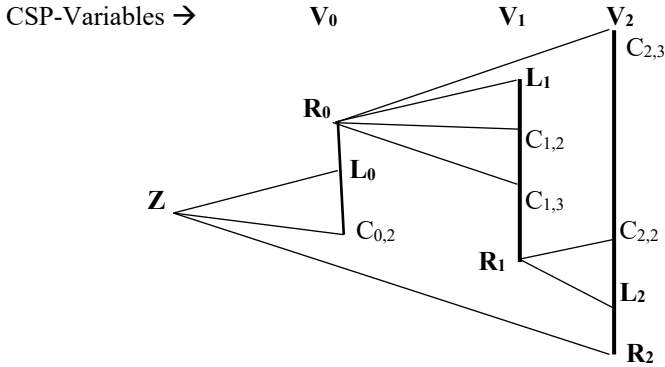


Figure 1.4. Symbolic representation of a t-whip[3]

In Figure 1.4, the whip[2] of Figure 1.2 has first been transformed into the same partial-whip[2] as in Figure 1.3, by adding a pending candidate R_2 to CSP-Variable V_2 . Its ex-target Z has been renamed R_0 (because it will not be the target of the t-whip[3]). A partial-whip[1] for some target Z and CSP-Variable V_0 has been added to the left. The pending candidate for the unique CSP-Variable V_0 of this new partial-

whip[1] must be R_0 . And, in order to have a complete t-whip[3], its target Z must be linked to the last pending candidate of the previous partial-whip[2], namely R_2 . I leave it as an easy exercise for the reader to prove that in this situation, Z can be eliminated.

The t-whip[3] in Figure 1.3 can be written symbolically as:

t-whip[3]: $V_0\{L_0 R_0\} \text{ --- } V_1\{L_1 R_1\} \text{ --- } V_2\{L_2 .\} \Rightarrow \text{not } Z$

Some users prefer t-whips because the main part of their construction does not depend on their final target(s). Unfortunately, they are less powerful than whips (as is obvious from their construction). Anyway, understanding the *simple relationship between partial-whips[n-1], whips[n] and t-whips[n]* is important for a human solver, because it means that, when he has found a partial-whip, he can try to extend it both ways. It is technically important also in the implementation of CSP-Rules, because the partial-whip structures are indeed shared between whips and t-whips.

1.7.5 Partial g-whips[1], g-whips[2], braids, g-braids

Whips[1] allow another kind of generalisation. In Figure 1.2, suppose that, instead of being a candidate, R_1 is a g-candidate for V_1 , i.e. a particular group of candidates for V_1 such that each of these candidates is linked to both L_2 and $C_{2,2}$. It is clear that the same reasoning as above still applies (using reasoning by cases for $C_{1,4}$) and the same conclusion allows to eliminate Z . This is what a g-whip[2] is. The same remarks apply to R_2 and R_3 . Again, I will not dwell on details or on extension to longer g-whips, but I'll refer you instead to [PBCS]. The existence of g-whips in a particular CSP is conditioned on the existence of whips[1].

Finally, braids and g-braids allow another type of extension, where the continuity condition is relaxed: in Figure 1.3, imagine that, instead of being linked to the pending candidate R_1 for the previous CSP-Variable V_1 , "left linking candidate" L_2 for V_2 (and its possible substitute $C_{2,2}$) were linked to Z ; or that, instead of being linked to the pending candidate R_2 for the previous CSP-Variable V_2 , "left linking candidate" L_3 for V_3 (and its possible substitute $C_{3,2}$) were linked to Z or to a more distant pending candidate, e.g. R_1 . It is easy to see that the proof for the elimination of Z remains valid. We have lost the simple form of continuity between the candidates making a single-threaded whip, but we have some "braided" continuity instead (still with no OR branching). However, this easy modification drastically increases the computational complexity, making the statistical approximation results of braids by whips invaluable in practice.

1.7.6 How to start looking for a chain pattern

In [PBCS], all my definitions of chain patterns (except bivalued-chains) start from their target Z . There is a good reason for this: it makes the formal definitions simpler. One shouldn't conclude from this that the starting point of finding a chain is trying each candidate in turn as a possible target. Nothing could be farther from the real

practice of solving puzzles with whips or other chains. [PBCS] is a logical presentation of a general resolution framework, of various types of resolution rules and of their resolution power. Even if part of the book consists of applying this to a lot of different logical puzzles, by showing how to define them so that they fit in the general framework, it doesn't say much about how to find the chain patterns in real cases: [PBCS] is not a tutorial on how to find these chains in a real CSP instance.

As the above graphico-symbolic representations should clearly show, *the real starting point for a whip/braid... is a partial-whip[1] and the real starting point for a g-whip/g-braid... is a partial-g-whip[1]*. These two patterns considerably restrict the number of candidates that could be used as potential targets. This should also make it clear that *whips, g-whips, braids... are patterns in exactly the same sense as Subsets are. They do not make any assumption; they do not start with any hypothesis that some candidate might be a target. They start by observing that there is a well-defined pattern (a partial-whip[1] or a partial-g-whip[1]) in the current resolution state.* And these two starting patterns are as simple as the simplest two patterns after Singles, namely bivalued cells and whips[1] (a pattern known under various names in Sudoku: row-block interaction / intersection / pointing + claiming / alignments...).

1.8 General warnings

- CSP-Rules interface is text-only and it is not interactive. One types a simple command line in a simple Lisp-like syntax asking for some solution and the output is the full resolution path in plain text. No blinking, no colours, no frills, no nothing. If you cannot do without a graphical interface, you would be better inspired to look for something else or to propose your own graphical extensions via GitHub, because I am not going to write one.
- CSP-Rules was designed as a research and teaching tool; several times, I gave my AI students a part of SudoRules plus some (generally vague and incomplete) definitions of rules found on websites and I asked them to formalise them, first in English or French, then in First Order Logic and then to code them in CLIPS. I made CSP-Rules public in July 2020 because of an increasing number of readers of [PBCS] and [HLS] insisting on giving it a try. (I took advantage of the first covid lockdown in 2020 in France to concentrate on writing the necessary additions – e.g. powerful but easy to use configuration files with related loaders – and on writing the first edition of this Manual to make it usable by others than me. Every bad has its good counterpart.) Notice that “research tool” doesn’t mean lower quality; on the contrary, I claim much higher quality than many “professional” softwares: CSP-Rules has not been designed for requiring maintenance fees.
- CSP-Rules hasn’t been designed for fast solving but for ease of implementation (for me). If what you need is a fast solver, you are not looking at the right place. Even the included DFS or T&E solvers are very slow compared to ones programmed in an optimal way in C. Thinking specifically of Constraint Satisfaction, there are

much faster (and free) generic CSP solvers – though none (as far as I know) that will output a readable resolution path. Although they all use the same rules, there are also differences of speed between the various existing CSP-Rules applications, e.g. between KakuRules (fast) and SlitherRules (slow), much depending on their inherent branching factors.

- As most knowledge-based systems, CSP-Rules may require a fair amount of memory for hard puzzles. However, all the examples appearing in [PBCS] have been solved with only 16 GB of RAM and most of them require much less.
- If you are a “normal” puzzle solver, i.e. you are not submitting to CSP-Rules puzzles that any player would not even consider solving himself, you can completely forget the above-mentioned limitations of CSP-Rules in terms of speed or memory. Instead, you can play with the various combinations of rules and see what they allow. The possibilities are almost unlimited.
- Since its first publication in June 2020, CSP-Rules-V2.1 has had a good number of updates. However, the version number (2.1) hasn’t changed because the core of the system hasn’t changed (it had been developed and largely tested on millions of puzzles long before being made public). The changes are mainly additions, some generic ones (Oddagons, OR_k-forcing-whips, OR_k-contrad-whips and OR_k-whips) that are conceptually trivial extensions of the rules defined in [PBCS], and some application-specific (e.g. Pandiagonals in Latin squares or all the Sudoku-specific parts related to strategies other than simplest-first or to the newly discovered tridagon and other impossible patterns.)

1.9 Selected generalities about CLIPS

Although the reader of this Manual does not need to know much about CLIPS, it may be useful when typing a user function to remember a few basic facts. Don’t worry if you have never used any programming language: you don’t have to understand this section in order to use CSP-Rules at the ordinary user level; you can totally skip it.

The only two things you will have to do is to use a text editor to delete semi-colons in the configuration files and to type something like:

(solve "4...3.....6..8.....1....5..9..8....6...7.2.....1.27..5.3....4.9....."),

where the string is some more or less standard representation of a puzzle. (See the application-specific chapters for details.)

What follows is more for programmers of classical languages, so that they don’t get lost with the specificities of CLIPS.

- If you have a look at the resolution rules coded in CSP-Rules, you will see that the CLIPS rules syntax is an elaborated version of First Order Logic. The main part of CSP-Rules is made of rules: ***the rules are the program***; it is the role of the CLIPS inference engine to apply properly these rules. The parts of CSP-Rules that are not

made of rules are of two kinds: output functions and interfaces of the various applications that feed the givens of a problem instance to the rules of CSP-Rules.

- CLIPS general syntax, as you will mainly see it in the user functions, is Lisp-like. Lisp is a functional language. A function is not called as $f(x)$ but as $(f\ x)$: opening parentheses are before the function symbol.
- *Names of variables always start with a “?”*. Names of global variables always start with “?*” and always end with “*”.
- *The last argument of a function may be a list*; in the function definition it has to be written with leading characters “\$?” as in “\$?rest” (the rest of the arguments); in a call to the function, all the arguments remaining after those that are associated with individually named variables are automatically made into a list and assigned to variable \$?rest. It is important to remember this, because many user functions in CSP-Rules will use this very convenient possibility. There can be only one list variable in the definition of a function and it can only be the last argument.
- Any positive number of consecutive spaces, tabs, carriage returns or line feeds is equivalent to a single space; this has the advantage of allowing nice formatting of the programs or the arguments to functions, at no cost for the programmer.
- A semi-colon is a reserved character. Anything in a line after a semi-colon is a comment and can be considered as non-existent as far as the effective code is concerned. It is common usage (but not mandatory) to use three semi-colons for comments at the start of a line. Comments can appear at almost any place inside a function:

```
;;; Use this function to solve a puzzle
(solve
  ;;; I am a general comment about function "solve"
  9 ; I am a real argument, the size of the grid
  Hidato ; I am a real argument, the type of game (Numbrix vs Hidato)
  ; argument3 ; in this version, I am no longer an argument
  1 5 6 12 ; these final arguments make a list variable
)
```

There are (apparently) very strange consequences of this rule when a semi-colon appears inside double quotes; but this will never happen in CSP-Rules (because it leads to what I consider unpredictable behaviour from a rational only point of view). Just for fun, you can play with the difference between the following two commands:

```
(printout t "; I am a string" crlf)
(printout t "; I am a string
" crlf)
```

By the way, if you are blocked after typing something like the above first command (i.e. if the CLIPS prompt does not reappear), try typing several closing parentheses. If it does not work, try typing a double quote (only one) and then as many closing parentheses as necessary. This will avoid to quit CLIPS in a savage way – i.e. with a control-c in Unix –, the proper way being by typing “(quit)”.

As a general recommendation, if you have to type anything in the CLIPS interpreter, it is much better to type it first in any text editor and then to paste it into CLIPS: it is very easy to miss or add some double quote or some semi-colon or some parenthesis and it may lead you to a blocked situation similar to the above-mentioned one; once a line is entered into CLIPS, there is no way to go back.

- There are six CLIPS commands that it may occasionally be useful to know:
 - 1) (rules) will output the set of current rules in CLIPS (the knowledge base);
 - 2) (facts) will output the set of current facts in CLIPS (the facts base);
 - 3) (clear) will empty CLIPS of all its facts and rules. You can use this instead of quitting CLIPS before loading another set of rules. It is equivalent to quitting and re-launching, but in practice I usually prefer quitting and re-launching, especially after an exceptionally hard puzzle that required large amounts of memory.
 - 4) (reset) will clear all the facts but not the rules. In CSP-Rules, the behaviour of (reset) is fixed so that it does not change the values of the global variables and it is important not to change this. A reset is done automatically by CSP-Rules every time a “solve” function is called and it involves releasing memory no longer used. Memory is managed in a very safe way in CLIPS: many times, I have left a single instance of CLIPS run for full days to solve hundreds of thousands after hundreds of thousands of puzzles without ever needing to quit and restart it.
 - 5) (release-mem) allows to release the memory claimed by CLIPS during resolution. This may be useful after a very hard puzzle has been solved. But this is also done automatically before each new puzzle is solved when batch solving full files of puzzles.
 - 6) (dribble-on “filename”) allows to redirect all the output (normally sent to the Terminal / Command Window) to the file named “filename”. (dribble-off) stops this behaviour and sends again the output to the standard output.

Part One

GENERALITIES

2. Installing and launching CSP-Rules

CSP-Rules is coded as a knowledge-based system and it requires an independent inference engine to run its sets of rules. The “programming” language used by CSP-Rules is that of the CLIPS inference engine, with a Lisp-like syntax. The present Manual will not explain how to use CLIPS beyond launching it – the only thing strictly necessary to run CSP-Rules. Indeed, in order to make CSP-Rules easy to use for anyone without requiring preliminary compilations (which can be quite challenging for non-programmers on Windows), executable versions of CLIPS for Unix (including MacOS) or Windows environments are provided with CSP-Rules-V2.1 (in the “CLIPS” folder). The relevant CLIPS source code is also provided.

2.1 Installing CSP-Rules (machine independent)

Create a “CSP-Rules” folder at any reasonable place in your file system, e.g. within a “Tools” directory inside your home directory. Download CSP-Rules-V2.1.zip from the GitHub repository: go to <https://github.com/denis-berthier/CSP-Rules-V2.1/master>, click the “Code” button to open its menu and then select “Download ZIP”; move the downloaded file into your newly created “CSP-Rules” folder, unzip it (by double-clicking it) and rename it as “CSP-Rules-V2.1” (in particular, delete the final “master” part, if any). At this point, the absolute path to CSP-Rules-V2.1 should look like this:

```
<absolute path to your home directory>/Tools/CSP-Rules/CSP-Rules-V2.1/
```

Now, you will need your preferred text editor to modify a few files (e.g. Xcode on a Mac, VS Code on Windows or Emacs or BBEdit on any platform).

Modify as follows each of the configuration files of the predefined applications (i.e. all the files inside the “CSP-Rules-V2.1.” folder with names ending in “config.clp”). The four modifications listed below are in the upper block of each configuration file, under the local banner “INSTALLATION ONLY”. The four lines are marked with an ending “<<<<<<<<<<” sign. You can modify one of the configuration files and then copy/paste this whole upper block onto the corresponding blocks of the other files so as to replace them.

1 – mandatory in odd cases) If you are using any odd system (other than MacOS, Unix or recent Windows) that doesn't use "/" as its directory symbol, then define it here, e.g. delete the semi-colon here:

```
; (bind ?*Directory-symbol* "\\")
```

2 – absolutely mandatory) Change the definition of the ?*CSP-Rules* global variable, so that it coincides with the absolute path to your previously defined CSP-Rules (not CSP-Rules-V2.1) folder (including the final directory symbol "~", otherwise it will not work); for instance:

- on a Unix system:

```
(defglobal ?*CSP-Rules* =  
  "/Users/<your_home_directory>/Tools/CSP-Rules/")
```

Beware: CLIPS does NOT understand the Unix "~" as a shortcut to your home directory.

- on a Windows system:

```
(defglobal ?*CSP-Rules* =  
  "c:/Users/<your_home_directory>/Tools/CSP-Rules/")
```

With this way of proceeding, CSP-Rules can be run from any place.

3 – optional) If necessary (i.e. if you want to use a release of CLIPS different from the r823 one provided with CSP-Rules), change the CLIPS version number (this is only used for keeping track of which release of CLIPS you have used during resolution and it will appear only in the CSP-Rules banners); it will not change anything else if you forget to do this:

```
(defglobal ?*Clips-version* = "6.32-r823")
```

4 – optional) Describe, with all the details you like, the machine you will use to run CSP-Rules. This will only be used for keeping track of this information and for printing it at the end of each resolution path, in the CSP-Rules banner:

```
(defglobal ?*Computer-description* =  
  "MacBookPro Retina Mid-2012 i7 2.7GHz 16GB, MacOS 10.5.4")
```

5 – additionally, if you are using a Mac with a not too old version of MacOS, you will have to recompile your own version of the CLIPS core, due to the strict MacOS security rules. You may have to do this also on some other versions of Unix. This is why the source of the CLIPS core is now included in the CLIPS folder. If not yet done, install XCode (plus the "additional tools" it requires on first launch). In a Terminal, go to the CLIPS/clips-core/ directory inside CSP-Rules-V2.1 and type "make". You will get a "clips" executable file in this directory; move it up to the CLIPS folder of CSP-Rules-V2.1 (thus crushing the previously existing clips file).

Et voilà. CSP-Rules is ready to run.

Notice that, if you download an updated version of CSP-Rules-V2.1 from GitHub, you will have to re-do the same installation procedure – unless you keep aside a copy of clips (or clips.exe) and of your configuration files.

2.2 Launching a CSP-Rules application

Each application *App* consists of two parts: a directory named *AppRules-V2.1* plus a configuration file named *AppRules-V2.1-config.clp*. If you frequently use several different configurations for the same application, there is no restriction on having several different configuration files for it. My recommendation is to always name them according to the pattern *AppRules-V2.1-config-xxx.clp*, where *xxx* can be any mnemonic for your configuration.

To launch and use an application, there are four steps:

Step 1) Launch CLIPS by double-clicking the proper application in the CLIPS subdirectory of CSP-Rules-V2.1, i.e. “clips” on a Unix (including MacOS) system and “clips.exe” on a Windows system. The starting of CLIPS is immediate. This is indicated by the standard CLIPS prompt: “CLIPS>”.

Step 2) In the relevant config file, specify which options and which resolution rules you want to use [how to make such choices consistently will be seen in the relevant chapters of Part II]. A choice by default is already made in the included configuration files, so that you can start using CSP-Rules without any delay.

Step 3) Inject the relevant configuration file into CLIPS. There are two ways to “inject” it:

- either copy the full content of the file and paste it directly into CLIPS (this works perfectly on MacOS, but I did not try on other systems);
- or type in CLIPS the following command line (with the relevant changes for the parts in *italics*):

```
(batch
"/Users/<your_home_directory>/Tools/CSP-Rules/CSP-Rules-V2.1/AppRules-config.clp")
```

Both ways amount to applying successively in CLIPS all the “constructs” and commands included in the configuration file. The configuration file sets a few global parameters and then it loads all the files corresponding to the application and the chosen resolution rules, with the chosen options.

At this point, after some amount of useless messages (including normal warnings about functions and rules being redefined), the CSP-Rules banner should appear, with the first line recalling which application you are using, based on which version of CSP-Rules, which version of CLIPS (if you have configured it during installation) and which resolution theory. The banner is followed by the standard CLIPS prompt (“CLIPS>”). Here you can see my standard – and the default – configuration for SudoRules: whips + Subsets + Finned Fish (the “.s” means that the default option for rules, “speed”, has been kept unchanged):

```

*****
*** SudoRules 20.1.s based on CSP-Rules 2.1.s, using CLIPS 6.32-r823, config = W+SFin
*** Copyright Denis Berthier
*** Running on MacBookPro Retina Mid-2012 i7 2.7GHz 16GB 1600MHz DDR3, MacOS 10.15.4
*****
CLIPS>

```

The information thus displayed may seem useless to you now, but if you solve hundreds or thousands or (as I have done) millions of puzzles, keeping track of it together with the actual resolution paths may spare you the necessity to re-run them in case you don't remember.

CSP-Rules is now ready to solve puzzles for you. If you want to check which rules have been loaded, you can type in the CLIPS command: "(rules)". The last line of the output will be the total number of rules. Notice that what is called a resolution rule in [PBCS] is generally implemented via several CLIPS rules (generally an activation rule, a tracking rule, one or more pattern definition/extension rules and one or more rule-application rules), so that what you get here is the number of CLIPS rules, not the number of resolution rules in the sense of [PBCS].

Step 4) Decide which puzzle P you want to solve and type something like:

```
(solve ".....the_puzzle.....")
```

where ".....the_puzzle....." must be the proper representation of P for this type of puzzle in CSP-Rules. Depending on the application, one or more additional parameters may be needed, such as size of the problem, variant of the puzzle... More application-specific commands will be described in Part II, but function "solve", or some form of it, is the basic command for all the applications. Go directly to the application-specific chapter for details about its syntax and a direct use of CSP-Rules.

The result will be the full resolution path for the chosen puzzle. Note that the computation times can be extremely different for different types of puzzles and for different instances of a given type. A good way of getting used to this is to try progressively harder puzzles.

Step 4 can be repeated as many times as you want, as long as you don't change the type of puzzle, the options or the set of resolution rules you want to apply. The "cleaning" of the CSP-Rules "memory" between the resolution of two puzzles is automatic, but you can apply it yourself by typing "(reset)" and then "(release-mem)" when the CLIPS prompt re-appears.

However, *if you want to change the set of resolution rules or the options or the type of puzzle (and for some applications such as Sudoku, the size of puzzles), you have to re-start from step 1* – because, *for efficiency reasons, only the rules selected in the configuration file are loaded when you "inject" this file into CLIPS at step 3*. In my own practice, this has never been a problem.

3. The generic resolution rules and functions in CSP-Rules

CSP-Rules V2.1 includes the generic resolution rules defined in [CRT] and [PBCS], plus (some generic form of) the more specific rules (“2D-chains”) previously defined in [HLS], plus more recent rules allowing to deal with OR_k relations between candidates (see section 3.5). It also includes rules specific to some applications, that will be discussed in the relevant chapters, in Part Two of this Manual.

3.1 Basic generic resolution rules

The first generic resolution rules present in CSP-Rules V2.1 constitute the universal Basic Resolution Theory (BRT) defined in [PBCS] and, as such, they cannot be turned off. They are:

- ECP (Elementary Constraints Propagation from decided values to candidates); their conclusions are so obvious that they are generally not printed (unless one explicitly sets global variable `?*print-details*` to TRUE in the configuration file);
- Singles (the rule that asserts a value when a CSP-Variable has only one candidate);
- Rules for managing the resolution process, such as contradiction detection, solution detection, ... (see [PBCS] for details). They act unnoticed by the ordinary user.

Note also that each application may (and some do effectively) overwrite the generic version of ECP and/or Singles or even whips[1], for efficiency reasons. All this is transparent to the ordinary user.

3.2 Ordinary generic resolution rules

First, note that Subset rules (and their variants, such as Finned Fish in Sudoku) are not provided in a generic form in CSP-Rules, although they could be programmed as set covering rules. But such a general form would be very inefficient (and it would cause quick memory overload). Instead, they have application-specific versions, but there are generic hooks to deal with them (see the relevant chapters).

As a result, the main types of resolution rules introduced in [HLS] and [PBCS] that are present in generic form in CSP-Rules V2.1 are various kinds of chains (or “braided chains”). They are:

1) Reversible ones (with no t-candidate):

- bivalued-chains, up to length 20;
- typed bivalued-chains, up to length 20;
- z-chains, up to length 20;
- typed-z-chains, up to length 20;
- oddagons, up to length 15 (see definition in section 3.4);
- g-bivalued chains, up to length 20;

2) Non reversible ones (with t-candidates) (from [HLS], [CRT] or [PBCS1]):

- t-whips, up to length 36; remember that t-whips are a special case of whips, they are less powerful, but they can be built independently of the target z;
- typed t-whips, up to length 36;
- whips, up to length 36;
- typed whips, up to length 36;
- g2-whips, up to length 36;
- g-whips, up to length 36;
- braids, up to length 36;
- g-braids, up to length 36;
- forcing-whips and forcing-g-whips, up to length 36;
- forcing-braids and forcing-g-braids, up to length 36;

3) Non reversible, recently added ones that require the definition of some application-specific OR_k relation for doing any effective work; they are intended to deal with exotic patterns that can be used to deduce some OR_k relations, e.g. exotic patterns based on some impossible pattern:

- OR_k -forcing-whips, $k = 2, 3, \dots 6$, up to length 36 (see definition in section 3.5.1);
- OR_k -contrad-whips, $k = 2, 3, \dots 6$, up to length 36 (see definition in section 3.5.2).
- OR_k -whips, $k = 2, 3, \dots 6$, up to length 36 (see definition in section 3.5.3).
- OR_k -forcing-g-whips, $k = 2, 3, \dots 6$, up to length 36 (see remarks in section 3.5.4).
- OR_k -contrad-g-whips, $k = 2, 3, \dots 6$, up to length 36 (see remarks in section 3.5.4).
- OR_k -g-whips, $k = 2, 3, \dots 6$, up to length 36 (see remarks in section 3.5.4).

I set the above-mentioned maximum lengths for each kind of chains because I never needed anything close to so long chains when solving millions of puzzles of different types. In practice, you will never see so long chains.

All of the above chain rules (except bivalued-chains, oddagons, g2-whips and OR_k-chains) come in two independent versions: speed and memory, corresponding to different optimisations. g2-whips have only the memory version, because they are supposed to be used mainly when g-links haven't yet been defined. Forcing-whips, forcing-g-whips, forcing-braids and forcing-g-braids have apparently only one version, but they are built on the chosen speed or memory versions of whips, g-whips, braids and g-braids, so that, in practice, they do have two versions also.

Independently of their speed or memory versions, some of the resolution rules have two slightly different behaviours:

- the old behaviour that works and prints the output as described in [PBCS1] and [PBCS2] and as in CSP-Rules-V2.0 – i.e. only one elimination at a time;
- and a more recent “blocked” behaviour that finds all the potential targets for an instantiation of the rule before eliminating all of them in a single sweep. In this new behaviour, rules no longer seem to be “interrupted” by simpler ones (and sometimes to re-start later). After experimenting with this behaviour, I made it the default one in version V2.1, but each configuration file allows you to revert to the previous ([PBCS1], [PBCS2] and CSP-Rules-V2.0) one if that is what you prefer.

Rules amenable to this new “blocked” behaviour are

- whips[1] (and OR_k-whips[1]),
- (typed or not) bivalued-chains, z-chains and t-whips,
- oddagons,
- Subset rules in any of the coded applications.

These four groups of rules can be independently reset to the old behaviour. Application-specific rules for Slitherlink were coded from the start with this new behaviour and they have no other version.

3.3 *A word on typed chains*

Typed bivalued-chains, typed z-chains, typed t-whips, typed whips and typed g-whips were not discussed in [PBCS], but they were introduced in [HLS] under other names. In Sudoku, they are the “2D” counterparts of bivalued-chains, z-chains, t-whips, whips and g-whips (see section 6.4).

The difference of any of these typed chains with its untyped version is, all its CSP-Variables must have the same type (e.g. rc, rn, cn or bn in Sudoku); however, typed-chains of different types can appear in a resolution path – unless this possibility is further restricted, using a simple generic mechanism (see the application-specific chapters, in particular the SudoRules chapter, for details). Obviously, the notion of a typed-chain is less general than that of a non-typed chain of the same kind (i.e.

bivalue-chain, z-chain, t-whip, whip or g-whip), but it may be used for many different purposes, depending on the applications and on one's goals.

In a resolution path, a typed chain (e.g. a typed t-whip) is printed as a chain of the same kind (e.g. a t-whip), with its type appended between its kind and its length (e.g. t-whip-rc[5]); the word “typed” does not appear at the start, because it would be redundant with the explicit naming of the type at the end.

3.4 Oddagons

Oddagons were not discussed in [PBCS1] or [PBCS2]. They are an oddity among generic chains. They first appeared in the Sudoku world. They can be defined as follows (according to Tarek, translated into the [PBCS] formalism): for any candidate Z (the target of the oddagon), for any odd integer $n \geq 3$, an oddagon[n] is defined by:

- a sequence of n different CSP-Variables $csp_1, csp_2, \dots, csp_n$,
- a continuous sequence of different candidates c_1, c_2, \dots, c_n ,

such that, setting $c_{n+1} = c_1$ and $csp_{n+1} = csp_1$, one has for every $1 \leq k \leq n$:

c_k and c_{k+1} are candidates for csp_k and they are the only two candidates for csp_k that are possibly not linked to Z .

In such conditions, the *oddagon chain rule* states that Z can be eliminated. The proof is very simple: if Z was TRUE, all the z -candidates would be FALSE and:

- if Z is not one of c_1, c_2, \dots, c_n , then by circulating clockwise along the chain, c_1 TRUE would imply c_1 FALSE whereas c_1 FALSE would imply c_1 TRUE;
- if Z is e.g. c_1 (still supposed to be TRUE), circulating clockwise along the chain from c_1 as before would imply that c_1 is FALSE, a contradiction.

Notice that nothing in the above definition or proof prevents the target Z from being one of c_1, c_2, \dots or c_n . In such a case, one will have an *autophage elimination*.

The candidates linked to Z (z -candidates) are also called guardians: one of them must be True in order to prevent the impossible pattern that would result from their absence.

Notice that Oddagons are not very brittle: if a right-linking candidate is deleted, the pattern degenerates into a z -chain for Z ; if it is asserted, it degenerates into a whip[1] for Z . It is therefore recommended to activate z -chains when oddagons are activated. Notice that this is not automatically ensured by CSP-Rules loading rules.

3.5 *OR_k-forcing-whips, OR_k-contrad-whips and OR_k-whips (advanced)*

The chain rules introduced in this section are easy generalisations of the rules defined in [HLS], [CRT] or [PBCS]. They are intended for use with rare exotic

patterns that lead to logical OR_k relations, in particular with patterns intended to avoid known contradictory patterns. They could also be used with patterns related to uniqueness in some CSPs, if one accepts the assumption of uniqueness. Oddagons could also be used, but they might lead to too many OR_k -relations.

3.5.1 OR_k -forcing-whips

OR_k -forcing-whips are a straightforward generalisation of forcing-whips.

OR_k -forcing-whip rules: if an OR relation between k different candidates ($Z_1, Z_2 \dots Z_k, k > 1$) has been proven, and if there are k partial-whips (of respective lengths $p_1, p_2, \dots p_k$), with respective targets $Z_1, Z_2 \dots Z_k$, then:

- if the last (right-linking) candidate of all the k partial-whips is the same, then one can assert it as True;
- if a candidate is linked to the ends (i.e. the last right-linking candidates) of all the k partial-whips, then it can be eliminated.

The proof is a trivial application of “reasoning by cases”. (For simplicity of the above formulation, a direct contradiction link between two candidates is considered as a partial-whip[0]).

As k streams of reasoning must be followed in parallel and complexity is more or less exponential in the length of chains, the global length of an OR_k -Forcing-Whip can be defined consistently in two and only two ways:

1) either consider that the OR_k relation doesn't lead to any elimination in and of itself and that it must therefore be counted in the complexity of the OR_k -forcing-whip, in which case the total length must be defined as: (length of the OR_k relation) + $p_1 + p_2 + \dots + p_k$; this is the view adopted in standard forcing-whips (based on the simple OR_2 bivalued relation of size 1);

2) or consider that the OR_k relation has been proven independently and doesn't have to be counted in the complexity of the forcing-whip, in which case the total length is $1 + p_1 + p_2 + \dots + p_k$ (the +1 is for consistency with the basic forcing-whips).

In the definition of the general OR_k -forcing-whips, I have adopted the second view, which corresponds to an extended resolution model, where OR_k relations can be asserted as intermediate results (in addition to only values and candidates).

The reason is, *OR_k -forcing-whips are only intended for use with rare exotic patterns that can be expressed as implying OR_k relations*. Typically, in such cases, one wants to give some priority to the exotic pattern and to what can be deduced from it (while maintaining some consistency with the complexities of the ingredients, i.e. partial-whips). For examples, see chapter 14.

3.5.2 OR_k -contrad-whips

When an application-specific OR_k relation between k candidates has been proven, the most natural way to take advantage of it is via the above-defined generic OR_k -Forcing-Whips. The OR_k relation serves as a natural starting point for the forcing whip. However, there is also another way of using an OR_k relation to eliminate candidates. As far as I know, the first time a Tridagon OR_k relation has been used in a similar way is by DEFISE, in this puzzle: (<http://forum.enjoysudoku.com/23427-more-anti-tridagon-guardians-t40295.html>)

The formal definition is almost obvious: *given an OR_k relation between candidates C_1, C_2, \dots, C_k , an OR_k -contradiction-whip[n] (or OR_k -contrad-whip[n] for short) based on the OR_k relation, with target Z , is an ordinary partial-whip[$n-1$] W with the same target Z , such that each of the C_k 's is linked to (at least) a right-linking candidate of W (and at least one of the C_k 's is linked to the last right-linking candidate of W – continuity condition).*

OR_k -contrad-whip rule: in such a situation, the target Z can be eliminated.

Proof: obvious. If Z was True, all the right-linking candidates would be True; which implies that none of the C_i 's could be True. Note that the OR_k relation plays here the same role as an n -th CSP-Variable for reaching a final impossibility (which also justifies the definition of length for the OR_k -contrad-whip).

3.5.3 OR_k -whips

OR_k -whips are an easy generalisation of whips or of contrad-whips. An OR_k -whip is a pattern more general than the previously defined OR_k -contrad-whips: the OR_k part may appear at another place than the final (contradiction) one.

Informally speaking, *an OR_k -whip[n] (based on some OR_k -relation) is much like a whip[n], except that one (and only one) of its CSP-Variables is replaced by an OR_k relation, where $k-1$ (and only $k-1$) candidates are linked to the target or to previous right-linking candidates, the continuity condition of the chain is ensured at this step also, and the remaining candidate is used as a right linking-candidate for the next step; as a special case, it can also be an OR_k -contrad-whip[n].*

OR_k -whip rule: in such a situation, the target can be eliminated.

Proof: obvious; copy the proof for the OR_k -contrad-whips

3.5.4 OR_kFW_n , OR_kCW_n and OR_kW_n parametric resolution theories

For every $k \geq 1$, one can obviously define “parametric” OR_kFW_n , OR_kCW_n , OR_kW_n and OR_kCH_n resolution theories by:

OR_kFW_n = all the OR_j -forcing-whip[p] resolution rules for $j \leq k$ and $p \leq n$;

OR_kCW_n = all the OR_j -contrad-whip[p] resolution rules for $j \leq k$ and $p \leq n$;

OR_kW_n = all the OR_j -whip[p] resolution rules for $j \leq k$ and $p \leq n$ (which includes all the OR_j -contrad-whip[p] resolution rules for $j \leq k$ and $p \leq n$);

$OR_kCH_n = OR_kFW_n + OR_kW_n$; (which includes OR_kCW_n)

In practice, they will generally be combined with SFin, Trid (the elementary tridagon elimination rule), some OR_k 's based on impossible patterns and some W_q .

Notes:

- OR_k -forcing-whips[1], OR_k -contrad-whips[1] and OR_k -whips[1] are the “same thing” (i.e. do the same eliminations) but considered from different points of view;

- the above theories are said *parametric* because they depend on the resolution rule(s) that produce the OR_k relations; generally, these rules will be clear from the context; but the parameter will always be written in the OR_k rule names when they appear in a resolution path, such as Trid- OR_3 -whip[n] when the OR_3 relation is justified by an anti-tridagon (see chapter 14 for details and for the notation);

*OR_k -forcing-whips, OR_k -contrad-whips and OR_k -whips are collectively called **OR_k-chains**. They are intended for use only with *exotic* OR_k relations – which is the only possible justification for not counting the real OR_k length in their total length).*

Note that in CSP-Rules, OR_k -forcing-whips are restricted in two complementary ways:

- *directly by their maximal allowed length (defined by $?*OR_k$ -forcing-whips-max-length*);*

- *and indirectly by the maximal lengths of their inner partial-whips (deduced from $?*whips$ -max-length* or $?*all$ -chains-max-length* or $?*OR_k$ -whips-max-length*);*

*But OR_k -contrad-whips and OR_k -whips are only restricted by their respective $?*OR_k$ -contrad-whips-max-length* and $?*OR_k$ -whips-max-length*.*

The reason in all cases is to maximise the use of partial-whips once they are found.

3.5.5 Extensions to g-candidates and to braided continuity and braided-g-continuity

The above definitions of OR_k -forcing-whips, OR_k -contrad-whips and OR_k -whips have straightforward extensions to accommodate 1) g-candidates as possible right-linking objects, and 2) braided or g-braided continuity. Notice that, as OR_k relations are not based on CSP-Variables, the OR_k steps in these new chains can only have candidates as their right-linking elements (OR_k relations have no g-candidates).

Corresponding resolution theories can also be defined in obviously similar ways.

3.5.6 Managing the brittleness of the OR_k relations: ultra-persistence

Exotic patterns are often *brittle*: if some of their candidates are deleted or asserted as TRUE, the pattern may degenerate into something that one may no longer be able to identify – whence possible problems on non-confluence for resolution theories based on them. This remark will apply to Tridagons in chapter 14. However:

- the above resolution theories are defined in such a way as to minimise problems on non-confluence that are not directly due to the OR_k relation;

- CSP-Rules has generic rules for *systematically making an OR_k -relation ultra-persistent* once it has been found: if one or more of the OR_k -related candidates (“guardians”) is eliminated – which makes the relation *a priori* unusable for the OR_k -chain rules (e.g. because this candidate was the target of a required partial-whip and there can be no partial-whip with no target) –, an OR_j -relation for some j smaller than k will automatically be asserted for the remaining guardians, even if the original pattern underlying the OR_k -relation has degenerated (and could therefore not be found directly). If $k=2$, the only remaining candidate is asserted. (See section 14.16 for an explanation and illustration of this.)

3.5.7 Splitting the OR_k relations

In some situations, potentially interesting OR_k relations appear between large numbers of candidates (i.e. k is large). However, the larger k , the more difficult it can be to find useful OR_k -chains of “reasonable” lengths. CSP-Rules has a set of generic rules to manage the simplest cases of this situation.

Let us first define a **c-chain[n]** as a sequence of $n+1$ candidates C_1, \dots, C_{n+1} such that, for each $1 \leq p \leq n$, there is a bivalence relation between C_p and C_{p+1} for some CSP-Variable csp_p (with all the csp_i ’s different). It is obvious (exercise for the reader) that in such a case, if n is even, C_1 and C_{n+1} must have the same truth value.

It is also obvious that, if there is some OR_k relation between k candidates Z_1, \dots, Z_k , and if there is some c-chain[n] between two of the Z_i ’s, say Z_a and Z_b , then the OR_k relation is equivalent two OR_{k-1} relations, with respective lists of candidates: $\{Z_1, \dots, Z_k\} - \{Z_a\}$ and $\{Z_1, \dots, Z_k\} - \{Z_b\}$.

It is finally obvious that for any OR_k -chain based on this OR_k relation, allowing some elimination Z , there will be at least one shorter OR_{k-1} chain based on either of the two OR_{k-1} relations and also allowing to eliminate Z .

CSP-Rules has generic “ OR_k splitting rules” implementing this idea, for $k \leq 12$ and $n \leq 10$.

Notice that this mechanism doesn’t claim to be an exhaustive way of reducing the number of guardians in OR_k -relations (in addition to OR_k ultra-persistence). The only

purpose here is to have generic and easy rules – much simpler than the OR_k -chain resolution rules.

Together, the OR_k ultra-persistence rules and the OR_k splitting rules are called OR_k -relation management rules or OR_k management rules.

3.6 Rules for simulating T&E (Trial and Error)

CSP-Rules V2.1 also provides a rule-based version of T&E (as defined in [PBCS]) at depths 1, 2 and 3. (Notice that it is very inefficient, compared to what an optimised C version could do.) This is mainly designed:

- to check (e.g. before launching the actual resolution) whether a puzzle is in $T\&E(1)$, i.e. whether it can be solved by braids (and then, probably by whips);
- to check (e.g. before computing its $B\>B$ classification) whether a puzzle is in $T\&E(2)$, i.e. whether it could be solved by B-braids;
- to find the $B\>B$ classification of a puzzle in $T\&E(2)$;
- to find the $S\>B$ classification of a puzzle in $T\&E(S, 1)$, when application-specific Subset rules are defined in some application.

In principle, T&E can be used in combination with any resolution theory T (i.e. any set of ordinary resolution rules), provided that T has the confluence property, in order to check whether a puzzle is in $T\&E(T, 1)$, $T\&E(T, 2)$... Notice however that using $T\&E(T, 1)$ amounts to solving hundreds of puzzles and it can take much time if T is complex. Roughly speaking, $T\&E(T, 2)$ will take almost the squared time of $T\&E(T, 1)$.

In practice, the configuration files consider using T&E for only three purposes:

- finding the T&E-depth of a puzzle P, i.e. its membership in $T\&E(BRT, k) = T\&E(k)$, the useful result being when $k = 1$ or $k = 2$ ($k = 0$ is trivial). $k = 1$ ensures the existence of a solution with braids (thanks to the T&E vs braids theorem). Most of the time in this case, there is also a solution using only whips. But sometimes, braids are really necessary; such puzzles are generally very hard and you can expect very long resolution times and memory requirements with braids; it is often faster to look for a solution with g-whips – though being in $T\&E(1)$ is not a guarantee for a g-whip solution;
- finding the smallest k such that P is in $T\&E(S_k)$, i.e. it is solvable by S_k -braids;
- finding the smallest k such that P is in $T\&E(B_k)$, i.e. it is solvable by B_k -braids.

3.6.1 Restricting the candidates tried in T&E (at any depth)

Global variable `?*restrict-TE-targets*` is FALSE by default and, at any depth, T&E tries all the candidates present in the current resolution state. But when this

variable is set to TRUE by some function, only candidates for which predicate (is-restricted-TE-target 0 ?candidate) has been asserted as TRUE will be tried (at any depth of T&E). Obviously, this is only an incomplete form of T&E.

See chapter 14 for an example of how this allows to *use SudoRules as an assistant theorem prover* to show that most contradictory 3-digit patterns don't need more than a given depth of T&E to be proven impossible. This will also allow to single out (very rare) patterns that may require T&E-depth 3 in Sudoku. Using such restrictions on T&E may be justified when some abstract pattern makes assumptions only on a limited number of cells; one may tentatively assume that all the other cells do not participate in any general proof about this pattern and that trying their candidates would be a pure waste of time. (Notice that this is computationally extremely efficient as a filter, but a negative answer has to be confirmed by the full T&E procedure).

3.7 Rules for simulating DFS (depth-first-search)

DFS is known to be the fastest method for solving 9×9 Sudoku puzzles. CSP-Rules V2.1 also provides a (very inefficient) rule-based version of DFS. Originally, this was mainly designed for obtaining solutions faster than with the true rule-based methods. DFS can be combined with any set of resolution rules (having the confluence property), but it is generally faster if one only allows whips[1] and possibly whips[2] or whips[3], depending on the application. Notice that the computation time of DFS increases very fast (i.e. exponentially, for all practical purposes) with the size of the puzzle and it does not depend in any measurable way on its W, B, gW, gB... complexity.

The candidates used as hypotheses in DFS can now be restricted in the same way as in T&E.

3.8 Rules for finding backdoors, anti-backdoors and anti-backdoor pairs

If T_0 is a resolution theory with the confluence property, one can define a T_0 -backdoor [respectively a T_0 -anti-backdoor] as a candidate that leads to a solution in T_0 if it is asserted as a value [resp. deleted from the remaining candidates]. Similarly, a T_0 -anti-backdoor-pair is a couple of candidates leading to a solution in T_0 if both are deleted. CSP-Rules contains the rules necessary for finding them. The generic functions for launching these rules, *“find-backdoors”*, *“find-anti-backdoors”* and *“find-anti-backdoor-pairs”* (with no argument), *“find-anti-backdoor-pairs-with-one-cand-in-list”* (with one argument: a list of candidates such that each anti-backdoor-pair found must contain at least one of them), work in the current resolution state and with T_0 chosen as the current set of ordinary resolution rules.

T_0 -anti-backdoors and T_0 -anti-backdoor-pairs can be used to find 1-step or 2-step solutions. While the necessary rules and functions are written in generic form, at this

point, I have tested them only on Sudoku and they will be explained in detail in the SudoRules chapter. See section 6.10 for reasonable choices of T_0 .

3.9 Rules for simulating Forcing-T&E and Forcing{3}-T&E

In [CRT] and [PBCS], I introduced two patterns I called forcing-whips (resp. forcing-braids), made up of a (rc, rn, cn or bn) bivalued cell and of two partial-whips (resp. partial-braids) with respective targets the two candidates in the bivalued cell.

I noticed that the associated resolution rules (eliminating common left-linking candidates and asserting common right-linking candidates) were of little use in practice, because in all the cases I tried, a solution with shorter whips/braids was available. More extensive data don't fundamentally change my conclusions about this result.

Three things I didn't consider at the time of the above publications were:

- a definition of Forcing-T&E(cand1, cand2): start from a bivalued pair of candidates (cand1, cand2), develop independently the T&E branches starting from each candidate, eliminate all the candidates eliminated in both branches and assert all the candidates asserted in both branches.
- a proof that any elimination/assertion done by Forcing-T&E(cand1, cand2) can be done by some Forcing-braid(cand1, cand2) – the converse being obvious as usual.
- an extension of these definitions and results to any theory T_0 with the confluence property.

I will not insist on this, because all three points are obvious consequences or extensions of my various definitions and of the T&E vs braids theorems.

Forcing-whips/braids are not very interesting as long as they respect the natural notion of length and as long as one uses the simplest-first strategy that rely on it. However, in the Sudoku world, there is some recent interest for various forcing-things of uncontrolled length. I have therefore coded Forcing-T&E in a generic form in CSP-Rules. Contrary to forcing-whips or forcing-braids, there is no restriction on length and Forcing-T&E does not require that whips or braids be activated.

Also contrary to forcing-whips/braids, Forcing-T&E is not submitted to the simplest-first strategy. But it allows some (often drastic) reduction of the number of steps in the resolution path. You can see an example of application in section 13.10. In some restricted sense, *Forcing-braids and Forcing-T&E are submitted to opposite optimisation strategies: minimum length of chains and uncontrolled number of steps versus reduced number of steps and uncontrolled length of chains.*

The principle for choosing a pair of candidates as a starting point for the next application of Forcing-T&E is the maximum number of eliminations common to the

two T&E branches. Notice that this “optimisation”, of the *steepest-descent* kind, with the number of candidates as the evaluation function, is purely local and, like any steepest-descent method, it isn’t guaranteed to produce the shortest resolution path.

Forcing{3}-T&E is the generalisation of Forcing-T&E where one starts from trivalue triplets of candidates and develops three independent paths instead of bivalue pairs and two independent paths. Of course, anything (i.e. assertion of a value or elimination of a candidate) common to the three paths is globally valid. This is merely reasoning by cases, with three branches instead of two.

The following generic functions (with no argument) apply respectively Forcing-T&E and Forcing{3}-T&E once (and only once) in the current resolution state: “*apply-F2TE*”, “*apply-F3TE*”. You can apply any of them any number of times. Notice that the set of rules (T_0) loaded into CLIPS must be restricted to those you want to consider as no-step (see section 13.1.1).

Being a combination of T&E and reasoning by cases, Forcing-T&E and Forcing{3}-T&E can be considered as the nukes of solving and the summum of inelegance.

3.10 Hooks for introducing new resolution rules

Although CSP-Rules-V2.1 does not have generic Subset rules, it provides hooks for dealing with CSPs defined on rectangular grids with rows and columns, as is often the case for logic puzzles. In particular, it defines the *nrc-notation* for the output of every rule, as a specialisation of the general CSP-Rules output mechanism. All the applications discussed in this Manual use this nrc-notation (or some direct variant of it when there is no underlying rectangular grid, such as in MapRules).

3.11 The most general generic functions in CSP-Rules

The following functions have a generic definition, according to which they do nothing; each application has to provide a specific implementation:

- “*init*”,
- “*solve*”,
- “*compute-current-resolution-state*” (abbreviated as “*compute-RS*”),
- “*print-current-resolution-state*” (abbreviated as “*print-RS*”),
- “*pretty-print-current-resolution-state*” (abbreviated as “*pretty-print-RS*”),
- “*init-resolution-state*” (abbreviated as “*init-RS*”),
- “*solve-resolution-state*” (abbreviated as “*solve-RS*”),

- “*solve-w-preferences*” (abbreviated as “*solve-w-prefs*”); see section 6.8.1 for the meaning,
- “*try-to-eliminate-candidates*” uses the rules loaded into CLIPS and tries to eliminate only the chosen candidates. This is a general focusing feature, available in all the applications without any further coding (see section 6.9 for details).
- “*mute-print-options*” sets to FALSE all the global variables that control what’s printed (i.e. *?*print-actions**, *?*print-solution**, *?*print-RS-after-Singles**, *?*print-RS-after-whips[1]**, *?*print-final-RS**, *?*print-main-levels**, *?*print-levels** – see section 4.4.1 for the definition of these variables – plus other control variables related to T&E).
- As expected, “*restore-print-options*” restores their original values (selected in the configuration file). This may be very convenient in order to avoid too long printings when you’re only interested in the final results. Notice that if you change any of the above variables manually instead of with “*mute-print-options*”, you cannot use “*restore-print-options*” to restore its original value; you must do it manually also.

3.12 Generic global variables

When an application (such as Sudoku or Latin Squares) has (properly coded) functions for dealing with a sequence of instances (e.g. stored in a file, one per line), there are two global variables of interest at the end of applying them. They are particularly useful when sorting large sets of instances according to some rating/classification system. At the end of calculations, just type the name of one of these variables (and carriage return / line feed) to get the corresponding list:

- *?*solved-list** is the list of all the instances (by their place number in the sequence) that have been solved with the current set of rules;
- *?*not-solved-list** is the (complementary) list of all the instances (by their place number in the sequence) that have not been solved with the current set of rules;
- *?*no-sol-list** is the list of all the instances that have been proven contradictory with the current set of rules (normally empty if the instances are consistent).

There is also a global variable that can be used to define a list of candidates that will automatically be eliminated at the start of resolution, i.e. before any resolution rule is applied:

- *?*simulated-eliminations**

It must be defined before any “init” or “solve” function is applied, e.g. by: (bind *?*simulated-eliminations** (create\$ cand₁ cand₂ ...)), where the cand_i’s are candidates (“create\$” is the list creation function in CLIPS).

It is very convenient when one wants to study the consequences of a new, not yet coded rule – or just the effect of deleting some candidate(s) for some reason.

3.13 Appendix 3A: The T&E-depth of a resolution rule

The T&E procedure provided with CSP-Rules can be used to compute more than the solution of a puzzle. Section 14.7, will show how to use it for analysing k-digit patterns. Here is a more general use case that will be useful to understand how some techniques or rules can lower the complexity of a puzzle.

3.13.1 Definitions:

Definition: **the T&E-depth of a resolution rule R** is the depth n of the T&E(BRT, n) procedure required to prove R , i.e. to prove all the expected eliminations/assertions of R in any resolution state where the pattern P and only the pattern P of R is assumed to be satisfied.

It is also informally the T&-depth you need to use in order to replace the use of R in an instance of the CSP in the most general situation.

Remarks:

- 1) as all my definitions, this is invariant under Sudoku isomorphisms; this is essential, as it will allow drastic simplifications in the computation of the T&E-depth of any particular resolution rule;
- 2) some particular cases of the rule (i.e. of its pattern) may require fewer levels of T&E, but that doesn't change the depth of the rule itself, as the definitions says: "in any resolution state";
- 3) some particular eliminations/assertions may also require only fewer levels, but that doesn't change the depth of the rule itself, as the definition says: "all the expected eliminations/assertions";
(about remarks 2 and 3, see the Naked Quads example below);
- 4) in a given puzzle, the applicability of a resolution rule R of T&E-depth n doesn't imply that the T&E-depth of the puzzle is (at least) n . There are always many resolution paths and some of them may totally avoid using R or may use only a special case of R ;
- 5) a similar definition, with similar remarks could be based on $gT\&E(n) = T\&E(W1, n)$ instead of $T\&E(n)$.

Definition: **the T&E-depth of a contradictory pattern P** is the depth n of the T&E(Singles, n) procedure required to prove that R is contradictory.

It is also the T&E-depth of the resolution rule: $P \Rightarrow \text{FALSE}$ (where FALSE can be considered as an abbreviation for any formula " $\text{CSP1} = a \text{ AND } \text{CSP1} \neq a$ " in the language of the CSP).

3.13.2 Elementary Examples

A Single has T&E-depth 0 (by definition of T&E).

A braid has T&E-depth 1 (independent of its length). All the special cases of braids (bivalue-chains, z-chains, t-whips, whips) have T&E-depth 1.

A B-braid has T&E-depth 2 (independent of its total length and of the lengths of its inner braids).

Note: a g-braid or g-whip has T&E-depth 2, but g-T&E-depth 1.

3.13.3 The Naked-Quads-in-a-row example

Before dealing with more complex patterns, let's see how this applies to the most familiar ones: Subsets in Sudoku.

a) Method for computing the T&E-depth of a resolution rule:

The following technique can be applied in many cases, but it should be enough to illustrate it with the Naked Quads example. First, and this is a situation that will occur most of the time: we know in advance what the targets can be. As a result, we can assume that the first level of T&E consists of supposing that one of the targets is True (proof by contradiction). The most general resolution state is:

! 1234	1234 #	!	1234 #	#	!	1234 #	#	!
! #	#	#	!	#	#	!	#	#
! #	#	#	!	#	#	!	#	#
! #	#	#	!	#	#	!	#	#
! #	#	#	!	#	#	!	#	#
! #	#	#	!	#	#	!	#	#
! #	#	#	!	#	#	!	#	#
! #	#	#	!	#	#	!	#	#
! #	#	#	!	#	#	!	#	#
! #	#	#	!	#	#	!	#	#

where # is just a notation for the presence of all the candidates 123456789 in a cell and is equivalent to nothing being supposed about it.

Notice that:

1) we suppose that the 4 candidates are present in the 4 cells (this is the hardest possible case, because T&E is monotonic with respect to eliminations);

2) in order to be complete, we should also analyse the different possible positions for the 4 cells of the Quad in the row; but I'll let the other cases as an easy exercise for the reader.

As for the target, by digit symmetries, we can assume it is number 1 in some of the other cells of the row. Again, there are several possibilities for the cell, but I shall analyse only one.

So, at the first level of T&E, we assume the target (we don't repeat the lower two bands):

```

+-----+-----+-----+
! 234 234 1 ! 234 # # ! 234 # # !
! # # # ! # # # ! # # # !
! # # # ! # # # ! # # # !
+-----+-----+-----+

```

Level 2 of T&E: assume that $r1c1=2$ (it can't be 1); by digit symmetries, there's no loss of generality:

```

+-----+-----+-----+
! 2 34 1 ! 34 # # ! 34 # # !
! # # # ! # # # ! # # # !
! # # # ! # # # ! # # # !
+-----+-----+-----+

```

Level 3 of T&E: assume that $r1c2=3$ (it can't be 1 or 2); again, by digit symmetries, there's no loss of generality:

```

+-----+-----+-----+
! 2 3 1 ! 4 # # ! 4 # # !
! # # # ! # # # ! # # # !
! # # # ! # # # ! # # # !
+-----+-----+-----+

```

The contradiction appears: number 4 has to be in two cells of row $r1$.

Conclusion (after checking all the other possibilities): The T&E-depth of the Naked-Quads rule is 3.

b) Special case:

As an extreme example of remark 2 in section 3.13.1, consider the cyclic special case of the NQ:

```

+-----+-----+-----+
! 12 23 # ! 34 # # ! 41 # # !
! # # # ! # # # ! # # # !
! # # # ! # # # ! # # # !
+-----+-----+-----+

```

It is obvious that assigning 1 to any of the other cells in the row will immediately result in a contradiction in BRT. So, this special case has T&E-depth 1. This is also consistent with the possible view of this pattern has a bivalence-chain[4].

But this special case doesn't change the T&E-depth of the general NQ.

Exercises for the reader:

- 1) Prove that the T&E-depth of the Naked Triplets rule is 2.
- 2) Prove that the T&E-depth of the Naked Pairs rule is 1.

Remarks:

- 1) all the above results can be extended by super-symmetry to Hidden and Super-Hidden Subsets (Fish patterns);
- 2) for an example of a Swordfish that brings down a puzzle from T&E(2) to T&E(0), i.e. to Singles, see section 8.8.2 of [PBCS]. Notice that the Swordfish resolution rule has T&E-depth 2, but most puzzles that have its pattern are indeed only in T&E(1): as I've shown in [PBCS], most cases of Subsets are subsumed by whips.

3.13.4 The Tridagon elimination rule example:

The “tridagon elimination rule” will be introduced in section 14.2. If you follow the proof of eliminations given there (reviewing all the possible cases modulo isomorphisms, you will see that it also proves that the tridagon elimination rule has T&E-depth 4.

Tridagons were my original motivation for defining the T&E-depth of a resolution rule.

Notice that the Tridagon elimination rule has T&E-depth 4, but all the known puzzles that have its pattern are in T&E(3).

4. Simplest-first strategy, saliences, ratings

As recalled in the introduction, given a fixed set of resolution rules, the standard resolution process of CSP-Rules is guided by the ***“simplest-first” strategy***: at any stage of the resolution process, the next rule that will be applied is the simplest available one (or some arbitrarily selected one among the simplest available ones in case several rules of same minimum complexity can be applied). The main advantage is, ***for any resolution theory T with the confluence property, this strategy guarantees that following a single resolution path is enough to provide a solution with the smallest rating with respect to T .***

However, CSP-Rules is not intended to be a normative system. As an automatic solver, it must have some strategy; it finds a resolution path according to the rules selected in the configuration file and to the priorities defined by its simplest-first strategy (and to the arbitrary choices made at points where several equally complex rules could be applied). It doesn't mean that you are wrong if, as a manual solver, you find a different path.

In addition, the Sudoku chapter and Part III of this Manual will show in detail how this strict simplest-first strategy can be drastically circumscribed in various ways by using functions or combinations of functions more elaborate than “solve”. For instance, it is possible to focus the eliminations on particular candidates and/or to prefer groups of rules (e.g. Subsets) over others. It is also possible to look for resolution paths leading to a solution with a single rule application (1-steppers) or with two rule applications (2-steppers); of course, this will work in practice only for relatively easy puzzles. More generally, there is also a possibility of looking for resolution paths with fewer steps (within a given resolution theory). This is currently available only in SudoRules, but most of it could easily be re-written in generic form or adapted to any other application.

4.1 The simplest-first strategy

The simplest-first strategy could be implemented in many different ways in CSP-Rules, but I have chosen to use CLIPS “saliences” (i.e. priorities between rules) in a systematic way. The use of too many saliences in the knowledge base (i.e. the set of rules) of a knowledge-based system is generally not very well considered in the AI community, but this is the most versatile way of allowing additional (application-specific or user-specific) rules to be finely inserted at the proper level of the

complexity hierarchy if an occasional user wants to write some rule(s) of his own, without requiring a deep understanding of the system. Moreover, from a more theoretical point of view, it allows to make this hierarchy completely explicit and thus to keep totally separate:

- the “*knowledge level*” (in the sense of [Newell 1982]), defined by the textual and/or logical formulations of the resolution rules, as written in [HLS] or [PBCS];
- the “*symbol level*” (also in the sense of [Newell 1982]), defined by their implementation as a set of CLIPS rules;
- the “*strategic meta-level*” (introduced in all the modern methodologies of Rule-Based systems development) of how the rules defined at the knowledge level are to be used in a resolution process; as said before, the meta-level corresponding to the default simplest-first strategy is implemented in CLIPS as a set of saliences.

As the main interest of this point is for the user who wants to extend some existing CSP-Rules application or to add a new one, details will only be given in a more advanced manual. What I’ll say in this chapter intends mainly to explain why some patterns appear before other ones in the resolution paths, in (the frequent) cases when different possibilities are available.

General priorities between existing resolution rules have been described in [PBCS]. They are organised by levels, each level L_n being defined by the number n of CSP-Variables involved in the defining pattern (i.e. in the conditions of the rule).

Within each level, there are indeed not many different priorities; such priorities are mainly based on the generalisation relation, where a special case is given higher priority (otherwise, it would never appear in the resolution paths).

4.1.1 The basic ordering within level L_n

For every $n > 1$, one has the basic ordering, which is the only thing you need to know unless you deal with OR_k -chains.

**oddagon[n] > biv-chain[n] > z-chain[n] > t-whip[n] > whip[n] >
 > g-bivalue-chains[n] > g-whip[n] >
 > braid[n] > g-braid[n] >
 > forcing-whip[n] > forcing-gwhip[n] > forcing-braid[n] > forcing-gbraid[n].**

For the typed-chains, which were not considered in [PBCS], the most natural place is to insert them just before their untyped version. The place of forcing-whips, forcing-gwhips, forcing-braids and forcing-gbraids was not mentioned in [PBCS], but at each level, they naturally come at the end of this hierarchy.

Being a rare generic pattern, oddagons[n] (when defined, i.e. for odd n) are placed before any other generic chain of same length. (One may debate whether they should

be placed after bivalue-chains[n] or even after z-chains[n]; in practice, it doesn't change fundamentally the results.)

Notice that z-chains[n] are placed before t-whips[n], though none is more general than the other. The reason is, although they depend on their target, z-chains are structurally simpler than t-whips (and they are reversible).

Notice also that g-whips[n] are placed before braids[n], though none is more general than the other. There are three reasons: they respect the structural continuity condition, they are computationally simpler patterns and they are statistically more likely to produce results not reachable by whips.

4.1.2 The extended ordering within level L_n

With the addition of OR_k chain rules, new priorities have been defined, making each level L_n slightly more complex:

oddagon[n] > biv-chain[n] > z-chain[n] > t-whip[n] > whip[n] >

> c-chain[n] (n even) >

> OR_2 -forcing-whip[n] > OR_2 -contrad-whip[n] > OR_2 -whip[n] >

> OR_3 -forcing-whip[n] > OR_3 -contrad-whip[n] > OR_3 -whip[n] > ...

> OR_6 -forcing-whip[n] > OR_6 -contrad-whip[n] > OR_6 -whip[n] >

> g-bivalue-chains[n] > g-whip[n] >

> OR_2 -contrad-gwhip[n] > OR_2 -gwhip[n] >

> OR_3 -contrad-gwhip[n] > OR_3 -gwhip[n] > ...

> OR_6 -forcing-gwhip[n] > OR_6 -contrad-gwhip[n] > OR_6 -gwhip[n] >

> braid[n] > g-braid[n] >

> forcing-whip[n] > forcing-gwhip[n] > forcing-braid[n] > forcing-gbraid[n].

Notice that all the OR_k -chains[n] come after whips[n]; g-whips[n] come after all these and OR_k -g-chains[n] come after g-whips[n]. Again, this order may be debated; but this is how it is currently.

Finally, notice that for any k ($k=1,2,...6$), OR_k -forcing-whips[n] are placed before OR_k -contrad-whips[n], in order to conform to my idea that OR_k -forcing-whips are more natural and to my experimental result that they are more powerful (for the same values of k and n). For partially similarly reasons, OR_k -contrad-whips[n] are placed before their generalisation: OR_k -whips[n]. See section 14.18 for how to place OR_k -forcing-whips[n] after OR_k -whips[n] (and OR_k -forcing-g-whips[n] after OR_k -g-whips[n]). Notice also that all the types of OR_k chains are placed before ordinary

forcing-whips, in order to conform to my other idea that they are intended for use in conjunction with rare OR_k relations derived from exotic patterns.

4.1.3 General remarks

CSP-Rules has a mechanism for allowing an easy addition of application-specific saliences at each level, before or after the generic saliences at the same level. In general, application-specific rules based on n CSP-Variables should be given higher priority than the generic rules with the same number of CSP-Variables. Otherwise, they might never appear in the resolution paths, because most application-specific rules turn out to be particular cases of the generic chain rules. This assertion is not strictly true for Subsets, but it is true in most of the cases (for details, see the subsumption theorems for Subsets in [PBCS]).

If two rules with the same priorities are available, which of the two is used first by CSP-Rules is decided arbitrarily. This refers to conceptual arbitrariness, i.e. you cannot rely on any assumption about how the choice will be made, but if you run the same example with the same rules, you will get the same resolution path; if you want different paths, you may try to vary the rules, e.g. add or delete some types of special cases. Often, I do this by activating or de-activating z -chains and/or t -whips. In case the application has typed-chains, they can also be used that way.

Notice that having many different kinds of chains activated simultaneously has a cost in terms of memory and computation time and it is not recommended for the extremely hard puzzles (that you never see in any magazine). Also, the simplest-first strategy tends to produce steps that are not strictly necessary to reach the solution, the more so as more different types of rules are activated. Whether this should be considered as a secondary advantage (showing the user more opportunities) or as a disadvantage depends on one's goals. The fact is, it is currently the only systematic strategy that has ever been formulated (except possibly some exceptions to be reviewed in chapter 13).

Part Two

RUNNING SPECIFIC APPLICATIONS


```
(clear) ; clean CLIPS of anything it may have had before.
;;; Default setting is for Unix and MacOS,
;;; but it should also work for recent versions of Windows:
(defglobal ?*Directory-symbol* = "/")

;;; Define your general CSP-Rules installation directory (including the ending
directory symbol /).
;;; This is the directory in which the CSP-Rules-V2.1 version is installed, not the
CSP-Rules-V2.1 directory.
;;; By defining the path in an absolute way, you will be able to launch CSP-Rules-V2.1
from anywhere.
;;; You need to write something as follows.
;;; For Unix (including MacOS):
  (defglobal ?*CSP-Rules* = "/Users/berthier/Documents/Projets/CSP-Rules/") ; <-----
;;; For Windows:
; (defglobal ?*CSP-Rules* = "c:/Users/berthier/Documents/Projets/CSP-Rules/") ; <-----

;;; CLIPS is the underlying inference engine.
;;; The version of CLIPS used may be defined here (used only for displaying it in the
banner)
(defglobal ?*Clips-version* = "6.32-r823"); <-----

;;; Description of the computer used for the resolution
(defglobal ?*Computer-description* =
  "MacBookPro Retina Mid-2012 i7 2.7GHz 16GB 1600MHz DDR3, MacOS 10.15.4") <-----
```

5.2 The second part of the configuration file must not be changed

The next part of a configuration file is application specific in its details but has the same structure in all the applications. It just elaborates the user data defined in the first part and it pre-loads the declarations of some global variables necessary for the user's upcoming choices. It should not be modified. For Sudoku, it looks like this:

```
;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;
;;;
;;; Define the application
;;; Define useful directories and load all the globals
;;; (they must be available before choosing the configuration of rules)
;;;
;;; Do NOT change any of the following
;;;
;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;

;;; an ?*Application* must be defined as the name of the application (here,
SudoRules), not as the name of the puzzle (Sudoku)
;;; this name must coincide with the leading part of the name of the directory for the
application inside the CSP-Rules-V2.1 directory
;;; the version number of the ?*Application* must also be defined
```

5.3 The third part of the configuration file is application specific

[illegible]

The next part of a configuration file is the most important one for the user. It allows you to define precisely which sets of rules you want to apply and with which

options. With all the comments they include, most subparts are self-explanatory. As recalled in the banner of this part of the configuration file, it is important to have semi-colons deleted in only one section or sub-section of rules at a time.

```

;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;
;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;
;;;
;;;                               DEFINE YOUR CONFIGURATION HERE:
;;;                               Choose general settings
;;;                               Define your resolution theory (i.e. your set of resolution rules)
;;;                               Simply delete the leading semicolon of the proper line(s)
;;;                               IN ORDER TO AVOID ERRORS,
;;;                               DELETE SEMI-COLONS IN ONLY ONE SECTION OF RULES AT A TIME
;;;
;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;

```

5.4.1 Choose general settings

There are four kinds of settings:

- The rule optimisation type: speed or memory. Default is “speed” and should not be changed unless you face a memory overflow problem for some extremely hard puzzle. Notice that resolution will be slower if “memory” is chosen.
- The “blocked” behaviour for some rules (a: Subsets; b: oddagons; c: whips[1] and OR_k -whips[1]; d: bivalued-chains, z-chains and t-whips and their typed versions) is now the default behaviour in CSP-Rules and in all its applications: when a pattern in the above rules is found, all its targets are eliminated as a group before other, simpler rules, are allowed to fire. However, the user may choose, independently for each of the above four families of rules a, b, c or d), to revert to the old behaviour (until V2.0 and as in [PBCS1] and [PBCS2]), where candidates were eliminated one by one. The same choice applies to the typed and untyped versions of the rules when they both exist.
- The details of the output. The names of the control variables are self-explanatory, except maybe `?*print-main-levels*` and `?*print-levels*`. They allow to print a line each time the solver enters a new level of the solving process (a level being defined by the number of CSP-Variables involved in the rules), respectively each time it activates a new type of rules or a longer length for a type already activated. All the rules selected by the user in the configuration file (plus implied rules) are loaded at the start, but for efficiency reasons and for limiting memory requirements, they are effectively activated only when necessary, i.e. when all the simpler rules have produced all that they can. (Once activated, they remain activated until the end.) For the very hardest puzzles, it may be useful to display tracking information about these activations when nothing seems to happen (i.e. no elimination) for a long time; it shows that CSP-Rules is still working and (for those who want to know about such “technical details”), it gives an idea of how many CLIPS facts it is dealing

with. `?*print-main-levels*` and `?*print-levels*` are now set to `FALSE` by default, because most users said they don't want to see such information.

- The printing of the resolution state at three points: a) after application of all the obvious steps, i.e. of all the rules in BRT (direct contradictions and Singles); b) after `whips[1]`; c) at the end if the puzzle is not solved by the current set of rules.

```

;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;
;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;
;;;
;;; 0) Choose general settings
;;;
;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;
;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;

;; DON'T CHANGE ANYTHING IN THIS SECTION UNLESS YOU HAVE SOME REASON

;;; Possibly change the type of optimisation for the chain rules.
;;; Default is pre-defined as SPEED.
;;; Don't change this unless you meet a memory overflow problem.
; (bind ?*chain-rules-optimisation-type* MEMORY)

;;; In the previous standard behaviour of CSP-Rules, when a pattern could have
produced more than one elimination,
;;; the activation of a simpler rule by the first elimination could prevent further
potential eliminations.
;;; This default behaviour is now changed:
;;; - for whips[1] (and ORK-whips[1]),
;;; - for Subsets,
;;; - for bivalence-chains, z-chains and t-Whips (whether typed or not),
;;; - for Oddagons.
;;; However, CSP-Rules allows to revert to the previous behaviour,
;;; independently for each of the above four groups of rules.
;;; Un-comment the relevant line(s) below if you want these rules to be "interrupted"
as all the other rules.
;;; Notice that ?*blocked-Subsets* = TRUE, ?*blocked-chains* = TRUE or ?*blocked-
oddagons* = TRUE
;;; will imply ?*blocked-Whips[1]* = TRUE
; (bind ?*blocked-Whips[1]* FALSE)
; (bind ?*blocked-Subsets* FALSE)
; (bind ?*blocked-chains* FALSE); i.e. bivalence-chains, z-chains and t-Whips (whether
typed or not)
; (bind ?*blocked-oddagons* FALSE)
;;; The old interrupted behaviour can be globally selected by ?*unblocked-behaviour*
to TRUE;
;;; (equivalent to setting the above four values to FALSE):
; (bind ?*unblocked-behaviour* TRUE)

;;; Choose what's printed as the output.
;;; The default combination is what has been used in [PBCS].
;;; Changes below will print more or less details.

```

```

; (bind ?*print-init-details* TRUE)
; (bind ?*print-ECP-details* TRUE)
; (bind ?*print-actions* FALSE)
; (bind ?*print-levels* TRUE)
; (bind ?*print-main-levels* TRUE)
; (bind ?*print-solution* FALSE)

;;; The resolution state after BRT is printed by default.
;;; Un-comment this if you do not want to print it.
; (bind ?*print-RS-after-Singles* FALSE)

;;; The resolution state after Singles and whips[1] is printed by default.
;;; Un-comment this if you do not want to print it:
; (bind ?*print-RS-after-whips[1]* FALSE)

;;; The resolution state is printed by default at the end of resolution
;;; if the solution has not been found.
;;; Un-comment this if you do not want to print it:
; (bind ?*print-final-RS* FALSE)

```

5.4.2 Choose which resolution method you want to apply

There are four kinds of choices that should not be mixed, i.e. un-commented lines should appear in only one of the following four sub-sections:

- 1) Ordinary generic resolution rules (or quasi-generic ones – like Subsets), where several groups of options appear (my personal most usual choice is selected by default so that you can start solving puzzles without modifying the configuration – except the installation part);
- 2) Application-specific resolution rules;
- 3) T&E-related configurations, where different typical options are proposed;
- 4) DFS (depth-first-search) options (with or without whips[1 or 2]);
- 5) Rules based on indirect binary contradictions (not in this public V2.1 version).

The five possibilities are described in sections 5.4.3 to 5.4.6 below. Remember that *selection is done by deleting the semi-colon at the start of a line*, as in the “my standard config” part in section 5.4.3 below. Remember also that, if you want to use rules from sections 3, 4 or 5, you must first comment out my default choices.

5.4.3 Choose ordinary generic and (quasi-generic) resolution rules

First, let me state the rule dependencies (mainly for consistency-preserving reasons) that will be automatically implemented at load time. Here, “A => B” means: “if A is loaded, then B will be loaded”. For chain rules, these implications must be read length by length (e.g. if braids are loaded up to length 10, whips will be loaded

up to length 10 – or more if they have been separately required to be loaded with a longer maximum length).

There is no implication other than those listed here; in particular, other special cases of the rules selected by the user (such as e.g. bivalued-chains, z-chains, t-whips, typed versions of the selected rules...) are not loaded unless explicitly required to. In addition, for each specific application, you will be able to load only the rules meaningful for it (e.g. you will not be able to load g-whips in LatinRules or Subsets in MapRules).

- For any pattern P and any $n > 0$: $P[n+1] \Rightarrow P[n]$
- Subsets \Rightarrow Subsets[4] \Rightarrow Subsets[3] \Rightarrow Subsets[2] \Rightarrow Whips[1]
- FinnedFish \Rightarrow FinnedFish[4] \Rightarrow FinnedFish[3] \Rightarrow FinnedFish[2]
- FinnedFish[k] \Rightarrow Subset[k]
- z-chains \Rightarrow bivalued-chains
- typed-z-chains \Rightarrow typed-bivalued-chains

- g-whips (or g2-whips) \Rightarrow whips
- braids \Rightarrow whips
- g-braids \Rightarrow braids and g-whips
- forcing-whips \Rightarrow whips
- forcing-g-whips \Rightarrow g-whips and forcing-whips
- forcing-braids \Rightarrow braids and forcing-whips
- forcing-g-braids \Rightarrow g-braids and forcing-g-whips

- For any OR_k chain, OR_k g-chain, OR_k forcing chain or OR_k forcing g-chain pattern P: $OR_6-P \Rightarrow OR_5-P \Rightarrow OR_4-P \Rightarrow OR_3-P \Rightarrow OR_2-P$
- For any k, OR_k -whips \Rightarrow OR_k -contrad-whips, which are a special case (note: not \Rightarrow whips)
- For any k, OR_k -contrad-g-whips \Rightarrow OR_k -contrad-whips, which are a special case (note: not \Rightarrow g-whips or whips)
- For any k, OR_k -g-whips \Rightarrow OR_k -whips and OR_k -contrad-g-whips, which are special cases (note: not \Rightarrow g-whips or whips)
- For any k, OR_k -forcing-g-whips \Rightarrow OR_k -forcing-whips, which are a special case (note: not \Rightarrow forcing-whips or forcing-g-whips)

The reason why using OR_k chains[n] does not imply using whips[n] is to allow more freedom for the user when exotic patterns come into play.

```

;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;
;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;
;;;
;;; 1) Choose ordinary generic or quasi-generic resolution rules
;;;
;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;
;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;

;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;
;;; My standard config and its usual variants
;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;

;;; My most usual rules (config = W+S+Fin, with unrestricted lengths):
;;; Sudoku-specific:
(bind ?*Subsets* TRUE)
(bind ?*FinnedFish* TRUE)
;;; Generic:
; (bind ?*Whips[1]* TRUE) ; allows to more easily activate only whips[1]
(bind ?*Bivalue-Chains* TRUE)
(bind ?*Whips* TRUE)
(bind ?*z-Chains* TRUE)
(bind ?*t-Whips* TRUE)

;;; Some additional rules I use frequently:
; (bind ?*G-Whips* TRUE)

;;; Some additional rules I use occasionally:
; (bind ?*Oddagons* TRUE)

;;; Some optional intermediary Typed Chains, allowing more varied resolution paths:
;;; (remember that whips[1] cannot be type-restricted)
; (bind ?*Typed-Bivalue-Chains* TRUE)
; (bind ?*Typed-z-Chains* TRUE)
; (bind ?*Typed-t-Whips* TRUE)
; (bind ?*Typed-Whips* TRUE)

;;; Choose stricter type restrictions in the above Typed Chains.
;;; The same type restrictions will apply to all the typed-chains.
;;; Type restrictions correspond to working in only some of the four 2D-spaces,
;;; i.e. using only part of the Extended Sudoku Board.
;;; BEWARE: type restrictions defined by global variable ?*allowed-csp-types*
;;; will apply only if ?*restrict-csp-types-in-typed-chains* is set to TRUE.
; (bind ?*restrict-csp-types-in-typed-chains* TRUE)
; (bind ?*allowed-csp-types* (create$ rc))

;;; Some additional rules I almost never use:

```

```

; (bind ?*G2-Whips* TRUE)
; (bind ?*Braids* TRUE)
; (bind ?*G-Bivalue-Chains* TRUE)
; (bind ?*G-Braids* TRUE)

;;; Forcingk-whips are based on k-value cells in any of the 2D-spaces.
;;; Their maximal length is determined by ?*forcing-whips-max-length*.
; (bind ?*Forcing2-Whips* TRUE)
; (bind ?*Forcing3-Whips* TRUE)
; (bind ?*Forcing4-Whips* TRUE)
; (bind ?*Forcing5-Whips* TRUE)
;;; Forcing-Whips are older and simpler than Forcing2-Whips, but they are the same
thing
; (bind ?*Forcing-Whips* TRUE)
; (bind ?*Forcing-G-Whips* TRUE)
; (bind ?*Forcing-Braids* TRUE)
; (bind ?*Forcing-G-Braids* TRUE)

;;; Setting ?*All-generic-chain-rules* to TRUE will activate all the generic chain
rules listed above,
;;; (which doesn't include the Subset rules),
;;; with the max-lengths as specified below (but automatically modified for
consistency).
;;; It is NOT RECOMMENDED to use this possibility, unless you know what you are doing
;;; Many complex rules are loaded and memory overflow problems may appear.
; (bind ?*All-generic-chain-rules* TRUE)

;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;
;;; Change the default maximal lengths of the chain patterns
;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;

;;; Don't change these lengths unless you have some reason.

;;; The maximum length of all the generic chains can be lowered at once.
;;; 36 is the absolute maximum, never reached in practice.
;;; Notice that this global restriction will prevail on any of the individual
restrictions below.
; (bind ?*all-chains-max-length* 36)

;;; Maximum lengths can also be lowered individually:
; (bind ?*bivalue-chains-max-length* 20)
; (bind ?*z-chains-max-length* 20)
; (bind ?*t-whips-max-length* 36)
; (bind ?*whips-max-length* 36)
; (bind ?*g2whips-max-length* 36)
; (bind ?*g-bivalue-chains-max-length* 20)
; (bind ?*gwhips-max-length* 36)
; (bind ?*braids-max-length* 36)
; (bind ?*gbraids-max-length* 36)
; (bind ?*oddagons-max-length* 15)

```

```
; (bind ?*typed-bivalue-chains-max-length* 20)
; (bind ?*typed-z-chains-max-length* 20)
; (bind ?*typed-t-whips-max-length* 36)
; (bind ?*typed-whips-max-length* 36)

; (bind ?*forcing-whips-max-length* 36)
; (bind ?*forcing-gwhips-max-length* 36)
; (bind ?*forcing-braids-max-length* 36)
; (bind ?*forcing-gbraids-max-length* 36)
```

5.4.4 Choose application-specific resolution rules

This part will obviously change from one application to another. It is very developed in SudoRules and almost inexistent in some other applications. Here is part of the Sudoku version. Details will be explained in part III of this Manual.

```
;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;
;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;
;;;
;;; 2) Choose application-specific resolution rules (besides Subsets)
;;;
;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;
;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;

;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;
;;; 2.1 Sudoku-specific rules : U-resolution rules for uniqueness
;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;

;;; BEWARE: don't activate the following uniqueness rules,
;;; if you are not sure that the puzzle has a unique solution.
;;; The result would be undefined.
; (bind ?*Unique-Rectangles* TRUE)
; (bind ?*BUG* TRUE)

;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;
;;; 2.2 Sudoku-specific rules (besides Subsets): sk-loops and J-Exocets
;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;

;;; Belt (sk-loop), J-Exocet and Tridagon rules fall under the category of what I
called exotic patterns,
;;; because they are very specialised and very rarely present in a puzzle -
;;; a name that has immediately been adopted on the Sudoku forums.
;;; When present in a puzzle, they are generally very powerful to reduce its
difficulty.

;;; 2.2.1) sk-loops:
; (bind ?*Belt4* TRUE)
; (bind ?*Belt6* TRUE)
```

This part is much too specific to Sudoku to be described here. See section 14.18.

```

;;;
;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;
;;; 3) Choose typical T&E config options, for various predefined purposes
;;;
;;; DO NOT FORGET TO DISABLE ALL THE RULES IN THE OTHER SECTIONS
;;; BEFORE ACTIVATING T&E
;;;
;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;
;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;

;;; Un-comment the proper line(s) below to change the level of details you want to be
printed.

;;; Less printing can make T&E faster.
; (bind ?*print-actions* FALSE)
; (bind ?*print-levels* TRUE)
; (bind ?*print-ECP-details* TRUE)
; (bind ?*print-solution* FALSE)
; (bind ?*print-hypothesis* FALSE)
; (bind ?*print-phase* TRUE)
; (bind ?*print-RS-after-Singles* FALSE)
; (bind ?*print-RS-after-whips[1]* FALSE)
; (bind ?*print-final-RS* FALSE)

;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;

;;; 3a) for checking membership in T&E(k) or gT&E(k), k = 1,2,3

```

```

;;; Choose one of the following 3 depths of T&E:
;;; - depth 1 is enough for almost all the 9x9 Sudokus
;;; - depth 2 is enough except for extremely rare 9x9 Sudokus
;;; - but deeper T&E is often required for larger Sudokus or for Sukakus

; (bind ?*TE1* TRUE) ;;; for T&E at level 1
; (bind ?*TE2* TRUE) ;;; for T&E at level 2
; (bind ?*TE3* TRUE) ;;; for T&E at level 3

;;; In addition to the previous choice, you can give priority to bivalue candidates:
; (bind ?*special-TE* TRUE)

;;; For gT&E(k) instead of T&E(k), activate the additional next line:
; (bind ?*Whips[1]* TRUE)

;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;
;;; 3b) For computing the SpB classification
;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;

;;; Choose one of the following forms of T&E(Sp or SpFin, 1)
; (bind ?*TE1* TRUE) ;;; for T&E at level 1
;;; For T&E at level 1, with priority for bivalue variables, add the following:
; (bind ?*special-TE* TRUE)

;;; Remember that whips[1] are always activated before Subsets,
;;; even if you don't activate them explicitly here.
;;; But you can choose to activate only them, to get gT&E (as in 2a)
; (bind ?*Whips[1]* TRUE)

;;; Choose which Subsets[p] and FinnedFish[p] are activated:
; (bind ?*Subsets[2]* TRUE)
; (bind ?*Subsets[3]* TRUE)
; (bind ?*Subsets[4]* TRUE)
; (bind ?*Subsets* TRUE) ; same as ?*Subsets[4]*

; (bind ?*FinnedFish[2]* TRUE)
; (bind ?*FinnedFish[3]* TRUE)
; (bind ?*FinnedFish[4]* TRUE)
; (bind ?*FinnedFish* TRUE) ; same as ?*FinnedFish[4]*

;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;
;;; 3c) for computing the BpB classification
;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;

;;; Choose one of the following forms of T&E(1)
; (bind ?*TE1* TRUE) ;;; for T&E at level 1
;;; For T&E at level 1, with priority for bivalue variables, add the following:
; (bind ?*special-TE* TRUE)

;;; Choose p (here p = 3):

```

```

; (bind ?*Whips* TRUE)
; (bind ?*Braids* TRUE)
; (bind ?*whips-max-length* 3)
; (bind ?*braids-max-length* 3)

;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;
;;; 3d) for computing the BpBB classification for puzzles in T&E(3)
;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;

;;; Added after the discovery that there are (extremely rare) Sudoku puzzles in
T&E(3).
;;; Beware that computation times can be very long for puzzles not in T&E(Bp, 2).
;;; Choose one of the following forms of T&E(2):
; (bind ?*TE2* TRUE) ;;; for T&E at level 2
;;; For T&E at level 2, with priority for bivalued variables, add the following:
; (bind ?*special-TE* TRUE)

;;; Choose p (here p = 2) (larger values of p should not be necessary for 9x9 Sudoku)
; (bind ?*Whips* TRUE)
; (bind ?*Braids* TRUE)
; (bind ?*whips-max-length* 2)
; (bind ?*braids-max-length* 2)

;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;
;;; 3e) for looking for backdoors, anti-backdoors or anti-backdoor pairs
;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;

;;; Choose one or several of backdoors, anti-backdoors and anti-backdoor pairs:
; (bind ?*Backdoors* TRUE)
; (bind ?*Anti-backdoors* TRUE)
; (bind ?*Anti-backdoor-pairs* TRUE)

;;; for W1-backdoors, W1-anti-backdoors or W1-anti-backdoor pairs, add the following:
; (bind ?*Whips[1]* TRUE)
;;; for S-backdoors, S-anti-backdoors or S-anti-backdoor pairs, add the following:
; (bind ?*Subsets* TRUE)

;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;
;;; 3f) for solving with Forcing-T&E
;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;

;;; For Forcing-T&E OR Forcing{3}-T&E OR Forcing{4}-T&E, activate any of the following
;;; (Several can be activated at the same time.)
; (bind ?*Forcing{2}-TE* TRUE)
; (bind ?*Forcing{3}-TE* TRUE)
; (bind ?*Forcing{4}-TE* TRUE)

;;; for Forcing-T&E(W1) or Forcing{3}-T&E(W1) or Forcing{4}-T&E(W1), add:
; (bind ?*Whips[1]* TRUE)

```


5.5 *The final part of the configuration file must not be changed*

After the configuration has been defined by the user, the final part ensures the proper loading of the relevant rules. In Sudoku, it looks like this (the “redefine-internal-factors” part is Sudoku-specific):

```

;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;
;;;
;;; AUTOMATIC CONFIGURATION AND LOADING (DON'T CHANGE ANYTHING BELOW THIS LINE)
;;;
;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;

;;; Because grid size may have been changed in this file,
;;; redefine the associated internal factors; (this has to be done BEFORE loading):
(redefine-internal-factors)

;;; Now, load all. The generic loader also loads the application-specific files.
(if (and (or ?*G-Bivalue-Chains* ?*G-Whips* ?*G-Braids*) (> ?*segment-size* 4))
    then (printout t
        "BEWARE: g-labels, g-bivalue-chains, g-whips and g-braids are not managed" crlf
        "for segment size larger than 4, i.e. grid size larger than 16" crlf)
    else (batch ?*CSP-Rules-Generic-Loader*))
)

```


6. SudoRules

SudoRules is the pattern-based solver of Sudoku puzzles based on CSP-Rules. The pattern-based approach of a CSP was first described in [HLS] for Sudoku and then in [CRT] and [PBCS] for the general CSP. I have written several versions of SudoRules before I started a total re-writing of all its general rules into a generic form, thus making what is now the generic part of CSP-Rules. [As several users have asked about it: that's why the version of SudoRules in CSP-Rules-V2.1 is not SudoRules-V2.1 but SudoRules V20.1.]

As a result of this historical development, together with a much broader and deeper study of the Sudoku puzzles than any other application, SudoRules is the most developed application of CSP-Rules. It has been used to solve and rate millions of puzzles. It has many more application-specific user functions than the other applications. One thing to remember is, SudoRules does not include the zillion Sudoku-specific rules one can find in Sudoku forums (most of the time in very imprecise and ambiguous forms) or in a typical Sudoku solver. (It does include the most familiar of them however, e.g. Subsets, Finned-Fish, Unique Rectangles and BUGs, plus exotic patterns: sk-loops, J-Exocets, Tridagons.) Most of these rules (except the uniqueness and exotic ones) are subsumed by the generic ones. My initial goals were, and remain, to prove the real applicability and to study the range of the generic resolution rules introduced in [PBCS]. (And, needless to repeat it, these goals included ease of programming for me; they did not include coding for the highest possible speed of resolution – which is anyway irrelevant to the usual user.)

Notice that none of the application-specific functions defined below takes any argument for grid size. ***The default puzzle size in SudoRules is set to 9.*** But this size can be changed in the SudoRules configuration file. The main reasons for this choice are history and the fact that almost all the Sudokus one meets in nature are 9×9. There is also a technical reason: g-whips don't work for large grid sizes (i.e. grid-size>16 or segment-size>4) and the corresponding rules should not be loaded when one tries to solve such puzzles. The same remarks (except the technical one) apply to LatinRules.

This chapter is for basic level Sudoku solving and for some goodies, whereas more advanced techniques (most of them for dealing with additional requirements on the resolution path) and techniques related to recently discovered puzzles in T&E(3) are to be found in chapters 13 and 14+15, respectively.

In this chapter, “number” or “digit” means:

- a member of $\{1, 2, \dots, 9\}$ if grid size is 9×9 ,
- a member of $\{1, 2, \dots, 9, A, B, C, D, E, F, G\}$ if grid size is 16×16 ,
- a member of $\{1, 2, \dots, 9, A, B, C, D, E, F, G, H, I, J, K, L, M, N, O, P\}$ if grid size is 25×25 ,
- a member of $\{1, 2, \dots, 9, A, B, C, D, E, F, G, H, I, J, K, L, M, N, O, P, Q, R, S, T, U, V, W, X, Y, Z, 0\}$ if grid size is 36×36 – but this large size may be in practice beyond the upper limit for SudoRules, depending on how much RAM you have.

6.1 Solving a puzzle given in the standard “line” (or “string”) format

“*solve*” is the first and simplest user function, in SudoRules as well as in all the CSP-Rules applications. In a first contact with SudoRules, this is indeed the only user function you need to know. The syntax is very simple:

```
(solve ?string)
```

where “*?string*” is a string of $n \times n$ characters (between double quotes) representing the puzzle in the classical “line format”. The rc-cells in a line are supposed to be numbered from left to right, the whole numbering going from the first line to the last one. A digit at the n th place in the string represents a given for the n th cell; a dot (sometimes a 0 for 9×9 puzzles) represents the absence of a given (it is there to mark a place in the string). Same example, with dots and with 0s:

```
(solve
  "4...3.....6..8.....1....5..9..8....6...7.2.....1.27..5.3....4.9.....")
(solve
  "40003000000060080000000000100005009008000600070200000000102700503000040900000000")
```

For compatibility with other function names, “*solve*” is also named “*solve-sudoku-string*”:

```
(solve-sudoku-string
  "4...3.....6..8.....1....5..9..8....6...7.2.....1.27..5.3....4.9.....")
```

Beware: when you copy the string from e.g. some Sudoku application or website, be careful not to insert a leading space after the first double quote, as in:

```
" 4...3.....6..8.....1....5..9..8....6...7.2.....1.27..5.3....4.9.....")
```

On the other hand, you can put anything (e.g. the name of the puzzle, its SER...) after the $n \times n$ th character; it will not be taken into account.

“*solve-knowing-solution*” is a variant of “*solve*” that can be used when the solution is already known:

```
(solve-knowing-solution ?puzzle-string ?sol-string)
```

where both “*?puzzle-string*” and “*?sol-string*” are strings of $n \times n$ characters representing the puzzle and the solution, as before. Example:

```
(solve-knowing-solution
"4...3.....6..8.....1....5..9..8....6...7.2.....1.27..5.3....4.9....."
"468931527751624839392578461134756298289413675675289314846192753513867942927345186")
```

The presence of this function may be surprising at first: why should one want to solve a puzzle if he already knows the solution? The reason is, the solution may be known (e.g. after applying a depth-first-search program) without a readable resolution path and/or without the rating being known.

In this function, the solution is only used to avoid building chains (whips,...) that are known in advance to be unable to lead to any elimination: candidates known to be in the solution are not tried as targets for building such chains on them.

The resolution path and the final result are exactly the same as those of “solve-sudoku-string”, except that useless calculations are avoided. This may be occasionally useful for the hardest puzzles, to save computation time and/or memory.

“*solve-sukaku-string*” is a variant of “solve-sudoku-string” that can be used when a resolution state (a state including both values and candidates) is given instead of an original puzzle (which has only values). The name “Sukaku” has been introduced recently in the Sudoku world for naming such situations. Syntax:

```
(solve-sukaku-string ?string)
```

where “?string” is a sequence of 729 digits or dots, such that the *n*th group of nine characters represents the candidates present in the *n*th rc-cell. There is much redundancy in this representation of a resolution state, because the presence of a digit in an rc-cell is doubly represented: by its value and by its position in the sequence. A sequence of 0s and 1s would be enough but it would also be less readable. Anyway, that is the form in which it came to existence and I kept it as is.

Example of an extremely difficult Sukaku puzzle found by Tarek, a famous puzzle creator (SudoRules will not solve it without using DFS):

```
(solve-sukaku-string
"...3.5678.1.3456789123456789.23456789...4.678912.4567891234567891.34567891..45.789123.
567891.3...7..12345.7..123....891234.678912.4...8.123..6.891.....12345.789123456789
1234567..12345678.123456.8912345678912345678.123.56.89123456..9123456789.23456789...4.
678912.4567891.3.567891.34567891..45.789.234567891..4.678912.456789.23..6.891234.67891
23456789123.567891.3...7.912345.789123.567891234.678912.4..78.123456.891234.6...123456
789123.56..91234567.91234..7..123456.891234.6...12345678.1234567891...5678912.45678912
345678912345678.12.45678..23.567891.3456789123456789123.567891....7.912.45.789123..6.
891234.678912.4..78..23.567891.3...7.912345.789123.56..91234567.9123456789123456.89123
4.6...12345678.1234567891234567.912345.7..")
```

As this format is totally illegible, SudoRules has a function for initializing and printing it in a more readable form (which will also be output at the start of function “solve-sukaku-string”):

```
(init-sukaku-string ?sukaku-string)
```

will output the starting resolution state:

```

35678      13456789 123456789 23456789 46789      12456789 23456789 3456789 45789
2356789    37      23457      2389      2346789    248      23689      1      2345789
123456789 1234567 12345678 12345689 123456789 12345678 235689 234569 23456789
23456789 46789    12456789 1356789 13456789 145789 23456789 46789 12456789
23689      12346789 123456789 12356789 1379      12345789 12356789 2346789 12478
12345689 12346    123456789 123569 12345679 12347 12345689 2346 12345678
123456789 156789 12456789 123456789 12345678 1245678 2356789 3456789 123456789
12356789 179      1245789 123689 12346789 12478 2356789 379 12345789
123569      12345679 123456789 12345689 12346 12345678 12345679 2345679 123457

```

Notice that a Sukaku not originating from a real Sudoku puzzle (contrary to the above example) can be much harder than a Sudoku puzzle: until recently, all the known 9×9 Sudoku puzzles were at worst in T&E(2) [we now know a few exceptional cases in T&E(3), see chapter 14], but some 9×9 Sukakus are known to be in T&E(4).

“solve-sukaku-string” can typically be used when a resolution state of a Sudoku puzzle is obtained after the application of some basic rules and one asks: “what comes next?”.

6.2 Solving Sudoku puzzles given in other formats

6.2.1 The list format for Sudoku

Often, a puzzle is given in a more user-friendly format than the line format, such as:

```

. . 1 2 . . . . 3
. . . . . 4 2 . .
5 . . . . . 6 .
7 . . 6 . . . 1 .
. . . . 3 . . . .
. 8 . . . 9 . . 4
. 3 . . . . . 6
. . 7 1 . . . 2 .
4 . . . . 7 5 . .

```

“*solve-sudoku-list*” allows to solve puzzles given in this format. This function has a unique argument `$?rest`. As explained in the introduction, the set of all the arguments given to it is interpreted as a single list. In this list format, make sure to keep at least one space between any two symbols (digits or dots): in a list, “7 5” is two elements, but “75” is only one (and a meaningless one in Sudoku).

For SudoRules, the following two forms are exactly the same:

```

(solve-sudoku-list . . 1 2 . . . . 3 . . . . 4 2 . . 5 . . . . . 6 . 7 . .
6 . . . 1 . . . . . 3 . . . . . 8 . . . 9 . . 4 . 3 . . . . . 6 . . 7 1 . .
. 2 . 4 . . . . 7 5 . .
)

```

```
(solve-sudoku-list
  . . 1 2 . . . 3
  . . . . . 4 2 . .
  5 . . . . . 6 .
  7 . . 6 . . . 1 .
  . . . . 3 . . . .
  . 8 . . . 9 . . 4
  . 3 . . . . . 6
  . . 7 1 . . . 2 .
  4 . . . . 7 5 . .
)
```

6.2.2 The list format for Sukaku

Most of the time, a Sukaku puzzle is given in a much more user-friendly format than the line format. Function “*solve-sukaku-list*” allows to deal with it; it has a single argument `$?list` representing the list of possible candidate sets for each cell. For each cell, all the possible candidate-values from $\{1, 2, \dots, Z, 0\}$ are glued into a single symbol. The syntax should be clear from the following example:

```
(solve-sukaku-list
  1 9 6 2 4 7 3 5 8
  8 2 7 3 5 1 4 6 9
  3 4 5 68 9 68 27 27 1
  7 8 24 1 6 49 29 3 5
  5 6 1 89 2 3 89 4 7
  9 3 24 578 78 458 1 28 6
  6 7 89 589 3 2 58 1 4
  4 5 3 6789 1 689 678 789 2
  2 1 89 4 78 56 56 789 3
)
```

[For the technically-minded readers, notice that an entry like 6789 in the above list of arguments is technically (i.e. in CLIPS) neither a string nor a number (in 16×16 or larger puzzles, it could contain letters, e.g. 6789BD); it is a symbol.]

6.2.3 The grid format for Sudoku

A still more user-friendly format (for the same puzzle as in §6.2.1) found on the Sudoku forums would be as shown below. This is the original reason why I introduced the list format. Unfortunately, there can be no way of giving the puzzle in this form directly to SudoRules, because “|” is a reserved symbol in CLIPS (it means logical “or” in some situations); in particular, it cannot appear as an argument of any function. However, the user can easily transform this format into the previous one, either manually or with any text editor.

	.	.	1		2	3	
	4		2	.	.	
	5	6	.	
	7	.	.		6	.	.		.	1	.	
	3	
	.	8	.		.	.	9		.	.	4	
	.	3	6	
	.	.	7		1	.	.		.	2	.	
	4	7		5	.	.	

Alternatively, function *“solve-sudoku-grid”* will allow something very close (where symbol “!” can also be “:” and “+” can also be “*”). Again, the syntax should be clear from an example:

```
(solve-sudoku-grid
```

!	.	.	1	!	2	.	.	!	.	.	3	!
!	.	.	.	!	.	.	4	!	2	.	.	!
!	5	.	.	!	.	.	.	!	.	6	.	!
!	7	.	.	!	6	.	.	!	.	1	.	!
!	.	.	.	!	.	3	.	!	.	.	.	!
!	.	8	.	!	.	.	9	!	.	.	4	!
!	.	3	.	!	.	.	.	!	.	.	6	!
!	.	.	7	!	1	.	.	!	.	2	.	!
!	4	.	.	!	.	.	7	!	5	.	.	!

```
)
```

Notice that *“solve-sudoku-grid”* is more general than *solve-sudoku-list* and the latter could be forgotten; technically, *“solve-sudoku-grid”* is just the combination of *“solve-sudoku-list”* with another SudoRules function: *“clean-grid-list”*.

6.2.4 The grid format for Sukaku

For Sukakus, function *“solve-sukaku-grid”* allows something similar to *“solve-sudoku-grid”*. The Sukaku in section 6.2.2 can be solved as follows (where symbol “!” can also be “:” and “+” can also be “*”). Notice that the number of spaces between different cells can be arbitrary; here, it is fitted for visual purposes – which is all there is to the *“solve-sudoku-grid”* and *“solve-sukaku-grid”* functions.

Notice also that *“solve-sukaku-grid”* is more general than *“solve-sukaku-list”* and the latter could be forgotten.


```
(solve-sukaku-grid
```

```

+-----+-----+-----+
! 1   9   6   ! 2   4   7   ! 3   5   8   !
! 8   2   7   ! 3   5   1   ! 4   6   9   !
! 3   4   5   ! 68  9   68  ! 27  27  1   !
+-----+-----+-----+
! 7   8   24  ! 1   6   49  ! 29  3   5   !
! 5   6   1   ! 89  2   3   ! 89  4   7   !
! 9   3   24  ! 578 78  458 ! 1   28  6   !
+-----+-----+-----+
! 6   7   89  ! 589 3   2   ! 58  1   4   !
! 4   5   3   ! 6789 1   689 ! 678 789 2   !
! 2   1   89  ! 4   78  56  ! 56  789 3   !
+-----+-----+-----+

```

```
)
```

6.2.5 The tatham format

A slightly different string format is used by Tatham, a famous creator of many types of puzzles (see <https://www.chiark.greenend.org.uk/~sgtatham/puzzles/>). His puzzles are generally relatively easy but they may be interesting for beginners and beyond. The “Tatham format” for Sudoku is more compact for printing than the standard line format and as such, it is interesting, though it’s harder to read: every sequence of zeros or dots in the line format is replaced by a lower case letter: “a” means one dot, “b” means two dots, ... It is meaningful only for 9×9 puzzles.

“*solve-tatham-string*” is a variant of “*solve-sudoku-string*” that can deal with the Tatham string format:

```
(solve-tatham-string ?tatham-str)
```

As you may have guessed, ?tatham-str is the Tatham representation of a puzzle as a string, i.e. between double quotes. Example:

```
(solve-tatham-string
  "2a9a15a4c58d9a3i1e4c127c7e9i3a4d17c2a54a6a8")
```

The underscores (“_”) that, for some unknown reason, appear in the format when the puzzle is copied from the Tatham website don’t add anything to the string and could as well be deleted. The following is equivalent to the above:

```
(solve-tatham-string
  "2a9a1_5a4c5_8d9a3i1e4c1_2_7c7e9i3a4d1_7c2a5_4a6a8")
```

Both forms are equivalent to:

```
(solve-sudoku-string
  "2.9.15.4...58...9.3.....1....4...127...7.....9.....3.4....17...2.54.6.8")
```

If you want to see how a puzzle given in Tatham format looks like in the familiar line format, the function “*tatham-to-sudoku-string*” allows this:

```
(tatham-to-sudoku-string "2a9a1_5a4c5_8d9a3i1e4c1_2_7c7e9i3a4d1_7c2a5_4a6a8")
gives:
```

```
"2.9.15.4...58...9.3.....1....4...127...7.....9.....3.4....17...2.54.6.8"
```

Indeed, (solve-tatham-string ?tatham-str) is defined as:
 (solve-sudoku-string (tatham-to-sudoku-string ?tatham-str))

6.2.6 The sdk format for files

It may sometimes be useful to have a puzzle displayed on 9 lines at the top of a file and then to write information about it and its resolution path(s) in the same file. The nine-line format is also easier to visualise than the one-line format. Function **“solve-sdk-grid”** reads the first nine symbols of the first nine lines of a file and solves the corresponding puzzle (its argument ?file-name is the path to the file; see section 6.3 for an example of path):

```
(solve-sdk-grid ?file-name)
```

For the puzzle in the previous example, the nine-line format at the top of the file is similar to the list format, but with all the spaces in each line deleted (including any spaces or tabs at the start of the lines); it is also similar to the line format, with line feeds / carriage returns added after each group of nine symbols. It does not accept anything before the nine lines or before the content of each of them.

```
..12...3
....42..
5.....6.
7..6...1.
....3....
.8...9..4
.3.....6
..71...2.
4....75..
```

6.3 Solving collections of puzzles

When studying general properties of Sudoku puzzles or of resolutions rules, one often has to deal with a large collection of puzzles written in a text file, with one puzzle in the line format per line. The functions in this section allow to deal with such cases. The first $n \times n$ characters of each line must be digits or dots; whatever comes after them is not taken into account. This allows to keep in the same file additional information about each puzzle, such as their “name” if they have one, their author, the date they were discovered, their SER (Sudoku Explainer Rating, ...). Fundamentally, each of the following functions repeatedly calls the “solve” function on puzzles in the list, as many times as specified by the argument(s). It also keeps track of the total solving time and it prints it at the end.

“solve-nth-grid-from-text-file” allows to pick one puzzle from the list and to solve it:

```
(solve-nth-grid-from-text-file ?file-name ?nb)
```

where “?file-name” is the path to the file and “?nb” is the place of the puzzle of interest in the list. ?nb may not be larger than the number of lines in the file. Example:
`(solve-nth-grid-from-text-file "/Users/My-User-name/Documents/MySudokuPuzzles.txt" 56)`

It may also be useful to check what there's on a particular line in a file. This can be done with function `display-nth-line-from-text-file`:
`(display-nth-line-from-text-file ?file-name ?nb)`

The name of function *“solve-n-grids-after-first-p-from-text-file”* is sufficiently explicit to need no explanation (however, beware the order of the arguments):
`(solve-n-grids-after-first-p-from-text-file ?file-name ?p ?n)`
 where “?file-name” is as before, ?p is the number of lines that must be skipped and “?n” is the number of puzzles that must be solved. Example:

```
(solve-n-grids-after-first-p-from-text-file
"/Users/User-name/Documents/Sudoku/MySudokuPuzzles.txt" 12 56)
```

If you want to solve all the puzzles in the file, set ?p to 0 and ?n to the length of the file.

It is very convenient to be able to keep track of global information about a collection of puzzles, as an additional first line in the same file. For this reason, SudoRules includes variants of the previous three functions that allow to work as if the first line of a file did not exist; they take the same arguments as before:
`(display-nth-effective-line-from-titled-text-file ?file-name ?nb)`
`(solve-nth-grid-from-titled-text-file ?file-name ?nb)`
`(solve-n-grids-after-first-p-from-titled-text-file ?file-name ?p ?n)`

One more very useful function for analysing large collections of puzzles is *“record-levels-n-grids-after-first-p-from-text-file”*, with syntax:
`(record-levels-n-grids-after-first-p-from-text-file ?file-name ?p ?n ?levels-file)`

where ?file-name, ?p and ?n are as before and ?levels-file is a file of ?n lines that will record the main levels L_k reached by the solutions of the ?n puzzles – i.e. the puzzles ratings wrt to the selected set of rules. (Note that there are no empty lines at the start for the first ?p puzzles that have been skipped). If a puzzle hasn't been solved, it is assigned conventional level 99.

When solving collections of puzzles, it may be also useful to know the existence of a few global variables: *?*solved-list**, *?*no-sol-list**, *?*belt-list**, *?*J-exocet-list**, *?*exotic-list**. They keep track respectively of the puzzles that have been solved, that have no solution (i.e. have contradictory givens), that have used some sk-loop, some J-Exocet, or some other exotic pattern. In order to display the contents of a list, just type its name, followed by enter/return. SudoRules also has statistical functions, not described here, but available in folder /SudoRules-V2.1/STATS.

6.4 For the readers of [HLS]

All the chain names used in [HLS] have been changed in [CRT], in [PBCS] and in this Manual. The naming convention in [HLS] was too dependent on the Sudoku grid structure and could not be made generic. The new naming convention is obviously simpler, as shown by the following table (where lengths of chains are arbitrary).

Name in [HLS]	Name in [PBCS]	Remarks
xy5-chain	biv-chain-rc[5]	
hxy-uu5-chain	biv-chain-uu[5]	for uu = rn, cn or bn
nrc5-chain	biv-chain[5]	
xyz6-chain	z-chain-rc[6]	
hxyz-uu7-chain	z-chain-uu[6]	for uu = rn, cn or bn
xyt-rc6-chain	t-whip-rc[6]	
hxyt-uu6-chain	t-whip-uu[6]	for uu = rn, cn or bn
nrc6-chain	t-whip[6]	t-whips are slightly more general than nrc6-chains
xyzt-rc8-chain	whip-rc[8]	whips-rc are slightly more general than xyzt-chains
hxyzt-uu8-chain	whip-uu[8]	for uu = rn, cn or bn whips-uu are slightly more general than xyzt-uu-chains
nrczt8-chain	whip[8]	whips are slightly more general than nrczt-chains

6.5 How different selections of rules change the resolution path

I shall now use a moderately difficult puzzle to show how the various selections of rules made possible in the configuration file can give very different resolution paths.

```
+-----+-----+-----+
! . . . ! 4 . . ! . 8 9 !
! . 5 . ! . . . ! 1 . . !
! . . 9 ! . 3 . ! . . 6 !
+-----+-----+-----+
! . 7 1 ! . 6 . ! 9 . 3 !
! . . . ! . . 2 ! 4 . . !
! 9 . . ! . . 5 ! . . 1 !
+-----+-----+-----+
! 3 . . ! . . . ! 6 . . !
! . 9 . ! . 4 . ! . 1 . !
! 8 1 5 ! . . 3 ! . . . !
+-----+-----+-----+
...4...89.5....1....9.3...6.71.6.9.3.....24..9....5...13.....6...9..4..1.815...3...
SER = 8.3
```

The puzzle is cbg#109 from the controlled-bias collection.

All the forthcoming resolution paths have the same straightforward start, ending in the same resolution state RS1 (represented here as a Sukaku grid):

```
singles ==> r4c4=8, r4c6=4, r6c5=7, r6c4=3, r9c4=6, r8c7=3, r2c8=3, r6c7=8
whip[1]: r9n7{c9 .} ==> r8c9≠7, r7c8≠7, r7c9≠7
whip[1]: r9n4{c9 .} ==> r7c9≠4, r7c8≠4
whip[1]: c7n5{r3 .} ==> r3c8≠5
whip[1]: c1n4{r3 .} ==> r3c2≠4, r2c3≠4
whip[1]: b6n2{r6c8 .} ==> r9c8≠2, r3c8≠2, r7c8≠2
hidden-pairs-in-a-row: r5{n3 n8}{c2 c3} ==> r5c3≠6, r5c2≠6
```

;;; Resolution state RS1:

! 1267	236	2367	! 4	125	167	! 257	8	9	!
! 2467	5	2678	! 279	289	6789	! 1	3	247	!
! 1247	28	9	! 1257	3	178	! 257	47	6	!
! 25	7	1	! 8	6	4	! 9	25	3	!
! 56	38	38	! 19	19	2	! 4	567	57	!
! 9	246	246	! 3	7	5	! 8	26	1	!
! 3	24	247	! 12579	12589	1789	! 6	59	258	!
! 267	9	267	! 257	4	78	! 3	1	258	!
! 8	1	5	! 6	29	3	! 27	479	247	!

This part of the resolution paths will not be repeated; instead, I'll write only the part after resolution state RS1. "ste" means "singles to the end".

All the set of rules I'll consider will include Subsets and Finned Fish, but this is not really relevant. All the presentations will follow the same schema: first, the selected set of options from the SudoRules configuration file (any option not listed is

supposed to be inactive) and then the resolution path. Notice that all the patterns that can be “blocked” are, i.e. they allow several eliminations at a time (which is now the default option).

6.5.1 Using whips

Let us first use the following configuration with Whips:

```
(bind ?*Subsets* TRUE)
(bind ?*FinnedFish* TRUE)
(bind ?*Bivalue-Chains* TRUE)
(bind ?*Whips* TRUE)
```

We get a resolution path in W5:

```
;;; Resolution state RS1
biv-chain[3]: r3c2{n2 n8} - r5c2{n8 n3} - b1n3{r1c2 r1c3} ==> r1c3#2
biv-chain[3]: r5n7{c9 c8} - r3c8{n7 n4} - b9n4{r9c8 r9c9} ==> r9c9#7
biv-chain[4]: r5c5{n1 n9} - r9n9{c5 c8} - r7c8{n9 n5} - c5n5{r7 r1} ==> r1c5#1
whip[4]: c6n9{r2 r7} - r7c8{n9 n5} - c9n5{r8 r5} - c9n7{r5 .} ==> r2c6#7
biv-chain[5]: r5c1{n5 n6} - c2n6{r6 r1} - b2n6{r1c6 r2c6} - c6n9{r2 r7} - r7c8{n9 n5}
==> r5c8#5
biv-chain[4]: r2n4{c1 c9} - c9n7{r2 r5} - r5n5{c9 c1} - r4c1{n5 n2} ==> r2c1#2
biv-chain[5]: c6n6{r1 r2} - c6n9{r2 r7} - r7c8{n9 n5} - b6n5{r4c8 r5c9} - r5c1{n5 n6}
==> r1c1#6
whip[5]: c1n7{r3 r8} - r8c6{n7 n8} - c5n8{r7 r2} - c3n8{r2 r5} - c3n3{r5 .} ==> r1c3#7
whip[5]: r1n6{c3 c6} - r1n1{c6 c1} - r1n7{c1 c7} - r3c8{n7 n4} - c1n4{r3 .} ==> r2c1#6
whip[4]: r9c5{n2 n9} - c6n9{r7 r2} - r2n8{c6 c3} - r2n6{c3 .} ==> r2c5#2
whip[4]: c3n7{r8 r2} - c9n7{r2 r5} - r5n5{c9 c1} - c1n6{r5 .} ==> r8c1#7
whip[1]: b7n7{r8c3 .} ==> r2c3#7
naked-triplets-in-a-column: c1{r4 r5 r8}{n2 n5 n6} ==> r3c1#2, r1c1#2
biv-chain[3]: c1n2{r4 r8} - r7c2{n2 n4} - b4n4{r6c2 r6c3} ==> r6c3#2
whip[4]: c9n8{r8 r7} - c9n5{r7 r5} - r4c8{n5 n2} - c1n2{r4 .} ==> r8c9#2
biv-chain[5]: c6n6{r1 r2} - c6n9{r2 r7} - r7c8{n9 n5} - r8c9{n5 n8} - r8c6{n8 n7} ==>
r1c6#7
biv-chain[3]: r2c1{n4 n7} - r1n7{c1 c7} - r3c8{n7 n4} ==> r3c1#4
singles ==> r2c1=4, r3c8=4, r9c9=4
finned-x-wing-in-columns: n2{c9 c3}{r2 r7} ==> r7c2#2
singles ==> r7c2=4, r6c3=4
biv-chain[3]: r9n2{c7 c5} - r1c5{n2 n5} - b3n5{r1c7 r3c7} ==> r3c7#2
biv-chain[3]: r2n7{c4 c9} - r5c9{n7 n5} - r8n5{c9 c4} ==> r8c4#7
biv-chain[3]: r2n7{c4 c9} - c9n2{r2 r7} - r7c3{n2 n7} ==> r7c4#7
whip[1]: b8n7{r8c6 .} ==> r3c6#7
hidden-triplets-in-a-block: b2{r2c4 r1c5 r3c4}{n2 n5 n7} ==> r3c4#1, r2c4#9
whip[1]: b2n1{r3c6 .} ==> r7c6#1
naked-pairs-in-a-row: r2{c4 c9}{n2 n7} ==> r2c3#2
whip[1]: c3n2{r8 .} ==> r8c1#2
singles to the end
```

6.5.2 Using t-whips

Let us now replace whips by the *a priori* less powerful t-whips:

```
(bind ?*Subsets* TRUE)
(bind ?*FinnedFish* TRUE)
(bind ?*Bivalue-Chains* TRUE)
(bind ?*t-Whips* TRUE)
```

We get a resolution path in tW5; this is a (probably rare) case where using t-whips instead of whips does not require longer chains:

```
;;; Resolution state RS1
biv-chain[3]: r3c2{n2 n8} - r5c2{n8 n3} - b1n3{r1c2 r1c3} ==> r1c3#2
biv-chain[3]: r5n7{c9 c8} - r3c8{n7 n4} - b9n4{r9c8 r9c9} ==> r9c9#7
biv-chain[4]: r5c5{n1 n9} - r9n9{c5 c8} - r7c8{n9 n5} - c5n5{r7 r1} ==> r1c5#1
t-whip[4]: c6n9{r2 r7} - r7c8{n9 n5} - c9n5{r8 r5} - c9n7{r5 .} ==> r2c6#7
biv-chain[5]: r5c1{n5 n6} - c2n6{r6 r1} - b2n6{r1c6 r2c6} - c6n9{r2 r7} - r7c8{n9 n5}
==> r5c8#5
biv-chain[4]: r2n4{c1 c9} - c9n7{r2 r5} - r5n5{c9 c1} - r4c1{n5 n2} ==> r2c1#2
biv-chain[5]: c6n6{r1 r2} - c6n9{r2 r7} - r7c8{n9 n5} - b6n5{r4c8 r5c9} - r5c1{n5 n6}
==> r1c1#6
t-whip[5]: c3n3{r1 r5} - r5c2{n3 n8} - r3n8{c2 c6} - r8c6{n8 n7} - r7n7{c6 .} ==>
r1c3#7
t-whip[5]: r9c5{n2 n9} - c6n9{r7 r2} - c6n6{r2 r1} - r1c3{n6 n3} - r1c2{n3 .} ==>
r1c5#2
singles ==> r1c5=5, r3c7=5
biv-chain[4]: r1c7{n2 n7} - c9n7{r2 r5} - r5n5{c9 c1} - r4c1{n5 n2} ==> r1c1#2
t-whip[4]: c5n2{r9 r2} - c5n8{r2 r7} - r8n8{c6 c9} - r8n5{c9 .} ==> r8c4#2
t-whip[5]: r1n6{c3 c6} - r1n1{c6 c1} - r1n7{c1 c7} - b3n2{r1c7 r2c9} - r2n4{c9 .} ==>
r2c1#6
t-whip[4]: r9c5{n2 n9} - c6n9{r7 r2} - r2n6{c6 c3} - r2n8{c3 .} ==> r2c5#2
whip[1]: c5n2{r9 .} ==> r7c4#2
t-whip[4]: c1n7{r3 r8} - c1n6{r8 r5} - r5c8{n6 n7} - c9n7{r5 .} ==> r2c3#7
whip[1]: c3n7{r8 .} ==> r8c1#7
naked-triplets-in-a-column: c1{r4 r5 r8}{n2 n5 n6} ==> r3c1#2
biv-chain[3]: c1n2{r4 r8} - r7c2{n2 n4} - b4n4{r6c2 r6c3} ==> r6c3#2
biv-chain[5]: r6n2{c2 c8} - r4c8{n2 n5} - r7c8{n5 n9} - r9n9{c8 c5} - c5n2{r9 r7} ==>
r7c2#2
singles ==> r7c2=4
hidden-single-in-a-block ==> r6c3=4
biv-chain[5]: c1n2{r8 r4} - r4c8{n2 n5} - r7c8{n5 n9} - r9n9{c8 c5} - c5n2{r9 r7} ==>
r7c3#2
naked-single ==> r7c3=7
whip[1]: b7n2{r8c3 .} ==> r8c9#2
t-whip[4]: c6n9{r2 r7} - r7c8{n9 n5} - r7c4{n5 n1} - r5c4{n1 .} ==> r2c4#9
naked-triplets-in-a-row: r2{c1 c4 c9}{n4 n7 n2} ==> r2c3#2
singles to the end
```

6.5.3 Using typed-whips

Let us now replace the originally chosen whips by typed-whips and (of course) also bivalue-chains by typed-bivalue-chains:

```
(bind ?*Subsets* TRUE)
```

```
(bind ?*FinnedFish* TRUE)
(bind ?*Typed-Bivalve-Chains* TRUE)
(bind ?*Typed-Whips* TRUE)
```

We get a resolution path in TyW9; i.e. this time, we need longer chains. This is a general property of solving in the 2D spaces. In [PBCS], I mentioned that 97% of the puzzles can be solved with 2D-chains instead of the fully super-symmetric whips, but that generally implies having longer chains.

```
;;; Resolution state RS1
whip-cn[5]: c3n3{r1 r5} - c2n3{r5 r1} - c2n6{r1 r6} - c2n4{r6 r7} - c2n2{r7 .} ==>
r1c3#2
whip-rc[6]: r9c7{n7 n2} - r9c5{n2 n9} - r9c8{n9 n4} - r3c8{n4 n7} - r3c7{n7 n5} -
r1c7{n5 .} ==> r9c9#7
whip-cn[5]: c6n9{r2 r7} - c8n9{r7 r9} - c8n4{r9 r3} - c8n7{r3 r5} - c9n7{r5 .} ==>
r2c6#7
whip-cn[7]: c2n6{r6 r1} - c6n6{r1 r2} - c6n9{r2 r7} - c8n9{r7 r9} - c8n4{r9 r3} -
c8n7{r3 r5} - c8n6{r5 .} ==> r6c3#6
whip-cn[7]: c8n9{r7 r9} - c8n4{r9 r3} - c8n7{r3 r5} - c8n6{r5 r6} - c2n6{r6 r1} -
c6n6{r1 r2} - c6n9{r2 .} ==> r7c5#9
whip-cn[7]: c8n9{r7 r9} - c8n4{r9 r3} - c8n7{r3 r5} - c8n6{r5 r6} - c2n6{r6 r1} -
c6n6{r1 r2} - c6n9{r2 .} ==> r7c4#9
whip-bn[4]: b5n1{r5c5 r5c4} - b5n9{r5c4 r5c5} - b8n9{r9c5 r7c6} - b8n1{r7c6 .} ==>
r1c5#1
whip-cn[7]: c6n6{r1 r2} - c6n9{r2 r7} - c8n9{r7 r9} - c8n4{r9 r3} - c8n7{r3 r5} -
c8n6{r5 r6} - c2n6{r6 .} ==> r1c3#6
whip-cn[7]: c6n6{r1 r2} - c6n9{r2 r7} - c8n9{r7 r9} - c8n4{r9 r3} - c8n7{r3 r5} -
c8n6{r5 r6} - c2n6{r6 .} ==> r1c1#6
whip-cn[7]: c8n6{r5 r6} - c2n6{r6 r1} - c6n6{r1 r2} - c6n9{r2 r7} - c8n9{r7 r9} -
c8n7{r9 r3} - c8n4{r3 .} ==> r5c8#5
whip-rc[7]: r4c1{n2 n5} - r5c1{n5 n6} - r8c1{n6 n7} - r1c1{n7 n1} - r3c1{n1 n4} -
r3c8{n4 n7} - r5c8{n7 .} ==> r2c1#2
whip-cn[7]: c6n9{r2 r7} - c8n9{r7 r9} - c8n4{r9 r3} - c8n7{r3 r5} - c8n6{r5 r6} -
c2n6{r6 r1} - c6n6{r1 .} ==> r2c6#8
whip-rn[8]: r3n5{c7 c4} - r8n5{c4 c9} - r5n5{c9 c1} - r4n5{c1 c8} - r4n2{c8 c1} -
r3n2{c1 c2} - r3n8{c2 c6} - r8n8{c6 .} ==> r3c7#7
whip-rc[9]: r3c2{n2 n8} - r5c2{n8 n3} - r1c2{n3 n6} - r2c3{n6 n7} - r1c1{n7 n1} -
r1c6{n1 n7} - r3c6{n7 n1} - r3c4{n1 n5} - r3c7{n5 .} ==> r3c1#2
whip-cn[8]: c9n8{r8 r7} - c9n5{r7 r5} - c1n5{r5 r4} - c8n5{r4 r7} - c5n5{r7 r1} -
c7n5{r1 r3} - c7n2{r3 r1} - c1n2{r1 .} ==> r8c9#2
whip-rc[5]: r8c6{n7 n8} - r3c6{n8 n1} - r7c6{n1 n9} - r7c8{n9 n5} - r8c9{n5 .} ==>
r1c6#7
whip-rn[4]: r2n4{c1 c9} - r9n4{c9 c8} - r9n7{c8 c7} - r1n7{c7 .} ==> r2c1#7
whip-rn[6]: r7n7{c6 c3} - r2n7{c3 c9} - r5n7{c9 c8} - r5n6{c8 c1} - r5n5{c1 c9} -
r8n5{c9 .} ==> r8c4#7
whip-rc[6]: r9c5{n9 n2} - r8c4{n2 n5} - r8c9{n5 n8} - r8c6{n8 n7} - r7c4{n7 n1} -
r5c4{n1 .} ==> r5c5#9
singles ==> r5c5=1, r5c4=9
biv-chain-rc[4]: r2c4{n7 n2} - r8c4{n2 n5} - r8c9{n5 n8} - r8c6{n8 n7} ==> r3c6#7,
r7c4#7
```



```

whip-rc[5]: r3c2{n2 n8} - r5c2{n8 n3} - r1c2{n3 n6} - r1c6{n6 n1} - r3c6{n1 .} ==>
r6c2≠2
biv-chain-rc[4]: r4c1{n2 n5} - r5c1{n5 n6} - r6c2{n6 n4} - r7c2{n4 n2} ==> r8c1≠2
biv-chain-rc[4]: r8c9{n5 n8} - r8c6{n8 n7} - r8c1{n7 n6} - r5c1{n6 n5} ==> r5c9≠5
singles ==> r5c9=7, r5c8=6, r5c1=5, r4c1=2, r4c8=5, r7c8=9, r6c3=4, r6c2=6, r6c8=2,
r1c6=6, r2c6=9, r9c5=9, r1c1=1, r7c2=4
whip[1]: b7n2{r8c3 .} ==> r2c3≠2
whip[1]: r9n2{c9 .} ==> r7c9≠2
naked-pairs-in-a-row: r3{c1 c8}{n4 n7} ==> r3c4≠7
hidden-single-in-a-block ==> r2c4=7
whip-rc[3]: r8c4{n5 n2} - r7c5{n2 n8} - r7c9{n8 .} ==> r7c4≠5
biv-chain-rc[4]: r3c2{n2 n8} - r2c3{n8 n6} - r2c1{n6 n4} - r2c9{n4 n2} ==> r3c7≠2
singles to the end

```

6.5.4 Using typed-t-whips

Let us restrict still more the patterns we allow, replacing the initial whips by typed-t-whips and (of course) also bivalued-chains by typed-bivalued-chains:

```

(bind ?*Subsets* TRUE)
(bind ?*FinnedFish* TRUE)
(bind ?*Typed-Bivalued-Chains* TRUE)
(bind ?*Typed-t-Whips* TRUE)

```

We get a resolution path in TytW9; this might have been conjectured in view of the W and tW ratings being identical, but the equality of the TyW and TytW ratings does not follow *a priori* from the equality of the W and tW ratings:

```

;;; Resolution state RS1
t-whip-cn[5]: c3n3{r1 r5} - c2n3{r5 r1} - c2n6{r1 r6} - c2n4{r6 r7} - c2n2{r7 .} ==>
r1c3≠2
t-whip-cn[7]: c6n9{r2 r7} - c8n9{r7 r9} - c8n4{r9 r3} - c8n7{r3 r5} - c8n6{r5 r6} -
c2n6{r6 r1} - c6n6{r1 .} ==> r2c6≠7, r2c6≠8
t-whip-cn[7]: c8n6{r5 r6} - c2n6{r6 r1} - c6n6{r1 r2} - c6n9{r2 r7} - c8n9{r7 r9} -
c8n4{r9 r3} - c8n7{r3 .} ==> r5c8≠5
t-whip-rc[7]: r5c9{n7 n5} - r5c1{n5 n6} - r5c8{n6 n7} - r3c8{n7 n4} - r9c8{n4 n9} -
r9c5{n9 n2} - r9c7{n2 .} ==> r9c9≠7
t-whip-cn[7]: c2n6{r6 r1} - c6n6{r1 r2} - c6n9{r2 r7} - c8n9{r7 r9} - c8n4{r9 r3} -
c8n7{r3 r5} - c8n6{r5 .} ==> r6c3≠6
t-whip-cn[7]: c8n9{r7 r9} - c8n4{r9 r3} - c8n7{r3 r5} - c8n6{r5 r6} - c2n6{r6 r1} -
c6n6{r1 r2} - c6n9{r2 .} ==> r7c4≠9, r7c5≠9
t-whip-cn[4]: c6n1{r3 r7} - c6n9{r7 r2} - c4n9{r2 r5} - c4n1{r5 .} ==> r1c5≠1
t-whip-cn[7]: c6n6{r1 r2} - c6n9{r2 r7} - c8n9{r7 r9} - c8n4{r9 r3} - c8n7{r3 r5} -
c8n6{r5 r6} - c2n6{r6 .} ==> r1c1≠6, r1c3≠6
t-whip-bn[9]: b1n4{r2c1 r3c1} - b3n4{r3c8 r2c9} - b9n4{r9c9 r9c8} - b9n7{r9c8 r9c7} -
b3n7{r1c7 r3c8} - b6n7{r5c8 r5c9} - b6n5{r5c9 r4c8} - b6n2{r4c8 r6c8} - b4n2{r6c3 .}
==> r2c1≠2
t-whip-rc[9]: r3c2{n8 n2} - r7c2{n2 n4} - r6c2{n4 n6} - r1c2{n6 n3} - r1c3{n3 n7} -
r7c3{n7 n2} - r8c3{n2 n6} - r8c1{n6 n7} - r8c6{n7 .} ==> r3c6≠8
singles ==> r2c5=8, r3c2=8, r5c2=3, r5c3=8, r1c3=3
t-whip-rn[4]: r9n2{c9 c5} - r9n9{c5 c8} - r7n9{c8 c6} - r7n8{c6 .} ==> r7c9≠2

```

```

t-whip-cn[5]: c5n2{r9 r1} - c5n5{r1 r7} - c8n5{r7 r4} - c8n2{r4 r6} - c2n2{r6 .} ==>
r7c4#2
t-whip-rn[6]: r1n6{c2 c6} - r1n1{c6 c1} - r1n7{c1 c7} - r9n7{c7 c8} - r9n4{c8 c9} -
r2n4{c9 .} ==> r2c1#6
t-whip-cn[6]: c1n7{r3 r8} - c1n6{r8 r5} - c1n5{r5 r4} - c8n5{r4 r7} - c9n5{r7 r5} -
c9n7{r5 .} ==> r2c3#7
whip[1]: c3n7{r8 .} ==> r8c1#7
naked-pairs-in-a-block: b1{r1c2 r2c3}{n2 n6} ==> r3c1#2, r1c1#2
hidden-pairs-in-a-row: r3{n2 n5}{c4 c7} ==> r3c7#7, r3c4#7, r3c4#1
whip[1]: b2n1{r3c6 .} ==> r7c6#1
naked-pairs-in-a-block: b2{r1c5 r3c4}{n2 n5} ==> r2c4#2
biv-chain-bn[4]: b4n6{r6c2 r5c1} - b7n6{r8c1 r8c3} - b7n7{r8c3 r7c3} - b7n4{r7c3 r7c2}
==> r6c2#4
hidden-single-in-a-block ==> r6c3=4
hidden-single-in-a-block ==> r7c2=4
biv-chain-rn[3]: r7n2{c5 c3} - r2n2{c3 c9} - r3n2{c7 c4} ==> r8c4#2, r1c5#2
singles ==> r1c5=5, r3c4=2, r3c7=5
finned-x-wing-in-rows: n2{r2 r8}{c9 c3} ==> r7c3#2
singles to the end

```

6.5.5 Using type-restricted typed-whips

You thought it was the end of it? It is not! With respect to the choices of section 6.5.3, we can also restrict the types of the typed-whips and (of course) also those of the typed-bivalue-chains. In Sudoku, the natural restriction is to allow only type rc, i.e. patterns that lie totally in the “natural” rc-space. This amounts to not taking bilocality into consideration. For some players, bilocality, i.e. a number being present in only two places in a row (or column or block), is more difficult to spot than bivalue rc-cells. When additional t- or z- candidates need to be taken into account, as in whips, the difference in difficulty may be still greater. It is therefore a reasonable idea to start looking for whips or t-whips in the rc-space.

```

(bind ?*Subsets* TRUE)
(bind ?*FinnedFish* TRUE)
(bind ?*Typed-Bivalue-Chains* TRUE)
(bind ?*Typed-Whips* TRUE)
(bind ?*restrict-csp-types-in-typed-chains* TRUE)
(bind ?*allowed-csp-types* (create$ rc))

```

We get a resolution path in rc-W12, i.e. we need significantly longer chains:

```

;;; Resolution state R51
whip-rc[6]: r9c7{n7 n2} - r9c5{n2 n9} - r9c8{n9 n4} - r3c8{n4 n7} - r3c7{n7 n5} -
r1c7{n5 .} ==> r9c9#7
whip-rc[7]: r3c2{n2 n8} - r5c2{n8 n3} - r1c2{n3 n6} - r2c3{n6 n7} - r2c1{n7 n4} -
r3c1{n4 n1} - r1c1{n1 .} ==> r1c3#2
whip-rc[7]: r8c6{n7 n8} - r3c6{n8 n1} - r7c6{n1 n9} - r7c8{n9 n5} - r8c9{n5 n2} -
r9c9{n2 n4} - r2c9{n4 .} ==> r2c6#7
whip-rc[10]: r3c2{n2 n8} - r5c2{n8 n3} - r1c2{n3 n6} - r2c3{n6 n7} - r2c9{n7 n4} -
r9c9{n4 n2} - r9c5{n2 n9} - r5c5{n9 n1} - r5c4{n1 n9} - r2c4{n9 .} ==> r2c1#2

```

```

whip-rc[10]: r5c5{n1 n9} - r9c5{n9 n2} - r2c5{n2 n8} - r3c6{n8 n7} - r8c6{n7 n8} -
r7c5{n8 n5} - r7c8{n5 n9} - r7c6{n9 n1} - r7c4{n1 n7} - r8c4{n7 .} ==> r1c5#1
whip-rc[12]: r3c2{n2 n8} - r5c2{n8 n3} - r1c2{n3 n6} - r2c3{n6 n7} - r1c1{n7 n1} -
r1c6{n1 n7} - r3c6{n7 n1} - r3c4{n1 n5} - r1c5{n5 n2} - r9c5{n2 n9} - r7c6{n9 n8} -
r8c6{n8 .} ==> r3c1#2
whip-rc[8]: r3c8{n7 n4} - r2c9{n4 n2} - r1c7{n2 n5} - r1c5{n5 n2} - r9c5{n2 n9} -
r2c5{n9 n8} - r3c6{n8 n1} - r3c1{n1 .} ==> r3c7#7
whip-rc[10]: r9c9{n2 n4} - r2c9{n4 n7} - r5c9{n7 n5} - r5c1{n5 n6} - r8c1{n6 n7} -
r2c1{n7 n4} - r3c1{n4 n1} - r1c1{n1 n2} - r1c5{n2 n5} - r1c7{n5 .} ==> r8c9#2
whip-rc[5]: r8c6{n7 n8} - r3c6{n8 n1} - r7c6{n1 n9} - r7c8{n9 n5} - r8c9{n5 .} ==>
r1c6#7
whip-rc[7]: r8c6{n7 n8} - r8c9{n8 n5} - r8c4{n5 n2} - r2c4{n2 n9} - r5c4{n9 n1} -
r5c5{n1 n9} - r9c5{n9 .} ==> r7c4#7
whip-rc[9]: r3c2{n2 n8} - r5c2{n8 n3} - r1c2{n3 n6} - r1c6{n6 n1} - r3c6{n1 n7} -
r8c6{n7 n8} - r7c6{n8 n9} - r7c8{n9 n5} - r8c9{n5 .} ==> r6c2#2
biv-chain-rc[4]: r4c1{n2 n5} - r5c1{n5 n6} - r6c2{n6 n4} - r7c2{n4 n2} ==> r8c1#2
biv-chain-rc[4]: r8c9{n5 n8} - r8c6{n8 n7} - r8c1{n7 n6} - r5c1{n6 n5} ==> r5c9#5
naked-single ==> r5c9=7
whip[1]: c9n5{r8 .} ==> r7c8#5
singles ==> r7c8=9, r9c5=9, r5c5=1, r5c4=9, r2c6=9, r1c6=6, r6c2=6, r5c1=5, r4c1=2,
r4c8=5, r6c3=4, r5c8=6, r6c8=2, r7c2=4, r1c1=1
whip[1]: b7n2{r8c3 .} ==> r2c3#2
whip[1]: r9n2{c9 .} ==> r7c9#2
naked-pairs-in-a-row: r3{c1 c8}{n4 n7} ==> r3c6#7, r3c4#7
hidden-single-in-a-block ==> r2c4=7
whip-rc[3]: r7c9{n5 n8} - r7c5{n8 n2} - r8c4{n2 .} ==> r7c4#5
biv-chain-rc[4]: r3c2{n2 n8} - r2c3{n8 n6} - r2c1{n6 n4} - r2c9{n4 n2} ==> r3c7#2
singles to the end

```

Now, you can ask: can we go still further and restrict the allowed patterns to t-whips in rc-space only? We can, but not in a very useful way for this puzzle! The only thing CSP-Rules finds in rc-space after RS1 is this t-whip:

```

t-whip-rc[7]: r5c9{n7 n5} - r5c1{n5 n6} - r5c8{n6 n7} - r3c8{n7 n4} - r9c8{n4 n9} -
r9c5{n9 n2} - r9c7{n2 .} ==> r9c9#7

```

Nevertheless, I am sure that, after playing with SudoRules and the various rule combinations it allows, you will be able to find examples where a t-whip solution in rc-space does not require chains much longer than when you allow the full power of all the 3D-chains. Puzzles of medium difficulty are the best candidates.

6.6 Goodies

SudoRules has currently two kinds of goodies, dealing with pretty-printing and permutations of rows or columns.

There are two functions for pretty printing a puzzle or a resolution state: “*pretty-print-sudoku-string*” (abbreviated as “*pretty-print*”) and “*pretty-print-sukaku-list*”, with respective syntax:

Examples should make it clear how they work. Command:

will give:

and command:

will give:

!	1	6	4789	!	5	3	89	!	789	48	2	!
!	459	2	4589	!	7	1489	189	!	5689	3	456	!
!	4579	789	3	!	2489	6	289	!	1	458	457	!
!	3579	1379	1579	!	12349	1249	12679	!	2367	1246	8	!
!	37	4	178	!	1238	5	12678	!	2367	9	1367	!
!	6	13789	2	!	13489	1489	1789	!	357	145	13457	!
!	2379	1379	6	!	1289	12789	5	!	4	128	13	!
!	249	5	149	!	12689	1289	3	!	268	7	16	!
!	8	137	17	!	126	127	4	!	2356	1256	9	!

In the Sukaku case, the size of the printed grid is adapted to the cell with the largest number of candidates.

6.6.2 Applying isomorphisms

There are a few functions for creating isomorphic variants of a puzzle (currently restricted to 9×9 puzzles:

```
(permute-floors-9x9 ?puzzle-string ?f1 ?f2 ?f3)
```

where ?puzzle-string is the usual string format for a puzzle and (?f1, ?f2, ?f3) is supposed to be a permutation of (1, 2, 3). This will permute the three floors such that the new 1 2 3 floors are the ?f1 ?f2 ?f3 floors of the given puzzle. The function is also named “permute-bands”. There is a similar function “permute-towers” or “permute-stacks” for vertical permutations.

```
(permute-rows-in-floor-9x9 ?floor ?r1 ?r2 ?r3)
```

where ?floor is supposed to be given as a string of 27 characters and (?r1, ?r2, ?r3) is supposed to be a permutation of (1, 2, 3). This will permute the three rows in the floor such that the new 1 2 3 rows of this floor are the ?f1 ?f2 ?f3 rows of the given floor. The function is also named “permute-rows-in-band”. There is a similar function “permute-columns-in-towers” or “permute-columns-in-stacks” for vertical permutations.

```
(horizontal-random-shuffle-9x9 ?puzzle-string)
```

where ?puzzle-string is the usual string format for a puzzle. This will randomly permute the three floors and the three rows in each floor. There is a similar function “vertical-random-shuffle” for vertical permutations.

```
(diagonal-symmetry-9x9 ?puzzle-string)
```

will apply a diagonal symmetry, as the name suggests. Notice that, in combination with horizontal-random-shuffle-9x9, this allows to make vertical random shuffles.

Finally,

```
(random-shuffle-9x9-puzzle ?puzzle-string)
```

will produce a random isomorph of the original puzzle.

There is currently no independent shuffle-digits function. It’s an easy exercise for the reader to write one.

WARNING: the next sections of this chapter are for more advanced users.

For the most part, they are additions to the original release of CSP-Rules-V2.1.

They describe features that are currently available only for Sudoku but that could easily be extended to other CSPs.

6.7 Bases for more elaborated functions and techniques

This section is for users who want to push some rules as far as possible before trying different ones – thus partly changing the default simplest-first strategy of CSP-Rules.

First three points to notice are: 1) when the set of resolution rules selected by the user is not enough to completely solve a puzzle, the final resolution state is printed; 2) it is printed in a form fully compatible with the input of functions `solve-sukaku-list` or `solve-sukaku-grid`; 3) it is also fully compatible with the input of the `init-sukaku-list` or `init-sukaku-grid` functions defined in the first subsection below.

6.7.1 Init functions

Knowing the independent existence of initialisation functions was not necessary until now. However, they may be useful in conjunction with the advanced features of SudoRules described in the forthcoming sections.

To make it simple, each of the 2×3 `solve-xxx` functions defined in sections 6.1 to 6.2.4 has a corresponding `init-xxx` function, with the same syntax, and with its name obtained by replacing “solve” by “init”, namely: ***“init-sudoku-string”, “init-sukaku-string”, “init-sudoku-list”, “init-sukaku-list”, “init-sudoku-grid”, “init-sukaku-grid”***. For consistency with “solve”, “init-sudoku-string” can be abbreviated as ***“init”***.

Whereas the `solve-xxx` functions completely solve a puzzle (if the selected rules are powerful enough for this), starting from their data and applying all the active resolution rules, the `init-xxx` functions only read the given data and initialise CLIPS without applying any resolution rule. They don’t output anything. Apart from some recording of the init and solve times, `solve-xxx` is basically the combination of `init-xxx` with CLIPS function “run” (which starts applying the resolution rules).

6.7.2 Printing the current resolution state and the four 2D-views

At any point of the resolution process, you can print the current resolution state, by calling function ***“print-current-resolution-state”*** with no argument, i.e. as: `(print-current-resolution-state)`.

Moreover, this is done systematically at the end of resolution if a puzzle is not fully solved by the chosen set of rules. The output is in a form readable by function ***“init-sukaku-grid”***, as shown in the following examples.

There are also functions to print any of the other views of the same resolution state, i.e. the views in the rn, cn and bn spaces, in the current resolution state:

“print-current-resolution-state-rn-view”, “print-current-resolution-state-cn-view”, “print-current-resolution-state-bn-view”. Moreover, there is a function to print all four views: ***“print-current-resolution-state-all-views”***. All these functions have the same syntax as “print-current-resolution-state”.

After some time of use, it appeared to be convenient to have abbreviations: ***“print-RS-rc”*** (also ***“print-RS”***), ***“print-RS-rn”***, ***“print-RS-cn”***, ***“print-RS-bn”***, ***“print-RS-all”***. I let you guess which abbreviates which.

6.7.3 Examples

As a first elementary example of how these functions and the associated rn, cn and bn representations can be used, in line with what was described in [HLS, 2007], consider the following puzzle (Royle17#21), already studied in section XV.3.1 of [HLS]:

```

+-----+-----+-----+
! . . . ! . . . ! . 3 1 !
! . 8 . ! . 4 . ! . . . !
! . 7 . ! . . . ! . . . !
+-----+-----+-----+
! 1 . 6 ! 3 . . ! . 7 . !
! 3 . . ! . . . ! . . . !
! . . . ! . 8 . ! . . . !
+-----+-----+-----+
! 5 4 . ! . . . ! 8 . . !
! . . . ! 6 . . ! 2 . . !
! . . . ! 1 . . ! . . . !
+-----+-----+-----+
.....31.8..4.....7.....1.63...7.3.....8....54....8....6..2....1.....
SER = 7.1

```

After 38 Singles and 3 whips[1], the resolution state is as follows. For the player not yet used to spot conjugated digits but knowing the most basic chains, i.e. the xy-chains, there's no obvious chain.

```

+-----+-----+-----+
! 4 6 5 ! 8 279 29 ! 79 3 1 !
! 9 8 1 ! 57 4 3 ! 6 25 257 !
! 2 7 3 ! 59 1 6 ! 59 8 4 !
+-----+-----+-----+
! 1 29 6 ! 3 29 5 ! 4 7 8 !
! 3 259 8 ! 4 6 7 ! 1 259 259 !
! 7 259 4 ! 29 8 1 ! 3 6 259 !
+-----+-----+-----+
! 5 4 279 ! 279 3 29 ! 8 1 6 !
! 8 1 79 ! 6 579 4 ! 2 59 3 !
! 6 3 29 ! 1 259 8 ! 57 4 579 !
+-----+-----+-----+

```

However, the cn-view, in which physical rows are columns, physical columns are digits and data are rows, shows what looks like an xy-chain[3] (lying on the cells in bold) and is therefore a bivalue-chain-cn[3] (and is enough to solve the puzzle):

cn-view:

4	3	5	1	7	9	6	8	2
8	456	9	7	56	1	3	2	456
2	79	3	6	1	4	78	5	789
9	67	4	5	23	8	27	1	367
3	149	7	2	89	5	18	6	1489
6	17	2	8	4	3	5	9	17
5	8	6	4	39	2	19	7	13
7	25	1	9	258	6	4	3	58
1	256	8	3	2569	7	29	4	569

```
biv-chain-cn[3]: c7n7{r9 r1} - c5n7{r1 r8} - c5n5{r8 r9} ==> r9c7≠5
stte
```

As a different use case, consider the puzzle below:

+-----+-----+-----+

! . 8 6 ! . 7 9 ! . . 5 !

! 4 . 9 ! 8 5 . ! 7 6 . !

! 7 5 . ! . . 6 ! 9 8 . !

+-----+-----+-----+

! . 9 . ! 5 . . ! 8 7 6 !

! 5 . 7 ! 6 8 . ! . 2 9 !

! 8 6 . ! . 9 7 ! 5 . . !

+-----+-----+-----+

! 9 . 8 ! 7 1 . ! 6 5 . !

! 6 . 5 ! 9 . 8 ! . . 7 !

! . 7 . ! . 6 5 ! . 9 8 !

+-----+-----+-----+

.86.79..54.985.76.75...698..9.5..8765.768..2986..975..9.871.65.6.59.8..7.7..65.98

First initialise SudoRules with it, e.g.:

```
(init
  ".86.79..54.985.76.75...698..9.5..8765.768..2986..975..9.871.65.6.59.8..7.7..65.98")
```

and type the command (print-RS-all). The four 2D views will be displayed.

standard rc-view:

Physical rows are rows, physical columns are columns. Data are digits.

123	8	6	1234	7	9	1234	134	5
4	123	9	8	5	123	7	6	123
7	5	123	1234	234	6	9	8	1234
123	9	1234	5	234	1234	8	7	6
5	134	7	6	8	134	134	2	9
8	6	1234	1234	9	7	5	134	134

9	234	8	7	1	234	6	5	234
6	1234	5	9	234	8	1234	134	7
123	7	1234	234	6	5	1234	9	8

The following representations may be used e.g. to more easily spot rn-, cn- or bn- bivalue pairs (also named bilocal pairs), mono-typed-chains, Hidden Subsets and Fishes (which will appear as Naked Subsets in the proper space).

rn-view:

Physical rows are rows, physical columns are digits. Data are columns.

1478	147	1478	478	9	3	5	2	6
269	269	269	1	5	8	7	4	3
349	3459	3459	459	2	6	1	8	7
136	1356	1356	356	4	9	8	7	2
267	8	267	267	1	4	3	5	9
3489	34	3489	3489	7	2	6	1	5
5	269	269	269	8	7	4	3	1
278	257	2578	2578	3	1	9	6	4
137	1347	1347	347	6	5	2	9	8

cn-view:

Physical rows are columns, physical columns are digits. Data are rows.

149	149	149	2	5	8	3	6	7
258	278	2578	578	3	6	9	1	4
3469	3469	3469	469	8	1	5	7	2
136	1369	1369	1369	4	5	7	2	8
7	348	348	348	2	9	1	5	6
245	247	2457	457	9	3	6	8	1
1589	189	1589	1589	6	7	2	4	3
168	5	168	168	7	2	4	3	9
236	237	2367	367	1	4	8	9	5

bn-view:

Physical rows are blocks, physical columns are digits. Data are positions in a block.

159	159	159	4	8	3	7	2	6
167	1678	1678	178	5	9	2	4	3
1269	169	1269	129	3	5	4	8	7
1359	139	1359	359	4	8	6	7	2
367	237	2367	2367	1	4	9	5	8
489	5	489	489	7	3	2	1	6
579	2579	2579	259	6	4	8	3	1
2	357	357	357	9	8	1	6	4
457	347	3457	3457	2	1	6	9	8

Notice how the rn, cn and bn spaces are represented: all the n coordinates correspond to physical columns. In a sequential presentation as here, this proved to be easier to use than the representation given by the Extended Sudoku Board of [HLS], [CRT] or [PBCS] (where the c and n coordinates are exchanged in the cn-space).

Now, let's show another elementary way how this can be used. This puzzle was proposed as a candidate for having no bivalued cell (an extremely rare property for a Sudoku puzzle). This seems to be true in the standard rc-space: no rc-cell has only two candidates. But, if you consider the rn-space, you can see that there is an rn-cell, namely r6n2 (in bold), with only two values (34, i.e. c3 and c4), meaning that on row 6, number 2 can only be in columns c3 and c4 (rn-cell r6c2 is rn-bivalued; or: it is bilocal in the usual Sudoku jargon); still another way of saying this is: candidates n2r6c3 and n2r6c4 make a (rn-)bivalued pair. *This puzzle has only one bivalued pair.*

If you want a puzzle with no bivalued pair at all after Singles have been applied, it's very rare, but the first one has been found by Nazaz (exercise: check this property visually, using the above-mentioned functions):

.3.21.45.41..5..235.23.41.61.5..234.72.43.5.1.431.5..225..41.3...15.32.43.482..15

6.8 Solving a puzzle in stages; sets of preferences

```

+-----+-----+-----+
! . . . ! . . . ! 1 . . !
! . . 1 ! 2 . . ! . . 3 !
! . 4 . ! . 5 . ! . 2 . !
+-----+-----+-----+
! . 5 . ! . 6 . ! . 4 . !
! . . 7 ! 3 . . ! . . 6 !
! . . . ! . . 7 ! 3 . . !
+-----+-----+-----+
! 2 . . ! . . . ! . . . !
! . . 8 ! 7 . . ! . . 1 !
! . 6 . ! . 4 . ! . 5 . !
+-----+-----+-----+

```

.....1....12....3.4..5..2..5..6..4...73....6.....73..2.....87....1.6..4..5.
SER = 7.1

Suppose you want to solve the above puzzle, created by "Mith". As Mith is famous (among other things) for proposing the best ever puzzles involving (Naked, Hidden and Super-Hidden) Subsets, it is natural to try to find as many of them as possible. However, Subsets plus Finned Fish are not enough for this puzzle. In addition to them, it requires at least bivalued-chains. As a result, a natural choice of rules is:

```

(bind ?*Subsets* TRUE)
(bind ?*FinnedFish* TRUE)
(bind ?*Bivalued-Chains* TRUE)

```

We get the following resolution path, using an extraordinarily large number of Subsets (15) intermingled with a few short bivalued-chains:

```

243 candidates, 1790 csp-links and 1790 links. Density = 6.09%
naked-pairs-in-a-block: b7{r8c2 r9c3}{n3 n9} ==> r9c1≠9, r9c1≠3, r8c1≠9, r8c1≠3,
r7c3≠9, r7c3≠3, r7c2≠9, r7c2≠3
hidden-pairs-in-a-block: b5{r5c6 r6c4}{n4 n5} ==> r6c4≠9, r6c4≠8, r6c4≠1, r5c6≠9,
r5c6≠8, r5c6≠2, r5c6≠1
hidden-pairs-in-a-block: b3{r1c9 r2c7}{n4 n5} ==> r2c7≠9, r2c7≠8, r2c7≠7, r2c7≠6,
r1c9≠9, r1c9≠8, r1c9≠7
finned-x-wing-in-rows: n3{r9 r3}{c6 c3} ==> r1c3≠3
finned-x-wing-in-columns: n3{c2 c5}{r1 r8} ==> r8c6≠3

;;; Resolution state RS1
biv-chain[2]: c2n3{r1 r8} - r9n3{c3 c6} ==> r1c6≠3
swordfish-in-columns: n3{c2 c5 c8}{r8 r1 r7} ==> r7c6≠3, r1c1≠3
swordfish-in-columns: n4{c3 c4 c9}{r7 r6 r1} ==> r7c7≠4, r6c1≠4, r1c6≠4
swordfish-in-columns: n7{c2 c5 c8}{r7 r2 r1} ==> r7c9≠7, r7c7≠7, r2c1≠7, r1c1≠7
swordfish-in-columns: n1{c2 c5 c8}{r6 r7 r5} ==> r7c6≠1, r7c4≠1, r6c1≠1, r5c1≠1
hidden-triplets-in-a-column: c1{n1 n3 n7}{r9 r4 r3} ==> r4c1≠9, r4c1≠8, r3c1≠9,
r3c1≠8, r3c1≠6
hidden-triplets-in-a-row: r7{n1 n3 n7}{c2 c5 c8} ==> r7c8≠9, r7c8≠8, r7c8≠6, r7c5≠9,
r7c5≠8
swordfish-in-rows: n5{r2 r5 r8}{c1 c7 c6} ==> r7c6≠5, r1c1≠5
biv-chain[3]: r9c3{n9 n3} - c2n3{r8 r1} - b1n2{r1c2 r1c3} ==> r1c3≠9
biv-chain[3]: c2n3{r1 r8} - b9n3{r8c8 r7c8} - r7n7{c8 c2} ==> r1c2≠7
biv-chain[3]: r1n7{c8 c5} - b2n3{r1c5 r3c6} - r3c1{n3 n7} ==> r3c7≠7, r3c9≠7
singles ==> r3c1=7, r9c1=1, r4c1=3, r7c2=7, r7c8=3, r7c5=1
biv-chain[3]: r1n2{c2 c3} - r4c3{n2 n9} - b7n9{r9c3 r8c2} ==> r1c2≠9
biv-chain[3]: r4c3{n9 n2} - r1n2{c3 c2} - b1n3{r1c2 r3c3} ==> r3c3≠9
jellyfish-in-columns: n8{c1 c8 c2 c5}{r6 r5 r2 r1} ==> r6c9≠8, r5c7≠8, r2c6≠8, r1c6≠8,
r1c4≠8
naked-triplets-in-a-block: b2{r1c4 r1c6 r2c6}{n4 n6 n9} ==> r3c6≠9, r3c6≠6, r3c4≠9,
r3c4≠6, r2c5≠9, r1c5≠9
whip[1]: r3n9{c9 .} ==> r1c8≠9, r2c8≠9
naked-triplets-in-a-column: c4{r3 r4 r9}{n8 n1 n9} ==> r7c4≠9, r7c4≠8, r1c4≠9
whip[1]: b2n9{r2c6 .} ==> r4c6≠9, r7c6≠9, r8c6≠9, r9c6≠9
whip[1]: r7n9{c9 .} ==> r8c7≠9, r8c8≠9, r9c7≠9, r9c9≠9
singles to the end

```

Now, suppose you are a patented fisherman and you want to find all the possible fishes before you try anything else. The simplest-first strategy, the default strategy in CSP-Rules, doesn't allow this if other simpler patterns are loaded, as shown in the above path. But there is a way to do it nevertheless. It will take two steps:

First step: load SudoRules with the following settings (no bivalued-chains):

```

(bind ?*Subsets* TRUE)
(bind ?*FinnedFish* TRUE)

```

and run it for our puzzle:

```

;;; Same path up to resolution state RS1
swordfish-in-columns: n3{c2 c5 c8}{r8 r1 r7} ==> r7c6≠3, r1c6≠3, r1c1≠3
swordfish-in-columns: n4{c3 c4 c9}{r7 r6 r1} ==> r7c7≠4, r6c1≠4, r1c6≠4
swordfish-in-columns: n7{c2 c5 c8}{r7 r2 r1} ==> r7c9≠7, r7c7≠7, r2c1≠7, r1c1≠7

```

```
swordfish-in-columns: n1{c2 c5 c8}{r6 r7 r5} ==> r7c6#1, r7c4#1, r6c1#1, r5c1#1
hidden-triplets-in-a-column: c1{n1 n3 n7}{r9 r4 r3} ==> r4c1#9, r4c1#8, r3c1#9,
r3c1#8, r3c1#6
hidden-triplets-in-a-row: r7{n1 n3 n7}{c2 c5 c8} ==> r7c8#9, r7c8#8, r7c8#6, r7c5#9,
r7c5#8
swordfish-in-rows: n5{r2 r5 r8}{c1 c7 c6} ==> r7c6#5, r1c1#5
jellyfish-in-columns: n8{c1 c8 c2 c5}{r6 r5 r2 r1} ==> r6c9#8, r5c7#8, r2c6#8, r1c6#8,
r1c4#8
naked-triplets-in-a-block: b2{r1c4 r1c6 r2c6}{n4 n6 n9} ==> r3c6#9, r3c6#6, r3c4#9,
r3c4#6, r2c5#9, r1c5#9
naked-triplets-in-a-column: c4{r3 r4 r9}{n1 n8 n9} ==> r7c4#9, r7c4#8, r1c4#9
whip[1]: b2n9{r2c6 .} ==> r4c6#9, r7c6#9, r8c6#9, r9c6#9
whip[1]: r7n9{c9 .} ==> r8c7#9, r8c8#9, r9c7#9, r9c9#9
jellyfish-in-rows: n9{r3 r9 r4 r7}{c9 c3 c4 c7} ==> r6c9#9, r6c3#9,
r5c7#9, r1c3#9
naked-pairs-in-a-block: b6{r5c7 r6c9}{n2 n5} ==> r4c9#2, r4c7#2
PUZZLE 0 NOT SOLVED. 59 VALUES MISSING.
```

Hurrah! The puzzle is not solved (this is what “Subsets and Finned Fish are not enough” means) but we have found one more fish – and not a small one: a big and rare Jellyfish (in bold). In many other cases, the difference in the numbers of Subsets will be much larger.

But now, what? Indeed, the above resolution path is what you would have gotten with the first release of CSP-Rules. There was no documented way of going further. Now, as the puzzle is not fully solved, you get automatically the following additional output:

FINAL RESOLUTION STATE:

+-----+-----+-----+			+-----+-----+-----+			+-----+-----+-----+			
! 689	23789	256	! 46	378	69	! 1	6789	45	!
! 5689	789	1	! 2	78	469	! 45	6789	3	!
! 37	4	369	! 18	5	138	! 6789	2	789	!
+-----+-----+-----+			+-----+-----+-----+			+-----+-----+-----+			
! 13	5	239	! 189	6	128	! 789	4	789	!
! 489	1289	7	! 3	1289	45	! 25	189	6	!
! 689	1289	246	! 45	1289	7	! 3	189	25	!
+-----+-----+-----+			+-----+-----+-----+			+-----+-----+-----+			
! 2	17	45	! 56	13	68	! 689	37	489	!
! 45	39	8	! 7	239	256	! 246	36	1	!
! 17	6	39	! 189	4	1238	! 278	5	278	!
+-----+-----+-----+			+-----+-----+-----+			+-----+-----+-----+			

We can now make the second step. Load another instance of SudoRules, with the following settings:

```
(bind ?*Subsets* TRUE)
(bind ?*FinnedFish* TRUE)
(bind ?*Bivalue-Chains* TRUE)
```

and, instead of re-starting from the beginning, start from the above resolution state:

```
(solve-sukaku-grid
+-----+-----+-----+
! 689 23789 256 ! 46 378 69 ! 1 6789 45 !
! 5689 789 1 ! 2 78 469 ! 45 6789 3 !
! 37 4 369 ! 18 5 138 ! 6789 2 789 !
+-----+-----+-----+
! 13 5 239 ! 189 6 128 ! 789 4 789 !
! 489 1289 7 ! 3 1289 45 ! 25 189 6 !
! 689 1289 246 ! 45 1289 7 ! 3 189 25 !
+-----+-----+-----+
! 2 17 45 ! 56 13 68 ! 689 37 489 !
! 45 39 8 ! 7 239 256 ! 246 36 1 !
! 17 6 39 ! 189 4 1238 ! 278 5 278 !
+-----+-----+-----+
)
```

You can see that Subsets were not very far from solving the puzzle. Only two short bivalue-chains[3] and two more Subsets will do it:

```
165 candidates, 672 csp-links and 672 links. Density = 4.97%
biv-chain[3]: r1c4{n6 n4} - r6n4{c4 c3} - b4n6{r6c3 r6c1} ==> r1c1#6
biv-chain[3]: r3c1{n7 n3} - b2n3{r3c6 r1c5} - b2n7{r1c5 r2c5} ==> r2c2#7
naked-pairs-in-a-block: b1{r1c1 r2c2}{n8 n9} ==> r3c3#9, r2c1#9, r2c1#8, r1c2#9,
r1c2#8
whip[1]: r3n9{c9 .} ==> r1c8#9, r2c8#9
whip[1]: c8n9{r6 .} ==> r4c7#9, r4c9#9
naked-pairs-in-a-block: b6{r4c7 r4c9}{n7 n8} ==> r6c8#8, r5c8#8
singles to the end
```

6.8.1 Automating the process by using sets of preferences

While the above “manual” approach remains the most versatile one, CSP-Rules now has a way of making easier the whole process of solving in stages, in the most likely to occur cases: function “*solve-w-preferences*”, with syntax:

```
(solve-w-preferences <sudoku-string> P1 P2 ...)
```

As usual, the first argument is the sudoku puzzle in the standard string format. The next arguments make a (possibly empty) sequence of preferences, each selected among the following list of resolution theories (they are here listed on two lines, one line for the generic resolution theories and one for the Sudoku-specific ones):

- W1, BIVALE-CHAINS, REVERSIBLE-CHAINS
- S2, S3, S4 (or S), S2Fin, S3Fin, S4Fin (or SFin), REVERSIBLE-PATTERNS, TRID, TRID-FW, TRID-ORK-FW, TRID-ORK-CW, TRID-ORK-W and TRID-ORK-CHAINS.

W1, S_n and S_nFin have already been defined; BIVALE-CHAINS means W1 plus the bivalue-chains of maximum length as defined in the configuration file;

REVERSIBLE-CHAINS means BIVALE-CHAINS plus z-chains and oddagons with similar restriction on lengths. REVERSIBLE-PATTERNS means REVERSIBLE-CHAINS plus SFin. Typed-chains are included in the above resolution theories if and only if they were selected in the configuration file (they don't change their resolution power). For TRIDAGONS (TRID-xxx), see chapter 14.

What happens when function “solve-w-preferences” is called is: CSP-Rules first tries to solve the puzzle using only the rules in P1; then, if the puzzle is not solved and starting from the final resolution state thus obtained, it tries again, using only the rules in P2; and so on. At the end, if the puzzle is not yet solved, CSP-Rules tries with all the rules chosen in the configuration file (considered as an implicit preference MAIN at the end of the list). Several remarks are in order:

- before the function does anything, it checks all the names in the list of preferences; if any name is not strictly as in the above list, the function mentions it, recalls the allowed list and stops without doing anything (even if the rest is correct);
- the list of preferences may be empty, in which case “solve-w-preferences” is equivalent to “solve”;
- within each phase of resolution in one of the P_i's, the simplest-first strategy keeps driving the resolution process; everything happens as if only the rules in P_i were loaded;
- at the end of each phase, if the solution is not yet found and global variable `?*print-final-RS*` is set to TRUE (the default value), the resolution state is printed;
- each preference virtually sets a new “process” running in parallel (conceptually with all the other ones and the default one; as a result, some pattern-matching work may be duplicated and performance may be reduced in terms of resolution time and memory used; (technical note: all these “processes” use the same global set of facts, but each of them has its own Rete network for its own pattern-matching; pattern-matching structures and processes is what's duplicated);
- when a resolution theory is mentioned for the first time in a call to “solve-w-preferences” after loading time, the associated rules are loaded again; this is the new “process” setting up its independent pattern-matching network;
- “solve-w-preferences” does not impose any restriction on the order of preferences, or the possible repetition of some of them; but it is obvious that putting S4 after S4Fin will not be very useful; one could imagine a sequence like “S4Fin REVERSIBLE-CHAINS” being repeated, but it seems more natural to use “S4Fin REVERSIBLE-PATTERNS”.

In the above example, function “solve-w-preferences” could be used as follows in order to obtain the second resolution path with a single command:

```
(solve-w-preferences
  ".....1.....12.....3.4..5..2..5..6..4...73....6.....73..2.....87....1.6..4..5."
  S4Fin BIVALE-CHAINS)
```

However, if you don't know in advance that this is enough to solve the puzzle, you may want to go further in restricting the increase in rules complexity before allowing all the loaded rules to apply, e.g.:

```
(solve-w-preferences
 ".....1....12....3.4..5..2..5..6..4...73....6....73..2.....87....1.6..4..5."
 S4Fin BIVALE-CHAINS REVERSIBLE-CHAINS REVERSIBLE-PATTERNS)
```

This will not change anything in the present case, but in many harder puzzles, it will allow to try e.g. all the reversible patterns before any non-reversible ones.

If you prefer avoiding fins, you can also be more specific about it:

```
(solve-w-preferences
 ".....1....12....3.4..5..2..5..6..4...73....6....73..2.....87....1.6..4..5."
 S4 S4Fin BIVALE-CHAINS REVERSIBLE-CHAINS REVERSIBLE-PATTERNS)
```

As should be expected from the previous sections, “solve-w-preferences” (further abbreviated as “*solve-w-prefs*”) is an abbreviation for “*solve-sudoku-string-w-preferences*” and there are similar functions: “*solve-sudoku-list-w-preferences*”, “*solve-sukaku-list-w-preferences*”, “*solve-sudoku-grid-w-preferences*”, “*solve-sukaku-grid-w-preferences*”. Their syntax is the same as with the corresponding function without preferences, but with an additional sequence of preferences at the end. CSP-Rules does the job of deciding what pertains to the puzzle and what is a preference. Example for the same puzzle as above:

```
(solve-sudoku-grid-w-preferences
+-----+-----+-----+
! . . . ! . . . ! 1 . . !
! . . 1 ! 2 . . ! . . 3 !
! . 4 . ! . 5 . ! . 2 . !
+-----+-----+-----+
! . 5 . ! . 6 . ! . 4 . !
! . . 7 ! 3 . . ! . . 6 !
! . . . ! . . 7 ! 3 . . !
+-----+-----+-----+
! 2 . . ! . . . ! . . . !
! . . 8 ! 7 . . ! . . 1 !
! . 6 . ! . 4 . ! . 5 . !
+-----+-----+-----+)
```

```
S4Fin BIVALE-CHAINS REVERSIBLE-CHAINS REVERSIBLE-PATTERNS)
```

6.9 Focusing on some candidates for eliminations

This section is for users who, for some reason of their own, want to focus their attention on some candidate(s).

One of those reasons (that will be considered in detail in chapter 13) can be that a candidate is a T_0 -anti-backdoor and eliminating it would lead to a single-step solution

(considering rules from some elementary resolution theory T_0 as obvious steps not to be counted as real steps); the same remarks apply to two-step solutions and anti-backdoor-pairs.

Generally speaking, generic function “*try-to-eliminate-candidates*” takes any number of candidates (which may be a single candidate in spite of the final “s” in the name) as arguments and it applies to them (considered as targets) – and only to them – the rules selected in the configuration file. During such focused eliminations, the simplest-first strategy still applies; it is only restricted to apply to candidates in the list. Function “*try-to-eliminate-candidates*” can be applied repeatedly to any lists of candidates; each time, the starting point is the current resolution state. Syntax:

```
(try-to-eliminate-candidates cand1 cand2 cand3 ...)
```

where $cand_i$ is defined by its label – which, in SudoRules, is given by function: (nrc-to-label $n_i r_j c_k$). In practice, if we are dealing with a 9×9 Sudoku and no rule involving g-candidates (e.g. g-whips, g-braids, ...) is loaded, this can merely be: $n_i r_j c_k$. However, if any such rule is activated, it is mandatory to use the “nrc-to-label” function for each candidate. The result of applying this function is the elimination of all the candidates in the list that the active rules can eliminate.

Remarks:

- All the generic non-exotic chain rules can be used for focused eliminations, except *t-whips*:
- for technical reasons (because they use the same partial-whips[1] as whips), ***t-whips (typed or not) MAY NOT be loaded for focusing to work.*** The “*try-to-eliminate-candidates*” function will merely halt if *t-whips* are loaded.
- For chain rules that have a blocked version (e.g. Subsets, bivalued-chains, z-chains...), not only the candidates focused on are eliminated, but also the other targets of the same chain. This is a deliberate choice. If you want to eliminate only the candidates on focus, select (in the configuration file) the non-blocked version of these rules.
- In all the applications delivered with CSP-Rules, Subsets allow focused eliminations (with the same remarks as above about their blocked vs non-blocked versions).
- With focused eliminations, the simplest-first strategy still applies, restricted to the candidates on focus.
- In forcing chains, focusing is done on the starting candidates, not on the potentially asserted or eliminated candidates; as a result, it is not recommended to explicitly activate other rules (apart from those they automatically imply) when any forcing chains are active – or conversely.

6.10 Eleven's replacement technique

This section is about a very smart and very powerful “algebraic” technique first introduced by “eleven” in 2010 (<http://forum.enjoysudoku.com/an-alternative-way-to-solve-the-hard-17-clue-t30022.html#p200126>), with a recent revival.

6.10.1 Original definition of eleven's replacement technique

If, in any resolution state RS, there is a line L (i.e. a row, a column or a block) with three cells having exactly the same remaining three candidates, say 1, 2, 3, then:

- step 1: in RS, replace any instance of any of these numbers (including the givens and decided values) by the three of them: 123; (in this step, some information is obviously lost);
- step 2: in L, replace the content of the three cells by different variables, respectively x, y, z;
- step 3: solve as if x, y, z were digits;
- step 4: identify the values of x, y, z based on the givens.

In many cases, this will lead to a solution simpler than for the original puzzle. Notice that, even if (Naked, Hidden and Super-Hidden) Triplets rules are allowed, it might be interesting to extend the technique to triplets of cells in the rn, cn or bn spaces; but this is currently not considered in SudoRules.

However powerful it can be, this technique has a few drawbacks:

- solving with x, y, z instead of real digits may not be so easy for the human solver in all the cases;
- it is not doable by the current computer-based solvers;
- in general, there are many possibilities for the three cells, but no general rule for choosing which is best; in some cases, a choice will lead to an easy (or at least easier) solution while another choice will lead nowhere;
- as some information is lost in the transformation process, no solution of the modified puzzle can be guaranteed *a priori*, even in the best case of the original one having a single solution (though, in practice, this doesn't seem to be very restrictive);
- this technique cannot be defined as a resolution rule (it is fundamentally a form of educated T&E – see sub-section 6.10.4);
- the computational complexity cannot be defined (more on this in sub-section 6.10.4).

6.10.2 SudoRules variant of eleven's replacement technique

Here is my own variant of eleven's technique, as implemented in SudoRules. It allows to discard the first two of the above-mentioned drawbacks, while still capturing the essence of the technique:

This puzzle has a solution in W7 (see it in [CSP-RULES-EXAMPLES], file Sudoku/eleven-replacement/123-pattern.clp). But we can also apply eleven's technique: suppose that, in the above resolution state, we replace every occurrence of 1 2 3 (including the givens) by the 3 digits (step 1). We get the following sukaku grid:

!	123	4	6	!	1239	12359	8	!	7	1235	1235	!
!	5	123	9	!	6	123	7	!	123	4	8	!
!	8	7	123	!	4	1235	123	!	6	1235	9	!
!	123	8	5	!	1239	12349	1234	!	123	7	6	!
!	7	123	4	!	8	6	5	!	123	9	123	!
!	6	9	123	!	7	123	123	!	5	8	4	!
!	1234	6	1237	!	123	1234	9	!	8	1235	12357	!
!	9	5	8	!	123	7	6	!	4	123	123	!
!	1234	123	1237	!	5	8	1234	!	9	6	1237	!

We can now choose any arrangement of values among {1, 2, 3} for r4c1, r5c2, r6c3 (step 2, in block b4). If we get a solution, it will be a solution of the original puzzle modulo some renaming of 1, 2, 3:

!	123	4	6	!	1239	12359	8	!	7	1235	1235	!
!	5	123	9	!	6	123	7	!	123	4	8	!
!	8	7	123	!	4	1235	123	!	6	1235	9	!
!	1	8	5	!	1239	12349	1234	!	123	7	6	!
!	7	2	4	!	8	6	5	!	123	9	123	!
!	6	9	3	!	7	123	123	!	5	8	4	!
!	1234	6	1237	!	123	1234	9	!	8	1235	12357	!
!	9	5	8	!	123	7	6	!	4	123	123	!
!	1234	123	1237	!	5	8	1234	!	9	6	1237	!

And we can apply the standard SudoRules function for solving this sukaku (step 3):

(solve-sukaku-grid

!	123	4	6	!	1239	12359	8	!	7	1235	1235	!
!	5	123	9	!	6	123	7	!	123	4	8	!
!	8	7	123	!	4	1235	123	!	6	1235	9	!
!	1	8	5	!	1239	12349	1234	!	123	7	6	!
!	7	2	4	!	8	6	5	!	123	9	123	!
!	6	9	3	!	7	123	123	!	5	8	4	!

```

! 1234 6      1237 ! 123  1234 9      ! 8      1235 12357 !
! 9      5      8      ! 123  7      6      ! 4      123  123  !
! 1234 123  1237 ! 5      8      1234 ! 9      6      1237 !
+-----+-----+-----+
)
singles ==> r4c7=2, r2c5=2, r6c5=1, r6c6=2

```

Resolution state after Singles and whips[1]:

```

+-----+-----+-----+
! 23      4      6      ! 139  359  8      ! 7      1235 1235  !
! 5      13      9      ! 6      2      7      ! 13      4      8      !
! 8      7      12      ! 4      35     13     ! 6      1235 9      !
+-----+-----+-----+
! 1      8      5      ! 39     349  34     ! 2      7      6      !
! 7      2      4      ! 8      6      5      ! 13      9      13     !
! 6      9      3      ! 7      1      2      ! 5      8      4      !
+-----+-----+-----+
! 234     6      127    ! 123     34     9      ! 8      1235 12357 !
! 9      5      8      ! 123     7      6      ! 4      123  123  !
! 234     13     127    ! 5      8      134    ! 9      6      1237 !
+-----+-----+-----+
85 candidates.

```

```

finned-x-wing-in-columns: n1{c6 c2}{r9 r3} ==> r3c3≠1
singles ==> r3c3=2, r1c1=3, r2c2=1, r2c7=3, r5c7=1, r5c9=3, r9c2=3
biv-chain[3]: r3c6{n3 n1} - r9c6{n1 n4} - r7c5{n4 n3} ==> r3c5≠3
stte

```

```

+-----+-----+-----+
! 3 4 6 ! 1 9 8 ! 7 2 5 !
! 5 1 9 ! 6 2 7 ! 3 4 8 !
! 8 7 2 ! 4 5 3 ! 6 1 9 !
+-----+-----+-----+
! 1 8 5 ! 9 3 4 ! 2 7 6 !
! 7 2 4 ! 8 6 5 ! 1 9 3 !
! 6 9 3 ! 7 1 2 ! 5 8 4 !
+-----+-----+-----+
! 2 6 1 ! 3 4 9 ! 8 5 7 !
! 9 5 8 ! 2 7 6 ! 4 3 1 !
! 4 3 7 ! 5 8 1 ! 9 6 2 !
+-----+-----+-----+

```

By observing cells r8c8 and r8c9, one can see that this is not a solution to the original puzzle; but (step 4) replace 3 by 1 and 1 by 2 (and therefore 2 by 3) and you'll get the solution.

Notice that the sukaku puzzle obtained after eleven's replacement also has a 1-step solution, but it is in Z5 (still better than W7):

```

z-chain[5]: b1n1{r3c3 r2c2} - r9c2{n1 n3} - c6n3{r9 r4} - r4c4{n3 n9} - r1c4{n9 .} ==>
r3c6≠1
stte

```

The point here is, ***a puzzle that was in W7 is now solvable in the much simpler BC3***. Which immediately raises a question: ***how is it possible that, after losing information (in the first replacement step), we get a simpler puzzle?***

6.10.4 The complexity of eleven's replacement technique

As noticed at the end of the example in the previous sub-section, eleven's technique has allowed an apparent reduction of complexity from W7 to BC3, even though it had lost some information in its first step. We shall see in chapter 14 that the technique can even drastically downgrade a puzzle from T&E(3) to Z5 (or less), a relatively low part of T&E(1). This obviously requires some explanation.

Notice that one could even raise the restriction that each of the three cells has the three candidates (it is enough that each cell has two candidates and that each candidate appears at least twice in the three cells – the conditions of a cyclic Naked-Triplet. And, in the replacement, one can even choose for a cell one of the three candidates that do not appear in it – which will of course require some isomorphism at the end.)

Subsets provide a very illuminating example. Suppose there is e.g. some Naked Triplet in a row and, instead of applying it, you apply eleven's replacement to its three digits and cells. The result is, you can now make by Singles all the eliminations that would have been made by the Triplet. In the present case, the complexity of the method appears to be the same as that of the Triplet: finding the three digits and cells that allow them to apply. Notice that eleven's technique could be applied to Pairs or Quadruplets of digits and cells in a line (though it seems to be less useful in such cases) and this conclusion could also be extended to Pairs and Quads. In such cases, the method has not simplified the puzzle.

Consider now the general case. What is there underneath the technique? It is easy to see that step 2 amounts to trying to plug two of the selected candidates in two of the selected cells (which decides the third); then checking if, using the selected resolution theory T , this implies a solution or not. Which is a form of $T\&E(T, 2)$. Obviously, the technique is much smarter than general T&E, let's say it's educated T&E, but complexity-wise it is $T\&E(T, 2)$, which provides the explanation required at the start.

6.10.5 The SudoRules functions for dealing with eleven's replacement technique

In any resolution state, there are two complementary parts in eleven's technique: choosing the relevant cells and applying the replacements. As of now, SudoRules provides only the functions for doing the second, boring mechanical part, leaving the choice of the three cells to the user. (See however chapter 14 for a case of automatic choice.)

SudoRules has two main functions for applying eleven's technique: ***solve-sukaku-list-by-eleven-replacement*** and ***solve-sukaku-grid-by-eleven-replacement***, with respective syntax:

```
(solve-sukaku-list-by-eleven-replacement
  ?nb1 ?nb2 ?nb3 ?row1 ?col1 ?row2 ?col2 ?row3 ?col3 $?sukaku-list)

(solve-sukaku-grid-by-eleven-replacement
  ?nb1 ?nb2 ?nb3 ?row1 ?col1 ?row2 ?col2 ?row3 ?col3 $?sukaku-grid)
```

As expected, ?nb1, ?nb2 and ?nb3 are for the three digits; (?rowi, ?coli) are the re-coordinates of the ith cell and \$?sukaku-list or \$?sukaku-grid are the usual SudoRules list/grid representations of the resolution state RS where the transformation must be applied. What these functions do is very simple: they apply eleven's replacement, they plug each ?nbi into the corresponding (?rowi, ?coli), and then they re-start a resolution path from the resolution state thus obtained. They also print the resolution state before and after the replacement.

Beware that these functions do not check that the conditions for the replacement are satisfied. In the current implementation, they also leave step 4 to the user: check the final solution (if any) and make the proper digit isomorphism of ?nb1, ?nb2 and ?nb3 if needed, based on their occurrences in the initial givens.

Those are very basic functions, letting the user totally free (but unaided) in his choice of the three digits and cells. It doesn't seem desirable to have such a replacement procedure automatically started based only on the overly general condition of three digits in three cells in a line. But chapter 14 will show how, in the very special context of Tridagon related rules, it can be started automatically.

If you're only interested in doing eleven's replacements in some resolution state, without anything else, there are two utilitarian functions: ***replace-digits-in-sukaku-list*** and ***fix-digits-in-3-rc-cells-of-sukaku-list***, doing respectively the first and second step of the technique, with syntax:

```
(replace-digits-in-sukaku-list ?nb1 ?nb2 ?nb3 $?sukaku-list)

(fix-digits-in-3-rc-cells-of-sukaku-list ?nb1 ?nb2 ?nb3 ?row1 ?col1
  ?row2 ?col2 ?row3 ?col3 $?sukaku-list)
```

plus two similar functions: ***replace-digits-in-sukaku-grid*** and ***fix-digits-in-3-rc-cells-of-sukaku-grid***, allowing to take into account the sukaku grid format.

Notice that eleven's method could be extended to cells in rn, cn and bn spaces and similar functions could easily be written, but this is not currently done in SudoRules.

For completeness, SudoRules also has two functions for applying eleven's technique to 4 digits: ***solve-sukaku-list-by-eleven-replacement4*** and ***solve-sukaku-grid-by-eleven-replacement4***, with respective syntax:

```
(solve-sukaku-list-by-eleven-replacement4
  ?nb1 ?nb2 ?nb3 ?row1 ?col1 ?row2 ?col2 ?row3 ?col3 ?row4 ?col4
  $?sukaku-list)
```

```
(solve-sukaku-grid-by-eleven-replacement4
  ?nb1 ?nb2 ?nb3 ?row1 ?col1 ?row2 ?col2 ?row3 ?col3 ?row4 ?col4
  $?sukaku-grid)
```

But I have no example where this could be useful in practice.

7. LatinRules

LatinRules is the pattern-based solver of Latin Square puzzles based on CSP-Rules. Latin Square puzzles are played on a square grid and grid size is unrestricted in general.

The 6th update of CSP-Rules-V2.1 (June 2021) added the Pandiagonal variant of Latin Squares. This variant is very unlikely to ever become a popular logic puzzle, but I finally chose to add it to LatinRules because it illustrates an easy way of adding a variant to a CSP already defined in CSP-Rules.

The Pandiagonal variant can be selected in the “General application-specific choices” part of the configuration file, by setting variable `*Pandiagonal*` to TRUE (it is FALSE by default), in which case grid size may not be divisible by 2 or 3.

```

;;
;;
;; General application-specific choices
;; Definition of grid size and related parameters
;; Choice of variants
;;
;;
;;
;; By default, grid size is 9, as in Sudoku
;; If needed, change grid size here (grid-size can be any integer)

; (bind ?*grid-size* 13) ;

;; By default, Latin Squares is the classical version. But Pandiagonal constraints
can be added.

;; Notice that, in this case, ?*grid-size* may not be divisible by 2 or 3.
; (bind ?*Pandiagonal* TRUE);

```

7.1 Latin Squares

In Latin Squares, with respect to Sudoku, the absence of constraints related to blocks implies there are no Subset rules for blocks, no whips[1], no g-labels, no g-whips or g-braids, no g-Subsets (such as Finned Fish), no g-anything. For Sudoku players, the interactions between blocks and rows or columns (e.g. whips[1]) make an important part of the excitement. Blocks are what makes Sudoku a unique logic game, with unmatched success.

LatinRules is a stripped-down version of SudoRules (eliminating any reference to blocks and g-labels) and it hasn't given rise to similar large-scale studies. It has the same basic user functions as Sudoku, with the same syntax, i.e. in essence functions *“init”*, *“solve”*, *“solve-n-grids-after-first-p-from-text-file”*, *“print-current-resolution-state”* and *“solve-list”* (which can take as input the result of the previous function or any resolution state in the same list format as in Sudoku). There is no *solve-xxx-grid* or *init-xxx-grid* function, as no blocks need to be separated by vertical or horizontal lines.

I keep LatinRules separate from SudoRules mainly for practical reasons: this way, it is easier to code variants for each, without needing to put (Latin Squares vs Sudoku) conditions everywhere blocks are mentioned.

7.2 Pandiagonal Latin Squares

Pandiagonal Latin Squares is a variant of Latin Squares where the “only one” constraint for each number is required to be true not only for rows and columns but also for all the wrap-around diagonals and anti-diagonals (see 7.2.1 for precise definitions).

These are very strong constraints and it can be shown that there exists no Pandiagonal Latin Square when grid size is divisible by 2 or 3 ([Bartlett 2012]). Moreover, there are only very few non essentially equivalent ones if grid size is less than 13 ([Atkin & al. 1983]): for $n = 5, 7$ and 11 there are exactly (up to isomorphism) $n-3$ complete grids and they are cyclic. For $n = 13$ there are 10 (still $n-3$) non essentially equivalent complete grids, 2 cyclic, 6 semi-cyclic and 1 acyclic.

Does this imply that non trivial Pandiagonal Latin Square puzzles should be quite large ($n > 13$)? I don't think so, as far as solving is concerned. The usual requirement of a solution in the pattern-based approach to CSP solving developed in [PBCS] and implemented in CSP-Rules requires that each step of the resolution path be based on a precise pattern. One may explicitly add to this requirement that knowledge about cyclicity of the completed grids be not used. In this view, small sized grids remain interesting from a solver's perspective.

Pandiagonal Latin Squares can be considered as a variant of Sudoku, where the block constraints are replaced by wrap-around diagonal and anti-diagonal constraints. This is justified from an abstract point of view and is totally in line with the approach taken in CSP-Rules. However, when one considers puzzles from a human solver point of view, the two types of puzzles are very different in practice. Block constraints are immediately visible to the player. On the contrary, due to the wrap-around, diagonal and anti-diagonal constraints are very unfriendly in practice, unless some graphical technique allows to visualize them better, e.g. different colours for diagonals and different background pattern for anti-diagonals.

In theory, Pandiagonal constraints could also be added to Sudoku(25) [25 being the smallest integer for which the two constraints are consistent], resulting in some very large and messy puzzles.

Pandiagonal Latin Squares have been the topic of recent interest in the New Sudoku Player's Forum, thanks to several participants (Mathimagics, 1to9only, ...). Wouldn't they have introduced it to the forum and generated the first example puzzles of various sizes, this new part of LatinRules wouldn't exist. I owe many thanks in particular to "1to9only" for generating a large collection (> 1000) of 7×7 puzzles.

7.2.1 Wrap-around diagonals and associated CSP-Variables

The definition of wrap-around diagonals is best understood if you consider that the square grid is wrapped around a torus (a tyre), the upper and lower sides being stuck together and the left and right sides being also stuck together, edge to edge. For grid size n , a wrap-around row draws a horizontal circle, a wrap-around column draws a vertical circle and a wrap-around diagonal or anti-diagonal draws a full ellipse on the torus. Each of them has exactly n cells and each digit must appear once and only once in each of them.

In LatinRules, wrap-around diagonals (respectively anti-diagonals) are designated by the letter d (respectively a) and are numbered from 1 to n . To be more specific, suppose grid size is 7:

- d_1 starts from cell r_1c_1 and it moves "upwards and rightwards" (like a $/$) to cells r_7c_2 , $r_6c_3 \dots$ until it finishes on cell r_2c_7 ;
- d_2 starts from cell r_2c_1 and it moves "upwards and rightwards" to cells r_1c_2 , $r_7c_3 \dots$ until it finishes on cell r_3c_7 ;
- d_7 starts from cell r_7c_1 and it moves "upwards and rightwards" to cells r_6c_2 , $r_5c_3 \dots$ until it finishes on cell r_1c_7 ;

Similarly,

- a_1 starts from cell r_1c_1 and it moves "downwards and leftwards" (like a \backslash) to cells r_2c_7 , $r_3c_6 \dots$ until it finishes on cell r_7c_2 ;
- a_7 starts from cell r_1c_7 and it moves "downwards and leftwards" to cells r_2c_6 , $r_3c_5 \dots$ until it finishes on cell r_7c_1 .

It is easy to see that wrap-around diagonals and anti-diagonals define a second system of coordinates on the grid. Indeed, any pair of different terms taken among row, column, diagonal and anti-diagonal defines a system of coordinates.

The CSP-Variables for Pandiagonal Latin Squares are the same as for Latin Squares (the rc , rn and cn Variables), plus similar ones related to wrap-around diagonals and anti-diagonals (the dn and an Variables).

7.2.2 *g-labels and Subsets*

Pandiagonal Latin Squares have whips[1] and therefore g-labels, g-whips and g-braids. g-labels are of four types (rn, cn, dn and an) and are made of three candidates with the same digit value, with cells respectively in the same row, column, diagonal or anti-diagonal. A g-label G of type xn has its three labels at the intersection of its CSP-Variable with a combination of three CSP-Variables, each of a different type among the other three types and intersecting at some point; this point will be g-linked to G. However, due to combinatorial explosion, g-labels are not coded in LatinRules and the corresponding g-chains are not available.

Pandiagonal Latin Squares also have Subsets – lots of. As in Latin Squares, Naked and Hidden Subsets rely on a single “line”, but a “line” can now be a row, a column, a diagonal or an anti-diagonal. For a fixed grid size, this multiplies by two the number of possibilities for Naked and Hidden Subsets.

The real computational problem arises with Super Hidden Subsets (Fish). Both the base sets and the transversal sets (or cover sets) of a Fish can *a priori* be made of CSP-Variables of different types. Even when one doesn’t allow mixing of types neither in the base set nor in the transversal set, there remains twelve (instead of two in Latin Squares) different “homogeneous” combinations of possible Fish patterns of fixed size. Notice that all these homogeneous combinations are coded in LatinRules, up to Fishes of size 4. (It was straightforward to code them by permuting words “row”, “column”, “diagonal”, “anti-diagonal” and associated variables in the original Fish rules of LatinRules).

For puzzles with large grid sizes, this implies a potential combinatorial explosion of the number of Fish patterns to be tested. This is why the Latin Rules configuration file recommends not to activate Subsets of size 4 in general when `?*Pandiagonal*` is TRUE and grid size is greater than 11.

7.2.3 *Branching factors*

One (though not the only) important number in the practical application of the generic chain rules of CSP-Rules is the branching factor of the CSP, i.e. the mean number of candidates that are linked to a given one. For any type xxx of chain, the square of this factor gives a rough estimate of how many partial-xxx-chains[n+1] one will have to consider for each partial-xxx-chain[n]. (Of course, for a better estimate, it has to be combined with the number of actual candidates.)

The branching factors are easy to compute for grid size n: $3n-1-2\sqrt{n}$ in Sudoku and $4(n-1)$ in Pandiagonal Latin Squares – and they are constant (the same for each candidate). The following tables allow a comparison between the two types of puzzles:

Sudoku:

grid size	branching factor
9	20
16	39
25	64

Pandiagonal Latin Squares:

grid size	branching factor
7	24
11	40
13	48
17	64

It appears that Pandiags(7) is the closest to standard Sudoku(9). This is also why it is important not to discard the small grid sizes from our considerations. Grid size 13 is closest to Sudoku(16 or 25), which generally implies lots of repetitive and boring easy eliminations before things eventually get exciting.

7.2.4 Example 1: whips[1], generic chains and Naked/Hidden Subsets

Consider the following 7×7 puzzle (created by 1to9only):

```

. 1 . . . . .
4 . . . . .
. . . 3 . . 5
. . . . . . .
. . . 6 . . .
. . . 2 . . .
. . . . . . .

```

```

.1.....4.....3..5.....6.....2.....

```

The first point to notice here is the density (after Singles), much larger than in Sudoku; it results from the existence of more (in the mean) direct contradiction links between remaining candidate pairs:

Resolution state after Singles:

2357	1	234567	457	23467	4567	237
4	23567	2567	157	12567	12367	137
167	27	12467	3	12467	1247	5
12367	34567	1257	1457	2457	367	123467
12357	247	13457	6	37	2457	12347
1567	34567	1347	2	1357	134567	467
2567	23457	367	147	134567	12357	12467

181 candidates, 1563 csp-links and 1563 links. Density = 9.59%

The first part of the resolution path provides an interesting example of all the types of whips[1]; study them and check them carefully on the grid if you want to

```

whip[1]: d1n5{r7c2 .} ==> r7c1≠5
whip[1]: r7n5{c6 .} ==> r4c2≠5
whip[1]: d2n6{r4c6 .} ==> r4c7≠6, r1c3≠6
whip[1]: r1n6{c6 .} ==> r2c6≠6, r4c2≠6, r7c5≠6, r2c5≠6
whip[1]: c5n6{r3 .} ==> r3c3≠6
whip[1]: r3n6{c5 .} ==> r6c1≠6, r7c1≠6
whip[1]: a2n6{r6c7 .} ==> r6c6≠6
whip[1]: a2n4{r4c5 .} ==> r4c7≠4
whip[1]: c7n4{r7 .} ==> r6c6≠4
whip[1]: d1n1{r2c7 .} ==> r2c6≠1
whip[1]: c6n1{r7 .} ==> r3c3≠1
whip[1]: a7n3{r1c7 .} ==> r1c5≠3
whip[1]: c5n3{r7 .} ==> r6c6≠3

```

If Subsets are not activated in the configuration file, a typical sequence of short chains leads to the solution:

[illegible]

```

z-chain[3]: c2n7{r7 r4} - a2n7{r4c5 r7c1} - d2n7{r7c3 .} ==> r5c7≠7
z-chain[3]: r6c1{n7 n5} - r7c2{n5 n2} - r3c2{n2 .} ==> r5c2≠7
z-chain[2]: c2n7{r4 r7} - d2n7{r4c6 .} ==> r3c3≠7
z-chain[2]: r3n7{c2 c6} - d6n7{r1c6 .} ==> r6c5≠7
z-chain[2]: a1n7{r5c5 r6c6} - c2n7{r3 .} ==> r4c5≠7
z-chain[2]: a2n7{r6c7 r7c1} - r3n7{c1 .} ==> r6c6≠7
stte
init-time = 0.05s, solve-time = 2.15s, total-time = 2.21s

```

If Subsets and chains are activated, an alternative path after Resolution state RS2 allows to see a Naked Triplets in a diagonal, where (diagonal, anti-diagonal) coordinates are used by the current output function:

```

naked-triplets-in-a-diagonal: d7{a2 a5 a7}{n7 n2 n3} ==> d7a4≠7,
d7a4≠3, d7a6≠7, d7a1≠7, d7a3≠2
whip[1]: r3n2{c6 .} ==> r7c6≠2
whip[1]: r7n2{c7 .} ==> r1c1≠2
whip[1]: c4n7{r7 .} ==> r1c5≠7
whip[1]: d7n7{r7c1 .} ==> r7c6≠7
whip[1]: r6n3{c5 .} ==> r1c3≠3
whip[1]: r1n3{c7 .} ==> r2c7≠3
whip[1]: d1n3{r6c3 .} ==> r4c1≠3
whip[1]: r4n3{c6 .} ==> r7c6≠3
whip[1]: r7n3{c5 .} ==> r5c5≠3
stte

```

If only Subsets (and whips[1]) are activated, the same Naked Triplets in a diagonal can be applied immediately after RS1, short-circuiting all the chains between RS1 and RS2, and the rest of the path is in W1.

7.2.5 Example 2: Fish

Consider now the following 7×7 puzzle (also created by 1to9only). The resolution state after Singles and whips[1] is given immediately after the puzzle (it is a good exercise in whips[1] to try to reach this state by yourself – or see the LatinSquares/Pandiagonals folder in [CSP-RULES-EXAMPLES] for details of the whips[1], similar to those in the previous example):

```

. . . . .
. . . . .
. 2 . . 7 . .
. . . . .
. . . . . 4
1 . . . 6 . .
. 3 . . . . .

.....2..7.....41...6...3.....

```

Resolution state RS1 after Singles and whips[1]:

```
2457 14567 25 13567 345 23457 135
3457 1457 1357 256 2345 1235 1567
345 2 13456 345 7 1456 15
3567 1457 3457 12345 1245 256 12357
257 567 12356 157 1235 12357 4
1 45 2457 23457 6 357 2357
2456 3 257 12457 15 1457 2567
```

Because that's what we're interested in in this example, only Subsets have been activated in the configuration file, leading to the following resolution path. After the above resolution state, there appears a sequence of Swordfishes in columns, diagonals or anti-diagonals with transversal cover sets of various types:

```
swordfish-in-columns-w-transv-anti-diags: n2{c1 c5 c7}{a2 a4 a1} ==>
a4c3≠2, a2c6≠2, a1c4≠2
swordfish-in-diags-w-transv-columns: n4{d2 d3 d7}{c4 c1 c2} ==>
d5c2≠4, d6c4≠4, d1c1≠4
swordfish-in-anti-diags-w-transv-rows: n3{a4 a5 a7}{r4 r2 r1} ==>
r4a1≠3, r2a2≠3, r1a6≠3
swordfish-in-anti-diags-w-transv-columns: n1{a4 a5 a7}{c7 c6 c4} ==>
a2c6≠1, a1c4≠1, a6c7≠1
(for the end of the resolution path, see the LatinSquares folder in
[CSP-RULES-EXAMPLES]).
```

Notice that both base and cover sets are homogeneous in all the cases (i.e. made of a single type: rn, cn, dn or an). (Currently, fully mixed Fishes are not coded in LatinRules – and they will probably never be, as there are too many possible cases. They are the exotic Fishes of Pandiagonal Latin Squares. An exotic example would be an X-Wing with base sets r_1n_1 and d_3n_1 and with cover sets c_4n_1 and a_6n_1 .)

In such conditions, “transversal” cover sets merely means that cover sets are of a different kind than base sets. Given any type x of homogeneous base sets ($x = rn, cn, dn$ or an), a homogeneous transversal cover set can be of any homogeneous type (rn, cn, dn or an) except x .

Notice that, for Fish patterns, LatinRules uses the coordinate system the most appropriate for each of them, according to the types of the base and cover sets.

For much harder Pandiagonal puzzles, see [CSP-RULES-EXAMPLES].

8. FutoRules

FutoRules is the pattern-based solver of Futoshiki puzzles based on CSP-Rules. Futoshiki is played on a square grid. Grid size is unrestricted (and FutoRules does not have any *a priori* restriction), but in practice, it will rarely be larger than 9.

8.1 The configuration file

The generic part looks much like the generic Sudoku part described in chapter 5. In particular, it allows to select g-whips and g-braids.

The Futoshiki specific part deals with allowing (or not): 1) the presence of givens in the cells (i.e. dealing with “impure” or “pure” Futoshiki); 2) the rules specifically related to sequences of inequalities and 3) the Subsets rules. By default:

- Futoshiki is pure (i.e. it does not have givens in the cells, it has only inequality symbols); but this can be changed in the configuration file;
- all the rules related to sequences of inequalities are disabled by default; but this can be changed in the configuration file, and this is indeed changed in my standard configuration, because they are as natural to Futoshiki as Subsets are to Sudoku;
- the option for Subsets is necessarily FALSE by default in CSP-Rules; it can be set to TRUE in the configuration file and it is indeed TRUE in my standard config.

[illegible]

8.2 The user functions

FutoRules has only two user functions.

1) Function “*solve*” has four arguments, with the following syntax:
(solve ?nb-rows ?givens-str ?horiz-ineq-str ?verti-ineq-str)
where:

- ?nb-rows is the number of rows (or columns),
- ?givens-str is a string representing the sequence of givens in the cells (with the same conventions as in SudoRules: a dot represents no given):
"....."
- ?horiz-ineq-str is a string representing the sequence of horizontal inequality signs,
- ?verti-ineq-str is a string representing the sequence of vertical inequality signs.

Example (Figure 8.1, H9305 from ATK:
<http://www.atksolutions.com/games/futoshiki.html>, solvable in S+W6):

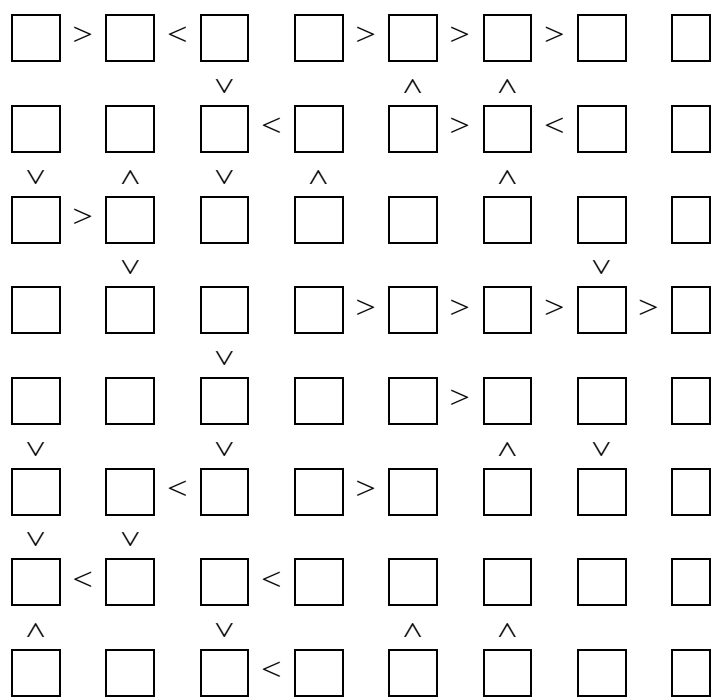


Figure 8.1. Futoshiki puzzle H9305 from ATK

To solve this 8×8 pure Futoshiki puzzle, the call to function “solve” should be:

```
(solve 8  
"  
....."  
"<->--<->--<->--->>>-->--<->--<-<--<--"  
"-->><-<->-->>-->--<-<--<-<-<-<->-->--"  
)
```

The first argument is 8, the number of rows and columns of the puzzle. The second argument is as in Sudoku, with a dot representing no given in the corresponding cell; in “pure” Futoshiki (no givens), this string reduces to a sequence of n^2 dots, as in this example.

The last two arguments require more explanations. On each row of the puzzle, there are n cells and there are at most n-1 inequality signs. If “-” is used to represent the absence of an inequality between two cells, then a row can be represented as a sequence of n-1 signs, looking like this (for the first row): >->>>-

The whole set of horizontal left to right inequalities, from top row to bottom row, will be a set of n similar lines:

>-<->>>-
 --<-><<-
 >-----
 --->>>>
 ---->---
 -<->----
 <-<-<----
 --<-<----

Stick these n lines together (by deleting the carriage returns), put them between double quotes and you get the first argument:

"><->>>---<-><->--->>>--->---<->---<-<-----<-----"

Similarly, write the set of top to bottom vertical inequalities, from left column to right column, as n lines of n-1 signs:

$\rightarrow \rightarrow \rightarrow \rightarrow \rightarrow$
 $\leftarrow \leftarrow \leftarrow \leftarrow \leftarrow$
 $\rightarrow \rightarrow \rightarrow \rightarrow \rightarrow$
 $\leftarrow \leftarrow \leftarrow \leftarrow \leftarrow$
 $\rightarrow \rightarrow \rightarrow \rightarrow \rightarrow$
 $\leftarrow \leftarrow \leftarrow \leftarrow \leftarrow$
 $\rightarrow \rightarrow \rightarrow \rightarrow \rightarrow$
 $\leftarrow \leftarrow \leftarrow \leftarrow \leftarrow$

Stick these n lines together (by deleting the carriage returns), put them between double quotes and you get the second argument:

"->-><-<->->>->->->-<-----<-----<<<-<-<->->-----"

2) Function **“solve-tatham”** has two arguments, with the following syntax:
(solve-tatham ?n ?tatham-str)

Suppose you generate a Futoshiki puzzle on the Tatham webpage for Futoshiki (where it’s named “unequal”)
<https://www.chiark.greenend.org.uk/~sgtatham/puzzles/js/unequal.html>)

You will get a puzzle like in Figure 7.2 (this is a 7×7 “Tricky” one). Now, suppose you click “link to this puzzle by game ID”. Your browser will give you an address that looks like this:

<https://www.chiark.greenend.org.uk/~sgtatham/puzzles/js/unequal.html#7:6,0,0L,0,0R,0RD,0,0D,0,0,0U,0,0,0,0R,0,0,0L,0,0,0,0U,0D,0,0,6U,0,0,0,0R,0R,0,0,3D,0,0,0,0R,0,0L,0R,0,0D,0,3,0R,0,6,0,0L,>

What I call the tatham string format for a Futoshiki puzzle is the part of this address following the second colon symbol, considered as a string. Notice that the address also encodes the size of the puzzle (between the “#” and the second “:”), but I prefer not to consider it as part of the representation of the puzzle, because grid size information is usually separate in the other CSP-Rules applications. This size will be given as the value for argument ?n.

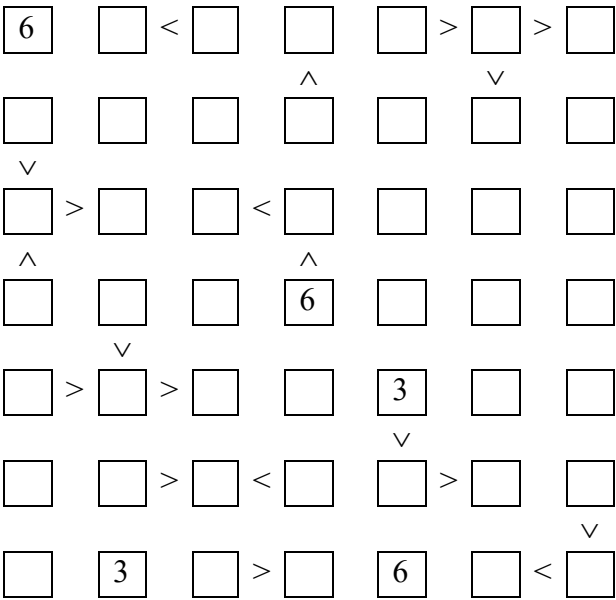


Figure 8.2. “Tricky”Futoshiki puzzle from Tatham

8.3 Some specific notations in the resolution path

As it has application-specific rules, FutoRules has some specific notation for them. All the examples in this section are taken from the resolution path of the Tatham puzzle in section 8.2.

Ascending chains (respectively strong ascending chains) appear as follows:

```
asc[3]: r3c3<r2c3<r1c3<r1c2 ==> r3c3#7, r3c3#6, r3c3#5, r2c3#7, r2c3#6, r2c3#1,
r1c3#7, r1c3#1, r1c2#3, r1c2#1
str-asc[1]: r4c2<r4c1 ==> r4c1#3
```

The number between square brackets is the length of the chain, measured by the number of < signs. It should not mislead you about the complexity of the pattern. I've shown in [PBCS] that, as far as eliminations are concerned, an ascending chain is equivalent to a series of whips[1]. Ascending chains are an example of an application-specific rule that can be interpreted as a macro-rule, i.e. a sequence of simpler ones. These rules are activated by default in my usual configuration, because they provide more compact, better looking resolution paths, although they add no resolution power.

Hills, valleys, strong hills and strong valleys also have their own notation, similar to that of ascending chains, with the same convention about the pseudo-length.

```
str-hill[3]: r5c3<r5c4>r5c5>r5c6 ==> r5c4#4
```

But they can only be reduced to much more complex rules (S_p -whips) and they do add to resolution power. However, as they rely on a very natural pattern, they are also activated by default in my usual configuration:

```
;;; My most usual rules:
(bind ?*asc-chains* TRUE) ; enable ascending chains
(bind ?*str-asc-chains* TRUE) ; enable strong ascending chains
(bind ?*hills-and-valleys* TRUE) ; enable hills and valleys
(bind ?*Subsets* TRUE)
(bind ?*Bivalue-Chains* TRUE)
(bind ?*Whips* TRUE)

;;; Some additional rules I use frequently:
; (bind ?*z-Chains* TRUE)
; (bind ?*t-Whips* TRUE)
; (bind ?*G-Whips* TRUE)
```

9. KakuRules

KakuRules is the pattern-based solver of Kakuro puzzles based on CSP-Rules. Kakuro can be played on any rectangular grid, but most of the grids we meet in practice are square. KakuRules requires a square grid (but a rectangular one can be straightforwardly transformed into a square one, by adding dummy black cells with no content).

Kakuro has Subsets and g-whips and both patterns are noteworthy. The theory of g-labels in Kakuro has been developed in full detail in [PBCS], with real examples only in [PBCS2] (due to a stupid bug in the implementation of g-labels in KakuRules at the time of [PBCS1]). It is quite complex but, as in Sudoku or even more, it leads to one of the most fascinating applications of g-whips (see examples in [PBCS2]).

Remarks and warnings:

1) KakuRules does not have any version of the rules related to “surface sums”, as they are explained in [PBCS]. It does not mean you cannot use KakuRules in case you notice almost closed areas in the grid. After properly using the surface sums, you can try to solve each resulting small puzzle separately and then inject the partial result(s) into the global puzzle. You can also apply KakuRules directly to the global puzzle, but then it may sometimes require (much) longer chains than if you first use the “surface sums”. I make no statement about whether the presence of surface sums is a good thing or not in a Kakuro puzzle; every player will have his own opinion on them. I’m just warning: don’t expect KakuRules to deal with them as such by itself.

2) In the CSP-Rules approach in general and in KakuRules in particular, additional CSP-Variables are added to the “natural” ones. In KakuRules, this means variables related to the sums in the black cells, i.e. variables intended to keep track of the *combinations* allowed in each horizontal or vertical sector. It is natural to attach these additional CSP-Variables to the black cells and to count the first (totally black) row and the first (totally black) column as parts of the Kakuro grid. This justifies the default numbering I’ve adopted for rows and columns, i.e. 1 for the first (black) row (or column). Similarly, the size of the grid (number of rows or columns) includes the first (black) row or column. The configuration file allows to change the numbering of the rows and columns (i.e. to start at 0 instead of 1) when printing the resolution path, but this does not change the size of the grid parameter required by function “solve”.

3) KakuRules has an interesting application of Typed-Chains (see section 8.3), totally different from the SudoRules one.

9.1 The configuration file

There is nothing much to say about the KakuRules configuration file. As said above, you can change the numbering of the rows and columns (setting 0 instead of the default 1 for the first all-black row and column). You can also disable the initial data consistency check (not recommended).

Kakuro has the most beautiful applications of g-whips. Don't miss trying them.

9.2 The user functions

Basically, KakuRules has only one user function, “*solve*”, with syntax:

(solve ?n \$?givens)

?n is grid size (including the first black row or column).

?givens is a sequence representing all the row and column data: first all the rows from top to bottom, then all the columns from left to right. The idea for this format, with separate data for the horizontal and vertical parts, was inspired by crosswords. It has some syntactic sugar (the separate lines, the single and double slashes) for better clarity and for easy checks of consistency of the horizontal data with the vertical ones.

K	17	42				8	5		
7			13		20	6		41	
9				19					13
35				13			12		
13			12			24	11		
	5		3						
	6				17	8	9		19
13				11			3		
9			12	29			8		
	23		15			12			
		16					4		

Figure 9.1. ATK Kakuro puzzle H2340

Once again, I'll use an example from the ATK website (Figure 9.1, puzzle H2340, a puzzle that can be solved in W6) to illustrate the proper syntax. For this puzzle, the proper call to “solve” is as follows.

As size is n , there are $n-1$ lines of horizontal data, followed by $n-1$ lines of vertical data. In the horizontal data part, there's no line corresponding to the first (black) row; in the vertical data part, there's no line corresponding to the first (black) column: they would contain no information.

```
(solve 10
  ;; horizontal data:
  7 . . B B 6 . . B B /
  9 . . . 19 . . . B /
  35 . . . . B 12 . . /
  13 . . 12 . . 24 . . /
  B 5 . . B B 9 . . B /
  13 . . . 11 . . 3 . . /
  9 . . B 29 . . . . /
  B 23 . . . . 12 . . /
  B B 16 . . B B 4 . . //

  ;; vertical data:
  17 . . . . 6 . . B B /
  42 . . . . . . . B /
  B 13 . . 3 . . 12 . . /
  B B 13 . . B B 15 . . /
  B 20 . . . 17 . . . B /
  8 . . B B 8 . . B B /
  5 . . 11 . . 8 . . B /
  B 41 . . . . . . . /
  B B 13 . . 19 . . . . //
)
```

Notice that the spaces between each entry are mandatory (writing “BB” instead of “B B” will produce an error message).

Each line must have $n+1$ symbols, each of which can only be:

- a dot, representing a white cell,
- an integer between 3 and 45, representing a sum constraint (horizontal if it's in the horizontal data part, vertical if it's in the vertical data part),
- symbol “B” representing a black cell with no horizontal (respectively vertical) sum constraint if it's in the horizontal (resp. vertical) data part,
- a slash, denoting the end of a line (it must appear at the end of the line and it may only appear there),
- a double slash, denoting the end of the horizontal and vertical parts (it must appear at these places in the sequence and it may only appear there).

The horizontal and vertical parts are the same as in function “solve”. The white cells part contains the already solved cells (none in the present case). The above calls to “solve” and to “solve-partly-solved-puzzle” for the same puzzle are equivalent. Try them to check that they give exactly the same resolution path. Of course, it would be particularly absurd in practice to use “solve-partly-solved-puzzle” in case no white cell is solved.

Notice that the white cells data part has $n-1$ lines of $n-1$ symbols each; it totally discards the first (black) row and column. Each line corresponds to a row in the grid (except the first black one) and its content corresponds to the $n-1$ cells of this row in the puzzle (excluding the first black cell). Each symbol may only be a dot or a non-zero digit. Non-zero digits may only appear at a place corresponding to a white cell.

If you want to try a real partly solved puzzle, you can change the white part in the above puzzle, by adding a single given, into the following. You will notice that the result is now in W5 instead of W6:

```
;;; white cells data
. . . . .
. . . . .
. . . . .
. . . . .
. . . . .
. . . . .
. 8 . . . . .
. . . . .
. . . . .
```

9.2.1 An example from [PBCS2]

In order to end this section with a very good example of whips, g-whips, surface sums, ..., you can play with the puzzle discussed in [PBCS2], by trying different sets of rules (showing that it is in W10 but in gW8, comparing the different resolution times and memory requirements), using surface sums, ... It's a hard puzzle from ATK (Figure 9.2). To make it easier to try it, here is the proper call to function “solve”:

```
(solve 13
;;; horizontal data:
23 . . . . B 33 . . . . B /
32 . . . . . 23 . . . . . /
B B 11 . . . 11 . . B 9 . . /
14 . . 25 . . . . 13 . . B B /
7 . . B B 16 . . . . B B /
6 . . 17 . . . 19 . . . . /
27 . . . . . 19 . . . 12 . . /
B B 19 . . . . . B B 13 . . /
B B 11 . . 12 . . . . 4 . . /
7 . . B 17 . . 21 . . . B B /
22 . . . . . 21 . . . . . /
B 27 . . . . . B 23 . . . . //
```

```

;;; vertical data:
10 . . 13 . . . . B 3 . . B /
16 . . 26 . . . . B 16 . . . /
23 . . . B B 8 . . . 14 . . /
12 . . . . 26 . . . . 3 . . /
B 20 . . . 14 . . . 21 . . . /
B B B 13 . . . 21 . . . . /
33 . . . . 23 . . . B B B /
11 . . . 8 . . . 8 . . . B /
11 . . 15 . . . . 25 . . . . /
15 . . 20 . . . B B 14 . . . /
8 . . . B 24 . . . . 17 . . /
B 8 . . B 11 . . . . 4 . . //
    
```

K	10	16	23	12			33	11	11	15	8	
23					20	33						8
32						23						
	13	11 26				11 13	D		15	9 20		
14			25		C			13 8				
7				26	16 14						24	11
6			17 8				19 23				A	
27		B				19 21				12		
		19						8	25	13		
	3	11 16			12 21			E		4 14		
7			14	17 3		F	21				17	4
22							21					
	27							23				

Figure 9.2. ATK Kakuro puzzle H83722

9.3 Typed-Chains in KakuRules

In chapter 6, we have seen how the generic Typed-Chains can be applied to SudoRules, when we adopt a typing system based on the four kinds of CSP-Variables specific to Sudoku, namely the “natural” rc ones and the additional rn , cn and bn ones, as I introduced them in [HLS] and as they are represented by the four 2D spaces of the Extended Sudoku Board. However, such a typing system would not be very interesting in Kakuro, because the most important interactions between CSP-Variables of types hrc (or vrc) and rc (i.e. interactions between the still possible combinations for a sector and the still possible values in the white cells of this sector) would be discarded in the resulting Typed-Chains. Instead of this, I’ve therefore defined a totally different typing system, where a type corresponds to a fixed (vertical or horizontal) sector.

For each horizontal sector, represented by its controller (black) cell r_{ic_k} and named correspondingly hr_{ic_k} , the following three kinds of CSP-Variables are assigned the hr_{ic_k} type:

- hr_{ic_k} (i.e. the variable representing the still possible combinations for this sector),
- $r_{ic_k'}$ for any white rc -cell $r_{ic_k'}$ in the sector,
- $r_{in_k'}$ for any rn -cell $r_{in_k'}$ in the sector and any mandatory number $n_{k'}$ in this sector.

Of course, there is a corresponding definition for each vertical sector.

The attentive reader will have noticed that each CSP-Variable for a white cell is assigned two types, one corresponding to its horizontal sector and one corresponding to its vertical sector. However, this is not a problem for CSP-Rules because the notion of “type” used in the Typed-Chains is not a function but a predicate.

Remark: few Kakuro puzzles are solvable using only Typed-Chains. But those that are may define an interesting level of easy puzzles: the human player does not have to look for complex interactions between values in different sectors. The only interactions between different sectors will appear when candidates in the white cells are effectively deleted or turned into values. Everything harder happens in a single sector.

As such typed rules for Kakuro were not mentioned in [PBCS], time has come for an example. Once more, I’ll take one from the ATK website, their puzzle M42942 (see Figure 9.3).

The calling function from CSP-Rules is:

(solve 10

```

;;; horizontal data
28 . . . . . 12 . . /
39 . . . . . 9 . . /
B B 17 . . 11 . . . /
31 . . . . . 23 . . . /
16 . . 19 . . . 14 . . /
22 . . . 15 . . . . /
19 . . . . 11 . . B B /
5 . . 32 . . . . . /
9 . . 38 . . . . . //

;;; vertical data
7 . . 39 . . . . . /
16 . . 23 . . . . . /
30 . . . . 13 . . B B /
33 . . . . . 18 . . . /
6 . . 15 . . . 13 . . /
20 . . . 27 . . . . . /
B B 11 . . 27 . . . . /
23 . . . . . 5 . . . /
38 . . . . . 6 . . . //

```

)

ℳ	7	16	30	33	6	20		23	38
28							12		
39							9 11		
	39	17 23			11 15				
31						23 27			
16			19 13				14 27		
22				15 18					
19					11 13			5	6
5			32						
9			38						

Figure 9.3. ATK Kakuro puzzle M42942

This puzzle has a solution in W3 or in TyW5, as shown in the following two resolution paths. Note that, in the first resolution path, where untyped chains are activated, I've activated both typed and untyped chains, in order to show how they easily live together. Also, this allows to have a common path at the start with only types chains (and Subsets), until resolution state RS1:

```
*****
*** KakuRules 2.1.s based on CSP-Rules 2.1.s, config = W+5
*** using CLIPS 6.32-r823
*** Running on MacBookPro Retina Mid-2012 i7 2.7GHz 16GB, 1600MHz DDR3, MacOS 10.15.4
*****
    Uppermost (black) row and leftmost (black) column have index 1
singles ==> r10c10=5, r10c9=3, r9c2=4, r6c3=7, r6c2=9, vr4c3=123467, r7c3=6,
hr7c1=679, r7c2=7, r7c4=9, vr6c4=49, r8c4=4, hr9c1=14, r9c3=1, vr8c9=23, r9c9=2,
vr8c10=15, r9c10=1, hr9c4=125789, ==> r4c9=1, r4c8=2, vr3c8=29, r5c8=9
323 candidates, 768 csp-links and 1672 links. Density = 3.22%
naked-pairs-in-verti-sector: c10{r4 r7}{n3 n5} ==> r6c10#5, r3c10#5, r3c10#3, r2c10#5,
r2c10#3
biv-chain-vr1c6[2]: vr1c6{n15 n24} - r3c6{n5 n4} ==> r2c6#4
biv-chain-vr1c6[2]: vr1c6{n24 n15} - r3c6{n4 n5} ==> r2c6#5
biv-chain-vr1c9[2]: vr1c9{n123458 n123467} - r5c9{n8 n6} ==> r3c9#6, r6c9#6
singles ==> vr1c9=123458, r5c9=8, r6c9=5, r5c10=6, r3c10=7, hr3c8=27, r3c9=2,
hr6c8=59, r6c10=9, r2c10=8, hr2c8=48, r2c9=4, r7c9=3, r7c10=5, r7c8=4, r4c10=3,
r4c7=5, vr6c8=4689
z-chain-hr8c1[2]: r8c3{n3 n2} - hr8c1{n3457 .} ==> r8c5#3
whip-hr8c1[2]: r8c3{n2 n3} - hr8c1{n2458 .} ==> r8c5#2
naked-single ==> vr7c5=567
whip-vr4c6[2]: r7c6{n2 n1} - vr4c6{n249 .} ==> r6c6#2, r5c6#2
whip-hr8c6[2]: hr8c6{n56 n29} - r8c8{n6 .} ==> r8c7#9
whip-hr8c6[2]: hr8c6{n56 n38} - r8c8{n6 .} ==> r8c7#8
whip-hr8c6[2]: hr8c6{n38 n56} - r8c8{n8 .} ==> r8c7#6
z-chain-vr5c7[2]: r8c7{n5 n2} - r7c7{n2 .} ==> vr5c7#24678
whip-hr8c1[2]: hr8c1{n3457 n2467} - r8c2{n5 .} ==> r8c5#6
naked-pairs-in-verti-sector: c5{r8 r9}{n5 n7} ==> r10c5#7
singles ==> r10c5=6, vr8c6=58, r10c6=8, r10c8=9, r10c7=7, r9c8=8, r8c8=6, r9c6=5,
r9c7=9, r9c5=7, r8c5=5, hr8c6=56, r8c7=5, vr5c7=24579, r7c7=2, r7c6=1, r6c7=4, r8c2=8,
hr8c1=2458, r8c3=2
biv-chain-hr5c1[2]: r5c3{n4 n3} - hr5c1{n45679 n35689} ==> r5c5#4
biv-chain-hr5c1[2]: hr5c1{n45679 n35689} - r5c3{n4 n3} ==> r5c5#3
whip-hr6c4[2]: hr6c4{n469 n478} - r6c6{n6 .} ==> r6c5#8
whip-vr4c6[2]: vr4c6{n168 n159} - r6c6{n6 .} ==> r5c6#9
x-wing-in-horiz-sectors: n9{r4 r5}{c4 c5} ==> r6c5#9, r3c5#9, r3c4#9, r2c5#9, r2c4#9
biv-chain-hr6c4[2]: hr6c4{n478 n469} - r6c5{n7 n6} ==> r6c6#6
biv-chain-vr4c6[2]: vr4c6{n159 n168} - r6c6{n9 n8} ==> r5c6#8
naked-pairs-in-horiz-sector: r5{c2 c6}{n5 n6} ==> r5c5#6, r5c5#5, r5c4#6
whip-vr1c2[2]: vr1c2{n34 n16} - r3c2{n4 .} ==> r2c2#6
whip-vr1c2[2]: vr1c2{n34 n25} - r3c2{n4 .} ==> r2c2#5
whip-vr1c2[2]: vr1c2{n25 n34} - r3c2{n5 .} ==> r2c2#4
;;; resolution state RS1
```

```
;;; resolution state RS1  
biv-chain[3]: vr1c7{n569 n578} - r3n9{c7 c3} - r2c3{n9 n7} ==> r2c7≠7 ; <<<<<<<<<<<  
whip-vr1c7[2]: vr1c7{n569 n578} - r2c7{n9 .} ==> r3c7≠8  
x-wing-in-horiz-sectors: n8{r3 r4}{c4 c5} ==> r5c5≠8, r5c4≠8, r2c5≠8, r2c4≠8  
singles ==> hr5c1=45679, r5c3=4, r10c3=3, hr10c1=36, r10c2=6, r5c2=5, r5c6=6  
naked-single ==> vr4c6=168, r6c6=8, hr6c4=478, r6c5=7, r5c5=9, r5c4=7, r2c4=6, r3c4=8,  
r4c4=9, r4c5=8  
hidden-pairs-in-horiz-sector: r3{n7 n9}{c3 c7} ==> r3c7≠6  
singles to the end  
  
-----  
-176428-48  
-698547-27  
---98-5213  
-54796-986  
-97-784-59  
-769-12435  
-8245-56--  
-41-759821  
-63-687935
```

```
;; resolution state RS1
z-chain-hr2c1[3]: r2c3{n7 n9} - r2c7{n9 n8} - r2c4{n8 .} ==> hr2c1#123589
z-chain-hr2c1[3]: r2c3{n7 n9} - r2c7{n9 n6} - r2c4{n6 .} ==> hr2c1#134569
whip-hr2c1[3]: r2c3{n9 n7} - r2c4{n7 n8} - r2c7{n8 .} ==> hr2c1#134578
whip-hr2c1[3]: r2c4{n8 n7} - r2c3{n7 n9} - r2c7{n9 .} ==> hr2c1#124579
ctr-to-horiz-sector ==> r2c5#5
whip-hr2c1[4]: r2c3{n7 n9} - hr2c1{n124678 n123679} - r2c4{n8 n6} - r2c7{n6 .} ==>
r2c5#7
whip-hr2c1[4]: hr2c1{n123679 n124678} - r2c3{n9 n7} - r2c4{n7 n6} - r2c7{n6 .} ==>
r2c5#8
whip-vr1c5[2]: vr1c5{n36789 n45789} - r2c5{n6 .} ==> r3c5#4
whip-hr2c1[5]: hr2c1{n124678 n123679} - r2c5{n4 n6} - r2c4{n6 n7} - r2c3{n7 n9} -
r2c7{n9 .} ==> r2c2#3
singles to the end
```

Which of the two resolution paths is simpler for a human solver is a matter of taste. As should be expected, using only less powerful chain rules (Typed-Chains) requires some form of compensation and this is provided in the present case by using longer chains.

10. SlitherRules

SlitherRules is the pattern-based solver of Slitherlink puzzles based on CSP-Rules. Slitherlink is played on a rectangular grid and SlitherRules does allow the numbers of rows and columns to be different (and function “solve” will therefore require two arguments for size: ?nb-rows and ?nb-columns). However, most Slitherlink puzzles found on the web are square.

There are no Subsets in Slitherlink.

Computationally, the main characteristic of Slitherlink is its large fan-out or branching factor: most candidates are linked to many ones. This explains the reputation of Slitherlink as a hard kind of puzzle for automated solvers. For the human player, he has to do many obvious eliminations between each interesting step. (It is worth trying to solve manually some of these puzzles if you want to really understand what I mean here). When such steps are done by an automated solver and each step is printed out, the resolution path seems extremely boring.

As a result of the large fan-out, each resolution state may lead to many different ones via Elementary Constraint Propagation rules. For the same reason, each chain of length $n-1$ can give rise to many chains of length n and this can lead very fast to memory overload. Therefore, by default, chains are limited to length 5 in the Slitherlink configuration file. For large grids, this may still be too large. For small grids, if you have enough memory, you can try to extend this to 7 if 5 is not enough to solve the puzzle. Be warned, SlitherRules is the slowest part of CSP-Rules.

Slitherlink does have whips[1], indeed lots of them, as you will see in the resolution paths. Therefore, it has g-labels and it could have g-whips. However, due to the already very large branching factor, I haven't coded g-labels; as a result, g-whips or any g-something cannot be activated. You may want to try g2-whips, a special case of g-whips.

Of all the CSP-Rules applications described in this Manual, SlitherRules has the largest number of application-specific resolution rules, the main purpose being to shorten the resolution paths. A complete and detailed description of each of them is available in [PBCS2]; it is largely inspired by what I found in [slinker www] and in the Wikipedia page (which seems to be a copy of [slinker www], without the proper credit); what I introduced is only some rational organisation and a systematic naming convention for the rules.

Using SlitherRules as an assistant theorem prover, I also showed that most (but not all) of these application-specific rules are equivalent to sequences of Singles and whips[1] (with a few of them needing slightly longer whips).

One change to be noticed with respect to version 1.0 used in [PBCS2] is the higher saliences given to Quasi-Loops and Colour rules. The reason is, these rules are very general and very easy to use. They have been raised to just before the whips[1]. As a result, the resolution paths may be different from those given in [PBCS2].

Other changes are the introduction of isolated-HV-chains and extended Quasi-Loops (see section 10.5) and of pre-computed backgrounds for square grids (making initialisation times much shorter).

10.1 The configuration file

After the generic settings that are the same in all the CSP-Rules applications, you can choose application-specific ones:

H, V, I, P and B singles are elementary rules for Singles applied to the H, V, I, P and B CSP-Variables. Contrary to “normal” Single rules, these are not printed by default, but they can be activated individually. If you set them to TRUE here, long sequences of them will appear:

```
;;; As H/V-singles, I-singles, P-singles and B-singles are trivial rules that
;;; appear very often, their output is not printed by default.
;;; Printing can be enabled here:
(bind ?*print-HV-single* TRUE)
(bind ?*print-I-single* TRUE)
(bind ?*print-P-single* TRUE)
(bind ?*print-B-single* TRUE)
```

You can also decide how the final output will appear:

```
;;; By default, the final output is not printed in any form.
;;; But you can independently choose to print it in two forms: HV borders and in/out
cells.
;;; (However, IO will be effectively printed only if rules for Colours are activated.)
(bind ?*print-IO-solution* TRUE)
(bind ?*print-HV-solution* TRUE)
```

Global variable `?*print-IO-solution*` controls whether the solution will be printed in the form of inner and outer cells (if `?*Colours*` has been set to TRUE), as in the following, where an “x” stands for an inner cell and an “o” for an outer cell.

```
0X0X0
XXXXX
XX00X
XXX00
X0XX0
```

Global variable `?*print-HV-solution*` controls whether the solution will be printed in the (standard) form of borders around the cells, as in the following standard form:

```

.  .---.  .---.  .
  | 3 |  | 3 | 2 |
.---.  .---.  .---.
| 2 | 0 |  | 2 |
.  .  .---.---.  .
|  |  | 3 |  |  |
.  .  .---.  .---.
| 1 |  | 2 | 1 |
.  .---.  .---.  .
| 3 | 3 |  | 3 |
.---.  .---.---.  .

```

When a complete solution is not found, the final partial solution can be printed (default option) or not, depending on the same global variables as for the full solution.

The next choices are about application-specific rules. These rules are separated into four groups: quasi-loops and extended-loops, colours, rules that are equivalent to series of Singles and whips[1], and rules that are not (which is in which group is made clear in [PBCS2]). The four groups are disabled by default in CSP-Rules and they can be separately activated; I did not consider useful to add a possibility for individually activating each rule.

```

;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;
;;; My standard config and its usual variants
;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;
;;; Without Loops, most puzzles cannot be solved;
;;; they are therefore always activated in my usual configuration.
;;; By default, ?*loops-max-length* is set to 300;
;;; it may have to be increased for very large puzzles (size > 15); change it here:
; (bind ?*loops-max-length* 300)
; (bind ?*Loops* TRUE)
;;; extended-Loops are useful in some circumstances
;;; their max-length is the same as Loops.
; (bind ?*xtd-Loops* TRUE)

;;; Propagation of colours (or in/out positions) is also a very general and useful
method.
; (bind ?*Colours* TRUE)

;;; By default, all the application-specific rules are FALSE
;;; They are enabled in my standard configuration:
; (bind ?*w1-equiv-patterns* TRUE)
; (bind ?*non-w1-equiv-patterns* TRUE)

;;; generic:

```

```

(bind ?*Bivalue-Chains* TRUE)
(bind ?*bivalue-chains-max-length* 5)
(bind ?*Whips* TRUE)
(bind ?*whips-max-length* 5)

;;; Some additional rules I use frequently:
; (bind ?*z-Chains* TRUE)
; (bind ?*z-chains-max-length* 5)
; (bind ?*t-Whips* TRUE)
; (bind ?*t-whips-max-length* 5)

;;; Some rules I use occasionally:
; (bind ?*G2-Whips* = TRUE)
; (bind ?*g2whips-max-length* 5)

;;; Some rules I almost never use:
; (bind ?*Braids* TRUE)
; (bind ?*braids-max-length* 5)

```

10.2 The user functions

Slitherlink has only two user functions, “*solve*” and “*solve-tatham*”, plus an auxiliary function for changing formats.

Example of using “*solve*” for a 10×10 puzzle:

```

(solve 10 10
  2 . . 3 . 3 2 . . .
  . 3 . 3 . . . 3 2 2
  . . . 2 2 . 1 2 2 .
  . 1 . 2 . . . . . 3
  . . 2 2 . . . 2 . .
  3 3 . . 3 1 3 . 2 .
  2 . . . . . . . . 3
  . 3 1 . . 2 . . 1 .
  2 1 2 2 1 1 2 . . 3
  . . . 1 . . . . 1 .
)

```

The syntax for “*solve*” is:

```
(solve ?nb-rows ?nb-columns $?givens)
```

where ?nb-rows (respectively ?nb-columns) is the number of rows (resp. columns) and \$?givens is the sequence of givens in the cells (as usual, a dot denotes no given). \$?nb-givens must have exactly nb-rows × nb-columns symbols. As usual, the givens may (but don’t have to) be arranged in an easy to read format.

“*solve-tatham*” is a syntactic variant of “*solve*”, based on the tatham format. The syntax is:

```
(solve-tatham ?nb-rows ?nb-columns ?tatham-str)
```

where ?nb-rows (respectively ?nb-columns) are as before and ?tatham-str is the string representation of the puzzle in the Tatham format for Slitherlink. For the above puzzle, it would be

```
2b3a32d3a3c322c22a122b1a2e3b22c2b33b313a2a2h3a31b2b1a2122112b3c1d1a
```

In the Tatham format, each letter stands for the corresponding number of dots. Take the Tatham string, replace each letter by the right number of dots, insert a space between any two symbols (re-format it to make it look nicer) and you get the sequence used in the “solve” function. We have that:

```
(solve-tatham 10 10
```

```
  "2b3a32d3a3c322c22a122b1a2e3b22c2b33b313a2a2h3a31b2b1a2122112b3c1d1a ")
```

is equivalent to:

```
(solve 10 10
```

```
  (tatham-to-csp-rules-list
```

```
    "2b3a32d3a3c322c22a122b1a2e3b22c2b33b313a2a2h3a31b2b1a2122112b3c1d1a"))
```

If you want to use the Tatham generator of Slitherlink puzzles, you should be aware that most of its “recursive” puzzles will require the use of T&E or DFS. The most entertaining Slitherlink puzzles I’ve found on the web are at <https://www.puzzle-loop.com>; but you have to copy them manually.

10.3 A lot of application-specific rules

Of all the applications of CSP-Rules, SlitherRules is the one for which I’ve manually coded the largest number of application-specific rules. Part of this work was somehow frustrating, as most of these rules can be replaced by whips[1] and they did not increase the resolution power of SlitherRules. But it made the output look much nicer, as it involved rules familiar to the players and it shortened the resolution paths by directly asserting several H or V lines. It also allowed to single out a few rules that did add some resolution power.

Slitherlink illustrates on a much larger scale than Futoshiki the idea of a *macro-rule*, i.e. a resolution rule that can be reduced in some resolution theory T to a sequence of rules in T. Although macro-rules don’t extend the resolution power of T, they can lead to shorter (and therefore more readable) resolution paths.

With this large number of application-specific rules, there appeared a strong need to test them individually. Slitherlink has therefore a “TEST” directory that reproduces the structure of the “SPECIFIC” directory: for each file for an application-specific rule, there is a file for testing it, with the same name. Load only the W1-equiv and non-W1-equiv rules (no Loops, Colours or Whips), set Final-Fill and Print-HV-solution to TRUE, choose the rule you want to test, go to the corresponding file in “TEST”, launch the examples there and check the result.

10.4 An experience in assisted theorem proving

I've shown in [PBCS2] that most of the classical resolution rules specific to Slitherlink can be considered as macro-rules in W_1 (or in W_k , for some $k > 1$, in a few cases), i.e. they can be reduced to sequences of Singles and whips[1] (or longer whips) – highlighting as a result those that are irreducibly Slitherlink-specific. For this purpose, I've used SlitherRules as an assistant theorem prover. This version of CSP-Rules allows you to easily reproduce all these proofs: activate only whips (and none of the Loops, Colours, W_1 -Equiv or Non- W_1 -Equiv patterns), open the file in “SlitherRules-V2.1/SPECIFIC/TESTS” corresponding to the rule you want to prove and paste into CSP-Rules one of the “(solve)” commands present in this file. You should obtain all the eliminations/assertions of H and V variables done by the rule (plus some for the P and B CSP-Variables).

The general idea of these assisted proofs was to create a pattern representing the situation one wants to deal with, on a sufficiently large grid to ensure that no unwanted corner or border condition creeps in, and then run SlitherRules on it. The result is a resolution path, each step of which is a short whip, with precise rows and columns, but this can easily be turned manually into a general proof: change the values of rows and columns in the given pattern into variable names, and then change accordingly all the row and columns in the resolution path into variables relative to the preceding ones. For instance, if the original pattern involves row 5 and column 6 and a row 6 and column 4 appear somewhere in the resolution path, first change “row 5” into variable ?row, “column 6” into variable ?col and then change “row 6” into (+ ?row 1) and column 4 into (- ?col 2). This is exactly what I've done for generating the proofs that appear in [PBCS2] (where I've also pruned the resolution path of its unnecessary steps). The final step involves checking that the tentative proof thus obtained is valid.

As the essential parts of these proofs have been published in [PBCS2], I leave it to the reader as an easy exercise to reproduce them for himself.

10.5 Isolated-HV-chains and Extended-Loops

In section 17.10.2 of [PBCS2], I mentioned the possibility of extending the definition of Quasi-Loops. I now have added this extension to SlitherRules-V2.1. Here are the relevant definitions:

- two undecided H or V lines with a common Point are said to have an *isolated junction* (at this Point) if the other two lines from this Point are decided and FALSE; as a result, the two given lines can only be TRUE or FALSE at the same time; they behave as a single line.
- a sequence of n H/V lines is called an *isolated-HV-chain*[n] if all these H/V lines are undecided and any two contiguous H/V lines in the sequence have an isolated junction; as an obvious result, all the lines of this isolated-HV-chain[n] can only be TRUE or FALSE at the same time;

- an *Extended-Loop* $[n]$ is defined as a *Quasi-Loop* $[p]$ plus an isolated-HV-chain $[q]$, such that $p + q = n$ and the two chains meet at their two ends, making a closed loop; as a result, depending on the total number of lines touching the given cells, the whole isolated-HV-chain (i.e. all of its HV-lines) can be declared TRUE or FALSE; this is the *Extended-Loop* resolution rule.

Let's take the following example (puzzle I.4 from Mebane – see the Slitherlink folder in [CSP-RULES-EXAMPLES] for details of the resolution paths):

```
. 3 . . 2 . . 2 . .
3 0 . 2 0 2 . 1 2 .
. 3 . . 3 . . 0 . .
. . . . . . . . .
. . 3 . . . 1 3 0 .
. 3 1 0 . . . 2 . .
. . . . . . . . .
. . 1 . . 0 . . 2 .
. 3 3 . 1 2 2 . 0 2
. . 1 . . 2 . . 3 .
```

If we apply all the rules in *SlitherRules*, except the *Extended-Loops*, we reach the following partial solution:

```
.  .---.  .  .---.---.---.---.---.
| 3 |      | 2      2      |
.---.  .---.---.  .  .---.---.  .
| 3  0      2  0  2 |  1  2 |  |
.---.  .---.---.  .---.  .  .---.  .
| 3 |      | 3 |      0  |  |
.  .---.  .  .---.  .  .---.  .
|      |      |      |
.---.---.---.  .  .  .---.  .  .
|      3 |      1 | 3  0  |
.  .---.---.  .  .  .---.  .....
|  3  1  0      2 |  :  :
.  .---.  .  .  .  .---.---.
|      |      :  :
:  :  1  :  0      | 2  |
.---.---.---.  .  .---.  .  .
|  3 | 3 |  1  2 | 2      0  2 |
.---.---.---.---.  .---.  .---.
:  :  1  :  2  |  | 3 |
.---.---.---.---.  .---.  .
```

You can see three (and only three) isolated-HV-chains (you could argue there are indeed six chains, as they can be reversed):


- isolated-HV-chains [2]: Hr6c10-Vr6c10
- isolated-HV-chains [2]: Hr11c2-Hr11c3

- isolated-HV-chains [4]: Hr8c3-Hr8c4-Vr8c5-Hr9c4.

If we activate xtd-Loops, the part of the resolution rule up to the previous partial solution is unchanged, but then an Extended-Loop appears and it's enough to allow a full solution using a few more standard Loops (see the “Slitherlink/Mebane” folder in [CSP-RULES-EXAMPLES] for details). The partial-loop part has length 42 and the isolated-HV-chain part has length 2 (hence the total length, 44):

XTD-LOOP [44]: Hr7c9-Vr6c9-Hr6c8-Vr5c8-Hr5c8-Vr4c9-Hr4c9-Vr3c10-Vr2c10-Hr2c9-Hr2c8-Hr2c7-Vr2c7-Hr3c6-Vr3c6-Hr4c5-Vr3c5-Hr3c4-Hr3c3-Vr3c3-Hr4c2-Vr3c2-Hr3c1-Vr2c1-Hr2c1-Vr1c2-Hr1c2-Vr1c3-Hr2c3-Hr2c4-Vr1c5-Hr1c5-Hr1c6-Hr1c7-Hr1c8-Hr1c9-Hr1c10-Vr1c11-Vr2c11-Vr3c11-Vr4c11-Vr5c11- ==> Hr6c10-Vr6c10 = 0

Notice the convention for writing the Extended-Loop: on the left is the partial-loop made of decided TRUE H/V-lines; on the right is the isolated-HV-chain made of undecided H/V-lines; they all become decided by the conclusion of the rule (i.e. they are all set to FALSE in the present case).

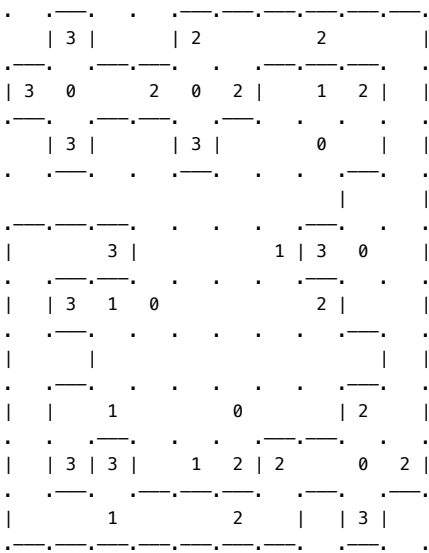

11. HidatoRules (Numbrix and Hidato)

HidatoRules is the pattern-based solver of Hidato and Numbrix puzzles based on CSP-Rules. Both games consist of finding a path between cells in a square grid, using only adjacent white cells for each elementary step. The only difference between Numbrix and Hidato lies in the meaning of “adjacent”: in Numbrix two cells are adjacent if and only if they touch each other by one side in the same row or column; in Hidato, they may also touch each other diagonally, i.e. by a corner.

11.1 The configuration file

Numbrix® and Hidato® have Subsets, but their implementation is greedy for memory and I often use only Subsets[2].

They also have whips[1] and therefore g-labels, g-whips,... But these are not coded in this version of HidatoRules, for the same reason they are not coded in SlitherRules: both applications have a large branching factor and g-whips would soon lead to memory overflow. Even g2-whips are not safe from this problem; you can try them, if the puzzle has small size (see the last but one example in this chapter).

11.2 The user functions

HidatoRules has a single user function, “*solve*”. The syntax is:
(solve

 ?game ?model ?grid-size ?nb-white-cells \$?data-sequence)

where:

- ?game is either Numbrix or Hidato,
- ?model is either topological or geometric (see [PBCS] for the difference),
- ?grid-size is the number of rows (or columns),
- ?nb-white-cells is the number of white cells,
- \$?data-sequence is a sequence of ?grid-size × ?grid-size symbols; each symbol is either a dot or a “B” (for black cell) or a number between 1 and ?nb-white-cells (both included); no number can be repeated in the sequence. If there are B’s, their number must be equal to ?grid-size × ?grid-size - ?nb-white-cells.

Numbrix example, from the <https://parade.com/member/marilynvossavant/> website:

```
(solve Numbrix topological 9 81
```

```

69 . 67 . 65 . 61 . 57
. . . . . . . .
77 . . . . . . . 55
. . . . . . . .
19 . . . . . . . 45
. . . . . . . .
3 . . . . . . . 39
. . . . . . . .
5 . 7 . 11 . 31 . 33
)

```

Hidato example, from the <https://www.smithsonianmag.com/games/> website:

```

(solve Hidato topological 10 78
B B . . 65 . . 62 B B
B . 19 . . 66 . . . B
. 21 . B . . B . 58 59
. . 12 B . . B 69 . 56
. 10 . 74 . . . 1 . .
. 26 . 5 4 76 . . 54 52
28 . B . . . 78 B . .
. . . B B B B 48 47 .
B . . . . 39 . 43 . B
B B 33 35 37 40 42 . B B
)

```

Even small puzzles can be very hard, e.g. example III.4 from the https://mellowmelon.files.wordpress.com/2012/05/pack03hidato_v3.pdf website (a puzzle in W8 or g2W7).

Generally speaking, the geometric model is more powerful, but it may lead faster to memory overflow for hard puzzles (because it has more links and therefore a larger fan-out). As an example of the difference, the following (hard) puzzle by Evert can only be solved with the geometric model, in W14. It can also illustrate the difference in computation time when you add special case patterns (e.g. z-chains, t-whips...) to only whips.

```

(solve Hidato geometric 9 81
. . . . 77 . 28 . .
. 13 . . . . . 21 .
. . . 15 16 . 31 . .
. 6 . . 73 . 19 . .
. 58 . . . . 36 . 33
60 . 62 . 71 . . . .
. . . . 64 . . . 43
. 54 . . . 68 . . .
. . . . . . . . .
)

```

12. MapRules

MapRules is the pattern-based solver of map colouring problems based on CSP-Rules. It has neither Subsets nor g-labels, which drastically restricts the possibilities for complex patterns. As the least developed application of CSP-Rules, it is intended only to provide one more illustration of the generic rules. A full solver of colouring problems should include pattern representation of graph concepts similar to those necessary for proving the four colour theorem.

12.1 The configuration file

There isn't much to say about the MapRules configuration file. My standard config is as follows.

```
;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;
;;; my standard config
;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;

(bind ?*Bivalue-Chains* TRUE)
(bind ?*Whips* TRUE)
; (bind ?*Braids* TRUE)

; (bind ?*bivalue-chains-max-length* 20)
; (bind ?*whips-max-length* 36)
; (bind ?*braids-max-length* 36)
```

12.2 The user functions


MapRules has a single user function: “*solve*” with syntax:

```
(solve ?nb-colours ?nb-countries ?givens $?list)
```

- ?nb-colours is the number of allowed colours;
- ?nb-countries is the number of countries to be coloured;
- ?givens is a string of given colours for some of the countries; its length must be equal to ?nb-countries; a country with no pre-defined colour appears as a dot;
- \$?list is a sequence of adjacency data; it is composed of at most ?nb-count - 1 sub-sequences, separated by colons; each sub-sequence is a sequence of country numbers, meaning that the first country in the sub-sequence has a common border with each of the other countries in the same sub-sequence; if $c_1 < c_2$ and a common

border between c1 and c2 has already been declared in the sub-sequence starting with c1, it does not have to be declared again in the sub-sequence starting with c2 (which also implies that there may be no sequence starting with c2).

Example (the same as in [PBCS]), an “unreasonable” one from the tatham website: <https://www.chiark.greenend.org.uk/~sgtatham/puzzles/js/map.html>, apparently the only place where this kind of colouring puzzle can be found; this example requires a whip[7]:

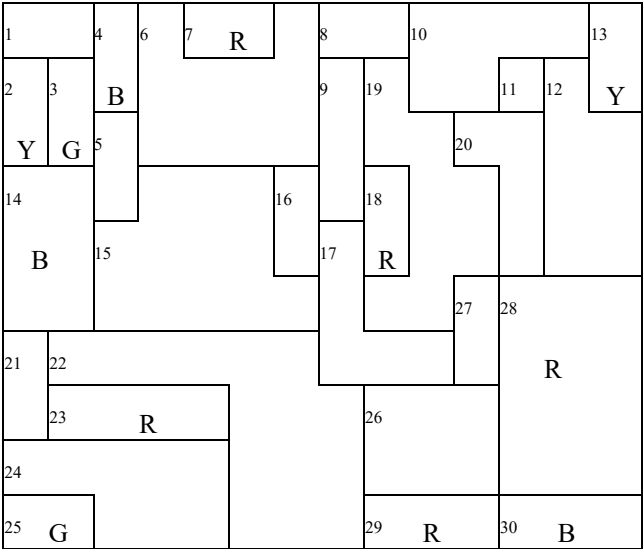

```
(solve 4 30
".YGB..R.....YB...R....R.G..RRB"
1 2 3 4 :
2 3 14 :
3 4 5 14 :
4 5 6 :
5 6 14 15 :
6 7 8 9 15 16 :
8 9 10 19 :
9 16 17 18 19 :
10 11 12 13 19 20 :
11 12 20 :
12 13 20 28 :
14 15 21 22 :
15 16 17 22 :
16 17 :
17 18 19 22 26 27 :
```

```

18 19 :
19 20 27 :
20 28 :
21 22 23 24 :
22 23 24 26 29 :
23 24 25 :
24 25 :
26 27 28 29 : 2
7 28 :
28 30 :
29 30
)

```

There are 30 countries (named 1, ...30) and only 4 colours are allowed. The given colours appear in large capital letters in the Figure and they correspond to the sequence appearing as the third argument in the function call.

As for the rest of the arguments (considered as a single list by CLIPS), the first sub-sequence of adjacency data “1 2 3 4” means that country 1 has a common border with each of countries 2, 3 and 4 and none other. You can notice that there is no sub-sequence starting from country 7; the reason is, it has a common border with country 6 only and this has already been declared in the sequence for country 6. Readability aside, all this could be written in a single line (but be careful to keep the “:” separators, whichever way you write these data).

Colours in the data and the solution are displayed as B, Y, R, G, because these are the default names for the first four colours (the full list is B, Y, R, G, O, V, I, 8, 9, 10, ..., if you need more than four colours).

I wanted to write a “solve-tatham” function for MapRules, especially as this is the only website I know of that produces those puzzles. But I’ve been unable to understand the Tatham format and I’ve received no answer to an email I sent them. If anyone has information about this, I would be glad to add such a function, which would allow testing many more examples than those one can only copy manually.

Part Three

ADVANCED TOPICS in SUDORULES

13. Requirements on the number of steps

The default resolution strategy in CSP-Rules is the simplest-first strategy introduced in my first works on the topic of pattern-based CSP solving (see [HLS], [CRT] or [PBCS]). However, I've always insisted on it: the resolution rules themselves are totally independent from this strategy. This chapter will largely illustrate this idea.

This chapter is mainly about alternative ways of using the rules, in particular about dealing with additional requirements on the number of steps in the resolution paths.

As a general background, it should be recalled that the number of steps of a proof in a logic theory T is irrelevant to what can be proven in T and there is thus no pure logic way of defining a rating based on the number of steps, let alone a rating of a full resolution path (combining the number of steps with the complexity of each step). And, as of now, no consistent proposal has ever been made for defining any other basis for such a rating. However, this doesn't exclude any possibility of dealing with some requirements on the number of steps.

Many of the advanced functions described in this chapter are written in (almost) generic form, but they are currently tested and available only for Sudoku.

It will be useful to keep in mind the remarks made in section 6.8 about focused eliminations. These remarks will not be repeated later, but they will fully apply to the ways we shall look for 1-step, 2-step or fewer-steps solutions – which are fundamentally based on focused eliminations:

- *all the generic non-exotic chain rules can be used for focused eliminations, except t -whips:*
- *for technical reasons (because they use the same partial-whips[1] as whips), **t -whips (typed or not) MAY NOT be loaded for focusing to work.** The “try-to-eliminate-candidates” function will merely halt if t -whips are loaded;*
- *for chain rules that have a blocked version (e.g. Subsets, bivalued-chains, z -chains...), not only the candidates focused on are eliminated, but also the other targets of the same chain. This is a deliberate choice. If you want to eliminate only the candidates on focus, select (in the configuration file) the non-blocked version of these rules;*
- *in forcing chains, focusing is done on the starting candidates, not on the potentially asserted or eliminated candidates; as a result, it is not recommended to explicitly activate other rules (apart from those they automatically imply) when any forcing chains are active – or conversely.*

Finally: don't try to use the material in this chapter before you properly master the workings of the configuration file and you can confidently use the elementary functions.

13.1 Considering some rules as “no-step”

When one is interested in the number of steps of a resolution path, this will generally be associated with the idea that some steps (such as Singles or Whips[1]) are trivial and should not be counted as real steps.

13.1.1 The general framework

Let us make this idea slightly more formal. Consider two resolution theories T and T_0 , with $T_0 \subset T$ (as will appear in the 1-step, 2-step and fewer-steps cases below). T is the set of rules we want to use to solve a puzzle P (and it should be specified in the configuration file); T_0 is the (small) set of rules we want to consider as no-step.

T_0 is supposed to have the confluence property. This condition ensures that the final result of applying rules in T_0 , starting from any resolution state, will not depend on the order of their application (and will therefore be a unique and well-defined resolution state). Typical examples for T_0 are:

- $W_1 = \text{BRT} + \text{whips}[1] = \text{Singles} + \text{ECP}$ (eliminations by direct contradictions between a decided value and a candidate) + whips[1];
- $S_2 = W_1 + \text{Subsets}[2]$ (i.e. + Naked, Hidden and Supper-Hidden Pairs);
- $S_3 = S_2 + \text{Subsets}[3]$ (i.e. + Naked, Hidden and Supper-Hidden Triplets);
- $S = S_4 = S_3 + \text{Subsets}[4]$ (i.e. + Naked, Hidden and Supper-Hidden Quads).

Notice that I consider that only BRT or W_1 can rationally be considered as no-step, especially as Subsets of any size tend to eliminate lots of candidates. But you can experiment with the other allowed choices. Note that BRT is no longer allowed as a possible value for T_0 because this is incompatible with the idea that whips[1] are too elementary to be counted as separate steps.

13.1.2 Example

Typical examples for T will be defined by a set of rule types and their maximal length. To make it concrete, in CSP-Rules this means the following choices in the configuration file (the semi-colons mean rules that I don't usually consider, but that could be; notice that t-whips are not activated):

```
(defglobal ?*all-chains-max-length* = xx)
(bind ?*Subsets* TRUE)
(bind ?*Bivalue-Chains* TRUE)
(bind ?*z-Chains* TRUE)
```

```

(bind ?*Whips* TRUE)
(bind ?*Typed-Bivalue-Chains* TRUE)
(bind ?*Typed-z-Chains* TRUE)
(bind ?*Typed-Whips* TRUE)
; (bind ?*G-Whips* TRUE)
; (bind ?*Oddagons* TRUE)
; (bind ?*Braids* TRUE)
; (bind ?*Typed-Braids* TRUE)
; (bind ?*G-Braids* TRUE)

```

The maximum allowed value for all the chains (**all-chains-max-length**), here written as *xx* must be selected carefully. If a puzzle has a solution using only bivalue-chains[3], it would be totally absurd to look for a resolution path with fewer steps but involving any chains of length much larger than 3. (Unfortunately for naive observers of some Sudoku forums, such nonsense is often implicitly proposed as a normal way of solving a puzzle.) It is true that a human solver doesn't care too much about the length of the chains he uses, but there are limits.

As a rule of thumb, **all-chains-max-length** should be taken as close as possible to the maximum length reached in the simplest-first solution with the same set of rules (i.e. equal to the T rating in the best case and not more than this rating +1 or +2 in any case). Beware also that, if you choose a too high value for **all-chains-max-length**, computation times may become very long. In practice, these remarks mean that, in every case this framework is applied to a puzzle, one should first compute its T-rating and use it as a guide to select the maximal length of chains allowed in any kind of solutions dealing with the number of steps.

13.2 Finding backdoors, anti-backdoors or anti-backdoor-pairs

If T_0 is a resolution theory with the confluence property, one can easily define the notions of a *T_0 -backdoor* and a *T_0 -anti-backdoor*: a candidate *Z* is a ***T_0 -backdoor*** (respectively a ***T_0 -anti-backdoor***) if adding *Z* as a decided value (respectively eliminating *Z*) allows to obtain a solution in T_0 .

Backdoors are mainly related to techniques of guessing, but anti-backdoors can be used in much more interesting ways. The reason for T_0 being required to have the confluence property in these definitions is the usual one (as developed in [PBCS]): it is a necessary condition for the final result of applying rules in T_0 to be independent of the order of their application.

Here, T_0 can be any resolution theory with the confluence property. But in practice, it will satisfy the conditions defined in section 13.1.1.

Although they have very different use cases, backdoors and anti-backdoors can be found in SudoRules with totally similar commands. I shall therefore illustrate here

only anti-backdoors (for backdoors, merely delete the “anti-” part of the function names). The puzzle I’ll use for this purpose is again one created by Mith:

```

+-----+-----+-----+
! . . 9 ! . . ! . . !
! 8 . . ! . . 9 ! 7 . . !
! . 7 . ! . 6 . ! . 5 . !
+-----+-----+-----+
! . 5 . ! . 4 . ! . 6 . !
! 9 . . ! . . 3 ! 8 . . !
! . . 2 ! . . . ! . . . !
+-----+-----+-----+
! . 6 . ! . 5 . ! 1 7 . !
! 2 . . ! . . 8 ! 4 . . !
! . . . ! . 1 . ! . . . !
+-----+-----+-----+

```

```

..9.....8....97...7..6..5..5..4..6.9....38....2.....6..5.17.2....84.....1....
SER = 7.1

```

Firstly, choose the following settings in the T&E-related part (i.e. section 3e) of the SudoRules configuration file (don’t forget to de-activate everything in the other sections of that file):

```

(bind ?*Anti-Backdoors* TRUE)
(bind ?*Whips[1]* TRUE)

```

Secondly, ask SudoRules to find the anti-backdoors:

– either this Sudoku-specific way:

```

(find-sudoku-anti-backdoors
  "..9.....8....97...7..6..5..5..4..6.9....38....2.....6..5.17.2....84.....1...."
)

```

– or, more generally, using the generic “*find-anti-backdoors*” function, after some Sudoku-specific initialisation:

```

(init-sudoku-string
  "..9.....8....97...7..6..5..5..4..6.9....38....2.....6..5.17.2....84.....1...."
)
(find-anti-backdoors)

```

Depending on whether you have activated nothing more than anti-backdoors or also whips[1] or also Subsets in the configuration file, you’ll get different results, as shown below:

```
1 BRT-ANTI-BACKDOOR FOUND:n1r8c2
```

```
13 W1-ANTI-BACKDOORS FOUND: n8r9c2 n3r8c8 n9r8c5 n9r8c2 n1r8c2 n9r7c9 n8r7c9 n9r6c8
n8r6c5 n9r4c4 n8r4c3 n8r3c4 n8r1c8
```

```
38 S-ANTI-BACKDOORS FOUND: n9r9c8 n5r9c7 n6r9c6 n4r9c3 n8r9c2 n6r8c9 n3r8c8 n9r8c5
n7r8c4 n5r8c3 n9r8c2 n1r8c2 n9r7c9 n8r7c9 n4r7c6 n3r7c1 n7r6c9 n9r6c8 n3r6c7 n5r6c6
n8r6c5 n3r6c2 n6r6c1 n5r5c9 n6r5c4 n3r4c9 n9r4c4 n8r4c3 n2r3c6 n8r3c4 n4r3c1 n5r2c4
n6r2c3 n8r1c8 n6r1c7 n7r1c5 n4r1c4 n5r1c1
```



```

hidden-pairs-in-a-block: b1{n5 n6}{r1c1 r2c3} ==> r2c3#4, r2c3#3, r2c3#1, r1c1#4,
r1c1#3, r1c1#1
finned-x-wing-in-rows: n9{r7 r4}{c4 c9} ==> r6c9#9
finned-x-wing-in-columns: n9{c5 c8}{r6 r8} ==> r8c9#9
t-whip[2]: r7n9{c4 c9} - c8n9{r9 .} ==> r6c4#9
swordfish-in-columns: n9{c2 c5 c8}{r9 r8 r6} ==> r9c9#9, r9c7#9, r9c4#9, r8c4#9,
r6c7#9
swordfish-in-columns: n8{c2 c5 c8}{r9 r6 r1} ==> r9c9#8, r9c3#8, r6c4#8, r1c9#8,
r1c4#8
hidden-pairs-in-a-block: b5{n8 n9}{r4c4 r6c5} ==> r6c5#7, r4c4#7, r4c4#2, r4c4#1
hidden-pairs-in-a-row: r9{n8 n9}{c2 c8} ==> r9c8#3, r9c8#2, r9c2#4, r9c2#3
swordfish-in-columns: n2{c2 c5 c8}{r1 r2 r5} ==> r5c9#2, r5c4#2, r2c9#2, r2c4#2,
r1c9#2, r1c7#2, r1c6#2, r1c4#2
swordfish-in-columns: n5{c1 c6 c7}{r9 r1 r6} ==> r9c9#5, r9c3#5, r6c9#5, r6c4#5,
r1c4#5
swordfish-in-rows: n6{r2 r5 r8}{c9 c3 c4} ==> r9c9#6, r9c4#6, r6c4#6, r1c9#6
hidden-pairs-in-a-block: b5{n5 n6}{r5c4 r6c6} ==> r6c6#7, r6c6#1, r5c4#7, r5c4#1
hidden-pairs-in-a-block: b9{n5 n6}{r8c9 r9c7} ==> r9c7#3, r9c7#2, r8c9#3
whip[1]: b9n2{r9c9 .} ==> r3c9#2, r4c9#2
hidden-pairs-in-a-column: c7{n2 n9}{r3 r4} ==> r4c7#3, r3c7#3
biv-chain[3]: r3n9{c7 c9} - r3n8{c9 c4} - r4c4{n8 n9} ==> r4c7#9
singles ==> r4c7#2, r3c7#9, r5c5#2, r2c5#3
naked-pairs-in-a-row: r5{c2 c8}{n1 n4} ==> r5c9#4, r5c9#1, r5c3#4, r5c3#1
swordfish-in-columns: n3{c2 c7 c8}{r8 r1 r6} ==> r8c4#3, r8c3#3, r6c9#3, r6c1#3,
r1c9#3
biv-chain[3]: r7n9{c9 c4} - c4n3{r7 r9} - r9c9{n3 n2} ==> r7c9#2
hidden-single-in-a-block ==> r9c9#2
hidden-triplets-in-a-column: c4{n2 n8 n9}{r7 r3 r4} ==> r7c4#4, r7c4#3, r3c4#4, r3c4#1
hidden-single-in-a-block ==> r9c4#3
whip[1]: b8n4{r9c6 .} ==> r1c6#4, r3c6#4
hidden-triplets-in-a-column: c9{n3 n8 n9}{r4 r3 r7} ==> r4c9#7, r4c9#1, r3c9#4, r3c9#1
whip[1]: r3n4{c3 .} ==> r1c2#4, r2c2#4
whip[1]: c2n4{r6 .} ==> r6c1#4
biv-chain[3]: r5n1{c8 c2} - r2c2{n1 n2} - c8n2{r2 r1} ==> r1c8#1
biv-chain[3]: r3c9{n3 n8} - c4n8{r3 r4} - r4n9{c4 c9} ==> r4c9#3
singles to the end

```

One can see that each step is easy but there are many steps (some of which are probably unnecessary). Now, suppose we want a single-step solution – modulo steps in some resolution theory T_0 made of easy rules (W1 for instance) that one would consider as no-steps (as explained in section 13.1).

The first step (pun not intended) for doing this in SudoRules is to look for the W1-anti-backdoors (because a 1-step solution will necessarily eliminate one of the W1-anti-backdoors). As we have already found the 13 W1-anti-backdoors for this puzzle in section 13.2 (n8r9c2 n3r8c8 n9r8c5 n9r8c2 n1r8c2 n9r7c9 n8r7c9 n9r6c8 n8r6c5 n9r4c4 n8r4c3 n8r3c4 n8r1c8), we now only have to check which of them can be eliminated by some pattern in CSP-Rules.

Here again, we can choose what type of elimination we are looking for, which leaves quite a large number of possibilities, considering all the rules that allow focused eliminations (which excludes t-whips). And this choice is almost totally independent of the choice made for T_0 in the search for T_0 -anti-backdoors.

The next subsections will describe the general procedure for looking for 1-step solutions and two approaches for automating it or part of it.

13.3.1 The “manual” approach

After we have the list of T_0 -anti-backdoors, how to check each of them individually as a basis for a one-step solution? Launch a new instance of CLIPS and select in the configuration file the rules you want to use (including the rules in T_0 , for consistency purposes). Whatever rules you choose, the way of checking if a chosen candidate can be eliminated by them will be the same: first initialise the puzzle with its resolution state after T_0 , then try-to-eliminate the candidate (say nrc):

```
(init-sukaku-grid
```

!	13456	1234	9	!	1234578	2378	12457	!	236	12348	123468	!
!	8	1234	13456	!	12345	23	9	!	7	1234	12346	!
!	134	7	134	!	12348	6	124	!	239	5	123489	!
!	137	5	1378	!	12789	4	127	!	239	6	12379	!
!	9	14	1467	!	12567	27	3	!	8	124	12457	!
!	13467	1348	2	!	156789	789	1567	!	359	1349	134579	!
!	34	6	348	!	2349	5	24	!	1	7	2389	!
!	2	139	1357	!	3679	379	8	!	4	39	3569	!
!	3457	3489	34578	!	234679	1	2467	!	23569	2389	235689	!

```
)
```

```
(try-to-eliminate-candidates nrc)
```

We can do this independently for each of the 13 $W1$ -anti-backdoors and for 3 choices of rules:

1) Let's first assume we allow only bivalence-chains. Among the above 13 $W1$ -anti-backdoors, we find that 7 lead to a single step solution (modulo steps in $W1$):

- ◆ n8r9c2: biv-chain[4]: c8n8{r9 r1} - c5n8{r1 r6} - c5n9{r6 r8} - b7n9{r8c2 r9c2} ==> r9c2≠8, r9c8≠9
- ◆ n8r7c9: biv-chain[4]: r3n8{c9 c4} - c5n8{r1 r6} - c5n9{r6 r8} - r7n9{c4 c9} ==> r7c9≠8, r3c9≠9
- ◆ n8r6c5: biv-chain[3]: c2n8{r6 r9} - b7n9{r9c2 r8c2} - c5n9{r8 r6} ==> r6c5≠8
- ◆ n9r4c4: biv-chain[3]: r4n8{c4 c3} - r7n8{c3 c9} - r7n9{c9 c4} ==> r4c4≠9
- ◆ n8r4c3: biv-chain[6]: r7n8{c3 c9} - r7n9{c9 c4} - c5n9{r8 r6} - c5n8{r6 r1} - c8n8{r1 r9} - c2n8{r9 r6} ==> r4c3≠8, r9c2≠8
- ◆ n8r3c4: biv-chain[5]: r4n8{c4 c3} - r7n8{c3 c9} - r7n9{c9 c4} - c5n9{r8 r6} - c5n8{r6 r1} ==> r3c4≠8, r6c5≠8

◆ n8r1c8: biv-chain[6]: r3n8{c9 c4} - r4n8{c4 c3} - r7n8{c3 c9} - r7n9{c9 c4} - c5n9{r8 r6} - c5n8{r6 r1} ==> r1c8≠8, r1c9≠8, r3c4≠8

Notice that any of the two bivalue-chains[3] might have occurred in the simplest-first resolution path in S3Fin+W3, but SudoRules followed a different path that didn't use them.

2) Let's now assume we allow only z-chains (and the particular case of bivalue-chains). Among the above 13 W1-anti-backdoors, we find that 10 lead to a single step solution (modulo steps in W1):

◆ n8r9c2: biv-chain[4]: c8n8{r9 r1} - c5n8{r1 r6} - c5n9{r6 r8} - b7n9{r8c2 r9c2} ==> r9c2≠8
 ◆ n9r8c5: z-chain[6]: c2n9{r8 r9} - c2n8{r9 r6} - r4n8{c3 c4} - c4n9{r4 r6} - c8n9{r6 r9} - r7n9{c9 .} ==> r8c5≠9
 ◆ n9r7c9: z-chain[4]: r7n8{c9 c3} - r4n8{c3 c4} - r4n9{c4 c7} - r3n9{c7 .} ==> r7c9≠9
 ◆ n8r7c9: biv-chain[4]: r3n8{c9 c4} - c5n8{r1 r6} - c5n9{r6 r8} - r7n9{c4 c9} ==> r7c9≠8
 ◆ n9r6c8: z-chain[5]: c5n9{r6 r8} - c2n9{r8 r9} - c2n8{r9 r6} - r4n8{c3 c4} - r4n9{c4 .} ==> r6c8≠9
 ◆ n8r6c5: biv-chain[3]: c2n8{r6 r9} - b7n9{r9c2 r8c2} - c5n9{r8 r6} ==> r6c5≠8
 ◆ n9r4c4: biv-chain[3]: r4n8{c4 c3} - r7n8{c3 c9} - r7n9{c9 c4} ==> r4c4≠9
 ◆ n8r4c3: biv-chain[6]: r7n8{c3 c9} - r7n9{c9 c4} - c5n9{r8 r6} - c5n8{r6 r1} - c8n8{r1 r9} - c2n8{r9 r6} ==> r4c3≠8
 ◆ n8r3c4: biv-chain[5]: r4n8{c4 c3} - r7n8{c3 c9} - r7n9{c9 c4} - c5n9{r8 r6} - c5n8{r6 r1} ==> r3c4≠8
 ◆ n8r1c8: biv-chain[6]: r3n8{c9 c4} - r4n8{c4 c3} - r7n8{c3 c9} - r7n9{c9 c4} - c5n9{r8 r6} - c5n8{r6 r1} ==> r1c8≠8

Notice that the previously obtained chains are unchanged (but some of their eliminations might *a priori* have been obtained by shorter z-chains). A larger change will appear with our third set of rules.

3) Let's finally assume we allow whips (plus the special cases of z-chains and bivalue-chains). Among the above 13 W1-anti-backdoors, we find that 11 lead to a single step solution (modulo steps in W1), i.e. only one more than without whips. But we can also see that some of the eliminations with whips are shorter than the previous eliminations with bivalue-chains or z-chains:

◆ n8r9c2: biv-chain[4]: c8n8{r9 r1} - c5n8{r1 r6} - c5n9{r6 r8} - b7n9{r8c2 r9c2} ==> r9c2≠8, r9c8≠9
 ◆ n9r8c5: whip[5]: r7n9{c4 c9} - c8n9{r9 r6} - r4n9{c9 c4} - r4n8{c4 c3} - r7n8{c3 .} ==> r8c5≠9
 ◆ n9r8c2: whip[4]: c5n9{r8 r6} - c8n9{r6 r9} - c8n8{r9 r1} - c5n8{r1 .} ==> r8c2≠9
 ◆ n9r7c9: z-chain[4]: r7n8{c9 c3} - r4n8{c3 c4} - r4n9{c4 c7} - r3n9{c7 .} ==> r7c9≠9
 ◆ n8r7c9: biv-chain[4]: r3n8{c9 c4} - c5n8{r1 r6} - c5n9{r6 r8} - r7n9{c4 c9} ==> r7c9≠8, r3c9≠9
 ◆ n9r6c8: whip[4]: r4n9{c9 c4} - r7n9{c4 c9} - r7n8{c9 c3} - r4n8{c3 .} ==> r6c8≠9
 ◆ n8r6c5: biv-chain[3]: c2n8{r6 r9} - b7n9{r9c2 r8c2} - c5n9{r8 r6} ==> r6c5≠8
 ◆ n9r4c4: biv-chain[3]: r4n8{c4 c3} - r7n8{c3 c9} - r7n9{c9 c4} ==> r4c4≠9


```

♦ n8r4c3: whip[5]: c2n8{r6 r9} - c8n8{r9 r1} - c5n8{r1 r6} - c5n9{r6 r8} - c2n9{r8 .}
==> r4c3≠8
♦ n8r3c4: whip[4]: c5n8{r1 r6} - c2n8{r6 r9} - c2n9{r9 r8} - c5n9{r8 .} ==> r3c4≠8
♦ n8r1c8: whip[4]: c5n8{r1 r6} - c2n8{r6 r9} - c2n9{r9 r8} - c5n9{r8 .} ==> r1c8≠8

```

We can consider that our search has been successful: instead of a long series of Subsets and chains of size no more than 3, we have several possibilities for a solution with a single step of size no more than 4, including two that require a single bivalence-chain[3] with a single elimination. Needless to say, this example is an extreme case. As for the other solutions, based on longer chains, we shall talk about them later. Notice also that we could have stopped this search for 1-step solutions as soon as we found one with a bivalence-chain[3], because the puzzle is in W3 and we know *a priori* there can be no simpler solution with whips or any simpler chains. Here, we continued for the only purpose of illustrating the various types of solutions one can find. Finally, notice also that we could have restricted *a priori* (in the configuration file) the lengths of all the chains used in the search of 1-step solutions.

13.3.2 The semi-automated approach

Trying manually each anti-backdoor in turn for checking which of them give rise to a 1-step solution can be very tedious, especially if there are many of them. SudoRules has two functions for automating this part of the search for 1-step solutions: ***“find-sudoku-1-steppers-among-cands”*** and ***“find-sukaku-1-steppers-among-cands”***. Their respective syntax is:

```

(find-sudoku-1-steppers-among-cands ?sudoku-string $?cand-list)
(find-sukaku-1-steppers-among-cands ?sukaku-list $?cand-list)

```

where `$?cand-list` is the pre-calculated list of the T_0 -anti-backdoors, as the list of 13 candidates in the previous section.

```

(find-sudoku-1-steppers-among-cands
  "...9.....8....97...7..6..5..5..4..6.9...38....2.....6..5.17.2....84.....1...."
  (list-of-nirjck-to-list-of-labels
    n8r9c2 n3r8c8 n9r8c5 n9r8c2 n1r8c2 n9r7c9 n8r7c9 n9r6c8 n8r6c5 n9r4c4 n8r4c3
    n8r3c4 n8r1c8
  )
)

```

where we have used function ***“list-of-nirjck-to-list-of-labels”*** to turn this external representation to internal labels (see section 13.5 for technical details).

Currently, these two functions only execute the successive tries of each T-anti-backdoor, leaving to the user the job of scanning their output to find which of them have led to a solution.

13.3.3 The fully-automated approach

The semi-automated approach still leaves much work to the user. The approach described in this section is much simpler for the user, but (for technical reasons) it also takes more computation time (which is in my opinion a very good trade for less user time). One can use a single function, ***“find-sudoku-1-steppers-wrt-resolution-theory”***, to launch all the necessary calculations. The syntax is:

```
(find-sudoku-1-steppers-wrt-resolution-theory ?T0 ?sudoku-string)
```

where ?T₀ is the (simple) resolution theory whose rules one decides to count as no steps, and ?sudoku-string is the usual string representation of a puzzle. ?T₀ can only be W1, S2, S3, S4 or S, as in section 13.1. I personally consider that only W1 really makes sense: considering a Subset, even a Pair, as a no-step is nonsense because it generally produces many eliminations.

What this function will do is:

- firstly, find the resolution state after the rules in ?T₀ are applied,
- secondly, find the ?T₀-anti-backdoors,
- finally, check each of them as a potential basis for a 1-step solution (modulo ?T₀) with the current set of rules (chosen in the configuration file).

Currently, this function leaves to the user the job of scanning the output to find which of the ?T₀-anti-backdoors have led to a solution.

A similar function ***“find-sukaku-1-steppers-wrt-resolution-theory”*** with syntax:

```
(find-sukaku-1-steppers-wrt-resolution-theory ?T0 $?sukaku-list)
```

does the same job, starting from a resolution state defined by \$?sukaku-list.

Notice that these two automatic functions rely on the technical possibility of disabling and re-enabling rules, as described in the next section.

Considering that W1 is the most common value for ?T₀ in these functions, there is an abbreviation for each of the above two functions: ***“find-sudoku-1-steppers-wrt-W1”*** (further abbreviated as ***“find-1-steppers”***) and ***“find-sukaku-1-steppers-wrt-W1”***, with the same syntax except the first (?T₀) input variable.

13.4 Disabling and re-enabling rules in CSP-Rules

In the standard working of CSP-Rules, resolution rules are selected in the configuration file, which defines what will be loaded by the system and made available to the user. However, for efficiency reason, that doesn't make all the rules immediately “enabled”. The simplest-first strategy automatically enables them when needed and they remain enabled until some (reset) or (init-...) command is issued.

However, since the inception of SudoRules, all the rules in it have been coded in a way that can prevent them from being enabled, even if loaded. Until recently, there

had been no opportunity to effectively use this feature. Since the 8th update of CSP-Rules-V2.1, a more dynamical way of disabling and re-enabling rules is possible. Such technical details are transparent to the standard user and irrelevant in a Basic User Manual, but the next sections will take advantage of this to take care of several types of additional requirements about the number of steps in the resolution path.

Notice that the good way of restricting rules has always been and remains as initially described, i.e. at load time via the configuration file. Any other ways imply an increase in computation time. However, there are cases when such an increase becomes acceptable by requiring less user time, as was the case in section 13.3 for function `find-sudoku-1-steppers-wrt-resolution-theory`.

13.4.1 Functions for disabling and re-enabling rules

Functions allowing to disable and re-enable resolution rules are not intended for being applied as such by the user, but they will appear in all the functions dealing with the number of steps. An advanced user may find other ways of using them.

Function ***“disable-rules-not-in-RT0”*** has syntax:

```
(disable-rules-not-in-RT0 ?cont ?RT0)
```

where `?cont` is an integer for a context (0 for the starting context) and `?RT0` is a resolution theory as in section 13.1. A context is the technical counterpart of a resolution state; as its content evolves with time, it represents a resolution path. After this function is called, all the generic rules that do not belong to `?RT0` will be disabled in context `?cont`. In this function, `?RT0` can only be W1, S2, S3, S4 or S, as in section 13.1. What’s new since the 8th update is, resolution rules can be disabled even if they have already been automatically enabled.

Function ***“re-enable-rules-not-in-RT0”*** with syntax:

```
(re-enable-rules-not-in-RT0 ?cont ?RT0)
```

(where `?RT0` can again only be W1, S2, S3, S4 or S) does the converse.

Notice that:

- only generic rules and Subset rules can be disabled and re-enabled;
- for any family of rules (e.g. z-chains or whips or g-whips or ...), disabling and re-enabling are global in a context, i.e. it is not currently possible to do it in a way that would depend on the length of chains (and there’s no known reason for allowing it);
- these functions are essential to the full automation of 1-step, 2-step and fewer-steps solutions.

13.4.2 Functions for reconstructing a resolution path

When some rules are considered as no-step, as in section 13.1, most of the specific functions for dealing with the number of steps output both a full resolution path and

a summary of their main steps (i.e. those not in RT0), as a list of candidates e.g. (n1r4c5 n8r7c3 n6r9c2). Knowing only the original puzzle, theory RT0 and this list, the following functions allow to reconstruct a full resolution path with the same eliminations. The arguments are as usual (notice that ?sukaku-list must first have been turned into a single argument – see section 13.5.2).

```
(reconstruct-sudoku-resolution-path-wrt-RT0 ?RT0 ?sudoku-string
  $?sequence-of-eliminations)
(reconstruct-sukaku-resolution-path-wrt-RT0 ?RT0 ?sukaku-list
  $?sequence-of-eliminations)
```

As expected, they have abbreviations for the most current cases:

```
(reconstruct-sudoku-resolution-path-wrt-W1 ?sudoku-string
  $?sequence-of-eliminations)
(reconstruct-sukaku-resolution-path-wrt-W1 ?sukaku-list
  $?sequence-of-eliminations)
```

13.5 Two technical details

Before going further, we need to evoke two more “technical details”. You don’t really need to know them if you use only the fully automated functions for finding 1-step, 2-step or fewer-step solutions.

13.5.1 Internal vs external representations of candidates

The first “technical detail” is about the difference between internal and external representations of candidates in SudoRules (or CSP-Rules in general). The n8r9c2, n3r8c8, ... appearing in the lists of anti-backdoors found by SudoRules use their external “nrc” representations – which have the advantage of being totally independent of any choice for their internal representations. However (because they need to be able to be combined with other functions), all the CSP-Rules functions work on internal representations. Function “*nirjck-to-label*” allows to transform a candidate from its external to its internal representations. More useful in practice, function “*list-of-nirjck-to-list-of-labels*” allows to transform a list of candidates in external representation into its internal representation. For instance, the command:

```
(list-of-nirjck-to-list-of-labels n8r9c2 n3r8c8 n9r8c5 n9r8c2 n1r8c2
n9r7c9 n8r7c9 n9r6c8 n8r6c5 n9r4c4 n8r4c3 n8r3c4 n8r1c8)
```

will give the following result if no rules involving g-labels is activated:

```
(892 388 985 982 182 979 879 968 865 944 843 834 818)
```

But it will give a different result, if such rules are activated (because, for technical reasons, the internal representations are different).

As an obvious consequence, both functions must be used in the environment where their result will be applied.

This first “technical detail” allows to understand why function “find-sudoku-1-steppers-among-cands” must be used this way:

```
(find-sudoku-1-steppers-among-cands
  "...9.....8...97...7..6..5..5..4..6.9...38....2.....6..5.17.2....84.....1...."
  (list-of-nirjck-to-list-of-labels
   n8r9c2 n3r8c8 n9r8c5 n9r8c2 n1r8c2 n9r7c9 n8r7c9 n9r6c8 n8r6c5 n9r4c4 n8r4c3
   n8r3c4 n8r1c8
  ))
```

Another possibility, generally cleaner and particularly useful when the list of candidates to be considered is large, consists of first defining a global variable, e.g. `?*my-cands*`:

```
(defglobal ?*my-cands* = (create$
  (list-of-nirjck-to-list-of-labels
   n8r9c2 n3r8c8 n9r8c5 n9r8c2 n1r8c2 n9r7c9 n8r7c9 n9r6c8 n8r6c5 n9r4c4 n8r4c3
   n8r3c4 n8r1c8
  )))
(find-sudoku-1-steppers-among-cands
  "...9.....8...97...7..6..5..5..4..6.9...38....2.....6..5.17.2....84.....1...."
  ?*my-cands*)
```

13.5.2 List arguments in CLIPS

The second “technical detail” is about a CLIPS function being allowed only one list argument, which can only be the last one. The apparent problem in e.g. function “find-sukaku-1-steppers-wrt-resolution-theory” introduced in section 13.2 is, both `?sukaku-list` and `?cand-list` are lists. The (trivial) solution is to first turn the first argument (i.e. `?sukaku-list`) into a single argument. The simplest way of doing this is to define a global variable, e.g. `?*RS*` (beware of not using a name already used by the system), for representing the `sukaku-list`:

```
(defglobal ?*RS* = (create$
  13456 1234 9 1234578 2378 12457 236 12348 123468
  8 1234 13456 12345 23 9 7 1234 12346
  134 7 134 12348 6 124 239 5 123489
  137 5 1378 12789 4 127 239 6 12379
  9 14 1467 12567 27 3 8 124 12457
  13467 1348 2 156789 789 1567 359 1349 134579
  34 6 348 2349 5 24 1 7 2389
  2 139 1357 3679 379 8 4 39 3569
  3457 3489 34578 234679 1 2467 23569 2389 235689 ))
```

As we’re interested in `W1-anti-backdoors` and single-step solutions modulo `whips[1]`, the resolution state chosen here is naturally the one obtained after applying `Singles` and `whips[1]` (indeed, there’s none applicable for this puzzle). One can now write:

```
(find-sukaku-1-steppers-among-cands ?*RS* ?*my-cands*)
```

where I have also used the previous global variable `?*my-cands*`. We could also have kept the list of candidates explicit, as in:

```
(find-sukaku-1-steppers-among-cands ?*RS*
 (list-of-nirjck-to-list-of-labels
  n8r9c2 n3r8c8 n9r8c5 n9r8c2 n1r8c2 n9r7c9 n8r7c9 n9r6c8 n8r6c5 n9r4c4 n8r4c3
  n8r3c4 n8r1c8
 ))
```

13.6 Looking for two-step solutions – 1st part (first example)

Consider now the following puzzle (from Denksport Magazine). It is moderately difficult, with a solution in gW4 or in W5 (or in Z7 if one wants to use only reversible chains). Let us assign the resolution state after Singles and whips[1] to a global variable `?*RS*` and consider for instance the resolution path in W5:

!	8	7	!	.	9	6	!	2	1	.	!	
!	2	5	1	!	.	.	8	!	.	6	9	!
!	9	.	.	!	1	2	.	!	.	.	7	!
!	.	3	.	!	.	.	2	!	.	.	1	!
!	.	.	.	!	.	.	.	!	.	2	.	!
!	4	.	2	!	8	.	.	!	.	3	.	!
!	3	.	.	!	2	.	1	!	6	.	8	!
!	6	2	.	!	9	.	.	!	1	4	.	!
!	1	.	5	!	6	.	.	!	.	7	2	!

```
(defglobal ?*RS* = (create$
  8      7      34      345      9      6      2      1      345
  2      5      1      347      347      8      34      6      9
  9      46      346      1      2      345      3458      58      7
  57      3      689      457      4567      2      45789      589      1
  57      1689      689      3457      134567      34579      45789      2      456
  4      169      2      8      1567      579      579      3      56
  3      49      47      2      457      1      6      59      8
  6      2      78      9      3578      357      1      4      35
  1      489      5      6      348      34      39      7      2
))
;;; 129 candidates
```

The standard simplest-first strategy gives the following resolution path in W5:

```
biv-chain[4]: r5n1{c5 c2} - c2n8{r5 r9} - r8c3{n8 n7} - r7n7{c3 c5} ==> r5c5≠7
z-chain[4]: c9n4{r5 r1} - r1n5{c9 c4} - r3c6{n5 n3} - r9c6{n3 .} ==> r5c6≠4
z-chain[4]: c9n3{r8 r1} - r1n5{c9 c4} - r3c6{n5 n4} - r9c6{n4 .} ==> r8c6≠3
whip[4]: c9n4{r5 r1} - r1n5{c9 c4} - c4n3{r1 r2} - r2c7{n3 .} ==> r5c4≠4
t-whip[5]: r9c7{n9 n3} - c9n3{r8 r1} - c3n3{r1 r3} - c6n3{r3 r5} - c6n9{r5 .} ==>
r6c7≠9
```

```

t-whip[4]: r6n9{c6 c2} - c3n9{r5 r7} - r7n7{c3 c5} - r8c6{n7 .} ==> r6c6≠5
finned-x-wing-in-rows: n5{r7 r6}{c5 c8} ==> r4c8≠5
t-whip[4]: r6n5{c9 c5} - c4n5{r5 r1} - c6n5{r3 r8} - c9n5{r8 .} ==> r5c7≠5, r4c7≠5
t-whip[4]: r8c6{n7 n5} - r7n5{c5 c8} - r3n5{c8 c7} - r6c7{n5 .} ==> r6c6≠7
naked-single ==> r6c6=9
naked-triplets-in-a-row: r5{c1 c4 c6}{n7 n5 n3} ==> r5c9≠5, r5c7≠7, r5c5≠5, r5c5≠3
whip[1]: b6n5{r6c9 .} ==> r6c5≠5
biv-chain[3]: r5n1{c5 c2} - r6c2{n1 n6} - b6n6{r6c9 r5c9} ==> r5c5≠6
biv-chain[4]: r9c7{n9 n3} - r8c9{n3 n5} - r6n5{c9 c7} - b6n7{r6c7 r4c7} ==> r4c7≠9
biv-chain[4]: r1n5{c4 c9} - c7n5{r3 r6} - c7n7{r6 r4} - r4c1{n7 n5} ==> r4c4≠5
biv-chain[4]: r4c4{n4 n7} - b6n7{r4c7 r6c7} - c7n5{r6 r3} - b2n5{r3c6 r1c4} ==> r1c4≠4
biv-chain[3]: r3c2{n6 n4} - r1n4{c3 c9} - r5c9{n4 n6} ==> r5c2≠6
biv-chain[3]: c3n3{r3 r1} - r1n4{c3 c9} - r2c7{n4 n3} ==> r3c7≠3
finned-x-wing-in-columns: n3{c7 c5}{r2 r9} ==> r9c6≠3
naked-single ==> r9c6=4
whip[1]: b2n4{r2c5 .} ==> r2c7≠4
singles to the end

```

Can one find a single-step solution for it? It has only 6 (BRT-, W1- or S-) anti-backdoors, but none of them can be eliminated by a whip of any length. (Exercise for the reader: check these claims, applying the techniques of section 13.2.)

As there's no one-step solution with whips, can one find a two-step one? The surprise appears when we look for anti-backdoor-pairs as a first step in the search for such solutions (because a two-step solution necessarily eliminates an anti-backdoor pair). While there were limited numbers of anti-backdoors, there are very large numbers of anti-backdoor-pairs: 615 BRT-anti-backdoor-pairs, 622 W1-anti-backdoor-pairs and 626 S-anti-backdoor-pairs. 85 of the 615 BRT ones give rise to a two-step solution, but many of these solutions involve long whips. Here is the simplest and only one in W5:

```

whip[5]: c3n3{r1 r3} - c7n3{r3 r9} - r9c6{n3 n4} - r3c6{n4 n5} - b3n5{r3c7 .} ==> r1c9≠3
singles ==> r8c9=3, r9c7=9, r7c8=5, r3c8=8, r4c8=9
whip[5]: r3n5{c7 c6} - r8c6{n5 n7} - r7c5{n7 n4} - c6n4{r9 r5} - c9n4{r5 .} ==> r1c9≠5
singles to the end

```

Notice that this solution makes sense with respect to the one obtained above by the simplest-first CSP-Rules strategy: it is also in W5. The large number of steps in the original solution is replaced by only two steps, without increasing the complexity of the hardest step (indeed increasing it only slightly from t-whip[5] to whip[5]).

Unfortunately, this is a very rare situation. As the next subsection will illustrate (and this is very far from being the worst case), most of the time, if one requires a 1- or 2- step solution, one has to accept much larger chains than in the original simplest-first solution, often to the point of total absurdity. Such solutions can also be computationally much heavier than the standard simplest-first solution.

13.7 Looking for two-step solutions – 2nd part (second example)

Consider the following (relatively hard) puzzle (proposed by Urhegyi) and let's start solving it from its resolution state (call it again ?*RS*) after Singles and whips[1]:

!	1	.	.	!	5	.	.	!	.	.	2	!
!	.	2	.	!	7	.	.	!	.	3	.	!
!	.	.	3	!	.	6	.	!	1	.	.	!
!	.	.	.	!	.	.	.	!	.	.	8	!
!	.	4	.	!	.	5	.	!	.	9	.	!
!	6	.	2	!	.	.	.	!	.	.	.	!
!	.	.	6	!	.	.	.	!	4	.	.	!
!	.	5	.	!	.	.	3	!	.	7	.	!
!	8	.	.	!	.	4	!	.	.	9	!	!

1..5...2.2.7...3...3.6.1.....8.4..5..9.6.2.....6...4...5...3.7.8....4..9
SER = 8.5

(solve-sukaku-grid

!	1	6	4789	!	5	3	89	!	789	48	2	!
!	459	2	4589	!	7	1489	189	!	5689	3	456	!
!	4579	789	3	!	2489	6	289	!	1	458	457	!
!	3579	1379	1579	!	12349	1249	12679	!	2367	1246	8	!
!	37	4	178	!	1238	5	12678	!	2367	9	1367	!
!	6	13789	2	!	13489	1489	1789	!	357	145	13457	!
!	2379	1379	6	!	1289	12789	5	!	4	128	13	!
!	249	5	149	!	12689	1289	3	!	268	7	16	!
!	8	137	17	!	126	127	4	!	2356	1256	9	!

)

;;; 198 candidates

the standard simplest-first strategy gives the following resolution path in W4:

z-chain[3]: r9n5{c7 c8} - c8n6{r9 r4} - c8n2{r4 .} ==> r9c7≠2
biv-chain[4]: r1c8{n4 n8} - r1c6{n8 n9} - b3n9{r1c7 r2c7} - b3n6{r2c7 r2c9} ==> r2c9≠4
finned-x-wing-in-columns: n4{c9 c4}{r3 r6} ==> r6c5≠4
z-chain[4]: c9n5{r3 r6} - c9n4{r6 r3} - b3n7{r3c9 r1c7} - c7n9{r1 .} ==> r2c7≠5
t-whip[4]: c9n4{r6 r3} - r1c8{n4 n8} - r3c8{n8 n5} - c9n5{r3 .} ==> r6c9≠7, r6c9≠3, r6c9≠1
biv-chain[2]: c9n7{r5 r3} - r1n7{c7 c3} ==> r5c3≠7
z-chain[4]: r9c3{n1 n7} - r1n7{c3 c7} - c9n7{r3 r5} - c9n1{r5 .} ==> r9c8≠1
whip[4]: r1c8{n8 n4} - r3c8{n4 n5} - c9n5{r3 r6} - c9n4{r6 .} ==> r7c8≠8
hidden-single-in-a-block ==> r8c7=8
whip[1]: b9n2{r9c8 .} ==> r4c8≠2


```

t-whip[3]: c7n9{r2 r1} - r1c6{n9 n8} - r2n8{c6 .} ==> r2c3#9
biv-chain[4]: r7n8{c4 c5} - b8n7{r7c5 r9c5} - r9c3{n7 n1} - r5c3{n1 n8} ==> r5c4#8
finned-x-wing-in-rows: n8{r5 r2}{c3 c6} ==> r3c6#8, r1c6#8
stte
init-time = 0.2s, solve-time = 0.87s, total-time = 1.06s

```

Applying the approach described in section 13.2, we find that this puzzle has 6 W1-anti-backdoors (n1r9c3 n7r3c9 n6r2c7 n9r1c7 n8r1c6 n7r1c3) and that 3 of them give rise to 1-step solutions, but with rather long whips (compared to the maximum length of the above solution in W4, the best solution is in W7):

```

whip[7]: c7n9{r2 r1} - r1c6{n9 n8} - r2n8{c6 c3} - c3n5{r2 r4} - c3n9{r4 r8} -
c3n4{r8 r1} - r1n7{c3 .} ==> r2c7#6
stte
OR:
whip[8]: r1n7{c7 c3} - r1n4{c3 c8} - c9n4{r3 r6} - c9n5{r6 r2} - r3c8{n5 n8} -
c2n8{r3 r6} - r5c3{n8 n1} - r9c3{n1 .} ==> r3c9#7
stte
OR:
whip[9]: r1c6{n9 n8} - r1c8{n8 n4} - r1c3{n4 n7} - r9c3{n7 n1} - r5c3{n1 n8} -
c2n8{r6 r3} - r3c8{n8 n5} - c9n5{r3 r6} - c9n4{r6 .} ==> r1c7#9
stte

```

I leave it to the reader to decide for himself if such solutions look better to him than the original one in W4. For me, they do not: don't forget that complexity increases "exponentially" with the W rating. I don't mean the resolution path in W4 is perfect; it could probably be simplified, because the simplest-first strategy tends to include unnecessary steps. (However, apart from allowing to compute the rating at the same time as finding the solution, the good point of this strategy is, it shows several patterns a manual user can naturally find.)

At this point, the natural question is, can one find a 2-step solution with shorter chains? In the rest of this section, I shall state the results of the search for such solutions, which will allow in the next subsection to justify some choices in the recommended procedure.

In resolution state **RS** (obtained after Singles and whips[1], as above), there are 198 candidates. An easy computation shows that $198 \cdot (198-1)/2 = 19,503$ pairs will have to be checked as potential W1-anti-backdoor-pairs. The "-1" is for eliminating pairs composed of identical candidates and the "/2" is for eliminating redundancies due to symmetry: (cand1 cand2) vs (cand2 cand1).

After loading SudoRules with the following settings:

```

(bind ?*Anti-backdoor-pairs* TRUE)
(bind ?*Whips[1]* TRUE)

```

the following commands:

```
(defglobal ?*RS* = (create$
  1      6      4789  5      3      89      789      48      2
  459    2      4589  7      1489   189     5689   3      456
  4579   789    3      2489   6      289     1      458    457
  3579   1379   1579   12349  1249   12679   236    1246   8
  37      4      178    1238   5      12678   2367    9      1367
  6      13789   2      13489   1489   1789    357     145    13457
  2379   1379   6      1289   12789   5      4      128     13
  249    5      149    12689   1289   3      268     7      16
  8      137    17     126    127     4      2356    1256   9
))
(init-sukaku-list ?*RS*)
(find-sukaku-anti-backdoor-pairs ?*RS*)
```

will find 1972 W1-anti-backdoor-pairs, after 24m 11s of computation. This is a very long computation time (on an old MacBookPro from 2012) and the result is a very large number of pairs to test for potential 2-step solutions. The next subsection will therefore explain a smarter procedure.

13.8 Looking for two-step solutions – 3rd part (the method)

Let us start by noticing that, for a 2-step solution eliminating candidates cand1 and cand2, not only does the (cand1 cand2) pair need to be an anti-backdoor-pair, but one must also be able to directly eliminate at least one of cand1 and cand2 from resolution state ?*RS* by the rules allowed for the 2-step solution.

SudoRules has a function for finding such candidates: “*find-erasable-candidates-sukaku-list*”, with syntax:

```
(find-erasable-candidates-sukaku-list $?sukaku-list)
```

Notice that this function is based on focused eliminations (and it has therefore the same restrictions about t-whips) and that it doesn’t change the resolution state. Here is how to use it in the example of the previous subsection and how to simplify the search for anti-backdoor-pairs by taking our goals into account since the beginning of the search.

◇ **First step:** decide the type of generic patterns you will accept in a 2-step solution (say bivalued-chains, z-chains, whips...; remember that t-whips are not allowed). Also decide the maximum length you will accept for these chains. Considering that this puzzle has a multi-step solution in W4 (and no one-step solution), it would be natural to put an upper bound of 5 or 6. For illustration purposes, we shall keep it much larger (8).

Load a first instance of CLIPS with the following settings (notice that, at this point, as whips are activated, it is not necessary to activate rules that are subsumed by them).

```
(bind ?*Whips* TRUE)
(bind ?*whips-max-length* 8)
```

– initialise it as before:

```
(defglobal ?*RS* = (create$ ...as before...))
(init-sukaku-list ?*RS*)
```

– and look for the candidates that can be eliminated:

```
(find-erasable-candidates-sukaku-list ?*RS*)
==> 34 candidates can be eliminated with the current set of rules:
(n4r1c3 n8r1c7 n8r1c8 n9r2c1 n9r2c3 n5r2c7 n6r2c7 n8r2c7 n4r2c9 n5r2c9 n4r3c9 n7r3c9
n2r4c8 n4r4c8 n7r5c3 n1r5c9 n6r5c9 n3r6c2 n4r6c4 n4r6c5 n7r6c7 n1r6c9 n3r6c9 n7r6c9
n8r7c8 n1r8c3 n8r8c4 n8r8c5 n2r8c7 n6r8c7 n6r8c9 n1r9c2 n2r9c7 n1r9c8)
computation time = 1m 11s
```

◇ **Second step:** load a second instance of SudoRules, with the following settings:

```
(bind ?*Anti-backdoor-pairs* TRUE)
(bind ?*Whips[1]* TRUE)
```

- initialise it as before:

```
(defglobal ?*RS* = (create$
  1      6      4789  5      3      89      789      48      2
  459    2      4589  7      1489   189      5689   3      456
  4579   789    3      2489   6      289      1      458    457
  3579   1379   1579   12349  1249   12679   236    1246    8
  37      4      178    1238   5      12678   2367    9      1367
  6      13789   2      13489  1489   1789    357     145    13457
  2379   1379   6      1289   12789   5      4      128    13
  249    5      149    12689  1289   3      268     7      16
  8      137    17     126    127     4      2356   1256    9
))
(init-sukaku-list ?*RS*)
```

– define the list of erasable candidates:

```
(defglobal ?*erasable-cands* = (list-of-nirjck-to-list-of-labels (create$
  n4r1c3 n8r1c7 n8r1c8 n9r2c1 n9r2c3 n5r2c7 n6r2c7 n8r2c7 n4r2c9 n5r2c9 n4r3c9 n7r3c9
  n2r4c8 n4r4c8 n7r5c3 n1r5c9 n6r5c9 n3r6c2 n4r6c4 n4r6c5 n7r6c7 n1r6c9 n3r6c9 n7r6c9
  n8r7c8 n1r8c3 n8r8c4 n8r8c5 n2r8c7 n6r8c7 n6r8c9 n1r9c2 n2r9c7 n1r9c8 )))
```

– ask SudoRules to find the anti-backdoor-pairs that contain at least one of the above erasable candidates. Notice that the number of pairs now expected to be tried is: $34 \cdot (198 - 34) + 34 \cdot 33/2 = 6,137$. This remains a large number, but significantly smaller than the total number of pairs (19,306) and the computation time is also smaller (6m 33s instead of 24m 11s).

```
(find-anti-backdoor-pairs-with-one-cand-in-list ?*erasable-cands*)
```

```
475 W1-ANTI-BACKDOOR-PAIRS FOUND:
computation time = 6m 33s
```

We now have only 475 relevant anti-backdoor-pairs instead of the full set of 1972 ones.

– as the number of relevant pairs remains large and it would be difficult to copy and paste them to another instance of CLIPS, copy them to a file “W1-anti-backdoor-pairs-for-W8.txt” anywhere in your Documents folder and surround the whole list by

```
(defglobal ?*W1-anti-backdoor-pairs-for-W8* =
  (list-of-nirjck-to-list-of-labels (create$
and
)))
```

so that this file can later be loaded into CLIPS.

◇ **Third step:** load a third instance of CLIPS with the final settings for the rules you allow, e.g. (notice the global restriction on chain lengths):

```
(bind ?*Bivalue-Chains* TRUE)
(bind ?*z-Chains* TRUE)
(bind ?*Whips* TRUE)
(bind ?*all-chains-max-length* 8)
```

– initialise it as before:

```
(defglobal ?*RS* = (create$ ... ))
(init-sukaku-list ?*RS*)
```

– initialise global variable ?*W1-anti-backdoor-pairs-for-W8* by loading the file where you have stored the previous results:

```
(load “xxx/W1-anti-backdoor-pairs-for-W8.txt”)
```

– and finally look for the possible two-step solutions:

```
(find-sukaku-2-steppers-among-pairs
  ?*RS*
  ?*W1-anti-backdoor-pairs-for-W8*
)
```

This will launch the search for 2-step solutions. When this is finished, you will have to scan manually the output in order to find which pairs led to a solution. In this example, we get the following four possibilities in W6 (among many more in W8):

```
◆ whip[4]: r1c8{n8 n4} - r3c8{n4 n5} - c9n5{r3 r6} - c9n4{r6 .} ==> r7c8#8
hidden-single-in-a-block ==> r8c7=8
z-chain[5]: r1n4{c3 c8} - b3n8{r1c8 r3c8} - b1n8{r3c2 r2c3} - r5c3{n8 n1} - r9c3{n1 .}
==> r1c3#7
stte
```

```

♦ whip[4]: r1c8{n8 n4} - r3c8{n4 n5} - c9n5{r3 r6} - c9n4{r6 .} ==> r7c8≠8
hidden-single-in-a-block ==> r8c7=8
whip[6]: r1c6{n9 n8} - r2n8{c6 c3} - c3n5{r2 r4} - c3n9{r4 r8} - c3n4{r8 r1} -
r1n7{c3 .} ==> r1c7≠9
stte

♦ whip[4]: r1c8{n8 n4} - r3c8{n4 n5} - c9n5{r3 r6} - c9n4{r6 .} ==> r7c8≠8
hidden-single-in-a-block ==> r8c7=8
whip[6]: r1n7{c7 c3} - r9c3{n7 n1} - r5c3{n1 n8} - c2n8{r6 r3} - c8n8{r3 r1} -
r1n4{c8 .} ==> r3c9≠7
stte

♦ whip[4]: r1c8{n8 n4} - r3c8{n4 n5} - c9n5{r3 r6} - c9n4{r6 .} ==> r2c7≠8
whip[6]: r1c6{n9 n8} - r2n8{c6 c3} - c3n5{r2 r4} - c3n9{r4 r8} - c3n4{r8 r1} -
r1n7{c3 .} ==> r1c7≠9
stte

```

The total computation time for the three steps has been 11 minutes, admittedly rather long, but much shorter than if we had dealt with all the anti-backdoor-pairs. Notice that this time could have been drastically reduced if we had stuck to our idea that W6 was the maximum reasonable size for chains for this puzzle:

Total computation time = 3m 21s

Contrary to the standard simplest-first solution, the above procedure supposes some time investment from the user. A disadvantage is, if you want to try with longer chains, you have to re-start all from the beginning.

13.9 Looking for two-step solutions – 4th part (fully automated search)

SudoRules has a way for fully automating the search for 2-step solutions. As the fully automated search is slower than the semi-automatic one (following manually the various steps described in section 13.8, with only the relevant rules loaded at each step), we shall restrict the lengths of all the chains to 5 in this example.

♦ **Unique step:** in the configuration file, choose which set of rules you will allow (remember that t-whips are not allowed) and load SudoRules with them, e.g.:

```

(bind ?*Bivalue-Chains* TRUE)
(bind ?*Z-Chains* TRUE)
(bind ?*Whips* TRUE)
(bind ?*all-chains-max-length* 5)

```

Use function “*find-sudoku-2-steppers-wrt-resolution-theory*”, or its abbreviation when $T_0 = W1$ “*find-2-steppers*”, i.e. type the command:

```

(find-sudoku-2-steppers-wrt-resolution-theory W1
  "1..5....2.2.7...3...3.6.1.....8.4..5..9.6.2.....6...4...5...3.7.8....4..9"
)

```

or:

```
(find-2-steppers
```

```
  "1..5....2.2.7...3...3.6.1.....8.4..5..9.6.2.....6...4...5...3.7.8....4..9")
```

and prepare some tea while it's running. After 7 minutes or so (depending on your brand of tea), you will get the following output:

```
====> There is 1 2-step solution, based on the following pair:
n8r7c8 n7r1c3
```

It is then left to you to scan the full output (e.g. by searching it for the message "PUZZLE 0 IS SOLVED", in order to find the only 2-step solution in W5:

```
whip[4]: r1c8{n8 n4} - r3c8{n4 n5} - c9n5{r3 r6} - c9n4{r6 .} ==>
r7c8≠8
hidden-single-in-a-block ==> r8c7=8
z-chain[5]: r1n4{c3 c8} - b3n8{r1c8 r3c8} - b1n8{r3c2 r2c3} - r5c3{n8
n1} - r9c3{n1 .} ==> r1c3≠7
stte
```

Considering the puzzle is in W4, we have found a 2-step solution including a chain that is only slightly longer than necessary (z-chain[5]). The search can be considered successful.

It is interesting to check the intermediate results, when chain length is restricted to 5:

There remains 198 candidates after the rules in W1 have been applied.

```
====> CHECKING WHICH OF THE 198 CANDIDATES CAN BE ELIMINATED BY THE CURRENT SET OF
RULES:
erasable candidates computation time = 1m 55.08s
====> 15 candidates can be eliminated:
n8r1c7 n5r2c7 n8r2c7 n4r2c9 n4r4c8 n3r6c9 n7r6c9 n8r7c8 n1r8c3 n8r8c4 n8r8c5 n2r8c7
n6r8c7 n2r9c7 n1r9c8
```

Having 15 candidates that can be eliminated from the resolution state after W1 using the chosen set of rules implies that, even with the strict restriction on chain length, $15 \cdot (198 - 15) + 15 \cdot 14/2 = 2,850$ relevant pairs must be checked as potential anti-backdoor-pairs. Of these, only 107 are found to satisfy the conditions:

```
====> LOOKING FOR THE RELEVANT ANTI-BACKDOOR-PAIRS (BE PATIENT):
anti-backdoor-pairs computation time = 4m 22.1s
====> There are 107 W1-anti-backdoor-pairs for the current set of rules
```

```
====> CHECKING WHICH OF THE ANTI-BACKDOOR-PAIRS LEAD TO 2-STEP SOLUTIONS:
Total computation time = 7m 19.81s
There is one 2-step solution for the current set of rules, based on the following
pair:
n8r7c8 n7r1c3
```

Only one pair among the potentially relevant 2,850 ones is found to lead to a 2-step solution. As a result, *it seems clear that such a 2-step solution is almost impossible to find by a human solver and any claim to the contrary should be considered with some grain of salt.*

Moreover, suppose we had allowed slightly longer chains, e.g. max-length 6 instead of 5 (because we had no *a priori* reason to think 5 would be enough). Then there would be 20 candidates (instead of 15) erasable from the resolution state after W1. This would imply $20 \cdot (198 - 20) + 20 \cdot 19/2 = 3,750$ relevant pairs to check as potential anti-backdoor-pairs. Only 146 of them are effectively anti-backdoor-pairs. And there are finally 5 2-step solutions in W6.

```
====> CHECKING WHICH OF THE 198 CANDIDATES CAN BE ELIMINATED BY THE CURRENT SET OF
RULES:
erasable candidates computation time = 1m 49.83s
====> 20 candidates can be eliminated:
n8r1c7 n5r2c7 n8r2c7 n4r2c9 n2r4c8 n4r4c8 n7r5c3 n4r6c4 n4r6c5 n1r6c9 n3r6c9 n7r6c9
n8r7c8 n1r8c3 n8r8c4 n8r8c5 n2r8c7 n6r8c7 n2r9c7 n1r9c8

====> LOOKING FOR THE RELEVANT ANTI-BACKDOOR-PAIRS (BE PATIENT):
anti-backdoor-pairs computation time = 5m 57.38s
====> There are 146 W1-anti-backdoor-pairs for the current set of rules.
====> CHECKING WHICH OF THE ANTI-BACKDOOR-PAIRS LEAD TO 2-STEP SOLUTIONS:
Total computation time = 9m 11.66s
====> There are 5 2-step solutions for the current set of rules, based on the following
pairs:
n8r2c7 n9r1c7      n7r5c3 n6r2c7      n8r7c8 n7r1c3      n8r7c8 n9r1c7      n8r7c8 n7r3c9
```

Notice that the 4 additional solutions rely on whips[6] and are therefore significantly more complex.

Considering that W1 is the most common value for $?RT_0$ in function “*find-sudoku-2-steppers-wrt-resolution-theory*”, there is an abbreviation for this case: “*find-sudoku-2-steppers-wrt-W1*” (further abbreviated as “*find-2-steppers*”). In parallel with the 1-step case, there is also a function “*find-sukaku-2-steppers-wrt-resolution-theory*”, with an abbreviation: “*find-sukaku-2-steppers-wrt-W1*”. Of course, they take one argument less than their original counterparts.

13.10 Reducing the number of steps

This section is about a method allowing to reduce the number of steps of a resolution path for a puzzle, with respect to a fixed, properly chosen resolution theory T. Notice that the goal is not to “find the smallest number of steps” in T; this would be meaningless without stating in which resolution theory and unachievable in most cases even with stating it. As previously, rules in some chosen T_0 are considered as no-step.

Given a family T of resolution rules, the CSP-Rules “standard” simplest-first strategy has the main advantage of computing the rating of a puzzle with respect to T at the same time as it solves it, but it tends to produce many steps, especially if various types of rules are activated at the same time as more general ones (e.g. bivalued-chains and/or z -chains at the same time as whips). This may be seen as a second advantage (as it shows many possibilities a manual player could use) or as a disadvantage, depending on one's goals.

Generally speaking, the simplest-first strategy is for a computer program and a human solver doesn't have to follow it (and in general he will not). But there is no reason why a computer program itself could not have different strategies for using the same rules.

There are two special cases that can (more or less) be excluded from our considerations here: 1-step and 2-step solutions. In such cases, the previous sections have shown that a systematic review of all the possible 1-step or 2-step paths is possible (though somewhat time consuming for 2-step solutions). Unfortunately, in case no such 1- or 2- step solution exists, a systematic exploration of all the resolution paths is impossible in practice, due to the combinatorial explosion of the number of paths to take into consideration. A totally different approach must be taken.

In such a case, any “fewer steps” approach has to choose each step “randomly” from the “most promising ones” among all the currently available ones. Obviously, for this to work, some heuristics for defining “promising steps” must be defined. The negative aspects of such an approach is, being based on random choices, the final result will depend on how many tries we make and we can never be sure that a shorter path doesn't exist. The following remark may sound a tad bit sarcastic; but it is only realistic. ***In order to find a resolution path with fewer steps, any algorithm or human solver has to explore many more steps than in the simplest-first strategy or in any natural “first-found-first-applied” strategy. The only thing that has fewer steps is the final printed result.***

Remark: one general problem about trying to “optimise” full resolution paths is, no rating of a full path has ever been defined in any rational way. Merely adding the lengths of each step would be total nonsense. As the intrinsic complexity of a step increases “exponentially” with its size (i.e. the length of a chain or the size of a Subset), it would be more rational to consider a function such as $\text{sum}(a^{\text{size}})$, where $a > 1$ is some parameter to be determined. Anyway, that would be totally useless, as it is impossible to use it in practice for any path optimisation.

The (much more modest) approach considered in this section almost totally avoids such problems. By first carefully selecting the allowed maximum length L of all the chains (based on the simplest-first solution and the rating of the puzzle thus obtained), only the number of steps of length $\leq L$ has to be taken into account.

The idea of reducing the number of steps by successive random choices among those selected as “most promising” is due to François Cordiolani (alias Defise).

Notice that my current implementation in CSP-Rules is quite slow. Speed-wise, there remains many open possibilities for improving it.

13.9.1 The heuristics used for evaluating the candidates

The strategy used by SudoRules to reduce the number of steps¹ is of the *steepest-descent* kind and is given by the following pseudo-code (with an infamous GOTO):

- 1) initialise the puzzle with the givens;
- 2) apply all the rules in T_0 , until none can be applied (as T_0 has the confluence property, this results in a uniquely defined resolution state RS);
- 3) define variable $\text{step} = 0$;
- 4) bind $\text{step} = \text{step} + 1$;
- 5) find all the candidates in RS that could be deleted by the application of a single rule in T (this does not change RS);
- 6) evaluate (according to the method defined below) each of these “erasable candidates” (this does not change RS);
- 7) randomly choose one of these erasable candidates among those with the best score, say C (this does not change RS);
- 8) apply the simplest rule in T that allows to eliminate C (as appears here, the simplest-first strategy is not completely discarded); this changes RS;
- 9) apply all the rules in T_0 until none can be applied; this changes RS (unless the C score was only 1);
- 10) if the puzzle is not solved, then GOTO 4, else report it as solved, report the value of variable “step” and stop.

The above procedure defines one try and produces a single resolution path in T (generally already shorter than the simplest-first one in T); in order to reduce more significantly the number of steps, several tries have to be made, in the hope that some of the combined random choices will lead to a path with still fewer steps. As in any steepest-decent method, no guarantee can be given that the smallest number of steps will ever be found, even if many tries are made.

There remains to define the *evaluation function* for an erasable candidate C in a resolution state RS during step 6. The most natural way of doing it is very simple; the score of C is defined as the total number of deletions that result from applying in RS the simplest rule that allows to delete C and then applying all the rules in T_0 .

¹ As he pointed it out, Defise’s strategy (although of the same steepest-descent kind) is slightly different: instead of evaluating candidates, he evaluates what, in the CLIPS parlance would be called rule activations; this implies that the same candidate can have several scores depending on how it is eliminated. In SudoRules, only the simplest rule activation is considered.

For ease of understanding, one can imagine this evaluation process is done for each candidate C in a copy RS' of the current resolution state RS and it starts by applying in RS' the simplest rule that deletes C (together with possibly other targets of the same rule instantiation, when the same rule can eliminate more than one candidate, i.e. when the “blocked” version of resolution rules is selected) and then applying the rules in T_0 , resulting in a final state RS'' . The score is the difference in the numbers of candidates between RS and the final RS'' . Notice that if, in this evaluation process, a candidate is asserted as a decided value, it is counted as deleted as a candidate and the other deletions this new decided value implies by direct contradictions are also counted; as a result, there is no reason to make any special proviso for values that are decided in the process.

The obvious heuristic justification for defining the score this way is, if many candidates are eliminated by applying one step that has to be counted, plus all the 0-step rules, there will remain fewer candidates to eliminate, hopefully requiring fewer additional steps. Unfortunately, this hope is not always verified and this is the main limitation of the approach, *a limitation typical of any steepest descent algorithm*.

In his original algorithm, François Defise had a secondary criterion for selection between candidates with the same score: those with minimum number of candidates in one of the (i.e. the four rc , rn , vn and bn) CSP-Variables to which it belongs. I haven’t retained such a criterion because my experience is, concentrating on bivalued cells is rarely useful and I can see no reason why generalizing this to possibly more companion candidates would be very useful.

13.9.2 Example 1

Application of the above procedure may be more or less effective, depending on the puzzle, on the chosen theories T and T_0 , and on luck. In any case, it takes much more time than a simplest-first solution, as it does a second level of “optimisation”, “exponentially” more complex than the standard strategy.

Consider the hard puzzle below, from my own collection, Pisces-9.0 ($SER = 9.0$, $W = 7$). (See the “pisces2#523-9.0-W7.clp” file in [CSP-RULES-EXAMPLES].)

!	6	.	.	!	.	.	.	!	.	.	1	!
!	.	2	.	!	.	.	.	!	.	4	.	!
!	.	.	7	!	.	.	.	!	8	.	.	!
!	.	.	4	!	1	.	5	!	9	.	.	!
!	3	8	1	!	6	9	7	!	4	2	5	!
!	.	.	9	!	3	.	2	!	6	.	.	!

```

! . . 6 ! . . . ! 7 . . !
! . 9 . ! . . . ! . 8 . !
! 1 . . ! . . . ! . . 3 !
+-----+-----+-----+

```

6.....1.2.....4...7...8....41.59..381697425..93.26....6...7...9.....8.1.....3
 29 gives, non-minimal, SER = 9.0

The resolution state after Singles and whips[1] is as follows:

! 6	345	358	! 24589	25	489	! 235	7	1	!
! 589	2	358	! 578	1567	168	! 35	4	69	!
! 459	1	7	! 245	2356	346	! 8	569	269	!
! 2	6	4	! 1	8	5	! 9	3	7	!
! 3	8	1	! 6	9	7	! 4	2	5	!
! 57	57	9	! 3	4	2	! 6	1	8	!
! 458	345	6	! 24589	1235	13489	! 7	59	249	!
! 457	9	235	! 2457	23567	346	! 1	8	246	!
! 1	457	258	! 245789	2567	4689	! 25	569	3	!

Using the simplest-first strategy, this puzzle has a solution in W7 with 31 non-W1 steps (with all the Subsets, Finned Fish, z-chains, t-whips and whips activated. Using the fewer-steps procedure, I obtained a solution with only 7 non-W1 steps in W8, after 5 tries (the first try had 15 steps); I considered it was good enough and I stopped after one more try. See the above-mentioned file for the details of all these calculations; you will notice in particular that they are very slow (about 10 minutes for each try, to be compared to the 18.3 seconds for the simplest-first solution – which is already slow for SudoRules, due to the inherent difficulty of this puzzle).

```

1) whip[8]: c3n2{r8 r9} - r9c7{n2 n5} - c8n5{r9 r3} - r3c4{n5 n4} - r1n4{c6 c2} -
r9c2{n4 n7} - r9c5{n7 n6} - c8n6{r9 .} ==> r8c4#2
2) whip[7]: r9c7{n5 n2} - r9c3{n2 n8} - c1n8{r7 r2} - r2n9{c1 c9} - r7c9{n9 n4} -
r7c1{n4 n5} - b9n5{r7c8 .} ==> r9c5#5
3) whip[8]: r2n1{c5 c6} - r2n6{c6 c9} - c8n6{r3 r9} - r9c5{n6 n2} - r9c7{n2 n5} -
r9c3{n5 n8} - c1n8{r7 r2} - r2n9{c1 .} ==> r2c5#7
hidden-single-in-a-block ==> r2c4=7
4) whip-rc[8]: r2c9{n9 n6} - r3c9{n6 n2} - r8c9{n2 n4} - r8c4{n4 n5} - r3c4{n5 n4} -
r3c1{n4 n5} - r8c1{n5 n7} - r6c1{n7 .} ==> r3c8#9
whip[1]: c8n9{r9 .} ==> r7c9#9
5) whip[8]: c9n4{r8 r7} - c1n4{r7 r3} - r3n9{c1 c9} - b3n2{r3c9 r1c7} - r1c5{n2 n5} -
r1c2{n5 n3} - r7c2{n3 n5} - r8n5{c1 .} ==> r8c4#4
naked-single ==> r8c4=5
6) whip[7]: b9n6{r9c8 r8c9} - c9n4{r8 r7} - c9n2{r7 r3} - r3c4{n2 n4} - r3c6{n4 n3} -
r8c6{n3 n4} - c1n4{r8 .} ==> r3c8#6
singles ==> r3c8=5, r2c7=3, r1c7=2, r1c5=5, r9c7=5, r7c8=9, r9c8=6, r2c3=5

```

```
7) whip-rc[5]: r6c1{n5 n7} - r8c1{n7 n4} - r7c2{n4 n3} - r8c3{n3 n2} - r8c9{n2 .} ==>
r6c2≠5
stte
```

13.9.3 Example 2

Here is another example for a much simpler puzzle due to Mith (see details in the “Tatooine-Tosche-Station.clp” file), using only Subsets:

!	.	.	.	!	.	.	.	!	.	.	.	!
!	.	.	1	!	2	.	.	!	.	.	3	!
!	.	4	.	!	.	5	.	!	.	6	.	!
!	.	5	.	!	.	6	.	!	.	7	.	!
!	.	.	3	!	8	.	.	!	.	.	2	!
!	.	.	.	!	.	.	7	!	.	.	.	!
!	.	.	.	!	.	.	.	!	.	.	.	!
!	.	.	2	!	3	.	.	!	.	9	8	!
!	.	6	.	!	.	7	.	!	.	5	.	!

.....12....3.4..5..6..5..6..7...38....2....7.....23...98.6..7..5.
SER = 4.0

The resolution state after Singles and whips[1] is as follows:

!	2356789	23789	56789	!	14679	13489	134689	!	1245789	1248	14579	!
!	56789	789	1	!	2	489	4689	!	45789	48	3	!
!	23789	4	789	!	179	5	1389	!	12789	6	179	!
!	12489	5	489	!	149	6	12349	!	13489	7	149	!
!	14679	179	3	!	8	149	1459	!	14569	14	2	!
!	124689	1289	4689	!	1459	12349	7	!	1345689	1348	14569	!
!	1345789	13789	45789	!	14569	12489	1245689	!	123467	1234	1467	!
!	1457	17	2	!	3	14	1456	!	1467	9	8	!
!	13489	6	489	!	149	7	12489	!	1234	5	14	!

265 candidates, 2088 csp-links and 2088 links. Density = 5.97%

Using the simplest-first strategy, there is a solution with 16 non-W1 steps using only Subsets and Finned Fish:

```
hidden-pairs-in-a-block: b5{n2 n3}{r4c6 r6c5} ==> r6c5≠9, r6c5≠4, r6c5≠1, r4c6≠9,
r4c6≠4, r4c6≠1
swordfish-in-columns: n7{c3 c4 c9}{r7 r3 r1} ==> r7c7≠7, r7c2≠7, r7c1≠7, r3c7≠7,
r3c1≠7, r1c7≠7, r1c2≠7, r1c1≠7
swordfish-in-columns: n3{c2 c5 c8}{r7 r1 r6} ==> r7c7≠3, r7c1≠3, r6c7≠3, r1c6≠3,
r1c1≠3
```

```

swordfish-in-columns: n6{c3 c4 c9}{r6 r1 r7} ==> r7c7≠6, r7c6≠6, r6c7≠6, r6c1≠6,
r1c6≠6, r1c1≠6
hidden-pairs-in-a-block: b9{n6 n7}{r7c9 r8c7} ==> r8c7≠4, r8c7≠1, r7c9≠4, r7c9≠1
swordfish-in-rows: n2{r3 r4 r9}{c7 c1 c6} ==> r7c7≠2, r7c6≠2, r6c1≠2, r1c7≠2, r1c1≠2
naked-pairs-in-a-block: b9{r7c7 r9c9}{n1 n4} ==> r9c7≠4, r9c7≠1, r7c8≠4, r7c8≠1
hidden-pairs-in-a-block: b1{n2 n3}{r1c2 r3c1} ==> r3c1≠9, r3c1≠8, r1c2≠9, r1c2≠8
swordfish-in-rows: n5{r2 r5 r8}{c1 c7 c6} ==> r7c6≠5, r7c1≠5, r6c7≠5, r1c7≠5, r1c1≠5
hidden-pairs-in-a-block: b1{n5 n6}{r1c3 r2c1} ==> r2c1≠9, r2c1≠8, r2c1≠7, r1c3≠9,
r1c3≠8, r1c3≠7
hidden-pairs-in-a-block: b6{n5 n6}{r5c7 r6c9} ==> r6c9≠9, r6c9≠4, r6c9≠1, r5c7≠9,
r5c7≠4, r5c7≠1
hidden-pairs-in-a-block: b8{n5 n6}{r7c4 r8c6} ==> r8c6≠4, r8c6≠1, r7c4≠9, r7c4≠4,
r7c4≠1
hidden-triplets-in-a-column: c1{n5 n6 n7}{r8 r2 r5} ==> r8c1≠4, r8c1≠1, r5c1≠9,
r5c1≠4, r5c1≠1
singles ==> r8c5=4, r8c2=1
hidden-pairs-in-a-block: b7{n5 n7}{r7c3 r8c1} ==> r7c3≠9, r7c3≠8, r7c3≠4
finned-x-wing-in-rows: n4{r5 r2}{c6 c8} ==> r1c8≠4
hidden-triplets-in-a-row: r1{n5 n6 n7}{c9 c3 c4} ==> r1c9≠9, r1c9≠4, r1c9≠1, r1c4≠9,
r1c4≠4, r1c4≠1
whip[1]: c4n4{r6 .} ==> r5c6≠4
stte

```

After a single try of the fewer steps function, I obtained a solution with only 8 steps; I didn't make more tries with Subsets only or tries including whips, because it is difficult to beat Subsets in the number of candidates they eliminate.

```

=====> STEP #1
swordfish-in-columns: n7{c3 c4 c9}{r7 r3 r1} ==> r1c2≠7, r7c7≠7, r7c2≠7, r7c1≠7,
r3c7≠7, r3c1≠7, r1c7≠7, r1c1≠7
=====> STEP #2
swordfish-in-columns: n6{c3 c4 c9}{r6 r1 r7} ==> r7c7≠6, r7c6≠6, r6c7≠6, r6c1≠6,
r1c6≠6, r1c1≠6
=====> STEP #3
hidden-pairs-in-a-block: b5{n2 n3}{r4c6 r6c5} ==> r4c6≠4, r6c5≠9, r6c5≠4, r6c5≠1,
r4c6≠9, r4c6≠1
=====> STEP #4
swordfish-in-rows: n5{r2 r5 r8}{c1 c7 c6} ==> r1c1≠5, r7c6≠5, r7c1≠5, r6c7≠5, r1c7≠5
=====> STEP #5
hidden-triplets-in-a-row: r1{n5 n6 n7}{c9 c3 c4} ==> r1c9≠1, r1c9≠9, r1c9≠4, r1c4≠9,
r1c4≠4, r1c4≠1, r1c3≠9, r1c3≠8
=====> STEP #6
hidden-triplets-in-a-column: c7{n5 n6 n7}{r2 r5 r8} ==> r2c7≠4, r8c7≠4, r8c7≠1,
r5c7≠9, r5c7≠4, r5c7≠1, r2c7≠9, r2c7≠8
=====> STEP #7
hidden-triplets-in-a-column: c1{n5 n6 n7}{r8 r2 r5} ==> r5c1≠4, r8c1≠4, r8c1≠1,
r5c1≠9, r5c1≠1, r2c1≠9, r2c1≠8
whip[1]: r8n4{c6 .} ==> r7c4≠4, r7c5≠4, r7c6≠4, r9c4≠4, r9c6≠4
whip[1]: c4n4{r6 .} ==> r5c5≠4, r5c6≠4
hidden-single-in-a-row ==> r5c8=4
naked-single ==> r2c8=8
hidden-single-in-a-block ==> r1c7=4

```

```

whip[1]: b3n9{r3c9 .} ==> r3c1≠9, r3c3≠9, r3c4≠9, r3c6≠9
=====> STEP #8
hidden-pairs-in-a-column: c6{n4 n6}{r2 r8} ==> r2c6≠9, r8c6≠5, r8c6≠1
stte

```

13.9.4 Syntax

The most general function for launching the above calculations is:

```
(solve-sudoku-with-fewer-steps-wrt-resolution-theory ?RT0 ?sudoku-string)
```

It has a specialised version for the most natural resolution theorie ?RT0:

```
(solve-sudoku-with-fewer-steps-wrt-W1 ?sudoku-string)
```

There are corresponding functions for puzzles given as a sukaku list:

```
(solve-sukaku-with-fewer-steps-wrt-resolution-theory ?RT0 $?sukaku-list)
(solve-sukaku-with-fewer-steps-wrt-W1 $?sukaku-list)
```

Examples for the first puzzle:

```
(solve-sudoku-with-fewer-steps-wrt-W1
"6.....1.2.....4...7...8....41.59..381697425..93.26....6...7...9.....8.1.....3")
```

Or, starting e.g. from the resolution state after Singles and whips[1]:

```
(solve-sukaku-with-fewer-steps-wrt-W1
 6      345   358   24589  25    489   235   7      1
589    2     358   578    1567  168    35    4     69
459    1     7     245    2356   346    8     569   269
2      6     4     1      8     5     9     3     7
3      8     1     6      9     7     4     2     5
57     57    9     3     4     2     6     1     8
458    345   6     24589  1235   13489  7     59    249
457    9     235   2457   23567   346    1     8     246
1      457   258   245789  2567   4689   25    569   3
)
```

In order to make several tries, you have to iterate the previous function or to use the function that does it for you, i.e. :

```
(solve-ntimes-sudoku-with-fewer-steps-wrt-resolution-theory
?ntimes ?RT0 ?sudoku-string)
```

or any of the abbreviations you can imagine for the ?RT0 = W1 case and for the corresponding Sukaku cases.

There is also a slightly smarter function that iterates a specified number of times, while avoiding to pursue resolution paths longer than any path previously obtained, with syntax:

```
(smart-solve-ntimes-sudoku-with-fewer-steps-wrt-resolution-theory
?ntimes ?RT0 ?sudoku-string)
```

As expected, ?ntimes is the number of times you want it to iterate. At the end, it will output the best resolution path it has found. Here, “best” means the first found among those with the fewest number of steps that also have the smallest effective max-chain-length.

There is also an associated function for the most usual ?RT0 case, with syntax:

```
(smart-solve-ntimes-sudoku-with-fewer-steps-wrt-W1
?ntimes ?sudoku-string)
```

13.10 Forcing T&E

Forcing-T&E and Forcing{3}-T&E were defined in section 3.9. Here is an extreme example of application. The puzzle (“Gata de Mar”) is a relatively hard one (with SER = 8.3), proposed by eleven:

```
+-----+-----+-----+
! 1 8 . ! . . 6 ! . . . !
! 7 . . ! 4 . . ! . . . !
! . . 3 ! . . . ! . 6 4 !
+-----+-----+-----+
! . 7 8 ! 6 . 4 ! . . 9 !
! . 4 . ! 7 . 8 ! . 5 . !
! . . . ! . 5 9 ! . . . !
+-----+-----+-----+
! . . . ! . . . ! . 8 . !
! . . . ! 5 . . ! 7 . . !
! 4 . 9 ! . . . ! . . 5 !
+-----+-----+-----+
```

The resolution state after Singles and whips[1] is as follows:

```
+-----+-----+-----+
! 1      8      4      ! 239    29      6      ! 5      2379   237    !
! 7      6      5      ! 4      1289   123     ! 12389  1239   1238   !
! 2      9      3      ! 18     7       5      ! 18     6       4      !
+-----+-----+-----+
! 5      7      8      ! 6      123     4      ! 123     123     9      !
! 9      4      126     ! 7      123     8      ! 1236    5      1236   !
! 36     123    126     ! 12     5       9      ! 12468   1247   12678  !
+-----+-----+-----+
```

!	36	5	7	!	1239	12469	123	!	123469	8	1236	!
!	8	123	126	!	5	12469	123	!	7	12349	1236	!
!	4	123	9	!	1238	1268	7	!	1236	123	5	!
+-----+-----+-----+												

148 candidates.

The puzzle has a simplest-first solution in SFin+Z5 (in 30 non-W1 steps):

```

hidden-pairs-in-a-row: r8{n4 n9}{c5 c8} ==> r8c8#3, r8c8#2, r8c8#1, r8c5#6, r8c5#2,
r8c5#1
hidden-pairs-in-a-block: b9{n4 n9}{r7c7 r8c8} ==> r7c7#6, r7c7#3, r7c7#2, r7c7#1
finned-x-wing-in-rows: n9{r8 r1}{c8 c5} ==> r2c5#9
whip[1]: r2n9{c8 .} ==> r1c8#9
finned-x-wing-in-rows: n6{r8 r5}{c3 c9} ==> r6c9#6
hidden-triplets-in-a-row: r6{n4 n7 n8}{c7 c8 c9} ==> r6c9#2, r6c9#1, r6c8#2, r6c8#1,
r6c7#6, r6c7#2, r6c7#1
whip[1]: r6n6{c3 .} ==> r5c3#6
biv-chain[3]: c7n9{r2 r7} - c4n9{r7 r1} - b2n3{r1c4 r2c6} ==> r2c7#3
z-chain[3]: c4n9{r7 r1} - b2n3{r1c4 r2c6} - c6n1{r2 .} ==> r7c4#1
z-chain[3]: c4n9{r7 r1} - b2n3{r1c4 r2c6} - c6n2{r2 .} ==> r7c4#2
z-chain[3]: c5n8{r9 r2} - r3c4{n8 n1} - b5n1{r6c4 .} ==> r9c5#1
biv-chain[4]: r1c5{n2 n9} - r8c5{n9 n4} - c8n4{r8 r6} - c8n7{r6 r1} ==> r1c8#2
biv-chain[3]: r1c8{n3 n7} - c9n7{r1 r6} - c9n8{r6 r2} ==> r2c9#3
z-chain[3]: c6n2{r8 r2} - r1n2{c4 c9} - r7n2{c9 .} ==> r9c5#2
z-chain[3]: c6n2{r8 r2} - r1n2{c5 c9} - r7n2{c9 .} ==> r9c4#2
biv-chain[4]: r3c7{n1 n8} - b2n8{r3c4 r2c5} - r9c5{n8 n6} - c7n6{r9 r5} ==> r5c7#1
biv-chain[4]: c5n8{r2 r9} - b8n6{r9c5 r7c5} - r7n4{c5 c7} - c7n9{r7 r2} ==> r2c7#8
biv-chain[4]: c8n9{r2 r8} - b9n4{r8c8 r7c7} - r6c7{n4 n8} - r3c7{n8 n1} ==> r2c8#1
z-chain[4]: b5n1{r5c5 r6c4} - c4n2{r6 r1} - b2n3{r1c4 r2c6} - c6n1{r2 .} ==> r7c5#1
biv-chain[5]: c5n6{r7 r9} - c5n8{r9 r2} - b3n8{r2c9 r3c7} - r6c7{n8 n4} - r7c7{n4 n9}
==> r7c5#9
biv-chain[5]: c5n6{r7 r9} - c5n8{r9 r2} - b3n8{r2c9 r3c7} - r6c7{n8 n4} - r7n4{c7 c5}
==> r7c5#2
whip[1]: b8n2{r8c6 .} ==> r2c6#2
hidden-pairs-in-a-row: r7{n1 n2}{c6 c9} ==> r7c9#6, r7c9#3, r7c6#3
z-chain[3]: b9n3{r9c8 r8c9} - r8n6{c9 c3} - r7c1{n6 .} ==> r9c2#3
biv-chain[4]: c2n3{r6 r8} - r7n3{c1 c4} - c4n9{r7 r1} - c4n2{r1 r6} ==> r6c2#2
whip[1]: c2n2{r9 .} ==> r8c3#2
biv-chain-cn[3]: c3n2{r5 r6} - c3n6{r6 r8} - c9n6{r8 r5} ==> r5c9#2
biv-chain[3]: r9c2{n2 n1} - r8c3{n1 n6} - b9n6{r8c9 r9c7} ==> r9c7#2
z-chain[3]: b7n1{r8c3 r9c2} - r9n2{c2 c8} - r7c9{n2 .} ==> r8c9#1
z-chain[4]: r9c2{n1 n2} - r9c8{n2 n3} - r2n3{c8 c6} - c6n1{r2 .} ==> r9c4#1
whip[1]: b8n1{r8c6 .} ==> r2c6#1
naked-single ==> r2c6=3
naked-pairs-in-a-block: b2{r1c4 r1c5}{n2 n9} ==> r2c5#2
whip[1]: r2n2{c9 .} ==> r1c9#2
biv-chain[3]: r8n3{c9 c2} - r7c1{n3 n6} - r8n6{c3 c9} ==> r8c9#2
z-chain[4]: r7c9{n1 n2} - r2c9{n2 n8} - r2c5{n8 n1} - r4n1{c5 .} ==> r5c9#1
whip[1]: b6n1{r4c8 .} ==> r4c5#1
naked-pairs-in-a-column: c9{r5 r8}{n3 n6} ==> r1c9#3
stte

```


This puzzle has no 1-step or 2-step solution based on whips of length no more than 8 – which would already be very complicated patterns for a puzzle in SFin+Z5. Using the method of section 13.9, I found a resolution path with 9 steps in S+W8, after 3 tries; based on a path obtained with $T_0 = S$, Defise found one with only 6 steps in S+W8, after 4 tries.

From all this, it appears that this puzzle has no easy solution with few steps of restricted length. However, it has a “1-step” solution using Forcing{3}-T&E, obtained with function “*apply-F3TE*” (to be called with no argument).

```
FORCING[3]-T&E(W1) applied to trivalued candidates n2r1c9, n3r1c9 and n7r1c9 :
==> 3 values decided in the three cases: n6r7c1 n3r6c1 n6r6c3
==> 63 candidates eliminated in the three cases: n2r1c4 n2r1c8 n9r1c8 n2r2c5 n9r2c5
n2r2c6 n1r2c7 n3r2c7 n8r2c7 n1r2c8 n2r2c9 n3r2c9 n2r4c5 n2r4c7 n3r4c8 n6r5c3 n2r5c5
n1r5c7 n3r5c7 n1r5c9 n2r5c9 n6r6c1 n3r6c2 n1r6c3 n2r6c3 n1r6c7 n2r6c7 n6r6c7 n1r6c8
n2r6c8 n1r6c9 n2r6c9 n6r6c9 n3r7c1 n1r7c4 n2r7c4 n1r7c5 n6r7c5 n2r7c6 n3r7c6 n1r7c7
n2r7c7 n3r7c7 n6r7c7 n1r7c9 n6r7c9 n1r8c2 n2r8c2 n6r8c3 n1r8c5 n2r8c5 n4r8c5 n1r8c6
n1r8c8 n2r8c8 n3r8c8 n2r8c9 n3r8c9 n3r9c4 n1r9c5 n2r9c5 n1r9c7 n2r9c7
stte
```

Such a carnage among the candidates is why I call Forcing-T&E and Forcing{3}-T&E the nukes of solving. Remember however that it doesn’t always work so smoothly and that it is among the most inelegant solving techniques as it cumulates T&E with reasoning by cases (i.e. using several streams of reasoning in parallel).

The corresponding function for Forcing-T&E is “*apply-F2TE*”.

14. Puzzles in T&E(3) and the Tridagon family of rules

This chapter is all about the recently found “trivalued oddagon” pattern in 9×9 Sudoku, the first known impossible pattern that requires T&E(3) to be proven contradictory. A consistent puzzle that “almost” have this pattern must indeed have some “guardian” candidates preventing it to fall into inconsistency and this translates into the existence of an OR_k relation between these guardians and then into the possibility of using generic OR_k chains based on it for trying to solve it.

This new pattern was indeed the original reason why I added to CSP-Rules new generic resolution rules based on OR_k relations (see section 3.5 for their definitions).

In addition to presenting final results, this chapter and the next one try to show the path of progressive discoveries, i.e. research in action. They also show how CSP-Rules can be used as a versatile tool on the most recent research topics.

The anti-tridagon pattern (i.e. the impossible trivalued oddagon pattern plus guardians) deserves to be considered as “exotic” because it is very rare (almost impossible to be found by randomly generating puzzles); in my view, this allows to grant its detection rule some special “rights” to break the natural classification based on the number of CSP-Variables it involves. But this was not obvious at the start of this work, as illustrated e.g. by the different views between sections 14.5 and 14.9.

14.1 The trivalued oddagon and the tridagon patterns

The patterns and resolution rules introduced in the first sections of this chapter are related to a recently discovered Sudoku-specific pattern that is impossible in any consistent puzzle, known as a “**trivalued oddagon**” (or “Thor’s Hammer” in some circles, due to the shape formed by the “+” signs in the following picture). It is based on four blocks forming a rectangle, each with three cells disposed as shown by the “+” signs (modulo Sudoku isomorphisms), with the twelve cells having the same three candidates (and only them) – and no conditions at all on any other cell.

```

+-----+-----+
! + . . ! + . . !
! . + . ! . + . !
! . . + ! . . + !
+-----+-----+
! + . . ! . . + !
! . + . ! . + . !
! . . + ! + . . !
+-----+-----+

```

This beautifully simple pattern has been made famous in the Sudoku community via a puzzle (“**Loki**”) created by mith, which also happened to be the 10th known one with the highest known SER: 11.9. Of course, Loki doesn’t have the trivalued-oddagon pattern itself: it has one more candidate in one of the twelve cells – allowing the application of an obvious Tridagon elimination rule (defined in section 14.2).

Although this is not strictly the topic of this chapter, it is worth noting the *role played by Loki in totally re-orienting the decades-old search for the hardest Sudoku puzzles*. Ever since I defined my BpB sub-classification of T&E(2) in [CRT, 2011] and its application to the hardest known puzzles in [PBCS1, 2012], at a time when only three known puzzles were in B7B, I had kept computing the BpB classification of all the puzzles with high SER as soon as they were published. During those eleven years, in spite of many conjugated efforts by many experts for creating new puzzles qualifying as hardest, including many recent SER 11.8 ones by mith, no new one was found to be in B7B or above.

Imagine my surprise when I found that Loki was not in B7B and my still bigger surprise when I also found that *Loki was the first ever known puzzle not in T&E(2)* (a result I first reported here:

<http://forum.enjoysudoku.com/the-hardest-sudokus-new-thread-t6539-1048.html>).

Two of my old conjectures (T&E(2) and the stronger B7B) that had resisted eleven years of intensive research were suddenly disproved by a single counter-example.

The positive counterpart was, now that puzzles not in T&E(2) were known to exist, the T&E-depth of a puzzle (much faster to compute than its SER) could become the criterion for looking for the hardest puzzles by the usual vicinity search methods. This suggestion quickly led to a sudden surge in the number of hard puzzles (now produced in millions by mith, and a few more by Hendrik Monard).

14.1.1 Historical note

Contrary to many familiar resolution rules, it is relatively easy to track the origins of the those defined in this section:

- first mention of the name “Thor’s Hammer” on sudoku forums:
<http://forum.enjoysudoku.com/the-hardest-sudokus-t4212-407.html>
- first mention of the name “trivalued oddagon” on sudoku forums:
<http://forum.enjoysudoku.com/the-hardest-sudokus-new-thread-t6539-811.html>
- eleven’s first explanation of the pattern:
<http://forum.enjoysudoku.com/the-hardest-sudokus-new-thread-t6539-816.html>
- eleven’s proof that the pattern is contradictory:
<http://forum.enjoysudoku.com/post318379.html#p318379>
- coloin’s identification of 6 cases:
<http://forum.enjoysudoku.com/the-hardest-sudokus-new-thread-t6539-817.html>

- mith's first 11.9 "Loki", the 10th known puzzle with SER = 11.9:
<http://forum.enjoysudoku.com/the-hardest-sudokus-new-thread-t6539-1030.html>
- my report that Loki is the first ever puzzle not in T&E(2) and my suggestion for a new way of searching for the hardest puzzles, based on T&E-depth instead of SER:
<http://forum.enjoysudoku.com/the-hardest-sudokus-new-thread-t6539-1048.html>
- see also all the posts following the previous two and the discussion about "trivalue oddagons";
- various resolution paths of Loki:
<http://forum.enjoysudoku.com/loki-ser-11-9-t39840.html>
- a YouTube presentation of the impossible pattern (unfortunately on a trivial puzzle) by rangsk: <https://youtu.be/V7RC1hJ8vZ8>
- my view of how to use the pattern in a resolution rule (see the whole thread):
<http://forum.enjoysudoku.com/the-tridagon-rule-t39859.html>

Notice that, in and of itself, an impossible pattern doesn't define any resolution rules. In order to avoid any ambiguities, I'll continue to use the more or less standard name "trivalue oddagon" for the above-mentioned impossible pattern. The next sections will consist of precisely defining two types of resolution rules based on it: the Tridagon elimination rule and the family of Tridagon-forcing-whips[n]. See section 14.9 to 14.11 for three more general families: Trid-OR_k-forcing-whips[n], Trid-OR_k-contrad-whips[n] and Trid-OR_k-whips[n], respectively based on the generic OR_k-forcing-whips[n], OR_k-contrad-whips[n] and OR_k-whips[n].

Notice also that using the patterns defined in this chapter can have drastic effects on the difficulty of a puzzle, but puzzles with this pattern, in spite of existing by millions, are extremely rare (no chance of finding one by random generation).

14.2 The Tridagon elimination rule

The first versions of the Tridagon rule started by supposing that there is a trivalue oddagon plus a unique additional candidate in one of its cells and they concluded that the additional candidate could be asserted as True. But this rule should better be seen as an elimination of the three candidates in the cell (the further assertion of the additional one being left to the Naked-Singles rule). It then becomes obvious that the rule will work the same way (with possibly no Naked Single after it) with any number of additional candidates in a single of the pattern cells.

14.2.1 The Tridagon elimination rule

Our starting point will therefore be the following set of conditions. Suppose there are four blocks forming a rectangle in two bands (floors) and two stacks (towers):

```

b11  b12
b21  b22

```

and that there are three digits (the target digits), say 1 2 3, such that:

- in each of the four blocks, there are three cells in different rows and different columns such that:
 - each of these 4×3 cells contains the three digits as candidates,
 - eleven of these cells (the 123-cells) do not contain any other candidate,
 - the twelfth cell (the target cell) contains at least one more candidate,
 - some additional conditions to be found below are satisfied.

Tridagon elimination rule: In the above conditions, the three target digits can be eliminated from the target cell.

My purpose here is to find the necessary and sufficient “additional conditions” for the rule to be valid. I’ll propose a T&E-ish direct proof (involving four levels of T&E, first published here: <http://forum.enjoysudoku.com/the-tridagon-rule-t39859.html>). It will be very inelegant but very elementary, and it will not use any uniqueness argument.

- First, notice that in the above conditions, it is easy to:
- make permutations of stacks and bands such that the target cell is in block b11;
 - make permutations of rows in the first band such that the target cell is in row r1;
 - make permutations of the columns in the first stack such that the target cell is in column r1;
 - make further permutations of rows and columns within each band or stack such that we have the following pattern, with the target cell in r1c1 and with the 123-cells of the first three blocks in their anti-diagonal.

! 123456789 . . .			! 123 . . !		
! . 123 . .			! . 123 . !		
! . . 123 .			! . . 123 !		
! 123 . .			! * * *		
! . 123 .			! * * *		
! . . 123			! * * *		

- blocks not concerned by the pattern are not represented;
- “456789” means that each of these candidates may be in the cell and at least one of them must be in it;
- “.” means a cell that does not participate in the pattern (or in the proof that it is contradictory) and that it can contain anything;
- “*” means a cell for which we are trying to decide whether it is part of the pattern.

At this point, there is nothing we can say about where the three cells of interest in b22 are. We can easily show that, given the conditions at the start (they are in different

rows and in different columns), they can form only six non-isomorphic patterns of cells in b22.

Let us now try to prove the elimination rule by contraposition. Suppose one of the target digits is true in the target cell. By symmetry of the conditions with respect to the three target digits, we can always suppose it is number 1. Again, by symmetry of the resulting situation with respect to the remaining two target digits, we can always suppose that $r2c2 = 2$, leading to the following situation in the four blocks:

+-----+						
! 1	.	.	! 23	.	.	!
! .	2	.	! .	13	.	!
! .	.	3	! .	.	12	!
+-----+						
! 23	.	.	! *	*	*	!
! .	13	.	! *	*	*	!
! .	.	12	! *	*	*	!
+-----+						

At this point, we can have either $r4c1 = 2$ or $r4c1 = 3$.

If $r4c1 = 2$, we can have either $r1c4 = 2$ or $r1c4 = 3$.

If $r1c4 = 2$, we have the situation represented below:

+-----+						
! 1	.	.	! 2	.	.	!
! .	2	.	! .	3	.	!
! .	.	3	! .	.	1	!
+-----+						
! 2	.	.	! 13*	1*	3*	!
! .	3	.	! 1*	12*	2*	!
! .	.	1	! 3*	2*	23*	!
+-----+						

We can now check how a contradiction could arise in b22, depending on where the three cells with no other candidates (no stars) are placed. There are 3 cases:

- cells 3 5 7 (anti-diagonal): 3 would appear twice in b22
- cells 2 4 9: 1 would appear twice in b22
- cells 1 6 8: 2 would appear twice in b22

Exercise for the reader: try all the possible values for $r4c1$ and $r1c4$ and show that all of them lead to the same three cell combinations in b22 for a contradiction to be obtained: (3 5 7), (2 4 9) and (1 6 8). It is boring but all the cases rely on the same reasoning. (Or see my full proof here:

<http://forum.enjyosudoku.com/the-tridagon-rule-t39859.html>.)

Conclusion: *given the conditions at the start of this section, the Tridagon elimination rule is valid if and only if the pattern of 123-cells in block b22 is one of the following three:*

. . +	. + .	+ . .
. + .	+ +
+ +	. + .

Remark: it has been noted that the first and second patterns are isomorphic (using isomorphisms that preserve r1c1 and the anti-diagonals in b11, b12 and b22) and that this makes only two non-isomorphic cases (with the above conditions) for the rule to apply. This is true, but I prefer to keep it in this form in anticipation of the forthcoming Tridagons-Forcing-Whip rules. With no condition on r1c1 fixed, the three patterns are isomorphic.

A visual interpretation that can be useful for manual solvers has been given by eleven: one can draw one and only one rectangle with all its corners on the + cells.

As should be expected, the Tridagon elimination rule is enabled in SudoRules by setting *?*Tridagons** to TRUE in the configuration file.

14.2.2 Example: *Loki*

The best natural example of applying the tridagon elimination rule is the first mith puzzle I found not to be in T&E(2) and which made me interested in all this, the above-mentioned *Loki*. If we apply this rule before any whips (using a TRIDAGONS set of preferences to be precisely defined in section 14.5), a puzzle in T&E(3) is simplified to a puzzle in T&E(1), more precisely in W3, at the low end of T&E(1):

```
+-----+-----+-----+
! 5 7 . ! . . . ! 9 . . !
! . . . ! . . . ! . . 8 !
! . 1 . ! . . . ! . . . !
+-----+-----+-----+
! . . 1 ! 6 8 . ! . 4 . !
! . . . ! . . 2 ! 8 . 9 !
! . . 2 ! . 9 4 ! 1 6 . !
+-----+-----+-----+
! . . . ! . 2 . ! . . . !
! . 6 . ! 9 . 8 ! 2 . 4 !
! . . . ! 4 1 . ! 6 . . !
+-----+-----+-----+
```

```
57...9.....8.1.....168..4.....28.9..2.9416.....2.....6.9.82.4...41.6..
SER = 11.9

(solve-w-preferences
  "57...9.....8.1.....168..4.....28.9..2.9416.....2.....6.9.82.4...41.6.."
  TRIDAGONS)
Resolution state after Singles and whips[1]:
```


!	5	7	3468	!	238	346	13	!	9	123	136	!
!	23469	2349	3469	!	2357	34567	13579	!	3457	12357	8	!
!	234689	1	34689	!	23578	34567	3579	!	3457	2357	3567	!
!	379	359	1	!	6	8	357	!	357	4	2	!
!	3467	345	34567	!	1	357	2	!	8	357	9	!
!	378	358	2	!	357	9	4	!	1	6	357	!
!	134789	34589	345789	!	357	2	6	!	357	135789	1357	!
!	137	6	357	!	9	357	8	!	2	1357	4	!
!	23789	23589	35789	!	4	1	357	!	6	35789	357	!

205 candidates

hidden-pairs-in-a-column: c8{n8 n9}{r7 r9} ==> r9c8≠7, r9c8≠5, r9c8≠3, r7c8≠7, r7c8≠5, r7c8≠3, r7c8≠1

!	5	7	3468	!	238	346	13	!	9	123	136	!
!	23469	2349	3469	!	2357	34567	13579	!	3457	12357	8	!
!	234689	1	34689	!	23578	34567	3579	!	3457	2357	3567	!
!	379	359	1	!	6	8	357	!	357	4	2	!
!	3467	345	34567	!	1	357	2	!	8	357	9	!
!	378	358	2	!	357	9	4	!	1	6	357	!
!	134789	34589	345789	!	357	2	6	!	357	89	1357	!
!	137	6	357	!	9	357	8	!	2	1357	4	!
!	23789	23589	35789	!	4	1	357	!	6	89	357	!

tridagon for digits 3, 5 and 7 in blocks:

b9, with cells: r8c8 (target cell), r7c7, r9c9

b8, with cells: r8c5, r7c4, r9c6

b6, with cells: r5c8, r4c7, r6c9

b5, with cells: r5c5, r4c6, r6c4

==> r8c8≠3,5,7

singles ==> r8c8=1, r1c9=1, r1c6=3, r1c8=2, r1c4=8, r2c6=1, r3c6=9, r3c9=6, r7c1=1
naked-triplets-in-a-row: r7{c4 c7 c9}{n3 n5 n7} ==> r7c3≠7, r7c3≠5, r7c3≠3, r7c2≠5, r7c2≠3

Resolution state at the end of the TRIDAGONS set of preferences:

!	5	7	46	!	8	46	3	!	9	2	1	!
!	23469	2349	3469	!	257	4567	1	!	3457	357	8	!
!	2348	1	348	!	257	457	9	!	3457	357	6	!
!	379	359	1	!	6	8	57	!	357	4	2	!
!	3467	345	34567	!	1	357	2	!	8	357	9	!
!	378	358	2	!	357	9	4	!	1	6	357	!

!	1	489	489	!	357	2	6	!	357	89	357	!
!	37	6	357	!	9	357	8	!	2	1	4	!
!	23789	23589	35789	!	4	1	57	!	6	89	357	!
+-----+-----+-----+												

The end is easy solving in W3:

```

finned-x-wing-in-columns: n3{c4 c9}{r6 r7} ==> r7c7≠3
whip[1]: b9n3{r9c9 .} ==> r6c9≠3
z-chain[3]: r1c3{n4 n6} - c1n6{r2 r5} - c1n4{r5 .} ==> r2c2≠4, r3c3≠4, r2c3≠4
whip[3]: r1c3{n6 n4} - c1n4{r3 r5} - r5n6{c1 .} ==> r2c3≠6
whip[3]: r8c1{n3 n7} - c3n7{r9 r5} - r5n6{c3 .} ==> r5c1≠3
whip[3]: c5n3{r5 r8} - r8c1{n3 n7} - b4n7{r4c1 .} ==> r5c3≠3
whip[3]: c5n3{r5 r8} - r8c1{n3 n7} - b4n7{r4c1 .} ==> r5c5≠7
biv-chain[3]: c4n3{r7 r6} - r5c5{n3 n5} - c6n5{r4 r9} ==> r7c4≠5
whip[1]: r7n5{c9 .} ==> r9c9≠5
biv-chain[3]: b6n3{r4c7 r5c8} - r5c5{n3 n5} - r4c6{n5 n7} ==> r4c7≠7
whip[3]: r4n7{c1 c6} - r9n7{c6 c9} - r6n7{c9 .} ==> r8c1≠7
singles ==> r8c1=3, r7c4=3, r5c5=3, r4c7=3, r6c2=3, r6c1=8, r3c3=8, r2c3=3, r3c8=3,
r9c9=3
whip[1]: c3n9{r9 .} ==> r7c2≠9, r9c1≠9, r9c2≠9
biv-chain[2]: c8n5{r2 r5} - r6n5{c9 c4} ==> r2c4≠5
biv-chain[2]: c8n7{r2 r5} - r6n7{c9 c4} ==> r2c4≠7
stte

```

As will appear from further examples in this chapter, this makes Loki one of the easiest puzzles in the Tridagon family.

14.3 The complexity of the contradictory trivalued-oddagon pattern

The complexity to be considered here is about proving that the pattern is contradictory. This section will also illustrate a way of *using CSP-Rules as an assistant theorem prover*, similarly to what was done for Slitherlink in [PBCS].

14.3.1 Proving the impossibility of the trivalued oddagon pattern

First of all, let's consider the "trivalued oddagon" impossible pattern in four blocks forming a rectangle, as at the beginning of section 14.1. Without making any other assumption, the most general possible resolution state is (modulo Sudoku isomorphisms):

+-----+-----+-----+												
!	123	123456789	123456789	!	123	123456789	123456789	!	123456789	123456789	123456789	!
!	123456789	123	123456789	!	123456789	123	123456789	!	123456789	123456789	123456789	!
!	123456789	123456789	123	!	123456789	123456789	123	!	123456789	123456789	123456789	!
+-----+-----+-----+												
!	123	123456789	123456789	!	123456789	123456789	123	!	123456789	123456789	123456789	!
!	123456789	123	123456789	!	123456789	123	123456789	!	123456789	123456789	123456789	!
!	123456789	123456789	123	!	123	123456789	123456789	!	123456789	123456789	123456789	!
+-----+-----+-----+												

```

! 123456789 123456789 123456789 ! 123456789 123456789 123456789 ! 123456789 123456789 123456789 !
! 123456789 123456789 123456789 ! 123456789 123456789 123456789 ! 123456789 123456789 123456789 !
! 123456789 123456789 123456789 ! 123456789 123456789 123456789 ! 123456789 123456789 123456789 !
+-----+-----+-----+

```

Theorem 14.1: the trivalued oddagon pattern can be proven contradictory in T&E(Singles, 4).

Proof: along the same lines as the proof in section 14.2.1. Whichever way four values are plugged into r1c1, r2c2, r1c4 and r4c1 (with no direct contradictions between them), one of the 123-cells in b4 has no possible value.

Notice that each of the following theorems also proves that *T&E(Singles, 3)* is *indeed enough*. See also section 14.6.2 for a direct proof of this result.

Theorem 14.2: after using eleven's replacement technique, the trivalued oddagon pattern can be proven contradictory in T&E(Singles, 1)

More precisely and somehow surprisingly:

Theorem 14.3: after using eleven's replacement technique, the trivalued oddagon pattern can be proven contradictory in Z5.

Proof: applying eleven's replacement to block b1 gives the following resolution state:

```

+-----+-----+-----+
! 1      123456789 123456789 ! 123      123456789 123456789 ! 123456789 123456789 123456789 !
! 123456789 2      123456789 ! 123456789 123      123456789 ! 123456789 123456789 123456789 !
! 123456789 123456789 3      ! 123456789 123456789 123      ! 123456789 123456789 123456789 !
+-----+-----+-----+
! 123      123456789 123456789 ! 123456789 123456789 123      ! 123456789 123456789 123456789 !
! 123456789 123      123456789 ! 123456789 123      123456789 ! 123456789 123456789 123456789 !
! 123456789 123456789 123      ! 123      123456789 123456789 ! 123456789 123456789 123456789 !
+-----+-----+-----+
! 123456789 123456789 123456789 ! 123456789 123456789 123456789 ! 123456789 123456789 123456789 !
! 123456789 123456789 123456789 ! 123456789 123456789 123456789 ! 123456789 123456789 123456789 !
! 123456789 123456789 123456789 ! 123456789 123456789 123456789 ! 123456789 123456789 123456789 !
+-----+-----+-----+

```

Select resolution theory Z5 in the configuration file and apply function solve-sukaku-grid to the above resolution state:

```

biv-chain[3]: r1c4{n2 n3} - r2c5{n3 n1} - r3c6{n1 n2} ==> r1c5≠2, r1c6≠2, r3c4≠2,
r3c5≠2
biv-chain[3]: r1c4{n3 n2} - r3c6{n2 n1} - r2c5{n1 n3} ==> r1c5≠3, r1c6≠3, r2c4≠3,
r2c6≠3
biv-chain[3]: r2c5{n1 n3} - r1c4{n3 n2} - r3c6{n2 n1} ==> r2c4≠1, r2c6≠1, r3c4≠1,
r3c5≠1
biv-chain[3]: r4c1{n2 n3} - r5c2{n3 n1} - r6c3{n1 n2} ==> r4c3≠2, r5c1≠2, r5c3≠2,
r6c1≠2

```

```

biv-chain[3]: r4c1{n3 n2} - r6c3{n2 n1} - r5c2{n1 n3} ==> r4c2≠3, r5c1≠3, r6c1≠3,
r6c2≠3
biv-chain[3]: r5c2{n1 n3} - r4c1{n3 n2} - r6c3{n2 n1} ==> r4c2≠1, r4c3≠1, r5c3≠1,
r6c2≠1
z-chain[4]: b4n1{r6c3 r5c2} - b4n3{r5c2 r4c1} - r4c6{n3 n2} - r3c6{n2 .} ==> r6c6≠1
z-chain[4]: b4n3{r4c1 r5c2} - b4n1{r5c2 r6c3} - r6c4{n1 n2} - r1c4{n2 .} ==> r4c4≠3
z-chain[4]: r4c1{n2 n3} - r4c6{n3 n1} - r6c4{n1 n3} - r1c4{n3 .} ==> r4c4≠2
z-chain[4]: r6c3{n2 n1} - r6c4{n1 n3} - r4c6{n3 n1} - r3c6{n1 .} ==> r6c6≠2
z-chain[5]: b4n1{r6c3 r5c2} - b4n3{r5c2 r4c1} - r4c6{n3 n2} - r5c5{n2 n3} - r2c5{n3 .}
==> r6c5≠1
z-chain[5]: b4n3{r4c1 r5c2} - b4n1{r5c2 r6c3} - r6c4{n1 n2} - r5c5{n2 n1} - r2c5{n1 .}
==> r4c5≠3
z-chain[5]: b4n2{r6c3 r4c1} - b4n3{r4c1 r5c2} - r5c5{n3 n1} - b2n1{r2c5 r3c6} -
b2n2{r3c6 .} ==> r6c4≠2
biv-chain[3]: r6c4{n1 n3} - r1c4{n3 n2} - r3c6{n2 n1} ==> r4c6≠1, r5c6≠1
biv-chain[2]: r4c6{n3 n2} - r4c1{n2 n3} ==> r4c7≠3, r4c8≠3, r4c9≠3
biv-chain[2]: r4c1{n2 n3} - r4c6{n3 n2} ==> r4c7≠2, r4c8≠2, r4c9≠2, r4c5≠2
biv-chain[3]: b4n2{r6c3 r4c1} - r4c6{n2 n3} - r6c4{n3 n1} ==> r6c3≠1
singles ==> r6c3=2, r4c1=3, r4c6=2, r3c6=1, r2c5=3, r1c4=2, r5c5=1
GRID 0 HAS NO SOLUTION : NO CANDIDATE FOR FOR BN-CELL b4n1

```

Note: a shorter resolution path can be obtained if Subsets[3] are allowed (three Triplets start by cleaning blocks b2, b4, b5 instead of all the bivalence-chains[3]) – block b1 is in any case cleaned by ECP), but this is not my point here, and anyway it still requires Z5. I give it here nevertheless because it shows more clearly the essential point about the z-chain[5] immediately after the Triplets:

```

naked-triplets-in-a-block: b5{r4c6 r5c5 r6c4}{n3 n2 n1} ==> r6c6≠3, r6c6≠2, r6c6≠1,
r6c5≠3, r6c5≠2, r6c5≠1, r5c6≠3, r5c6≠2, r5c6≠1, r5c4≠3, r5c4≠2, r5c4≠1, r4c5≠3,
r4c5≠2, r4c5≠1, r4c4≠3, r4c4≠2, r4c4≠1
naked-triplets-in-a-block: b4{r4c1 r5c2 r6c3}{n2 n3 n1} ==> r6c2≠3, r6c2≠1, r6c1≠3,
r6c1≠2, r5c3≠2, r5c3≠1, r5c1≠3, r5c1≠2, r4c3≠2, r4c3≠1, r4c2≠3, r4c2≠1
naked-triplets-in-a-block: b2{r1c4 r2c5 r3c6}{n2 n3 n1} ==> r3c5≠2, r3c5≠1, r3c4≠2,
r3c4≠1, r2c6≠3, r2c6≠1, r2c4≠3, r2c4≠1, r1c6≠3, r1c6≠2, r1c5≠3, r1c5≠2
z-chain[5]: b2n1{r2c5 r3c6} - b2n2{r3c6 r1c4} - b5n2{r6c4 r4c6} - b4n2{r4c1 r6c3} -
b4n1{r6c3 .} ==> r5c5≠1
biv-chain[3]: r5c5{n2 n3} - r2c5{n3 n1} - r3c6{n1 n2} ==> r4c6≠2
biv-chain[3]: b5n2{r5c5 r6c4} - r6c3{n2 n1} - r5c2{n1 n3} ==> r5c5≠3
naked-single ==> r5c5=2
biv-chain[3]: r6c4{n1 n3} - r1c4{n3 n2} - r3c6{n2 n1} ==> r4c6≠1
singles ==> r4c6=3, r4c1=2, r6c3=1
GRID 0 HAS NO SOLUTION : NO CANDIDATE FOR FOR BN-CELL b5n1

```

14.3.2 Degenerate forms of the trivalence oddagon pattern

By using T&E restricted to cells in the pattern, I have checked that degenerate forms of the contradictory trivalence oddagon pattern, i.e. forms that have a missing 123-candidate in one of the twelve tridagon cells or forms that have a decided candidate in one of these cells, are still contradictory (obviously) but they no longer require T&E(3) to be proven so. For the proofs, see Sudoku/Tridagons/Proofs in

[CSP-RULES-EXAMPLES]. Not only is the trivalued oddagon pattern brittle, its position in T&E(3) (as a contradictory pattern) is also brittle.

14.4 Tridagon links

Other applications of the impossible trivalued oddagon pattern are known. My goal in this section is to review only the second simplest case (after the basic Tridagon elimination rule), where two and only two different cells of the impossible pattern have one and only one additional candidate each. In this case, the conclusion is that one of the additional candidates must be True – which doesn't define a resolution rule in and of itself. But it allows to conclude on the existence of an OR2 relation between these two candidates, which can then be used to build new types of Forcing Chains.

Based on the analysis of section 14.2, it is easy to see that there are the following cases (and only them). By the same isomorphisms as before, we can always suppose one of the two additional candidates is in r1c1 and the pattern of cells is as before:

```
# . . | + . .
. + . | . + .
. . + | . . +
-----
+ . . | x x x
. + . | x x x
. . + | x x x
```

with the same conditions on the pattern in the fourth block, i.e. one of:

```
. . +      . + .      + . .
. + .      + . .      . . +
+ . .      . . +      . + .
```

Now, the question is: where can the second candidate be? Notice that the following four cases are possible and have real examples.

◇ First case: in the same block. Only one possible place modulo isomorphisms:

```
# . . | + . .
. # . | . + .
. . + | . . +
-----
+ . . | x x x
. + . | x x x
. . + | x x x
```

◇ Second case: in a different block but the same band. Only two possible places modulo isomorphisms:

same row:

```
# . . | # . .
. + . | . + .
. . + | . . +
-----
+ . . | x x x
. + . | x x x
. . + | x x x
```

different row:

```
# . . | + . .
. + . | . # .
. . + | . . +
-----
+ . . | x x x
. + . | x x x
. . + | x x x
```

◇ Third case: in a different block but the same stack. Only two possible places modulo isomorphisms (deduced from the previous two by row/column symmetry).

◇ Fourth case: in opposite blocks. It can be almost anywhere in the 4th block (which must still satisfy one of the three patterns found in the section 14.2).

```
# . . | + . .
. + . | . + .
. . + | . . +
-----
+ . . | x x x
. + . | x x x
. . + | x x x
```

14.5 Tridagon-forcing-whips

Disregarding the difference about the definitions of length, the chain patterns discussed in this section are special cases of the Tridagon-OR_k-Forcing-Whips to be introduced later (in section 14.9). I defined them before I introduced the general notion of an OR_k relation and the generic OR_k chains that can use them. I keep them here as a step towards the more general ones and as a different view of ratings.

14.5.1 General remarks on forcing chains

Whenever an OR relation $OR(C1, C2)$ between two candidates $C1$ and $C2$ has been proven, assertions and eliminations can easily be obtained by resorting to reasoning by cases. This is not very elegant as it relies on two different streams of reasoning, but it can be useful. More precisely, consider two different chains, one based on $C1$ and one based on $C2$. It can be concluded in an obvious way that:

- any candidate X that is linked to some candidate with positive valence in each chain can be eliminated,
- and any candidate that has positive valence in both chains can be asserted as a decided value.

As a special case of X having negative valence, one or two of the chains can have length 0 (which means that the corresponding C_i is linked to X).

As for the complexity assigned to such OR-forcing-chains in my usual approach of chains: the $OR(C1, C2)$ relation isn't supposed to be proven with the use of a crystal ball. It involves some particular pattern with its own length. Similarly, each of the partial-chains has its own length, resp. p_1 and p_2 . The length of the OR-forcing-chain is thus naturally assigned value $n = k + p_1 + p_2$. Indeed, there is no choice in my standard approach: no other possible value would be consistent with my other ratings for the hardest step in a resolution path. This view also reflects the idea that *every elimination is self-contained*.

One might object that if the same OR relation is used several times in the resolution path, this is “unfair”. But this would rely on a misunderstanding of the fundamental nature of all my ratings: they are ratings of the hardest elimination/assertion step and how many times this highest rating is reached in the resolution path is totally irrelevant. One might prefer a rating of a full resolution path, but as of now, any rating that has been proposed along such lines is totally inconsistent.

In my approach, the typical OR-forcing-chain[n] is a forcing-whip[n], the OR relation being a mere bivalence relation (length 1) and I have already shown long ago that the length of this forcing-whip must be defined as $n = 1 + p_1 + p_2$.

Note: see sections 14.9 to 14.11 for a different view of counting complexity in Tridagon- OR_k -chains – or more generally in cases where the OR_k relation is based on an exotic pattern. The way complexity is defined is the main difference between the Tridagon-forcing-whips defined in this section and the more general OR_k -chains to be analysed later. The fact is, due to this different way of defining complexity, solutions with the more general chains will be simpler because the Tridagon pattern will be detected sooner and the associated OR_k -chain rules will be applied sooner.

14.5.2 Tridagon-forcing-whips

Definition: a Tridagon-forcing-whip[n] is a particular type of OR forcing-chain where:

- the partial-chains involved are partial-whips, of respective lengths p_1 and p_2 ;
- the OR relation involved is a Tridagon-link[12];
- $n = 12 + p_1 + p_2$.

Remarks:

- in order to avoid considering special cases when p_1 and/or p_2 is 0, a direct link will be considered as a partial-whip[0];
- having a well-defined length, these application-specific forcing chains have a natural place in the CSP-Rules hierarchy. However, as for any other rules, various strategies allow to change this default hierarchy. More on this later.

Notation: see the example below. The "-" symbol at the end of the lines for the partial-whips means as usual a direct contradiction link.

As should be expected, the Tridagon-forcing-whip rules are enabled in SudoRules by setting *?*Tridagon-Forcing-Whips** to TRUE in the configuration file. In such a case, it is suggested to restrict both the maximum length of all the chains and the maximum length of Tridagon-Forcing-Whips, and to increase them only progressively in order to avoid potential memory overflows, e.g. to start with:

```
(bind ?*all-chains-max-length* 7)
(bind ?*tridagon-forcing-whips-max-length* 15)
```

Example (#147 in mith's database of 246 T&E(3) puzzles), showing two Tridagon-forcing-whips of length 14. Here whips-max-length has been restricted to 4, in order to allow an earlier detection of the tridagon-link.

```

+-----+-----+-----+
! . . . ! . . . ! . 1 2 !
! . . . ! . . . ! 3 . 4 !
! . . . ! . 1 5 ! 6 7 . !
+-----+-----+-----+
! . . 8 ! . 9 . ! . . 6 !
! . 5 1 ! . 7 6 ! . . . !
! 6 9 . ! . . 8 ! . . . !
+-----+-----+-----+
! . 7 5 ! . 8 9 ! . 6 . !
! 8 . . ! 6 5 . ! . 9 . !
! 9 . 6 ! 7 . 1 ! . . . !
+-----+-----+-----+
.....12.....3.4....1567...8.9...6.51.76...69...8....75.89.6.8..65..9.9.67.1...;31
SER = 11.7
```

Resolution state after Singles and whips[1]:

+-----+-----+-----+									
! 3457	3468	3479	! 3489	346	347	! 589	1	2	!
! 1257	1268	279	! 289	26	27	! 3	58	4	!
! 234	2348	2349	! 23489	1	5	! 6	7	89	!
+-----+-----+-----+									
! 2347	234	8	! 12345	9	234	! 12457	2345	6	!
! 234	5	1	! 234	7	6	! 2489	2348	389	!
! 6	9	2347	! 12345	234	8	! 12457	2345	1357	!
+-----+-----+-----+									
! 1234	7	5	! 234	8	9	! 124	6	13	!
! 8	1234	234	! 6	5	234	! 1247	9	137	!
! 9	234	6	! 7	234	1	! 2458	23458	358	!
+-----+-----+-----+									

176 candidates

hidden-pairs-in-a-column: c4{n1 n5}{r4 r6} ==> r6c4≠4, r6c4≠3, r6c4≠2, r4c4≠4, r4c4≠3, r4c4≠2

whip[4]: r4n7{c1 c7} - r4n1{c7 c4} - r4n5{c4 c8} - r2n5{c8 .} ==> r2c1≠7

+-----+-----+-----+									
! 3457	3468	3479	! 3489	346	347	! 589	1	2	!
! 125	1268	279	! 289	26	27	! 3	58	4	!
! 234	2348	2349	! 23489	1	5	! 6	7	89	!
+-----+-----+-----+									
! 2347	234	8	! 15	9	234	! 12457	2345	6	!
! 234	5	1	! 234	7	6	! 2489	2348	389	!
! 6	9	2347	! 15	234	8	! 12457	2345	1357	!
+-----+-----+-----+									
! 1234	7	5	! 234	8	9	! 124	6	13	!
! 8	1234	234	! 6	5	234	! 1247	9	137	!
! 9	234	6	! 7	234	1	! 2458	23458	358	!
+-----+-----+-----+									

tridagon-link (verti, different column) for digits 2, 3 and 4 in blocks:

b7, with cells: r7c1 (link cell), r8c3, r9c2

b8, with cells: r7c4, r8c6, r9c5

b4, with cells: r5c1, r6c3 (link cell), r4c2

b5, with cells: r5c4, r6c5, r4c6

==> tridagon-link[12](n1r7c1, n7r6c3)

tridagon-forcing-whip-elim[14] based on tridagon-link(n7r6c3, n1r7c1)

|| n7r6c3: partial-whip[1]: c9n7{r6 r8} -

|| n1r7c1: partial-whip[1]: r7c9{n1 n3} -

==> r8c9≠3

tridagon-forcing-whip-elim[14] based on tridagon-link(n1r7c1, n7r6c3)

|| n1r7c1: -

|| n7r6c3: partial-whip[2]: c1n7{r4 r1} - c1n5{r1 r2} -

==> r2c1≠1

singles ==> r2c2=1, r1c2=6, r3c2=8, r3c9=9, r5c7=9, r2c5=6, r7c1=1, r7c9=3, r5c9=8, r9c9=5

hidden-pairs-in-a-block: b9{n1 n7}{r8c7 r8c9} ==> r8c7≠4, r8c7≠2

hidden-pairs-in-a-block: b2{n8 n9}{r1c4 r2c4} ==> r2c4≠2, r1c4≠4, r1c4≠3

```

finned-x-wing-in-columns: n2{c5 c8}{r9 r6} ==> r6c7#2
z-chain[4]: r1c5{n3 n4} - r1c6{n4 n7} - b1n7{r1c1 r2c3} - c3n9{r2 .} ==> r1c3#3
z-chain[2]: b1n3{r3c1 r3c3} - c4n3{r3 .} ==> r5c1#3
z-chain[3]: c4n3{r5 r3} - c3n3{r3 r8} - b8n3{r8c6 .} ==> r6c5#3
biv-chain[3]: r6c5{n2 n4} - r1c5{n4 n3} - c4n3{r3 r5} ==> r5c4#2
z-chain[4]: c5n2{r6 r9} - r9n3{c5 c2} - b4n3{r4c2 r4c1} - b4n7{r4c1 .} ==> r6c3#2
z-chain[3]: c3n2{r3 r8} - c6n2{r8 r4} - b4n2{r4c2 .} ==> r2c1#2
singles ==> r2c1=5, r2c8=8, r1c7=5, r2c4=9, r1c4=8, r1c3=9, r9c7=8
finned-swordfish-in-columns: n2{c4 c7 c1}{r3 r7 r4} ==> r4c2#2
whip[1]: c2n2{r9 .} ==> r8c3#2
whip[1]: c3n2{r3 .} ==> r3c1#2
biv-chain[3]: r4c2{n4 n3} - r6n3{c3 c8} - c8n5{r6 r4} ==> r4c8#4
biv-chain[4]: b5n2{r6c5 r4c6} - r2c6{n2 n7} - c3n7{r2 r6} - r6n3{c3 c8} ==> r6c8#2
hidden-single-in-a-row ==> r6c5=2
naked-pairs-in-a-row: r4{c2 c6}{n3 n4} ==> r4c8#3, r4c7#4, r4c1#4, r4c1#3
whip[1]: c1n3{r3 .} ==> r3c3#3
finned-x-wing-in-rows: n3{r4 r9}{c2 c6} ==> r8c6#3
singles ==> r9c5=3, r1c5=4
finned-x-wing-in-columns: n4{c6 c2}{r4 r8} ==> r8c3#4 ; stte

```

14.5.3 The TRIDAGONS and TRIDAGON-FW sets of preferences

In order to allow applying Tridagons before whips or other resolution rules, a **TRID** set of preferences is defined, made of:

- all the Subset and Finned Fish resolution rules;
- the Tridagon elimination rule.

Similarly, in order to allow applying Tridagons and Tridagon-forcing-whips before whips or other resolution rules, a **TRID-FW** set of preferences is defined, made of:

- the same rules as in the TRIDAGONS module;
- the rules for finding the tridagon-links;
- the rules for the Tridagon-Forcing-Whips (up to the length specified in the configuration file by ?*tridagon-forcing-whips-max-length*).

Example of application (again a puzzle created by mith, #2 in his database of 246):

```

+-----+-----+-----+
! . . . ! . . . ! . . 1 !
! . . . ! . . 2 ! . 3 . !
! . . . ! . 4 . ! 5 6 . !
+-----+-----+-----+
! . . . ! . . 7 ! . . . !
! . . 4 ! 8 1 . ! 2 . . !
! 1 9 . ! . 2 4 ! 8 . . !
+-----+-----+-----+
! . 8 9 ! . . 1 ! . . 7 !
! 4 2 . ! . 7 8 ! . . 9 !
! 7 . 1 ! . 9 . ! . . . !
+-----+-----+-----+

```

```
.....1.....2.3.....4.56.....7.....481.2..19..248...89..1..742..78..97.1.9....;28
```

```
(solve-w-preferences
```

```
".....1.....2.3.....4.56.....7.....481.2..19..248...89..1..742..78..97.1.9....;28"
```

```
TRIDAGON-FW)
```

```
Resolution state after Singles and whips[1]:
```

+-----+-----+-----+-----+-----+										
!	235689	34567	235678	!	35679	3568	3569	!	479	2489
!	5689	14567	5678	!	15679	568	2	!	479	3
!	2389	137	2378	!	1379	4	39	!	5	6
+-----+-----+-----+-----+-----+										
!	23568	356	23568	!	3569	356	7	!	13469	1459
!	356	3567	4	!	8	1	3569	!	2	579
!	1	9	3567	!	356	2	4	!	8	57
+-----+-----+-----+-----+-----+										
!	356	8	9	!	23456	356	1	!	346	245
!	4	2	356	!	356	7	8	!	136	15
!	7	356	1	!	23456	9	356	!	346	2458
+-----+-----+-----+-----+-----+										

```
196 candidates
```

```
tridagon-link (horiz, different row) for digits 3, 5 and 6 in blocks:
```

```
  b4, with cells: r6c3 (link cell), r5c1, r4c2
```

```
  b5, with cells: r6c4, r5c6 (link cell), r4c5
```

```
  b7, with cells: r8c3, r7c1, r9c2
```

```
  b8, with cells: r8c4, r7c5, r9c6
```

```
==> tridagon-link[12](n7r6c3, n9r5c6)
```

```
tridagon-forcing-whip-elim[13] based on tridagon-link(n9r5c6, n7r6c3)
```

```
  || n9r5c6: -
```

```
  || n7r6c3: partial-whip[1]: r5n7{c2 c8} -
```

```
==> r5c8#9
```

```
singles ==> r5c6=9, r3c6=3
```

```
naked-pairs-in-a-block: b6{r5c8 r6c8}{n5 n7} ==> r6c9#5, r5c9#5, r4c9#5, r4c8#5
```

```
singles ==> r9c9=5, r8c8=1, r9c6=6, r1c6=5, r9c2=3, r9c7=4, r7c8=2, r7c4=4, r9c8=8,
```

```
r9c4=2, r3c9=2, r2c9=8, r2c5=6, r1c5=8, r1c8=4, r4c8=9, r2c2=4, r3c2=1, r2c4=1,
```

```
r4c9=4, r4c7=1
```

```
whip[1]: r4n3{c5 .} ==> r6c4#3
```

```
whip[1]: c2n5{r5 .} ==> r5c1#5, r6c3#5
```

```
naked-pairs-in-a-row: r5{c1 c9}{n3 n6} ==> r5c2#6
```

```
naked-pairs-in-a-row: r1{c4 c7}{n7 n9} ==> r1c3#7, r1c2#7, r1c1#9
```

```
stte
```

After the Tridagon-forcing-whip[13] has been applied, nothing more complex than Naked-Pairs is required.

This is an example where not having whips intermingled with Tridagon-forcing-whips, as they would be in the default simplest-first strategy, simplifies the resolution

path. However, be aware that this will not always be the case and that this may on the contrary lead to much more complicated paths.

14.5.4 Where to find more examples

As puzzles relying on the trivalued oddagon impossible pattern are extremely rare and can only be found by specifically searching for them, it seems necessary to provide some reference of where one can find a few. Mith is the main creator of such puzzles. Check the various editions of his database, starting e.g. from the version with 246 puzzles here: <http://forum.enjoysudoku.com/the-hardest-sudokus-new-thread-t6539-1190.html>. In [CSP-RULES-EXAMPLES], see the Sudoku/Tridagons folder.

14.5.5 The effectiveness of Tridagons and Tridagon-forcing-whips

As of the writing of this section, the largest database of puzzles related to trivalued-oddagons consisted of 972 puzzles in T&E(3) found by mith after he changed his search criterion from max SER to T&E-depth:

(https://docs.google.com/spreadsheets/d/1t-PsJT-pKGQEWjSbbNBXzLcxb5Inmooszntu9ZVCW_M/edit#gid=0). (See section 14.8 for a much larger database.) See also Sudoku/mith-972-TE3 in [CSP-RULES-EXAMPLES] for more details.

These puzzles may not be minimal, but they are expanded forms of minimal puzzles (i.e. all the Singles have been applied). This avoids part of the redundancy (several minimal puzzles having the same expanded form), although much redundancy remains. Only what I've called the *min-expands* (the puzzles in this database that don't have super-puzzles in it) are of real interest (they play among expanded forms the same role as the classical minimals do in random collections).

Considering the way this database was produced (neighbourhood search, expansion by Singles, re-search...), it is obviously very biased; don't take the following results in any statistical sense. It can nevertheless be interesting to note that, of the 972 puzzles:

- 216 can be solved using only Subsets + Finned Fish + the Tridagon elimination rule;
 - 505 more can be solved if one adds whips[≤ 12] to the previous rules;
 - 41 more can be solved if one adds Tridagon-Forcing-Whips[≤ 15];
- which leaves 210 of them unsolved (section 14.6 will show how to solve them).

14.6 Automating eleven's method in the context of trivalued oddagons

The attentive reader will have noticed that the tridagon related situations offer large opportunities for applying eleven's very general replacement technique.

In section 6.10.5, I defined user functions for applying the replacement technique and I said there was currently no general way to start it automatically in SudoRules.

However, there is an exception when some anti-tridagon pattern (see section 14.8) is present in some resolution state. This behaviour can be activated by setting global variable `?*Eleven-Replacement-in-Tridagons*` to True in the configuration file.

The conditions are very general: there must be a block with three cells having exactly the three digits and three other blocks with three cells each, satisfying the same pattern as in the trivalue oddagon, but with the cells being allowed to have more candidates than the 123 ones. One may consider it as restrictive to have a mandatory block with exactly the three digits in the three cells and to have each of the three digits in all the other nine cells. But this is an experimental set of conditions and it may change in the future; in any case, those are the conditions the results reported in the next two subsections rely on.

Notice that nothing forbids to apply the technique several times to the same digits on the same puzzle.

14.6.1 Example of an automatic start of the replacement

Consider puzzle #396 in the 972 database (chosen here because it's the hardest one I found in this collection with automatic replacement applied – see the next subsection). In the configuration file, chains are active up to length 9 and `?*Eleven-Replacement-in-Tridagons*` is True.

```

+-----+-----+-----+
! . . . ! 4 . . ! . . . !
! 4 . . ! . 8 9 ! . . . !
! 6 8 . ! 3 7 . ! . 4 . !
+-----+-----+-----+
! . 6 8 ! . 4 7 ! 9 . . !
! 7 3 . ! 9 6 . ! 4 . . !
! 9 . 4 ! 8 . 3 ! 6 . . !
+-----+-----+-----+
! 3 . . ! . . . ! . 5 2 !
! . . . ! . 3 . ! . 9 . !
! 8 7 . ! . . . ! 3 . . !
+-----+-----+-----+

```

...4....4...89...68.37..4..68.479..73.96.4..9.48.36..3.....52....3..9.87....3..
SER = 11.6

Resolution state after Singles and whips[1]:

```

+-----+-----+-----+-----+-----+-----+-----+
! 125   1259   123579 ! 4       125   1256   ! 12578   13678   136789 !
! 4     125    12357 ! 1256   8       9       ! 1257   1367   1367   !
! 6     8      1259 ! 3       7       125   ! 125    4       19     !
+-----+-----+-----+-----+-----+-----+
! 125   6       8       ! 125   4       7       ! 9       123    135   !
! 7     3       125    ! 9       6       125   ! 4       128    158   !
! 9     125    4       ! 8       125   3       ! 6       127    157   !
+-----+-----+-----+-----+-----+-----+

```

!	3	149	169	!	167	19	1468	!	178	5	2	!
!	125	1245	1256	!	12567	3	124568	!	178	9	14678	!
!	8	7	12569	!	1256	1259	12456	!	3	16	146	!

179 candidates.

hidden-pairs-in-a-column: c3{n3 n7}{r1 r2} ==> r2c3#5, r2c3#2, r2c3#1, r1c3#9, r1c3#5, r1c3#2, r1c3#1
 whip[7]: b9n6{r9c9 r8c9} - r1n6{c9 c8} - c8n8{r1 r5} - c9n8{r5 r1} - r1n3{c9 c3} - r1n7{c3 c7} - b9n7{r7c7 .} ==> r9c6#6

***** STARTING ELEVEN'S REPLACEMENT TECHNIQUE FOR GENERAL TRIDAGON in resolution
 state: *****

!	125	1259	37	!	4	125	1256	!	12578	13678	136789	!
!	4	125	37	!	1256	8	9	!	1257	1367	1367	!
!	6	8	1259	!	3	7	125	!	125	4	19	!
!	125	6	8	!	125	4	7	!	9	123	135	!
!	7	3	125	!	9	6	125	!	4	128	158	!
!	9	125	4	!	8	125	3	!	6	127	157	!
!	3	149	169	!	167	19	1468	!	178	5	2	!
!	125	1245	1256	!	12567	3	124568	!	178	9	14678	!
!	8	7	12569	!	1256	1259	1245	!	3	16	146	!

Trying in block 5:

!	125	1259	37	!	4	125	1256	!	12578	1235678	12356789	!
!	4	125	37	!	1256	8	9	!	1257	123567	123567	!
!	6	8	1259	!	3	7	125	!	125	4	1259	!
!	125	6	8	!	5	4	7	!	9	1235	1235	!
!	7	3	125	!	9	6	2	!	4	1258	1258	!
!	9	125	4	!	8	1	3	!	6	1257	1257	!
!	3	12459	12569	!	12567	1259	124568	!	12578	125	125	!
!	125	1245	1256	!	12567	3	124568	!	12578	9	1245678	!
!	8	7	12569	!	1256	1259	1245	!	3	1256	12456	!

finned-x-wing-in-columns: n5{c1 c5}{r1 r8} ==> r8c6#5
 z-chain[4]: b4n5{r6c2 r5c3} - b4n1{r5c3 r4c1} - r1c1{n1 n2} - r1c5{n2 .} ==> r1c2#5
 z-chain[4]: r6c2{n2 n5} - r2c2{n5 n1} - r1c1{n1 n5} - r1c5{n5 .} ==> r1c2#2
 z-chain[5]: r1c5{n5 n2} - r1c1{n2 n1} - r4c1{n1 n2} - r6c2{n2 n5} - r2n5{c2 .} ==> r1c9#5, r1c8#5, r1c7#5
 z-chain[5]: b4n1{r5c3 r4c1} - b4n2{r4c1 r6c2} - b1n2{r2c2 r1c1} - r1c5{n2 n5} - r3c6{n5 .} ==> r3c3#1
 whip[5]: c6n8{r8 r7} - r7n4{c6 c2} - c2n9{r7 r1} - c2n1{r1 r2} - c4n1{r2 .} ==> r8c6#1
 whip[6]: r1c5{n2 n5} - c1n5{r1 r8} - c1n2{r8 r4} - r6c2{n2 n5} - b1n5{r2c2 r3c3} - r3n2{c3 .} ==> r1c9#2

```

whip[6]: r1c5{n2 n5} - c1n5{r1 r8} - c1n2{r8 r4} - r6c2{n2 n5} - b1n5{r2c2 r3c3} -
r3n2{c3 .} ==> r1c8≠2
whip[6]: r1c5{n2 n5} - c1n5{r1 r8} - c1n2{r8 r4} - r6c2{n2 n5} - b1n5{r2c2 r3c3} -
r3n2{c3 .} ==> r1c7≠2
whip[5]: r1n2{c5 c1} - r4c1{n2 n1} - r5c3{n1 n5} - r3c3{n5 n9} - r9n9{c3 .} ==> r9c5≠2
whip[4]: c5n5{r7 r1} - c5n2{r1 r7} - r7c8{n2 n1} - r7c9{n1 .} ==> r7c6≠5
whip[6]: b1n1{r1c2 r1c1} - r1n2{c1 c5} - r1n5{c5 c6} - r3c6{n5 n1} - r9c6{n1 n4} -
r7n4{c6 .} ==> r7c2≠1
whip[6]: c4n1{r7 r2} - r3c6{n1 n5} - r1n5{c5 c1} - b1n1{r1c1 r1c2} - c2n9{r1 r7} -
r7n4{c2 .} ==> r7c6≠1
z-chain[7]: r3n9{c9 c3} - c2n9{r1 r7} - r7n4{c2 c6} - r7n8{c6 c7} - c7n5{r7 r8} -
c1n5{r8 r1} - r2n5{c2 .} ==> r3c9≠5
whip[8]: r3c6{n1 n5} - r3c7{n5 n2} - r3c3{n2 n9} - r9n9{c3 c5} - b8n5{r9c5 r7c5} -
r7c9{n5 n2} - r7c8{n2 n1} - b6n1{r5c8 .} ==> r3c9≠1
whip[8]: r6c2{n2 n5} - r2c2{n5 n1} - r8c2{n1 n4} - r7n4{c2 c6} - c6n8{r7 r8} -
c6n6{r8 r1} - r2c4{n6 n2} - b8n2{r7c4 .} ==> r7c2≠2
whip[8]: c1n5{r8 r1} - b2n5{r1c5 r3c6} - c3n5{r3 r5} - r6c2{n5 n2} - r2c2{n2 n1} -
b2n1{r2c4 r1c6} - r9c6{n1 n4} - r7n4{c6 .} ==> r7c2≠5
whip[9]: c1n5{r8 r1} - b2n5{r1c5 r3c6} - r3n1{c6 c7} - c7n5{r3 r2} - c2n5{r2 r6} -
c8n5{r6 r5} - c8n8{r5 r1} - r1c7{n8 n7} - b9n7{r7c7 .} ==> r8c9≠5
whip[9]: c6n8{r8 r7} - r7n4{c6 c2} - r8n4{c2 c9} - r8n8{c9 c7} - b9n7{r8c7 r7c7} -
r1c7{n7 n1} - r1c6{n1 n5} - r1c1{n5 n2} - r1c5{n2 .} ==> r8c6≠6
whip[7]: r7n7{c4 c7} - r7n8{c7 c6} - c6n6{r7 r1} - r2c4{n6 n2} - b8n2{r7c4 r7c5} -
r7c8{n2 n5} - r7c9{n5 .} ==> r7c4≠1
whip[7]: r3c6{n1 n5} - r9c6{n5 n4} - r8c6{n4 n8} - b9n8{r8c7 r7c7} - r1c7{n8 n7} -
b9n7{r7c7 r8c9} - c9n4{r8 .} ==> r1c6≠1
whip[5]: c1n5{r8 r1} - b2n5{r1c5 r3c6} - b2n1{r3c6 r2c4} - r2c2{n1 n2} - b4n2{r6c2 .}
==> r8c1≠2
biv-chain[3]: r8c1{n5 n1} - r4c1{n1 n2} - r6c2{n2 n5} ==> r8c2≠5
whip[5]: c2n5{r2 r6} - b4n2{r6c2 r4c1} - r1c1{n2 n5} - b2n5{r1c5 r3c6} - b2n1{r3c6 .}
==> r2c2≠1
whip[1]: b1n1{r1c1 .} ==> r1c9≠1, r1c7≠1, r1c8≠1
naked-pairs-in-a-column: c2{r2 r6}{n2 n5} ==> r8c2≠2
whip[1]: b7n2{r9c3 .} ==> r3c3≠2
whip[1]: r3n2{c9 .} ==> r2c9≠2, r2c8≠2, r2c7≠2
z-chain[3]: r7n1{c9 c3} - r8c2{n1 n4} - c9n4{r8 .} ==> r9c9≠1
whip[3]: r1c7{n7 n8} - b9n8{r7c7 r8c9} - b9n7{r8c9 .} ==> r2c7≠7
biv-chain[4]: r3c9{n2 n9} - r1n9{c9 c2} - r1n1{c2 c1} - c1n2{r1 r4} ==> r4c9≠2
z-chain[4]: r2c7{n5 n1} - b2n1{r2c4 r3c6} - r3n5{c6 c3} - c1n5{r1 .} ==> r8c7≠5
whip[1]: r8n5{c1 .} ==> r7c3≠5, r9c3≠5
z-chain[4]: r2c7{n1 n5} - c2n5{r2 r6} - r5c3{n5 n1} - r7n1{c3 .} ==> r8c7≠1
whip[4]: r8c6{n4 n8} - b9n8{r8c7 r7c7} - b9n7{r7c7 r8c7} - r1c7{n7 .} ==> r8c9≠4
hidden-single-in-a-block ==> r9c9≠4
naked-pairs-in-a-column: c6{r3 r9}{n1 n5} ==> r1c6≠5
naked-single ==> r1c6=6
hidden-pairs-in-a-row: r1{n2 n5}{c1 c5} ==> r1c1≠1
stte

```

```

+-----+-----+-----+
! 2 1 3 ! 4 5 6 ! 7 8 9 !
! 4 5 7 ! 2 8 9 ! 1 3 6 !
! 6 8 9 ! 3 7 1 ! 5 4 2 !
+-----+-----+-----+

```

```

! 1 6 8 ! 5 4 7 ! 9 2 3 !
! 7 3 5 ! 9 6 2 ! 4 1 8 !
! 9 2 4 ! 8 1 3 ! 6 7 5 !
+-----+-----+-----+
! 3 9 6 ! 7 2 4 ! 8 5 1 !
! 5 4 1 ! 6 3 8 ! 2 9 7 !
! 8 7 2 ! 1 9 5 ! 3 6 4 !
+-----+-----+-----+

```

By comparing block 9 in this solution with the original puzzle, we see that digits 1 and 2 must be permuted.

14.6.2 How powerful is eleven's method in the context of trivalued oddagons?

There are two answers to the question.

1) Considering mith's database of 972 puzzles in T&E(3), it appeared at the end of section 14.4 that 210 of them remained unsolved by Tridagons + whips[≤ 12] + Tridagon-forcing-whips[≤ 15]. All of them can be solved by applying the above defined "eleven replacement in tridagons" technique.

2) Forgetting any tridagon resolution rule and considering the full 972 database, all of the puzzles in it can be solved by whips (of length ≤ 9) plus eleven replacement in tridagons.

Now, considering theorem 14.3, there might appear another question: beyond the theoretical interest of this theorem, does it imply anything for real puzzles? A valid puzzle can't have the trivalued oddagon pattern; it must have at least one additional candidate in one of the 123 cells. In such conditions, theorem 14.3 doesn't apply, but does it imply anything useful in practice? The only way to test this is to use existing puzzles and as of the writing of this section the largest relevant collection was mith's 972 one. So, the question will now be: in this 972 database, if not using any tridagon related resolution rule, but using eleven's replacement technique, can all the puzzles be solved in Z5 and how far must one go otherwise? The results are clear.

Only 78 (i.e. 8%) of the puzzles are not solved in Z5: 8 12 20 76 77 80 89 90 128 129 155 156 164 165 168 169 173 226 232 234 235 236 237 265 266 267 269 271 396 442 459 517 518 522 524 563 564 565 567 570 595 596 597 677 776 827 828 836 837 846 884 915 932 933 937 942 944 945 947 948 952 953 956 957 958 959 960 962 963 964 965 966 967 968 969 970 971 972

Of those 78:

- 67 are solved in W6: 20 76 77 80 89 90 129 155 164 165 168 169 173 226 232 234 235 236 237 266 267 269 271 442 518 522 524 563 564 565 567 570 595 596 597 677 776 837 846 884 915 932 933 937 942 944 945 947 948 952 953 956 957 958 959 960 962 963 964 965 966 967 968 969 970 971 972

- 2 are solved in W7: 156 265

14.7.2 Proving in T&E(3) that the trivalued oddagon pattern is contradictory

Select only T&E(3) in the SudoRules configuration file – i.e. (bind ?*TE3* TRUE) – and type:

```
(solve-k-digit-pattern-string 3
  "1001000000100100000010010001000010000100100000011000000000000000000000000000"
)
```

After a few combinations of 3 candidates (the whole taking a fraction of a second), the following message will appear:

GRID HAS NO SOLUTION : NO CANDIDATE FOR RC-CELL r3c3

meaning that the pattern is contradictory in restricted T&E(3). For details, you can find the full T&E resolution path leading to this conclusion in the “Sudoku/Tridagons/Proofs/Proofs-of-Tridagon-pattern.clp” file of [CSP-RULES-EXAMPLES].

14.7.3 SudoRules functions for analysing k-digit patterns

SudoRules has several general functions for dealing with k-digit patterns in general, with syntax given below:

```
(solve-k-digit-pattern-string ?k ?string)
(solve-n-grids-after-first-p-from-k-digit-pattern-string-file
  ?k ?file-name ?p ?n)
(solve-n-grids-after-first-p-from-k-digit-pattern-string-file-
  excluding ?k ?file-name ?p ?n $?l-out)
```

where ?k is the number of digits in the pattern, ?file-name, ?p and ?n are as in similar functions and \$?l-out is the list of puzzles that are excluded from consideration – possibly because they have already been dealt with by another set of rules/techniques.

14.7.4 Finding other contradictory 3-digit patterns

The trivalued oddagon pattern is far from being the only known contradictory 3-digit pattern. Eleven has produced a list of 380 of them involving 10 to 16 cells. It would have been impossible to manually analyse them all, but the above functions allowed to filter those that potentially require T&E(3) for proving they are contradictory. Indeed, only one of them could be found, the following 15-cell pattern:

```
+-----+-----+-----+
! . . . ! . . X ! . . X !
! . . X ! . . . ! . X . !
! . X . ! . X . ! X . . !
+-----+-----+-----+
! . . . ! . X . ! . . X !
! . . X ! . . X ! X . . !
! . X . ! X . . ! . X . !
+-----+-----+-----+
```

```

! . . . ! . . . ! . . . !
! . . . ! . . . ! . . . !
! . . . ! . . . ! . . . !
+-----+-----+-----+

```

Or :

```
00000100100100001001001010000001000100100110001010001000000000000000000000000000
```

Or, in “sauce pan with lid” representation:

```

+-----+-----+-----+
! . . . ! . . X ! . . X !
! . . . ! . X . ! . X . !
! . . . ! X . . ! X . . !
+-----+-----+-----+
! . . . ! . . X ! X . . !
! . . . ! . X . ! . . . !
! . . . ! X . . ! . . X !
+-----+-----+-----+
! . . . ! X . . ! . X . !
! . . . ! . X . ! X . . !
! . . . ! . . . ! . . . !
+-----+-----+-----+

```

The whole analysis can be found in the “Sudoku/eleven-impossible-3-digit-patterns” folder of [CSP-RULES-EXAMPLES]. Note that the proof that a pattern effectively requires T&E(3) still requires to try it and fails to find a conclusion in the full T&E(2). But now, we need to do this for only one puzzle instead of 380. As the restricted form is orders of magnitude faster, this is a clear advantage. *It can also be interesting in and of itself to know that the full T&E(2) is required: this means that candidates other than those in the pattern must be considered in the proof.*

As of the updating of this section, eleven has extended his original set of 380 patterns to 630 ones, among which 10 (instead of 1 previously) cannot be proven contradictory in restricted T&E(2) [but they can in restricted T&E(3)]:

```

00000100100001001000010010000001001000010100000100010000000000000000000000 #38
12-cells (= tridagon)
00000000000100100100101001000000101000001000100110010000000000000000000000 #171
13-cells
00000000000100100100101001000100000001000101001000100000000000000000000000 #180
13-cells
00000000000100100100101001000100000001000101010001000100000000000000000000 #181
13-cells
00000000100001101000110010000100000010101000011001000100000000000000000000 #56
15-cells
00000000100100101001001010000100100001010000110001000100000000000000000000 #66
15-cells
00000100100100001001001010000001000100100110001010001000000000000000000000 #97
15-cells (the previously mentioned one)

```

```

000001001001010010001010010001000001010001100010001100000000000000000000000000 #5
16-cells
000001001001010010001010010001000001010001100100001100000000000000000000000000 #6
16-cells
000001001001010010001010100001001000011001000010000000000000000000000000000000 #9
16-cells

```

The question arises which among them cannot be proven contradictory in the full T&E(2). Now, SudoRules has a function for launching the full test in T&E(2) – or in whatever set of rules or techniques is selected in the configuration file; the only difference is, no focusing is applied:

(*fully-solve-k-digit-pattern-string* ?k ?string)

The result is [no pattern can be proven contradictory in full T&E(1) and] only the first pattern cannot be proven contradictory in full T&E(2). In the following representation, it is one of the isomorphic forms of the trivalued oddagon pattern.

```

+-----+-----+-----+
! . . . ! . . X ! . . X !
! . . . ! . X . ! . X . !
! . . . ! X . . ! X . . !
+-----+-----+-----+
! . . . ! . . X ! . . X !
! . . . ! X . . ! . X . !
! . . . ! . X . ! X . . !
+-----+-----+-----+
! . . . ! . . . ! . . . !
! . . . ! . . . ! . . . !
! . . . ! . . . ! . . . !
+-----+-----+-----+

```

Finally, remember that our goal here was to find patterns that would *potentially* require T&E(3) to prove their contradiction. If our goal was only to prove that they are contradictory, one should use the much faster DFS instead of T&E(3). The CSP-Rules version of DFS had been updated to work with the above focused functions. However, DFS will be of no use for suggesting a smart proof of the contradiction.

14.7.5 SudoRules functions for analysing kl-digit patterns

It seemed useful in some cases to have a generalisation of the previous functions. Given two digits k and l, a kl-digit pattern is defined by a sequence of 81 characters, all k, l or “.”, with the intended meaning that the set of candidates for cells with symbol k must be {1, ..., k}, the set of candidates for cells with symbol l must be {1, ..., l}, and cells with a dot are unrestricted. SudoRules has a function with syntax given below:

(solve-kl-digit-pattern-string ?k ?l ?string)

Example of use:

(*solve-kl-digit-pattern-string* 2 3 ".3...3...3...3.....2.2....3...3.....2.....3.3.....")

14.8 The anti-tridagon pattern and mith's 63,137 puzzles in T&E(3)

We are now starting the more general approach hinted to at the start of this chapter.

While I use the expression “trivalued oddagon pattern” for (and only for) the precise contradictory pattern defined in section 14.1 (a pattern that can appear in no well-formed puzzle), let me call anti-tridagon pattern the following very broad set of conditions (which, in and of itself, allows no assertion or elimination, but only a big OR conclusion). It is defined to cover all the cases of any number of additional candidates in any number of cells of the “trivalued oddagon pattern”. (It doesn't cover any case of “degenerate anti-tridagon”, i.e. of any missing 123-candidate(s) in any of the 123-cells – but I haven't seen any such case as yet and I have shown that such cases are degenerate when there are no guardians.)

This pattern covers the basic tridagon pattern as well as the patterns at the start of the Tridagon-forcing-whips. But it covers many more cases and it will allow to define Tridagon-OR_k-relations and to use generic OR_k-chains based on them: Tridagon-OR_k-forcing-whips, Tridagon-OR_k-contrad-whips, Tridagon-OR_k-whips...

14.8.1 Definition of the general anti-tridagon pattern

Definition of the anti-tridagon pattern: let there be four blocks forming a rectangle in two bands and two stacks:

b11 b12

b21 b22

Let there be three digits, say 1 2 3, such that: in each of the four blocks, there are three cells in different rows and different columns such that:

- the same additional conditions on the 4×3 cells as in section 14.1.2 are satisfied;
- each of these 4×3 cells contains the three digits (notice the only difference with the contradictory trivalued oddagon pattern of section 14.1.1: each cell may contain any number of additional candidates);
- at least one of the 4×3 cells contains at least one additional digit (anti-contradiction condition, which is automatically satisfied in a consistent puzzle).

Additional candidates in the 4×3 cells are called “*guardians*” because they guard against the contradiction inherent in the trivalued oddagon pattern.

Essential remark (due to mith): in any such case, none of the three digits can be a given (or a decided value) in the two bands and two stacks of the four blocks. *As a result, at least two of the three digits must be a given or a decided value in the uniquely defined block that is neither in the two stacks nor in the two bands.* This defines an additional criterion (first mentioned by mith) that significantly simplifies the detection of the pattern (be it by a manual solver or a computer program). This may also justify lowering the complexity assigned to the detection of the anti-tridagon pattern, if one considers that this additional criterion is indeed the main detection one and that the other conditions are mere checking.

14.8.2 Mith's database of 63,137 T&E(3) min-expand puzzles

As of the writing of this section, the largest available collection of T&E(3) min-expand puzzles is mith's extension of the above-mentioned 972 one. It now has 63,137 puzzles. Let's state three basic results about it:

◆ First result: all the T&E(3) puzzles in mith's collection are indeed in T&E(W2, 2), i.e. at the low end of T&E(3). ***T&E(W2, 2) thus seems to be the new frontier for the hardest puzzles.*** Note: this result can be extended to the more recent collection of 158,276 min-expands and corresponding collection of 845,781 minimal puzzles.

◆ Second result: ***each of the 63,137 min-expand puzzles in mith's database has at least one anti-tridagon pattern*** (and obviously at most one possibility for the broader pattern of blocks and digits). Thanks to mith for pointing out a rare example where there are two possible combinations of cells, namely puzzle "Tanngriðsnir and Tanngriðstr" (SER 11.7, see section 14.9.4 below):

.....1....23.4..56...237....82.....53.6....8.45.....43...6.226..348.55.826....

◆ ***Third result: classification of the number of guardians*** when Subsets, Finned-Fish, whips[≤ 7], Tridagons and Tridagon-forcing-whips(≤ 22) are active:

```
1: 33,579 (including 29,356 solved in SFin+Trid+W7)
2: 19,016 (including 9,089 solved in SFin+Trid+W7+TFW22 but not in
   SFin+Trid+W7)
3: 7,443
4: 2,201
5: 647
6: 191
7: 42
8: 7
9: 7
10: 2
11: 1
12: 1
Total: 63,137
```

The above results will be better appreciated if compared to the results after allowing only Subsets and Finned Fish:

```

1: 23,279
2: 16,830
3: 10,851
4: 6,165
5: 3,254
6: 1,718
7: 562
8: 233
9: 121
10: 59
11: 40
12: 20
13: 1
14: 0
15: 4
Total: 63,137

```

The above results justify trying to use OR_k -chains based on a OR_k -anti-tridagon relation for $k > 2$. They also suggest more precisely that OR_k -chains with $k > 5$ or 6 may be useful, but only in rare cases.

14.9 Tridagon- OR_k -forcing-whips

When an anti-tridagon pattern with k guardians $C_1, C_2, \dots C_k$ has been found in a puzzle, one can conclude that there is an OR_k relation between them: $OR_k(C_1, C_2, \dots C_k)$. In turn, this allows to use the various types of generic OR_k -chains defined in section 3.5. This can easily be done in SudoRules, where several sections of the configuration file have been added for this purpose (see section 14.18 below for full details).

It is important to understand that:

1) originally, the anti-tridagon rule that detects the anti-tridagons and asserts the OR_k relations was defined at its proper level of complexity (12, because it involves 12 CSP-Variables), after all the non-forcing generic rules at level 12 but before all the forcing-chains at this level. This choice entailed that all the non- OR_k chains of length 12 or less were tried before this rule, if they were activated in the configuration file. One of the the reason was, it allowed to give the other rules a chance to **minimise the number of guardians** (too many guardians may make it hard to find common eliminations). It pertained to the user to choose how much chance he wanted to let to the “normal” rules. For a more recent and smarter behaviour (allowed in large part by the introduction of ultra-persistency rules for the Tridagon- OR_k relations and now set to always be used by default), see section 14.18.

2) however, once an OR_k relation has been found, its use as a starting point for OR_k -forcing-whips is not counted as 12, but only as 1 (as is the bivalued relation in standard forcing-whips), which provides a good balance between the standard chains and those exotic OR_k -forcing-whips. This is the standard way for OR_k -forcing-whips, as defined in section 3.5, which is justified by their intended use in conjunction with exotic patterns only. The same remarks apply to OR_k -contrad-whips and OR_k -whips to appear in the next sections, and to the corresponding OR_k -g-chains.

14.9.2 An example with OR_4 -forcing-whips

Consider puzzle #339 in mith's 63,137 min-expand collection, a puzzle that still has 4 guardians, even after applying W7 to it:

+	+	+	+	+	+	+	+	+	+
!	.	.	.	!	4	.	6	!	7
!	.	.	.	!	.	.	.	!	2
!	.	8	.	!	2	7	.	!	.
+	+	+	+	+	+	+	+	+	+
!	2	.	8	!	3	4	.	!	.
!	3	7	.	!	.	6	.	!	.
!	.	4	6	!	8	.	7	!	.
+	+	+	+	+	+	+	+	+	+
!	.	6	.	!	.	.	.	!	1
!	.	3	4	!	.	.	.	!	5
!	.	.	.	!	.	4	!	.	7
+	+	+	+	+	+	+	+	+	+

...4.678.....2...8.27....2.834...737..6....468.7....6....194.34...52.....4.73;111;
44367

The resolution state after Singles and whips[1] is:

+	+	+	+	+	+	+	+	+	+
!	159	1259	12359	!	4	1359	6	!	7
!	145679	159	13579	!	159	13589	13589	!	2
!	14569	8	1359	!	2	7	1359	!	3469
+	+	+	+	+	+	+	+	+	+
!	2	159	8	!	3	4	159	!	69
!	3	7	159	!	159	6	1259	!	489
!	159	4	6	!	8	1259	7	!	39
+	+	+	+	+	+	+	+	+	+
!	578	6	257	!	57	2358	2358	!	1
!	1789	3	4	!	1679	189	189	!	5
!	1589	1259	1259	!	1569	12589	4	!	68
+	+	+	+	+	+	+	+	+	+

184 candidates

hidden-pairs-in-a-column: c1{n4 n6}{r2 r3} ==> r3c1≠9, r3c1≠5, r3c1≠1, r2c1≠9, r2c1≠7, r2c1≠5, r2c1≠1
hidden-single-in-a-block ==> r2c3=7
biv-chain[3]: r4c7{n9 n6} - b9n6{r9c7 r8c9} - c9n8{r8 r5} ==> r5c9≠9
z-chain[3]: c4n6{r9 r8} - r8n7{c4 c1} - r8n1{c1 .} ==> r9c4≠1


```

z-chain[3]: c4n6{r9 r8} - r8n7{c4 c1} - r8n9{c1 .} ==> r9c4≠9
biv-chain[4]: r4c7{n9 n6} - b9n6{r9c7 r8c9} - c9n8{r8 r5} - b6n2{r5c9 r6c9} ==> r6c9≠9
whip[1]: c9n9{r3 .} ==> r3c7≠9
biv-chain[4]: r8c9{n6 n8} - b6n8{r5c9 r5c7} - c7n4{r5 r3} - r3c1{n4 n6} ==> r3c9≠6
z-chain[5]: c1n7{r8 r7} - c1n8{r7 r9} - b9n8{r9c7 r8c9} - r8n6{c9 c4} - r8n7{c4 .} ==>
r8c1≠1, r8c1≠9
whip[1]: r8n9{c6 .} ==> r9c5≠9
whip[1]: r8n1{c6 .} ==> r9c5≠1

```

+-----+-----+-----+									
! 159	1259	12359	! 4	1359	6	! 7	8	159	!
! 46	159	7	! 159	13589	13589	! 2	13456	1569	!
! 46	8	1359	! 2	7	1359	! 346	13456	159	!
+-----+-----+-----+									
! 2	159	8	! 3	4	159	! 69	156	7	!
! 3	7	159	! 159	6	1259	! 489	145	1258	!
! 159	4	6	! 8	1259	7	! 39	135	125	!
+-----+-----+-----+									
! 578	6	25	! 57	2358	2358	! 1	9	4	!
! 78	3	4	! 1679	189	189	! 5	2	68	!
! 1589	1259	1259	! 56	258	4	! 68	7	3	!
+-----+-----+-----+									

OR4-anti-tridagon[12] for digits 1, 5 and 9 in blocks:

b1, with cells: r1c1, r2c2, r3c3

b2, with cells: r1c5, r2c4, r3c6

b4, with cells: r6c1, r4c2, r5c3

b5, with cells: r6c5, r4c6, r5c4

with 4 guardians: n3r1c5 n3r3c3 n3r3c6 n2r6c5

Based on this OR4 relation, four different OR4-forcing-whips will allow an easy solution.

Trid-OR4-forcing-whip-elim[4]:

|| n3r3c6 -

|| n3r1c5 -

|| n3r3c3 - partial-whip[1]: b3n3{r3c8 r2c8} -

|| n2r6c5 - partial-whip[2]: c6n2{r5 r7} - r7n3{c6 c5} -

==> r2c5≠3

t-whip[5]: c6n8{r8 r2} - r2n3{c6 c8} - r2n4{c8 c1} - r2n6{c1 c9} - r8c9{n6 .} ==> r8c5≠8

Trid-OR4-forcing-whip-elim[5]:

|| n3r3c6 -

|| n3r3c3 -

|| n3r1c5 - partial-whip[1]: c3n3{r1 r3} -

|| n2r6c5 - partial-whip[3]: r5n2{c6 c9} - r5n8{c9 c7} - c7n4{r5 r3} -

==> r3c7≠3

hidden-single-in-a-column ==> r6c7=3

naked-pairs-in-a-row: r3{c1 c7}{n4 n6} ==> r3c8≠6, r3c8≠4

z-chain[5]: c6n2{r5 r7} - r7c3{n2 n5} - r5c3{n5 n9} - r6n9{c1 c5} - b5n2{r6c5 .} ==> r5c6≠1

t-whip[6]: c5n3{r7 r1} - r2n3{c6 c8} - r2n4{c8 c1} - r2n6{c1 c9} - r8n6{c9 c4} - r9c4{n6 .} ==> r7c5≠5

Trid-OR4-forcing-whip-elim[7]:

```
|| n3r3c6 - partial-whip[1]: r2n3{c6 c8} -
|| n3r3c3 - partial-whip[1]: b3n3{r3c8 r2c8} -
|| n3r1c5 - partial-whip[1]: r2n3{c6 c8} -
|| n2r6c5 - partial-whip[3]: r5n2{c6 c9} - c9n8{r5 r8} - c9n6{r8 r2} -
==> r2c8≠6
```

hidden-single-in-a-column ==> r4c8=6

naked-single ==> r4c7=9

z-chain[7]: c6n2{r5 r7} - r7c3{n2 n5} - r5c3{n5 n1} - r4n1{c2 c6} - r8c6{n1 n8} - c9n8{r8 r5} - r5n2{c9 .} ==> r5c6≠9

whip[5]: r8c5{n1 n9} - b5n9{r6c5 r5c4} - c4n1{r5 r8} - r8c6{n1 n8} - r2n8{c6 .} ==> r2c5≠1

whip[7]: b3n4{r2c8 r3c7} - c7n6{r3 r9} - c4n6{r9 r8} - c4n1{r8 r5} - b6n1{r5c8 r6c9} - r6n2{c9 c5} - b5n9{r6c5 .} ==> r2c8≠1

whip[7]: b5n9{r6c5 r5c4} - r8n9{c4 c6} - r8c5{n9 n1} - c4n1{r8 r2} - r2c2{n1 n5} - r4n5{c2 c6} - c6n1{r4 .} ==> r2c5≠9

Trid-OR4-forcing-whip-elim[7]:

```
|| n3r3c6 - partial-whip[1]: r2n3{c6 c8} -
|| n3r3c3 - partial-whip[1]: b3n3{r3c8 r2c8} -
|| n3r1c5 - partial-whip[1]: r2n3{c6 c8} -
|| n2r6c5 - partial-whip[3]: r5n2{c6 c9} - r5n8{c9 c7} - c7n4{r5 r3} -
==> r2c8≠4
```

The end is easy:

singles ==> r3c7=4, r3c1=6, r2c1=4, r5c7=8, r9c7=6, r8c9=8, r8c1=7, r9c4=5, r7c4=7, r2c9=6, r8c4=6, r5c8=4

finned-x-wing-in-rows: n1{r4 r2}{c2 c6} ==> r3c6≠1

biv-chain[2]: r4n1{c2 c6} - c4n1{r5 r2} ==> r2c2≠1

whip[1]: r2n1{c6 .} ==> r1c5≠1

biv-chain[3]: r4n1{c2 c6} - r5c4{n1 n9} - b4n9{r5c3 r6c1} ==> r6c1≠1

biv-chain[4]: c2n2{r1 r9} - r9c5{n2 n8} - r2c5{n8 n5} - r2c2{n5 n9} ==> r1c2≠9

biv-chain[3]: c2n9{r9 r2} - c4n9{r2 r5} - b4n9{r5c3 r6c1} ==> r9c1≠9

biv-chain[4]: b7n9{r9c3 r9c2} - r2c2{n9 n5} - r2c5{n5 n8} - r9c5{n8 n2} ==> r9c3≠2

biv-chain[3]: c1n1{r1 r9} - r9c3{n1 n9} - b4n9{r5c3 r6c1} ==> r1c1≠9

singles ==> r6c1=9, r5c4=9, r2c4=1

finned-x-wing-in-rows: n1{r5 r3}{c3 c9} ==> r1c9≠1

whip[1]: b3n1{r3c9 .} ==> r3c3≠1

biv-chain[3]: r5c3{n1 n5} - r7n5{c3 c1} - r1c1{n5 n1} ==> r1c3≠1

biv-chain[3]: c1n5{r1 r7} - r7c3{n5 n2} - b1n2{r1c3 r1c2} ==> r1c2≠5

biv-chain[3]: c3n2{r7 r1} - r1n3{c3 c5} - b8n3{r7c5 r7c6} ==> r7c6≠2

singles ==> r5c6=2, r6c9=2

finned-x-wing-in-columns: n5{c2 c6}{r4 r2} ==> r2c5≠5

singles ==> r2c5=8, r9c5=2, r7c5=3, r7c6=8, r7c1=5, r1c1=1, r1c2=2, r9c1=8, r7c3=2, r1c3=3

finned-x-wing-in-columns: n5{c3 c9}{r5 r3} ==> r3c8≠5

```

finned-x-wing-in-columns: n5{c8 c5}{r6 r2} ==> r2c6#5
finned-x-wing-in-columns: n5{c6 c3}{r3 r4} ==> r4c2#5
stte

```

Notice that currently OR_k -forcing-whips don't have a "blocked" version and they may be interrupted by simpler rules; but this is quite irrelevant to the purposes of this chapter.

14.9.3 An example with OR_5 -forcing-whips

Consider puzzle #47008 in mith's 63,137 min-expand collection, a puzzle that still has 5 guardians, even after applying W7 to it:

```

+-----+-----+-----+
! 1 . 3 ! 4 5 . ! . 8 9 !
! 4 . . ! . . . ! 1 . 3 !
! . 9 8 ! 1 3 . ! . . . !
+-----+-----+-----+
! . . 9 ! . . . ! . 3 5 !
! . . 4 ! . . 5 ! 8 1 . !
! . . . ! . . . ! . . 4 !
+-----+-----+-----+
! . . . ! 5 . 1 ! 3 . 8 !
! 8 . . ! . 6 . ! . . . !
! 9 3 . ! 2 7 8 ! . . . !
+-----+-----+-----+

```

1.345..894.....1.3.9813.....9....35..4..581.....4...5.13.88...6....93.278...;98

The resolution state after Singles and whips[1] is:

```

+-----+-----+-----+-----+
! 1      267      3      ! 4      5      267      ! 267      8      9      !
! 4      2567     2567    ! 6789    289     2679    ! 1      2567     3      !
! 2567    9      8      ! 1      3      267     ! 24567   24567   267    !
+-----+-----+-----+-----+
! 267     12678    9      ! 678     1248    2467    ! 267     3      5      !
! 2367     267     4      ! 3679     29      5      ! 8      1      267    !
! 23567    125678  12567  ! 3678     128     2367    ! 2679     2679    4      !
+-----+-----+-----+-----+
! 267     2467     267    ! 5      49      1      ! 3      2679     8      !
! 8      12457    1257    ! 39      6      349    ! 2579    2579    127    !
! 9      3      156     ! 2      7      8      ! 456     456     16     !
+-----+-----+-----+-----+

```

177 candidates.

```

biv-chain[3]: r5c5{n2 n9} - r7c5{n9 n4} - b5n4{r4c5 r4c6} ==> r4c6#2
biv-chain[3]: r4n1{c2 c5} - b5n4{r4c5 r4c6} - r8n4{c6 c2} ==> r8c2#1
whip[1]: b7n1{r9c3 .} ==> r6c3#1
hidden-pairs-in-a-block: b4{n1 n8}{r4c2 r6c2} ==> r6c2#7, r6c2#6, r6c2#5, r6c2#2,
r4c2#7, r4c2#6, r4c2#2

```

biv-chain[4]: c1n5{r6 r3} - c2n5{r2 r8} - r8n4{c2 c6} - c6n3{r8 r6} ==> r6c1≠3
 hidden-single-in-a-block ==> r5c1=3
 z-chain[5]: c7n4{r3 r9} - c7n5{r9 r8} - c2n5{r8 r2} - r3n5{c1 c8} - r3n4{c8 .} ==>
 r3c7≠2, r3c7≠7, r3c7≠6

+-----+-----+-----+											
! 1	267	3	! 4	5	267	! 267	8	9	!		
! 4	2567	2567	! 6789	289	2679	! 1	2567	3	!		
! 2567	9	8	! 1	3	267	! 45	24567	267	!		
+-----+-----+-----+											
! 267	18	9	! 678	1248	467	! 267	3	5	!		
! 3	267	4	! 679	29	5	! 8	1	267	!		
! 2567	18	2567	! 3678	128	2367	! 2679	2679	4	!		
+-----+-----+-----+											
! 267	2467	267	! 5	49	1	! 3	2679	8	!		
! 8	2457	1257	! 39	6	349	! 2579	2579	127	!		
! 9	3	156	! 2	7	8	! 456	456	16	!		
+-----+-----+-----+											

OR5-anti-tridagon[12] for digits 2, 6 and 7 in blocks:

b1, with cells: r1c2, r2c3, r3c1

b3, with cells: r1c7, r2c8, r3c9

b4, with cells: r5c2, r6c3, r4c1

b6, with cells: r5c9, r6c8, r4c7

with 5 guardians: n5r2c3 n5r2c8 n5r3c1 n5r6c3 n9r6c8

Trid-OR5-forcing-whip-elim[7]:

```
|| n5r2c3 - partial-whip[1]: b7n5{r9c3 r8c2} -
|| n5r3c1 - partial-whip[1]: c2n5{r2 r8} -
|| n5r6c3 - partial-whip[1]: b7n5{r9c3 r8c2} -
|| n9r6c8 - partial-whip[1]: c7n9{r6 r8} -
|| n5r2c8 - partial-whip[2]: c2n5{r2 r8} - r9n5{c3 c7} -
==> r8c7≠5
```

hidden-pairs-in-a-column: c7{n4 n5}{r3 r9} ==> r9c7≠6

Trid-OR5-forcing-whip-elim[7]:

```
|| n5r2c3 - partial-whip[1]: b7n5{r9c3 r8c2} -
|| n5r2c8 - partial-whip[1]: c2n5{r2 r8} -
|| n5r3c1 - partial-whip[1]: c2n5{r2 r8} -
|| n5r6c3 - partial-whip[1]: b7n5{r9c3 r8c2} -
|| n9r6c8 - partial-whip[2]: r7n9{c8 c5} - b8n4{r7c5 r8c6} -
==> r8c2≠4
```

After these two OR₅ eliminations, the end is quite easy (for a puzzle in T&E(3):

singles ==> r7c2=4, r7c5=9, r5c5=2, r2c5=8, r6c5=1, r4c5=4, r6c2=8, r4c2=1, r8c4=3,
 r8c6=4, r6c6=3, r4c4=8, r5c4=9, r2c6=9
 finned-x-wing-in-columns: n2{c9 c2}{r8 r3} ==> r3c1≠2
 t-whip[2]: r5n6{c2 c9} - c7n6{r6 .} ==> r1c2≠6
 finned-x-wing-in-columns: n6{c4 c2}{r2 r6} ==> r6c3≠6, r6c1≠6

```

biv-chain[2]: r1n6{c7 c6} - b5n6{r4c6 r6c4} ==> r6c7≠6
biv-chain[3]: r4c6{n7 n6} - r6n6{c4 c8} - r5c9{n6 n7} ==> r4c7≠7
z-chain[3]: r5n7{c9 c2} - r1n7{c2 c6} - b5n7{r4c6 .} ==> r6c7≠7
biv-chain[3]: c7n7{r8 r1} - c7n6{r1 r4} - r5c9{n6 n7} ==> r8c9≠7
z-chain[3]: c9n7{r5 r3} - r1n7{c7 c6} - r4n7{c6 .} ==> r5c2≠7
singles ==> r5c2=6, r5c9=7
x-wing-in-rows: n6{r1 r4}{c6 c7} ==> r3c6≠6
finned-x-wing-in-columns: n6{c1 c9}{r3 r7} ==> r7c8≠6
whip[1]: b9n6{r9c9 .} ==> r9c3≠6
biv-chain[3]: b2n2{r1c6 r3c6} - r3c9{n2 n6} - r1n6{c7 c6} ==> r1c6≠7
biv-chain[3]: b2n7{r2c4 r3c6} - c6n2{r3 r1} - r1c2{n2 n7} ==> r2c2≠7, r2c3≠7
x-wing-in-columns: n7{c2 c7}{r1 r8} ==> r8c8≠7, r8c3≠7
biv-chain[3]: r3c6{n2 n7} - r2n7{c4 c8} - r7c8{n7 n2} ==> r3c8≠2
biv-chain[3]: r2n7{c8 c4} - r3c6{n7 n2} - r3c9{n2 n6} ==> r2c8≠6
biv-chain[3]: r2n6{c3 c4} - r6c4{n6 n7} - c3n7{r6 r7} ==> r7c3≠6
stte

```

14.9.4 An example with two different combinations of tridagon cells

Puzzle “Tanngrisnir and Tannngjóstr” (SER 11.7) was mentioned in section 14.8.2 as a rare one (found by mith) with two different anti-tridagon patterns in the same four blocks for the same three digits:

```

+-----+-----+-----+
! . . . ! . . . ! . . 1 !
! . . . ! . 2 3 ! . 4 . !
! . 5 6 ! . . . ! 2 3 7 !
+-----+-----+-----+
! . . . ! . 8 2 ! . . . !
! . . 5 ! 3 . 6 ! . . . !
! . 8 . ! 4 5 . ! . . . !
+-----+-----+-----+
! . 4 3 ! . . . ! 6 . 2 !
! 2 6 . ! . 3 4 ! 8 . 5 !
! 5 . 8 ! 2 6 . ! . . . !
+-----+-----+-----+
.....1....23.4..56...237....82.....53.6....8.45.....43...6.226..348.55.826....

```

The resolution state after Singles and whips[1] is:

```

+-----+-----+-----+
! 34789 2379 2479 ! 56789 479 5789 ! 59 5689 1 !
! 1789 179 179 ! 156789 2 3 ! 59 4 689 !
! 1489 5 6 ! 189 149 189 ! 2 3 7 !
+-----+-----+-----+
! 134679 1379 1479 ! 179 8 2 ! 134579 15679 3469 !
! 1479 1279 5 ! 3 179 6 ! 1479 12789 489 !
! 13679 8 1279 ! 4 5 179 ! 1379 12679 369 !
+-----+-----+-----+

```

!	179	4	3	!	15789	179	15789	!	6	179	2	!
!	2	6	179	!	179	3	4	!	8	179	5	!
!	5	179	8	!	2	6	179	!	13479	179	349	!
+-----+-----+-----+												

189 candidates.

```
naked-pairs-in-a-column: c7{r1 r2}{n5 n9} ==> r9c7≠9, r6c7≠9, r5c7≠9, r4c7≠9, r4c7≠5
hidden-single-in-a-block ==> r4c8=5
whip[1]: c7n9{r2 .} ==> r1c8≠9, r2c9≠9
hidden-pairs-in-a-row: r9{n3 n4}{c7 c9} ==> r9c9≠9, r9c7≠7, r9c7≠1
whip[1]: b9n1{r9c8 .} ==> r5c8≠1, r6c8≠1
whip[1]: b9n7{r9c8 .} ==> r5c8≠7, r6c8≠7
whip[1]: c9n9{r6 .} ==> r5c8≠9, r6c8≠9
hidden-pairs-in-a-row: r7{n5 n8}{c4 c6} ==> r7c6≠9, r7c6≠7, r7c6≠1, r7c4≠9, r7c4≠7,
r7c4≠1
biv-chain[3]: r1c7{n9 n5} - r2n5{c7 c4} - b2n6{r2c4 r1c4} ==> r1c4≠9
biv-chain[4]: c3n4{r4 r1} - c3n2{r1 r6} - r6c8{n2 n6} - b4n6{r6c1 r4c1} ==> r4c1≠4
z-chain[5]: c2n2{r1 r5} - r5c8{n2 n8} - r1c8{n8 n6} - r2n6{c9 c4} - r2n7{c4 .} ==>
r1c2≠7
biv-chain[6]: r1c7{n9 n5} - r2n5{c7 c4} - b2n6{r2c4 r1c4} - c8n6{r1 r6} -
b6n2{r6c8 r5c8} - c2n2{r5 r1} ==> r1c2≠9
t-whip[5]: c1n6{r4 r6} - r6c8{n6 n2} - r5n2{c8 c2} - r1c2{n2 n3} - b4n3{r4c2 .} ==>
r4c1≠1, r4c1≠7, r4c1≠9
z-chain[6]: r1n3{c1 c2} - c2n2{r1 r5} - r5c8{n2 n8} - r1c8{n8 n6} - r2n6{c9 c4} -
r2n7{c4 .} ==> r1c1≠7
biv-chain[7]: r1c7{n9 n5} - r2n5{c7 c4} - b2n6{r2c4 r1c4} - c8n6{r1 r6} -
b6n2{r6c8 r5c8} - c2n2{r5 r1} - b1n3{r1c2 r1c1} ==> r1c1≠9
```

+-----+-----+-----+												
!	348	23	2479	!	5678	479	5789	!	59	68	1	!
!	1789	179	179	!	156789	2	3	!	59	4	68	!
!	1489	5	6	!	189	149	189	!	2	3	7	!
+-----+-----+-----+												
!	36	1379	1479	!	179	8	2	!	1347	5	3469	!
!	1479	1279	5	!	3	179	6	!	147	28	489	!
!	13679	8	1279	!	4	5	179	!	137	26	369	!
+-----+-----+-----+												
!	179	4	3	!	58	179	58	!	6	179	2	!
!	2	6	179	!	179	3	4	!	8	179	5	!
!	5	179	8	!	2	6	179	!	34	179	34	!
+-----+-----+-----+												

First anti-tridagon pattern, with 4 guardians, and associated OR₄-forcing-whip elimination:

OR₄-anti-tridagon[12] for digits 1, 7 and 9 in blocks:

```
b4, with cells: r4c3, r5c2, r6c1
b5, with cells: r4c4, r5c5, r6c6
b7, with cells: r8c3, r9c2, r7c1
b8, with cells: r8c4, r9c6, r7c5
```

with 4 guardians: n4r4c3 n2r5c2 n3r6c1 n6r6c1

Trid-forcing-whip-elim[6]:

```
|| n4r4c3 -
|| n2r5c2 - partial-whip[1]: c3n2{r6 r1} -
|| n3r6c1 - partial-whip[2]: c2n3{r4 r1} - r1n2{c2 c3} -
|| n6r6c1 - partial-whip[2]: r6c8{n6 n2} - c3n2{r6 r1} -
==> r1c3≠4
```

hidden-single-in-a-column ==> r4c3=4

z-chain[6]: c9n8{r2 r5} - r5c8{n8 n2} - c2n2{r5 r1} - r1n3{c2 c1} - c1n4{r1 r3} - r3n8{c1 .} ==> r2c4≠8

t-whip[6]: c1n4{r3 r1} - r1n3{c1 c2} - c2n2{r1 r5} - r5c8{n2 n8} - c9n8{r5 r2} - c1n8{r2 .} ==> r3c1≠9, r3c1≠1

whip[1]: r3n1{c6 .} ==> r2c4≠1

whip[1]: r3n9{c6 .} ==> r1c5≠9, r1c6≠9, r2c4≠9

whip[7]: r5n2{c2 c8} - r5n8{c8 c9} - r2n8{c9 c1} - r3c1{n8 n4} - c5n4{r3 r1} - c5n7{r1 r7} - c1n7{r7 .} ==> r5c2≠7

+-----+-----+-----+			+-----+-----+-----+			+-----+-----+-----+			+-----+-----+-----+			
!	348	23	279	!	5678	47	578	!	59	68	1	!
!	1789	179	179	!	567	2	3	!	59	4	68	!
!	48	5	6	!	189	149	189	!	2	3	7	!
+-----+-----+-----+			+-----+-----+-----+			+-----+-----+-----+			+-----+-----+-----+			
!	36	1379	4	!	179	8	2	!	137	5	369	!
!	179	129	5	!	3	179	6	!	147	28	489	!
!	13679	8	1279	!	4	5	179	!	137	26	369	!
+-----+-----+-----+			+-----+-----+-----+			+-----+-----+-----+			+-----+-----+-----+			
!	179	4	3	!	58	179	58	!	6	179	2	!
!	2	6	179	!	179	3	4	!	8	179	5	!
!	5	179	8	!	2	6	179	!	34	179	34	!
+-----+-----+-----+			+-----+-----+-----+			+-----+-----+-----+			+-----+-----+-----+			

Second anti-tridagon pattern on different cells, with 2 guardians, and associated OR₂-forcing-whip elimination:

OR₂-anti-tridagon[12] for digits 1, 7 and 9 in blocks:

b4, with cells: r4c2, r5c1, r6c3

b5, with cells: r4c4, r5c5, r6c6

b7, with cells: r9c2, r7c1, r8c3

b8, with cells: r9c6, r7c5, r8c4

with 2 guardians: n3r4c2 n2r6c3

Trid-OR₂-forcing-whip-elim[2]:

```
|| n2r6c3 -
|| n3r4c2 - partial-whip[1]: r1c2{n3 n2} -
==> r5c2≠2
```

singles ==> r6c3=2, r6c8=6, r1c8=8, r2c9=6, r5c8=2, r1c4=6, r5c9=8, r5c7=4, r9c7=3, r9c9=4, r2c1=8, r3c1=4, r1c1=3, r1c2=2, r4c1=6, r4c2=3, r4c9=9, r6c9=3, r1c5=4

whip[1]: b4n7{r6c1 .} ==> r7c1≠7

biv-chain[2]: c2n7{r9 r2} - b2n7{r2c4 r1c6} ==> r9c6≠7

biv-chain[3]: c5n7{r7 r5} - b5n9{r5c5 r6c6} - r9c6{n9 n1} ==> r7c5≠1

biv-chain[3]: r5n7{c1 c5} - r7c5{n7 n9} - r7c1{n9 n1} ==> r5c1≠1

```

biv-chain[3]: r5n1{c2 c5} - b5n9{r5c5 r6c6} - r9c6{n9 n1} ==> r9c2≠1
biv-chain[3]: b8n1{r9c6 r8c4} - c4n9{r8 r3} - b2n8{r3c4 r3c6} ==> r3c6≠1
t-whip[4]: r1c3{n9 n7} - r2n7{c3 c4} - r4c4{n7 n1} - r8c4{n1 .} ==> r8c3≠9
whip[1]: c3n9{r2 .} ==> r2c2≠9
biv-chain[2]: b7n9{r9c2 r7c1} - r6n9{c1 c6} ==> r9c6≠9
naked-single ==> r9c6=1
biv-chain[3]: r2c2{n7 n1} - r5n1{c2 c5} - r4c4{n1 n7} ==> r2c4≠7
singles ==> r2c4=5, r1c6=7, r1c3=9, r1c7=5, r6c6=9, r3c6=8, r7c6=5, r2c7=9, r7c4=8
biv-chain[3]: c1n9{r7 r5} - r5n7{c1 c5} - r7c5{n7 n9} ==> r7c8≠9
biv-chain[3]: b9n1{r7c8 r8c8} - c8n9{r8 r9} - b7n9{r9c2 r7c1} ==> r7c1≠1
stte

```

14.9.5 Semi-manual use of the anti-tridagon pattern

Whereas the above examples show how to automatically combine the detection of the anti-tridagon pattern with its use in OR_k -forcing-whips, one may prefer to apply a more manual approach. Let's illustrate it with a new example, puzzle #62886 in mith's 63137 min-expands list.

```

+-----+-----+-----+
! . . . ! 4 . . ! 7 8 . !
! 4 . . ! 1 . . ! . . 3 !
! . . . ! . . . ! 1 . 4 !
+-----+-----+-----+
! . 4 1 ! 3 . 7 ! 8 . 5 !
! . . 5 ! . 1 8 ! . . . !
! . . . ! . 4 . ! . 1 7 !
+-----+-----+-----+
! 3 . 4 ! . . . ! 5 . 8 !
! . 9 6 ! 8 . . ! . . . !
! 8 . 2 ! 7 3 . ! . . . !
+-----+-----+-----+

```

```

...4..78.4..1...3.....1.4.413.78.5..5.18.....4..173.4...5.8.968.....8.273....;1402
2;367772
SER = 10.1

```

Suppose, in a first instance of CSP-Rules, we activate only Subsets, Finned-Fish and Anti-Tridagons. We'll get the following:

Resolution state RS1 after Singles and whips[1]:

```

+-----+-----+-----+
! 12569 12356 39 ! 4 2569 23569 ! 7 8 269 !
! 4 2568 789 ! 1 256789 2569 ! 269 2569 3 !
! 2569 23568 3789 ! 2569 256789 23569 ! 1 2569 4 !
+-----+-----+-----+
! 269 4 1 ! 3 269 7 ! 8 269 5 !
! 2679 2367 5 ! 269 1 8 ! 23469 23469 269 !
! 269 2368 389 ! 2569 4 2569 ! 2369 1 7 !

```


!	3	17	4	!	269	269	1269	!	5	2679	8	!
!	157	9	6	!	8	25	1245	!	234	2347	12	!
!	8	15	2	!	7	3	14569	!	469	469	169	!

185 candidates.

hidden-pairs-in-a-column: c5{n7 n8}{r2 r3} ==> r3c5≠9, r3c5≠6, r3c5≠5, r3c5≠2, r2c5≠9, r2c5≠6, r2c5≠5, r2c5≠2

finned-x-wing-in-columns: n5{c5 c1}{r8 r1} ==> r1c2≠5

!	12569	1236	39	!	4	2569	23569	!	7	8	269	!
!	4	2568	789	!	1	78	2569	!	269	2569	3	!
!	2569	23568	3789	!	2569	78	23569	!	1	2569	4	!
!	269	4	1	!	3	269	7	!	8	269	5	!
!	2679	2367	5	!	269	1	8	!	23469	23469	269	!
!	269	2368	389	!	2569	4	2569	!	2369	1	7	!
!	3	17	4	!	269	269	1269	!	5	2679	8	!
!	157	9	6	!	8	25	1245	!	234	2347	12	!
!	8	15	2	!	7	3	14569	!	469	469	169	!

OR6-anti-tridagon[12] for digits 2, 6 and 9 in blocks:

b2, with cells: r1c5, r2c6, r3c4

b3, with cells: r1c9, r2c7, r3c8

b5, with cells: r4c5, r6c6, r5c4

b6, with cells: r4c8, r6c7, r5c9

with 6 guardians: n5r1c5 n5r2c6 n5r3c4 n5r3c8 n5r6c6 n3r6c7

At this point, none of the activated rules can be applied. But we have found an anti-tridagon pattern with 6 guardians. This is quite a lot of guardians, but there is an easy way of checking if some of them can be eliminated. Load CSP-Rules with SFin plus, say whips of length ≤ 8 , initialize it with the previous resolution state and try to eliminate these 6 guardians:

(init-sukaku-grid

!	12569	1236	39	!	4	2569	23569	!	7	8	269	!
!	4	2568	789	!	1	78	2569	!	269	2569	3	!
!	2569	23568	3789	!	2569	78	23569	!	1	2569	4	!
!	269	4	1	!	3	269	7	!	8	269	5	!
!	2679	2367	5	!	269	1	8	!	23469	23469	269	!
!	269	2368	389	!	2569	4	2569	!	2369	1	7	!
!	3	17	4	!	269	269	1269	!	5	2679	8	!
!	157	9	6	!	8	25	1245	!	234	2347	12	!
!	8	15	2	!	7	3	14569	!	469	469	169	!

```
(try-to-eliminate (list-of-nirjck-to-list-of-labels n5r1c5 n5r2c6 n5r3c4 n5r3c8 n5r6c6
n3r6c7))
```

```
whip[4]: r5n3{c8 c2} - r5n7{c2 c1} - r8n7{c1 c8} - r8n3{c8 .} ==> r6c7≠3
whip[1]: r6n3{c3 .} ==> r5c2≠3
```

Only one of the 6 guardians can be eliminated, but that's enough to fall into what was available in CSP-Rules at the time of the initial writing of this section (OR_k-chains are now defined for $k = 2, \dots, 8$, but $k = 7$ or 8 implies high computational complexity). It requires at least W4. The full solution of this puzzle will finally require W7, but the only purpose here was to illustrate how to focus on eliminating a few guardians. Starting from RS1:

```
hidden-pairs-in-a-column: c5{n7 n8}{r2 r3} ==> r3c5≠9, r3c5≠6, r3c5≠5, r3c5≠2, r2c5≠9,
r2c5≠6, r2c5≠5, r2c5≠2
finned-x-wing-in-columns: n5{c5 c1}{r8 r1} ==> r1c2≠5
biv-chain[3]: r5n7{c2 c1} - r8n7{c1 c8} - c8n3{r8 r5} ==> r5c2≠3
whip[1]: r5n3{c8 .} ==> r6c7≠3
hidden-pairs-in-a-block: b6{n3 n4}{r5c7 r5c8} ==> r5c8≠9, r5c8≠6, r5c8≠2, r5c7≠9,
r5c7≠6, r5c7≠2
hidden-pairs-in-a-row: r6{n3 n8}{c2 c3} ==> r6c3≠9, r6c2≠6, r6c2≠2
whip[1]: c3n9{r3 .} ==> r1c1≠9, r3c1≠9
z-chain[4]: c2n6{r3 r5} - c9n6{r5 r9} - c9n1{r9 r8} - c1n1{r8 .} ==> r1c1≠6
t-whip[4]: c6n4{r8 r9} - r9n5{c6 c2} - r9n1{c2 c9} - r8c9{n1 .} ==> r8c6≠2
t-whip[5]: r8c5{n5 n2} - r7n2{c6 c8} - c8n7{r7 r8} - r8n3{c8 c7} - r8n4{c7 .} ==>
r8c6≠5
```

+-----+-----+-----+									
! 125	1236	39	!	4	2569	23569	! 7	8	269
!	4	2568	789	!	1	78	!	269	2569
!	256	23568	3789	!	2569	78	!	1	2569
+-----+-----+-----+									
!	269	4	1	!	3	269	7	!	8
!	2679	267	5	!	269	1	8	!	34
!	269	38	38	!	2569	4	2569	!	269
+-----+-----+-----+									
!	3	17	4	!	269	269	1269	!	5
!	157	9	6	!	8	25	14	!	234
!	8	15	2	!	7	3	14569	!	469
+-----+-----+-----+									

OR5-anti-tridagon[12] for digits 2, 6 and 9 in blocks:

```
b2, with cells: r1c5, r2c6, r3c4
b3, with cells: r1c9, r2c7, r3c8
b5, with cells: r4c5, r6c6, r5c4
b6, with cells: r4c8, r6c7, r5c9
```

with 5 guardians: n5r1c5 n5r2c6 n5r3c4 n5r3c8 n5r6c6

As expected, when an anti-tridagon is found, it has fewer than 6 guardians. In the present case (which is also a reason for my choosing this puzzle), one finds the elimination of a candidate that is directly linked to the 5 guardians (an OR₅-whip[1]):

Trid-OR5-whip[1]:

```

|| n5r1c5 -
|| n5r2c6 -
|| n5r3c4 -
|| n5r3c8 -
|| n5r6c6 -
==> r3c6≠5

```

Trid-OR5-forcing-whip-elim[4]:

```

|| n5r3c4 -
|| n5r3c8 -
|| n5r1c5 - partial-whip[1]: r8n5{c5 c1} -
|| n5r2c6 - partial-whip[1]: c8n5{r2 r3} -
|| n5r6c6 - partial-whip[1]: c4n5{r6 r3} -
==> r3c1≠5

```

hidden-pairs-in-a-column: c1{n1 n5}{r1 r8} ==> r8c1≠7, r1c1≠2

singles ==> r7c2=7, r5c1=7, r7c6=1, r8c6=4, r8c8=7, r8c7=3

naked-single ==> r5c7=4, r5c8=3, r9c8=4, r1c6≠5

t-whip[6]: c2n1{r1 r9} - c9n1{r9 r8} - b9n2{r8c9 r7c8} - b8n2{r7c4 r8c5} - r4n2{c5 c1} - r3c1{n2 .} ==> r1c2≠6

z-chain[3]: r1n6{c6 c9} - r5n6{c9 c2} - b1n6{r2c2 .} ==> r3c4≠6

t-whip[7]: b2n6{r3c6 r1c5} - c5n5{r1 r8} - r8n2{c5 c9} - r1c9{n2 n9} - r5n9{c9 c4} - c5n9{r4 r7} - r9c6{n9 .} ==> r6c6≠6

whip[7]: c7n2{r2 r6} - c8n2{r4 r7} - b8n2{r7c4 r8c5} - r4n2{c5 c1} - c1n9{r4 r6} - r6c6{n9 n5} - b8n5{r9c6 .} ==> r1c9≠2

z-chain[5]: c7n2{r2 r6} - c9n2{r5 r8} - r8n1{c9 c1} - r1n1{c1 c2} - r1n2{c2 .} ==> r2c6≠2

whip[6]: r5n9{c4 c9} - r1c9{n9 n6} - r9c9{n6 n1} - r9n9{c9 c7} - r9n6{c7 c6} - b2n6{r1c6 .} ==> r7c4≠9

whip[5]: r7c4{n2 n6} - b5n6{r5c4 r4c5} - c5n9{r4 r1} - r1c9{n9 n6} - c8n6{r2 .} ==> r7c5≠2

biv-chain[2]: c9n2{r5 r8} - b8n2{r8c5 r7c4} ==> r5c4≠2

biv-chain[2]: c7n2{r2 r6} - r5n2{c9 c2} ==> r2c2≠2

whip[1]: r2n2{c8 .} ==> r3c8≠2

biv-chain[3]: b8n2{r7c4 r8c5} - c5n5{r8 r1} - c4n5{r3 r6} ==> r6c4≠2

biv-chain[3]: c4n2{r3 r7} - r8n2{c5 c9} - r5n2{c9 c2} ==> r3c2≠2

biv-chain[3]: b5n2{r6c6 r4c5} - r8n2{c5 c9} - r5n2{c9 c2} ==> r6c1≠2

biv-chain[2]: b5n2{r6c6 r4c5} - c1n2{r4 r3} ==> r3c6≠2

biv-chain[4]: c4n5{r6 r3} - b3n5{r3c8 r2c8} - b3n2{r2c8 r2c7} - r6n2{c7 c6} ==> r6c6≠5

hidden-single-in-a-block ==> r6c4=5

biv-chain[3]: r3c4{n9 n2} - r7c4{n2 n6} - r7c5{n6 n9} ==> r1c5≠9

biv-chain[3]: c4n6{r5 r7} - r7n2{c4 c8} - c9n2{r8 r5} ==> r5c9≠6

finned-x-wing-in-columns: n6{c9 c6}{r9 r1} ==> r1c5≠6

whip[1]: b2n6{r3c6 .} ==> r9c6≠6

whip[1]: r9n6{c9 .} ==> r7c8≠6

naked-pairs-in-a-column: c5{r1 r8}{n2 n5} ==> r4c5≠2

```
singles ==> r6c6=2, r2c7=2
naked-triplets-in-a-row: r1{c3 c6 c9}{n9 n3 n6} ==> r1c2≠3
finned-swordfish-in-columns: n9{c1 c7 c5}{r4 r6 r9} ==> r9c6≠9
stte
```

14.10 Tridagon-OR_k-contrad-whips

Generic OR_k-contrad-whips have been defined in section 3.5.2. Here, we combine their use with OR_k-anti-tridagon relations. An example should be enough to make the idea clear. As for selecting them in the configuration file, the latter has a part similar to the one for Tridagon-OR_k-forcing-whips (see section 14.18 for details).

The notation for an OR_k-contrad-whip (or an OR_k-whip in the next section) based on an OR_k-relation is as follows:

- the full name is <ORname>-OR_k-whip[n], with "n" the total length as usual, "k" the size or the OR relation and <OR-name> the short name of this relation (here Trid);
- double curly braces are used for the OR_k part (to recall that it is not a CSP-Variable);
- contrary to CSP-Variables, all the OR_k candidates are written inside the OR_k relation, the first of them is the left-linking candidate;
- a vertical bar is used inside the OR_k-relation to separate the right-linking candidate (possibly none, i.e. a dot, for OR_k-contrad-whips) from the rest.

Consider puzzle #25591 in mith's list of 63,137 min-expands:

```
+-----+-----+-----+
! 1 . 3 ! . . . ! . . . !
! . 5 . ! 1 . 9 ! . . 6 !
! 6 9 . ! 2 3 . ! . . . !
+-----+-----+-----+
! 2 . . ! . . . ! 4 . 8 !
! 3 6 . ! . . . ! 1 2 7 !
! . . . ! . . 2 ! . 9 5 !
+-----+-----+-----+
! 5 . 6 ! . 2 3 ! . . . !
! . . 1 ! 6 9 . ! . 5 . !
! 9 . . ! 5 . 1 ! . . . !
+-----+-----+-----+
```

```
1.3.....5.1.9..669.23....2.....4.836....127.....2.955.6.23.....169..5.9..5.1...;5250
;73296 ; SER = 11.0
```

The resolution state after Singles and whips[1] is:

```
+-----+-----+-----+
! 1      2478 3      ! 478  45678 45678 ! 25789 478  249  !
! 478    5      2478 ! 1      478    9      ! 2378 3478 6      !
! 6      9      478 ! 2      3      4578 ! 578  1478 14      !
```

+-----+-----+-----+									
! 2	17	579	! 379	1567	567	! 4	36	8	!
! 3	6	4589	! 489	458	458	! 1	2	7	!
! 478	1478	478	! 3478	14678	2	! 36	9	5	!
+-----+-----+-----+									
! 5	478	6	! 478	2	3	! 789	1478	149	!
! 478	23478	1	! 6	9	478	! 278	5	234	!
! 9	23478	2478	! 5	478	1	! 2678	4678	234	!
+-----+-----+-----+									

169 candidates.

```
hidden-pairs-in-a-column: c3{n5 n9}{r4 r5} ==> r5c3≠8, r5c3≠4, r4c3≠7
whip[1]: r5n4{c6 .} ==> r6c4≠4, r6c5≠4
whip[1]: r5n8{c6 .} ==> r6c4≠8, r6c5≠8
z-chain[5]: c2n3{r8 r9} - b7n2{r9c2 r9c3} - r2n2{c3 c7} - r8n2{c7 c9} - r8n3{c9 .} ==>
r8c2≠4, r8c2≠8, r8c2≠7
whip[5]: c8n6{r9 r4} - r4n3{c8 c4} - r6c4{n3 n7} - r7n7{c4 c2} - r4n7{c2 .} ==> r9c8≠7
```

+-----+-----+-----+									
! 1	2478	3	! 478	45678	45678	! 25789	478	249	!
! 478	5	2478	! 1	478	9	! 2378	3478	6	!
! 6	9	478	! 2	3	4578	! 578	1478	14	!
+-----+-----+-----+									
! 2	17	59	! 379	1567	567	! 4	36	8	!
! 3	6	59	! 489	458	458	! 1	2	7	!
! 478	1478	478	! 37	167	2	! 36	9	5	!
+-----+-----+-----+									
! 5	478	6	! 478	2	3	! 789	1478	149	!
! 478	23	1	! 6	9	478	! 278	5	234	!
! 9	23478	2478	! 5	478	1	! 2678	468	234	!
+-----+-----+-----+									

At this point, an OR3 anti-tridagon appears and (with a t-whip[5] in between them) it allows 7 direct eliminations with OR3-contrad-whips of lengths 4 and 5, which is enough to solve the puzzle:

OR3-anti-tridagon[12] for digits 4, 7 and 8 in blocks:

```
b1, with cells: r1c2, r2c1, r3c3
b2, with cells: r1c4, r2c5, r3c6
b7, with cells: r7c2, r8c1, r9c3
b8, with cells: r7c4, r8c6, r9c5
```

with 3 guardians: n2r1c2 n5r3c6 n2r9c3

```
Trid-OR3-ctr-whip[4]: c3n2{r9 r2} - r1n2{c2 c7} - c7n5{r1 r3} - OR3{{n2r9c3 n5r3c6
n2r1c2 | .}} ==> r9c9≠2
```

```
Trid-OR3-ctr-whip[5]: r8c2{n3 n2} - c9n2{r8 r1} - r1n9{c9 c7} - c7n5{r1 r3} -
OR3{{n2r1c2 n5r3c6 n2r9c3 | .}} ==> r9c2≠3
```

```
singles ==> r8c2=3, r9c9=3
```

```
whip[1]: r8n2{c9 .} ==> r9c7≠2
```

```
t-whip[5]: c2n2{r9 r1} - r2n2{c3 c7} - c7n3{r2 r6} - r6c4{n3 n7} - r4n7{c6 .} ==>
r9c2≠7
```

```
Trid-OR3-ctr-whip[5]: r2n2{c7 c3} - r1n2{c2 c9} - r1n9{c9 c7} - c7n5{r1 r3} -
OR3{{n2r9c3 n5r3c6 n2r1c2 | .}} ==> r8c7≠2
hidden-single-in-a-block ==> r8c9=2
```

```
Trid-OR3-ctr-whip[4]: b1n2{r1c2 r2c3} - b3n2{r2c7 r1c7} - c7n5{r1 r3} - OR3{{n2r1c2
n5r3c6 n2r9c3 | .}} ==> r1c2≠4
```

```
Trid-OR3-ctr-whip[4]: b1n2{r1c2 r2c3} - b3n2{r2c7 r1c7} - c7n5{r1 r3} - OR3{{n2r1c2
n5r3c6 n2r9c3 | .}} ==> r1c2≠7
```

```
Trid-OR3-ctr-whip[4]: r2n2{c7 c3} - r1c2{n2 n8} - b2n8{r1c4 r3c6} - OR3{{n2r1c2 n5r3c6
n2r9c3 | .}} ==> r2c7≠8
```

```
Trid-OR3-ctr-whip[4]: b1n2{r1c2 r2c3} - b3n2{r2c7 r1c7} - c7n5{r1 r3} - OR3{{n2r1c2
n5r3c6 n2r9c3 | .}} ==> r1c2≠8
stte
```

14.11 Tridagon-OR_k-whips

Generic OR_k-whips have been defined in section 3.5.3. Here, we combine their use with OR_k-anti-tridagon relations.

Examples should be enough to make the idea clear.

14.11.2 First example

Take #1359 in mith's list of 63137 min-expand puzzles in T&E(3).

```
+-----+-----+-----+
! . . . ! . . . ! . . . !
! 4 . 6 ! . 8 . ! . 2 3 !
! 7 . . ! . 3 2 ! . . 4 !
+-----+-----+-----+
! 2 . 8 ! . 6 3 ! 4 . . !
! 3 4 . ! . 7 . ! 6 . . !
! . 6 7 ! . . 4 ! . . . !
+-----+-----+-----+
! . . . ! . . . ! . 9 5 !
! 8 . 4 ! . . . ! . . 6 !
! . . . ! . 2 7 ! . 4 1 !
+-----+-----+-----+
```

```
.....4.6.8..237...32..42.8.634..34..7.6...67..4.....958.4.....6....27.41;250;
48833
SER = 11.7
```

The start is quite easy, using only short reversible chains.

```

hidden-pairs-in-a-row: r1{n2 n3}{c2 c3} ==> r1c3≠9, r1c3≠5, r1c3≠1, r1c2≠9, r1c2≠8,
r1c2≠5, r1c2≠1
hidden-single-in-a-block ==> r3c2=8
biv-chain[4]: r1n4{c4 c5} - r7c5{n4 n1} - r7c1{n1 n6} - c6n6{r7 r1} ==> r1c4≠6
z-chain[5]: r8n2{c2 c7} - r8n7{c7 c8} - r4n7{c8 c9} - r4n9{c9 c4} - r9n9{c4 .} ==>
r8c2≠9
whip[1]: r8n9{c6 .} ==> r9c4≠9

```

!	159	23	23	!	14579	1459	1569	!	1579	15678	789	!
!	4	159	6	!	1579	8	159	!	1579	2	3	!
!	7	8	159	!	1569	3	2	!	159	156	4	!
!	2	159	8	!	159	6	3	!	4	157	79	!
!	3	4	159	!	12589	7	1589	!	6	158	289	!
!	159	6	7	!	12589	159	4	!	1359	1358	289	!
!	16	1237	123	!	13468	14	168	!	2378	9	5	!
!	8	12357	4	!	1359	159	159	!	237	37	6	!
!	569	359	359	!	3568	2	7	!	38	4	1	!

OR3-anti-tridagon[12] for digits 1, 5 and 9 in blocks:

- b1, with cells: r1c1, r2c2, r3c3
- b2, with cells: r1c5, r2c6, r3c4
- b4, with cells: r6c1, r4c2, r5c3
- b5, with cells: r6c5, r4c4, r5c6

with 3 guardians: n4r1c5 n6r3c4 n8r5c6[/code]

This is where the OR_k-whips appear:

```

Trid-OR3-whip[4]: r7c1{n6 n1} - r7c6{n1 n8} - OR3{{n8r5c6 n6r3c4 | n4r1c5}} -
r7c5{n4 .} ==> r7c4≠6
z-chain[4]: c7n1{r3 r7} - c1n1{r6 r7} - r7n6{c1 c6} - r1n6{c6 .} ==> r1c8≠1
Trid-OR3-whip[5]: r7c1{n1 n6} - r9n6{c1 c4} - r7c6{n6 n8} - OR3{{n8r5c6 n6r3c4 |
n4r1c5}} - r7c5{n4 .} ==> r7c4≠1, r7c2≠1, r7c3≠1

```

The end is easy, in W5:

```

naked-pairs-in-a-column: c3{r1 r7}{n2 n3} ==> r9c3≠3
t-whip[5]: r1n6{c8 c6} - r7n6{c6 c1} - b7n1{r7c1 r8c2} - r8n2{c2 c7} - r8n7{c7 .} ==>
r1c8≠7
biv-chain[4]: b3n8{r1c8 r1c9} - c9n7{r1 r4} - c8n7{r4 r8} - c8n3{r8 r6} ==> r6c8≠8
hidden-pairs-in-a-row: r6{n2 n8}{c4 c9} ==> r6c9≠9, r6c4≠9, r6c4≠5, r6c4≠1
biv-chain[3]: r1n6{c6 c8} - c8n8{r1 r5} - c6n8{r5 r7} ==> r7c6≠6
singles ==> r9c4=6, r1c6=6, r3c8=6, r7c1=6, r8c2=1, r8c7=2, r8c8=7, r4c9=7, r7c2=7,
r7c3=2, r1c3=3, r1c2=2, r9c2=3, r9c7=8, r7c7=3, r6c8=3, r8c4=3
whip[1]: c8n1{r5 .} ==> r6c7≠1
z-chain[3]: c9n9{r5 r1} - r3n9{c7 c4} - r4n9{c4 .} ==> r5c3≠9
biv-chain[3]: c1n1{r1 r6} - r5c3{n1 n5} - b7n5{r9c3 r9c1} ==> r1c1≠5
biv-chain[3]: r2c2{n5 n9} - b4n9{r4c2 r6c1} - r6c7{n9 n5} ==> r2c7≠5
biv-chain[4]: r5c3{n5 n1} - r6n1{c1 c5} - b8n1{r7c5 r7c6} - c6n8{r7 r5} ==> r5c6≠5
biv-chain[4]: b4n9{r6c1 r4c2} - r2c2{n9 n5} - c6n5{r2 r8} - b8n9{r8c6 r8c5} ==> r6c5≠9

```

```

biv-chain[2]: r6n9{c7 c1} - c2n9{r4 r2} ==> r2c7≠9
finned-x-wing-in-rows: n9{r4 r2}{c2 c4} ==> r3c4≠9, r1c4≠9
finned-x-wing-in-rows: n9{r6 r3}{c7 c1} ==> r1c1≠9
stte

```

14.11.3 Second example

Here is an easier example, #1167 in mith's list of 63,137 min-expand puzzle in T&E(3):

```

+-----+-----+-----+
! . . . ! 4 5 . ! . 8 . !
! 4 5 . ! . . . ! 2 . 3 !
! 6 8 . ! 3 . 2 ! 4 5 . !
+-----+-----+-----+
! . . . ! . 3 4 ! 5 . 8 !
! . . . ! 6 . 5 ! . . 2 !
! . . 5 ! 8 2 . ! 6 . . !
+-----+-----+-----+
! . 7 . ! . . . ! . . 5 !
! . 9 . ! . . . ! 8 . 4 !
! . . 2 ! . . 3 ! . . . !
+-----+-----+-----+

```

```

...45..8.45....2.368.3.245.....345.8...6.5..2..582.6...7.....5.9....8.4..2..3...;234;
17556
SER = 11.7

```

As usual, using the simplest-first strategy, let's first do some easy cleaning:

```

hidden-pairs-in-a-column: c3{n4 n8}{r5 r7} ==> r7c3≠6, r7c3≠3, r7c3≠1, r5c3≠9, r5c3≠7,
r5c3≠3, r5c3≠1
biv-chain[3]: r9n8{c1 c5} - b8n4{r9c5 r7c5} - r7c3{n4 n8} ==> r7c1≠8
biv-chain[3]: r9n8{c5 c1} - r7c3{n8 n4} - b8n4{r7c5 r9c5} ==> r9c5≠1, r9c5≠6, r9c5≠7,
r9c5≠9
z-chain[3]: r9n7{c9 c4} - c4n5{r9 r8} - r8n2{c4 .} ==> r8c8≠7
whip[1]: b9n7{r9c9 .} ==> r9c4≠7
z-chain[3]: r7c1{n1 n3} - b9n3{r7c7 r8c8} - c8n2{r8 .} ==> r7c8≠1
z-chain[4]: r7c1{n1 n3} - r8n3{c3 c8} - r8n2{c8 c4} - r8n5{c4 .} ==> r8c1≠1

```

```

+-----+-----+-----+
! 12379 123 1379 ! 4 5 1679 ! 179 8 1679 !
! 4 5 179 ! 179 16789 16789 ! 2 1679 3 !
! 6 8 179 ! 3 179 2 ! 4 5 179 !
+-----+-----+-----+
! 1279 126 1679 ! 179 3 4 ! 5 179 8 !
! 13789 134 48 ! 6 179 5 ! 1379 13479 2 !
! 1379 134 5 ! 8 2 179 ! 6 13479 179 !
+-----+-----+-----+
! 13 7 48 ! 129 14689 1689 ! 139 2369 5 !
! 35 9 136 ! 1257 167 167 ! 8 1236 4 !
! 158 146 2 ! 159 48 3 ! 179 1679 1679 !
+-----+-----+-----+

```


OR3-anti-tridagon[12] for digits 7, 9 and 1 in blocks:

b2, with cells: r1c6, r2c4, r3c5

b3, with cells: r1c7, r2c8, r3c9

b5, with cells: r6c6, r4c4, r5c5

b6, with cells: r6c9, r4c8, r5c7

with 3 guardians: n6r1c6 n6r2c8 n3r5c7

The part with the OR_k-whips:

Trid-OR3-whip[4]: c9n6{r9 r1} - OR3{{n6r2c8 n6r1c6 | n3r5c7}} - b9n3{r7c7 r7c8} - c8n2{r7 .} ==> r8c8≠6, r7c8≠6

The end is easy, in S3+W3:

whip[1]: b9n6{r9c9 .} ==> r9c2≠6

singles ==> r8c3=6, r4c2=6, r4c1=2, r1c2=2, r1c3=3

whip[1]: c2n3{r6 .} ==> r5c1≠3, r6c1≠3

naked-pairs-in-a-block: b8{r8c5 r8c6}{n1 n7} ==> r9c4≠1, r8c4≠7, r8c4≠1, r7c6≠1, r7c5≠1, r7c4≠1

whip[1]: b8n1{r8c6 .} ==> r8c8≠1

hidden-pairs-in-a-column: c4{n1 n7}{r2 r4} ==> r4c4≠9, r2c4≠9

whip[1]: c4n9{r9 .} ==> r7c5≠9, r7c6≠9

hidden-pairs-in-a-row: r6{n3 n4}{c2 c8} ==> r6c8≠9, r6c8≠7, r6c8≠1, r6c2≠1

biv-chain[2]: r7n1{c7 c1} - c2n1{r9 r5} ==> r5c7≠1

naked-triplets-in-a-column: c5{r3 r5 r8}{n1 n9 n7} ==> r2c5≠9, r2c5≠7, r2c5≠1

biv-chain[3]: c7n3{r5 r7} - r7n1{c7 c1} - c2n1{r9 r5} ==> r5c2≠3

hidden-single-in-a-block ==> r6c2=3

naked-single ==> r6c8=4

z-chain[3]: r4n9{c8 c3} - r2n9{c3 c6} - b5n9{r6c6 .} ==> r5c8≠9

z-chain[3]: r4n9{c8 c3} - r3n9{c3 c5} - b5n9{r5c5 .} ==> r6c9≠9

t-whip[3]: r4n9{c8 c3} - r6n9{c1 c6} - r2n9{c6 .} ==> r9c8≠9, r7c8≠9

naked-pairs-in-a-block: b9{r7c8 r8c8}{n2 n3} ==> r7c7≠3

singles ==> r5c7=3, r4c8=9

whip[1]: b4n9{r6c1 .} ==> r1c1≠9

biv-chain[2]: b6n1{r6c9 r5c8} - c2n1{r5 r9} ==> r9c9≠1

finned-swordfish-in-columns: n1{c8 c2 c4}{r2 r9 r5} ==> r5c5≠1

biv-chain[3]: r4n7{c3 c4} - r5c5{n7 n9} - b4n9{r5c1 r6c1} ==> r6c1≠7

biv-chain[2]: b6n7{r6c9 r5c8} - c1n7{r5 r1} ==> r1c9≠7

biv-chain[3]: c7n7{r9 r1} - c1n7{r1 r5} - b6n7{r5c8 r6c9} ==> r9c9≠7

biv-chain[3]: r9n7{c7 c8} - r5c8{n7 n1} - c2n1{r5 r9} ==> r9c7≠1

biv-chain[3]: r2c4{n7 n1} - c5n1{r3 r8} - b8n7{r8c5 r8c6} ==> r1c6≠7, r2c6≠7

biv-chain[2]: b2n7{r3c5 r2c4} - r4n7{c4 c3} ==> r3c3≠7

x-wing-in-columns: n7{c3 c4}{r2 r4} ==> r2c8≠7

finned-x-wing-in-rows: n7{r3 r6}{c9 c5} ==> r5c5≠7

singles ==> r5c5=9, r6c1=9

naked-pairs-in-a-block: b2{r2c4 r3c5}{n1 n7} ==> r2c6≠1, r1c6≠1

biv-chain[2]: b2n1{r3c5 r2c4} - r4n1{c4 c3} ==> r3c3≠1

stte

14.11.4 Third example

Our third example (#1888) has a simplest-first solution using only chains of lengths ≤ 5 and it has a large number (12) of direct eliminations by OR_k -whips based on the anti-tridagon pattern:

!	1	2	!	.	.	.	!	7	8	!
!	4	.	7	!	.	8	!	2	.	6
!	.	6	8	!	.	2	!	.	1	4
!	2	.	.	!	.	.	.	8	4	!
!	.	.	.	!	!
!	7	.	.	!	.	.	4	!	6	.
!	.	.	.	!	!
!	6	7	.	!	5	.	.	!	.	.
!	8	1	.	!	9	.	3	!	.	.

12...78.4.7.8.2.6.68.2..142.....84.....7....46.1....7.1..67.5.....81.9.3...;326;
25948 ; SER = 11.6

```
Resolution state after Singles and whips[1]:
```

!	1	2	359	!	346	34569	569	!	7	8	359	!
!	4	359	7	!	13	8	159	!	2	359	6	!
!	359	6	8	!	37	2	579	!	359	1	4	!
!	2	359	13569	!	1367	13569	15679	!	8	4	3579	!
!	359	34589	134569	!	123678	13569	1256789	!	359	23579	23579	!
!	7	3589	359	!	238	359	4	!	6	2359	1	!
!	359	3459	23459	!	2468	7	268	!	1	23569	23589	!
!	6	7	2349	!	5	14	128	!	349	239	2389	!
!	8	1	245	!	9	46	3	!	45	2567	257	!

189 candidates.

```
hidden-pairs-in-a-column: c3{n1 n6}{r4 r5} ==> r5c3≠9, r5c3≠5, r5c3≠4, r5c3≠3, r4c3≠9,
r4c3≠5, r4c3≠3
```

singles ==> r5c2=4, r6c2=8

$$\text{biv-chain}[3]: r_{9c7}\{n_5 \ n_4\} - r_{9c5}\{n_4 \ n_6\} - b_{9n6}\{r_{9c8} \ r_{7c8}\} \implies r_{7c8} \neq 5$$

!	1	2	359	!	346	34569	569	!	7	8	359	!
!	4	359	7	!	13	8	159	!	2	359	6	!
!	359	6	8	!	37	2	579	!	359	1	4	!
!	2	359	16	!	1367	13569	15679	!	8	4	3579	!
!	359	4	16	!	123678	13569	1256789	!	359	23579	23579	!
!	7	8	359	!	23	359	4	!	6	2359	1	!

!	359	359	23459	!	2468	7	268	!	1	2369	23589	!
!	6	7	2349	!	5	14	128	!	349	239	2389	!
!	8	1	245	!	9	46	3	!	45	2567	257	!

OR2-anti-tridagon[12] for digits 3, 5 and 9 in blocks:

b1, with cells: r1c3, r2c2, r3c1
 b3, with cells: r1c9, r2c8, r3c7
 b4, with cells: r6c3, r4c2, r5c1
 b6, with cells: r6c8, r4c9, r5c7

with 2 guardians: n7r4c9 n2r6c8

This is now the main part:

```

Trid-OR2-whip[2]: OR2{{n2r6c8 | n7r4c9}} - r9n7{c9 .} ==> r9c8#2
Trid-OR2-whip[3]: OR2{{n7r4c9 | n2r6c8}} - r6c4{n2 n3} - r3c4{n3 .} ==> r4c4#7
Trid-OR2-whip[3]: OR2{{n2r6c8 | n7r4c9}} - r9n7{c9 c8} - c8n6{r9 .} ==> r7c8#2
Trid-OR2-whip[4]: r6c4{n3 n2} - OR2{{n2r6c8 | n7r4c9}} - b5n7{r4c6 r5c6} - r5n8{c6 .}
==> r5c4#3
Trid-OR2-whip[4]: r5n8{c6 c4} - b5n7{r5c4 r4c6} - OR2{{n7r4c9 | n2r6c8}} -
b5n2{r6c4 .} ==> r5c6#9, r5c6#6, r5c6#5, r5c6#1
Trid-OR2-whip[4]: r5n8{c4 c6} - b5n7{r5c6 r4c6} - OR2{{n7r4c9 | n2r6c8}} -
b5n2{r6c4 .} ==> r5c4#6
biv-chain[4]: r8c5{n1 n4} - r9c5{n4 n6} - r5n6{c5 c3} - b4n1{r5c3 r4c3} ==> r4c5#1
Trid-OR2-whip[4]: r5n8{c4 c6} - b5n7{r5c6 r4c6} - OR2{{n7r4c9 | n2r6c8}} -
b5n2{r6c4 .} ==> r5c4#1
hidden-pairs-in-a-row: r5{n1 n6}{c3 c5} ==> r5c5#9, r5c5#5, r5c5#3
naked-triplets-in-a-column: c5{r5 r8 r9}{n6 n1 n4} ==> r4c5#6, r1c5#6, r1c5#4
singles ==> r1c4=4, r1c6=6, r7c3=4
biv-chain[4]: r5c5{n1 n6} - r9n6{c5 c8} - r9n7{c8 c9} - r4n7{c9 c6} ==> r4c6#1
hidden-pairs-in-a-block: b5{n1 n6}{r4c4 r5c5} ==> r4c4#3
Trid-OR2-ctr-whip[6]: r5n8{c6 c4} - b5n2{r5c4 r6c4} - r7c4{n2 n6} - c8n6{r7 r9} -
c8n7{r9 r5} - OR2{{n7r4c9 n2r6c8 | .}} ==> r5c6#7
naked-pairs-in-a-column: c6{r5 r7}{n2 n8} ==> r8c6#8, r8c6#2
singles ==> r8c6=1, r8c5=4, r9c5=6, r5c5=1, r4c4=6, r4c3=1, r5c3=6, r2c4=1, r7c8=6,
r9c7=4, r8c9=8
whip[1]: b8n2{r7c6 .} ==> r7c9#2
Trid-OR2-whip[2]: OR2{{n7r4c9 | n2r6c8}} - b9n2{r8c8 .} ==> r9c9#7

```

The rest is easy, in Z4:

```

hidden-single-in-a-block ==> r9c8=7
whip[1]: b9n5{r9c9 .} ==> r1c9#5, r4c9#5, r5c9#5
biv-chain[4]: r4n7{c9 c6} - r3n7{c6 c4} - b2n3{r3c4 r1c5} - r1c9{n3 n9} ==> r4c9#9
z-chain[4]: c5n3{r6 r1} - c3n3{r1 r8} - r8n2{c3 c8} - r6n2{c8 .} ==> r6c4#3
singles ==> r6c4=2, r5c6=8, r5c4=7, r3c4=3, r7c6=2, r7c4=8, r3c6=7, r4c9=7
finned-x-wing-in-rows: n3{r1 r7}{c9 c3} ==> r8c3#3
whip[1]: r8n3{c8 .} ==> r7c9#3
finned-x-wing-in-columns: n3{c9 c3}{r1 r5} ==> r5c1#3
hidden-single-in-a-column ==> r7c1=3

```

```

whip[1]: r5n3{c9 .} ==> r6c8#3
x-wing-in-columns: n5{c1 c7}{r3 r5} ==> r5c8#5
finned-x-wing-in-columns: n5{c8 c6}{r2 r6} ==> r6c5#5
whip[1]: b5n5{r4c6 .} ==> r4c2#5
biv-chain[3]: r3n9{c1 c7} - r1c9{n9 n3} - b1n3{r1c3 r2c2} ==> r2c2#9
biv-chain[3]: r2n9{c6 c8} - r2n3{c8 c2} - r4c2{n3 n9} ==> r4c6#9
singles ==> r4c6=5, r2c6=9, r1c5=5
finned-x-wing-in-rows: n9{r1 r8}{c3 c9} ==> r7c9#9
stte

```

14.12 Resolution power of OR_k -chains

The above sections have shown that puzzles in T&E(3) can be brought down to being solvable by short regular chains after a few anti-tridagon rules have been applied. But what is the resolution power of such rules? First of all, it is clear that it doesn't extend beyond puzzles that have a non-degenerate anti-tridagon pattern, because the degenerate versions are very difficult to spot.

Keeping these remarks in mind, this section compares the resolution powers of OR_k -forcing-whips, OR_k -contrad-whips, OR_k -whips and all these OR_k -chains together when they are used in conjunction with ordinary whips and with the anti-tridagon pattern. Control variable *?*high-Tridagon-salience** was set to FALSE – but this shouldn't make much difference, considering the way the tables were computed: by progressively increasing the lengths of all the chains. The reference database is the already mentioned one, the 63,137 min-expand puzzles in T&E(3), developed by mith.

In addition to their intrinsic interest, and combined with your preferences for one type of OR_k -chain or another, the results below can be used as a guide for choosing the various parameters when you want to solve a puzzle.

There are a priori three parameters to consider: the maximal number of guardians k used in the OR_k anti-tridagon relation, the maximal length of whips and the maximal length of OR_k -forcing-whips (resp. OR_k -contrad-whips, OR_k -whips). However, all these OR_k -chains are built on the same partial-whips as whips, and the (statistically) best way to use all the partial whips underlying these three chain patterns is to take the same maximal lengths for whips, OR_k -forcing-whips, OR_k -contrad-whips and OR_k -whips. The systematic comparisons done here will stick to this idea, although SudoRules allows much more varied combinations that may occasionally produce more interesting individual solutions; you are strongly encouraged to try them, together with the various sets of preferences that will be defined later.

The tables in the next four sub-sections will present the number of puzzles solved by $SFin + Trid + W_n +$ respectively $OR_kFW_n / OR_kCW_n / OR_kW_n / OR_kCH_n$, for different values of k and n .

Values of k are in different lines and values of n in different columns; $k=1$ means that only the basic Tridagon elimination rule (Trid) has been used, possibly with ordinary whips, but with no OR_k chain. The starting point of the four tables is their first line after the title: 8,196 puzzles can readily be solved using only SFin (i.e. Subsets + Finned Fish) + Trid. All the tables also share the next line, where only SFin + Trid + whips[n] are used.

Each (k, n) cell (except the first column) has three values in it: the main one, in bold, in the lower right corner, is the total number of puzzles solved by SFin + Trid + W_n + respectively OR_kFW_n , OR_kCW_n , OR_kW_n , OR_kCH_n . The value above it is the difference with the previous line; it shows what's gained by increasing k by one. The value on the left of the main number is the difference with the previous cell (if any) in the same line; it shows what's gained by increasing n .

14.12.1 Resolution power of OR_k -Forcing-Whips

Solved in SFin+Trid+ W_n + OR_kFW_n				
	8 196	puzzles solved by SFin+Trid (among 63 137 min-expands)		
	$n = 3$	$n = 5$	$n = 7$	$n = 8$
	8 137	17 532	21 160	22 332
$k = 1$	16 333	9 395 25 728	3 628 29 356	1 172 30 528
	3 350	8 713	11 231	12 068
$k = 2$	19 683	14 758 34 441	6 146 40 587	2 009 42 596
	428	2 255	3 471	3 886
$k = 3$	20 111	16 585 36 696	7 362 44 058	2 424 46 482
	67	365	540	722
$k = 4$	20 178	16 883 37 061	7 537 44 598	2 606 47 204
	2	28	99	119
$k = 5$	20 180	16 909 37 089	7 608 44 697	2 626 47 323
	0	4		
$k = 6$	20 180	16 913 37 093		

14.12.2 Resolution power of OR_k -Contrad-Whips

Solved in SFin+Trid+W _n +OR _k CW _n							
	8 196	puzzles solved by SFin+Trid (among 63 137 min-expands)					
	n = 3	n = 5		n = 7		n = 8	
k = 1	8 137	17 532		21 160		22 332	
	16 333	9 395	25 728	3 628	29 356	1 172	30 528
k = 2	1 700	6 276		8 863		9 944	
	18 033	13 971	32 004	6 215	38 219	2 253	40 472
k = 3	286	1 379		2 413		2 849	
	18 319	15 064	33 383	7 249	40 632	2 689	43 321
k = 4	49	319		478		640	
	18 368	15 334	33 702	7 408	41 110	2 851	43 961
k = 5	6	25		111		140	
	18 374	15 353	33 727	7 494	41 221	2 880	44 101

14.12.3 Resolution power of OR_k -Whips

Solved in SFin+Trid+W _n +OR _k W _n							
	8 196	puzzles solved by SFin+Trid (among 63 137 min-expands)					
	n = 3	n = 5		n = 7		n = 8	
k = 1	8 137	17 532		21 160		22 332	
	16 333	9 395	25 728	3 628	29 356	1 172	30 528
k = 2	3 422	9 705		12 499		13 457	
	19 755	15 678	35 433	6 422	41 855	2 130	43 985

	508	2 818	4 049	4 444
k = 3	20 263	17 988 38 251	7 653 45 904	2 525 48 429
	94	566	892	998
k = 4	20 357	18460 38 817	7 979 46 796	2 631 49 427
	7	70	179	234
k = 5	20 364	18 523 38 887	8 088 46 975	2 676 49 651

14.12.4 Resolution power of all the OR_k -chains together

Solved in SFin+Trid+W _n +OR _k FW _n +OR _k W _n				
	8 196	puzzles solved by SFin+Trid (among 63 137 min-expands)		
	n = 3	n = 5	n = 7	n = 8
	8 137	17 532	21 160	22 332
k = 1	16 333	9 395 25 728	3 628 29 356	1 172 30 528
	3 488	9 736	12 503	13 460
k = 2	19 821	15 643 35 464	6 395 41 859	2 129 43 988
	514	2 884	4 140	4 530
k = 3	20 335	18 013 38 348	7 651 45 999	2 519 48 518
	97	584	929	1 050
k = 4	20 432	18 500 38 932	7 996 46 928	2 640 49 568
	9	72	209	251
k = 5	20 441	18 563 39 004	8 133 47 137	2 682 49 819

Some general conclusions can be drawn from the tables in the above four sub-sections:

- for fixed n , as k increases, the difference between two lines decreases quite fast; this shouldn't be too surprising, as larger k means e.g. that more partial-whips (with same total of lengths) have to converge to the same candidate;
- for fixed k , as n increases, the difference between two columns decreases quite fast; this shouldn't be too surprising either, as it already happens with all the "classical" chains (whips...);
- starting from $k=2$ and $n=3$, at any point in the table, it is much more fruitful to increase n than to increase k ;
- for any k and n , OR_k -forcing-whips[n] have a larger resolution power than OR_k -contrad-whips[n];
- *for any k and n , there is a large overlap between puzzles that can be solved by OR_k -forcing-whips[n] and puzzles that can be solved by OR_k -whips[n];*
- *for any k and n , OR_k -whips[n] (which include OR_k -contrad-whips[n] as a special case) have a larger resolution power than OR_k -forcing-whips[n].*

14.12.5 Comparison of OR_k -Whips with OR_k -forcing-whips[n]

In the table below, while k and n have the same meanings as before, each (k, n) cell has two values:

- the left value is the number of puzzles solved in $SFin+Trid+W_n+OR_kFW_n$ but not in $SFin+Trid+W_n+OR_kW_n$;
- the right value is the number of puzzles solved in $SFin+Trid+W_n+OR_kW_n$ but not in $SFin+Trid+W_n+OR_kFW_n$.

Solved in SFin+Trid+W _n +(OR _k FW _n vs OR _k W _n)								
	n = 3		n = 5		n = 7		n = 8	
k = 2	66	138	22	1 014	3	1 271	3	1 392
k = 3	72	224	78	1633	81	1 927	70	2017
k = 4	75	254	96	1852	101	2 299	108	2 331
k = 5	77	261	96	1894	129	2 407	134	2 462

The calculations underlying this table allow one more conclusion:

- *most of the puzzles that have a solution with OR_k -forcing-whips[n] also have one with OR_k -whips[n] but the converse is not true:* for instance, only 96 puzzles can be

solved in SFin+Trid+W5+OR5FW5 but not in SFin+Trid+W5+OR5W5; whereas 1894 can be solved in SFin+Trid+W5+OR5W5 but not in SFin+Trid+W5+OR5FW5; and the difference is still larger for $n=7$.

Underlying calculations also show that:

- the difference between OR_k -forcing-whips and OR_k -whips is not well compensated by increasing the FW lengths: for instance, only 55 puzzles can be solved in SFin+Trid+W5+OR5FW5 but still not in SFin+Trid+W7+OR5W7; whereas 683 can be solved in SFin+Trid+W5+OR5W5 but still not in SFin+Trid+W7+OR5FW7.

14.13 General remarks on OR_k -chains

First remark: forcing-chains in general are very inelegant, because they start with a big OR and they suppose one follows two (or more) streams of reasoning in parallel. They amount to reasoning by cases – which mathematicians tend to avoid whenever possible. With respect to T&E, they also amount to having some T&E step right at the start (any OR-branching step in a chain amounts to introducing one level of T&E).

Ordinary forcing whips have no argument to make forgive this inelegance: they are statistically not more powerful than whips of same length (see [PBCS3, section 6.5.1]). Tridagon-based OR_k -forcing-whips are radically different, both in terms of resolution power (as shown in the tables of section 14.12) and in terms of focus: their OR starting point is concentrated on very specific candidates, the guardians – which drastically reduces the risk of combinatorial explosion.

Second remark: using the tridagon elimination rule, the anti-tridagon pattern and any OR_k -forcing-whip, OR_k -contrad-whip or OR_k -whip based on it does NOT suppose any assumption of consistency. It may seem so, because the argument is: if the puzzle is consistent, then the anti-tridagon pattern cannot be present; therefore at least one guardian must be True. And the above-mentioned rules are built on this to make eliminations. However, if the original puzzle is inconsistent, applying any of these rules cannot make it *more* inconsistent. Conclusion: the rules can be applied without making any ado about consistency of the puzzle.

Third remark: OR_k -contrad-whips being a special case of OR_k -whips, they could be merged with them. However, one may consider that they are easier to find; that's why CSP-Rules allows to activate them independently and, in any case, grants them a higher priority than OR_k -whips of same length.

Fourth remark: the table for all the OR_k -chains shows that there remains much room for solutions with longer OR_k -chains; there also remains some room for solutions based on larger values of k , but this is less promising. CSP-Rules has OR_k -

chains for k up to 8, but the computational complexity is too high for being useful. The value $k=6$ remains to be explored more extensively.

14.14 Sets of preferences for OR_k -chains

Along with the introduction of OR_k -forcing-whips, OR_k -contrad-whips and OR_k -whips based on anti-tridagon OR_k relations, four application-specific sets of preferences have been defined in SudoRules; they are intended to be used with function “solve-with-preferences”: ***TRID-ORk-FW***, ***TRID-ORk-CW***, ***TRID-ORk-W*** and ***TRID-ORk-CHAINS***. They all include SFin+Trid.

They respectively include the OR_k -forcing-whips and/or OR_k -contrad-whips and/or OR_k -whips, with the values of k selected in the configuration file for each of them (automatically extended downwards for k , in order to make the choices consistent) and with the relevant length restrictions defined by the choices in the configuration file for global variables: *all-chains-max-length*, *OR_k-forcing-whips-max-length*, *OR_k-contrad-whips-max-length* and *OR_k-whips-max-length* (here again adapted to be made consistent). The latter set (***TRID-ORk-CHAINS***) includes the above three types of Tridagon- OR_k -chains. As is the case with any other set of preferences, some puzzles have better solutions with and some without using them.

Notice that the tables in section 14.12 have been obtained without using any set of preferences. The classifications might be slightly different if one uses them. The purpose of these tables is only to give an idea of what to expect with different values of k and n .

Be aware that using these preferences implies lots of unseen pattern-matching in the MAIN module (the module in which all the rules are loaded at start time) and in all the other selected OR_k chain modules; in particular, lots of partial-whips are found in the MAIN module, but not used in it. If chains lengths are chosen large, this may be very inefficient. The problem is, most puzzles in the known T&E(3) database require some mixing of ordinary chains and OR_k chains. That’s why I rarely use the OR_k sets of preferences and, in any case, I don’t use them before seeing what the solution without them (with “*high-Tridagon-salience*” set to TRUE) looks like. If it has many ordinary chains before any OR_k chain, it’s likely not worth trying.

14.15 OR_k -forcing-g-whips

This section illustrates the combined use of Trid- OR_k -forcing-g-whips with the ultra-persistency and splitting of OR_k -relations. Here, “*high-Tridagon-salience*” is set to TRUE. The puzzle is #2423 in the 63,137 list.

+-----+-----+-----+											
!	.	.	.	!	4	.	.	!	7	.	9
!	.	5	7	!	.	8	9	!	.	.	.
!	.	.	9	!	7	3	2	!	.	.	.
+-----+-----+-----+											
!	.	4	5	!	9	.	.	!	.	1	.
!	6	7	.	!	.	.	.	!	5	9	.
!	9	.	1	!	5	.	.	!	4	.	.
+-----+-----+-----+											
!	.	9	4	!	.	.	1	!	6	7	.
!	.	.	6	!	.	.	.	!	9	.	1
!	7	1	.	!	.	9	.	!	.	.	.
+-----+-----+-----+											

...4..7.9.57.89.....9732....459...1.67....59.9.15..4...94..167...6...9.171..9....;418;
 4232
 SER = 11.7

Resolution state after Singles and whips[1]:

+-----+-----+-----+											
!	1238	2368	238	!	4	156	56	!	7	2368	9
!	1234	5	7	!	16	8	9	!	123	2346	2346
!	148	68	9	!	7	3	2	!	18	4568	4568
+-----+-----+-----+											
!	238	4	5	!	9	267	3678	!	238	1	23678
!	6	7	238	!	1238	124	348	!	5	9	238
!	9	238	1	!	5	267	3678	!	4	2368	23678
+-----+-----+-----+											
!	2358	9	4	!	238	25	1	!	6	7	2358
!	2358	238	6	!	238	2457	34578	!	9	23458	1
!	7	1	238	!	2368	9	34568	!	238	23458	23458
+-----+-----+-----+											

167 candidates.

137 g-candidates, 607 csp-glinks and 361 non-csp glinks

OR5-anti-tridagon[12] for digits 2, 3 and 8 in blocks:

b4, with cells: r4c1, r5c3, r6c2

b6, with cells: r4c7, r5c9, r6c8

b7, with cells: r7c1, r9c3, r8c2

b9, with cells: r7c9, r9c7, r8c8

with 5 guardians: n6r6c8 n5r7c1 n5r7c9 n4r8c8 n5r8c8

z-chain[3]: c5n4{r8 r5} - r5n1{c5 c4} - c4n2{r5 .} ==> r8c5#2

biv-chain[4]: r1n5{c6 c5} - c5n1{r1 r5} - c5n4{r5 r8} - b8n7{r8c5 r8c6} ==> r8c6#5

biv-chain[4]: r5n4{c6 c5} - b5n1{r5c5 r5c4} - r2c4{n1 n6} - b8n6{r9c4 r9c6} ==> r9c6#4

whip[1]: r9n4{c9 .} ==> r8c8#4

;;; OR_k ultra-persistence:

+-----+-----+-----+											
!	1238	2368	238	!	4	156	56	!	7	2368	9
!	1234	5	7	!	16	8	9	!	123	2346	2346
!	148	68	9	!	7	3	2	!	18	4568	4568

+-----+-----+-----+									
! 238	4	5	! 9	267	3678	! 238	1	23678	!
! 6	7	238	! 1238	124	348	! 5	9	238	!
! 9	238	1	! 5	267	3678	! 4	2368	23678	!
+-----+-----+-----+									
! 2358	9	4	! 238	25	1	! 6	7	2358	!
! 2358	238	6	! 238	457	3478	! 9	2358	1	!
! 7	1	238	! 2368	9	3568	! 238	23458	23458	!
+-----+-----+-----+									

At least one candidate of a previous Trid-OR5-relation has just been eliminated.
There remains a Trid-OR4-relation between candidates: n6r6c8 n5r7c1 n5r7c9 n5r8c8

hidden-pairs-in-a-row: r8{n4 n7}{c5 c6} ==> r8c6≠8, r8c6≠3, r8c5≠5

+-----+-----+-----+									
! 1238	2368	238	! 4	156	56	! 7	2368	9	!
! 1234	5	7	! 16	8	9	! 123	2346	2346	!
! 148	68	9	! 7	3	2	! 18	4568	4568	!
+-----+-----+-----+									
! 238	4	5	! 9	267	3678	! 238	1	23678	!
! 6	7	238	! 1238	124	348	! 5	9	238	!
! 9	238	1	! 5	267	3678	! 4	2368	23678	!
+-----+-----+-----+									
! 2358	9	4	! 238	25	1	! 6	7	2358	!
! 2358	238	6	! 238	47	47	! 9	2358	1	!
! 7	1	238	! 2368	9	3568	! 238	23458	23458	!
+-----+-----+-----+									

;;; OR_k splitting:

Trid-OR4-relation between candidates n6r6c8, n5r7c1, n5r7c9 and n5r8c8
+ same valence for candidates n5r8c8 and n5r7c1 via c-chain[2]: n5r8c8,n5r8c1,n5r7c1
==> Trid-OR4-relation can be split into two Trid-OR3-relations with respective lists of guardians:

n6r6c8 n5r7c1 n5r7c9 and n6r6c8 n5r7c9 n5r8c8 .

Trid-OR3-forcing-whip-elim[5]:

```
|| n6r6c8 -
|| n5r7c9 - partial-whip[1]: c8n5{r9 r3} -
|| n5r7c1 - partial-whip[3]: c5n5{r7 r1} - r1c6{n5 n6} - c2n6{r1 r3} -
==> r3c8≠6
```

Trid-OR3-forcing-whip-elim[5]:

```
|| n6r6c8 -
|| n5r7c1 - partial-whip[2]: c5n5{r7 r1} - r1c6{n5 n6} -
|| n5r7c9 - partial-whip[2]: c5n5{r7 r1} - r1c6{n5 n6} -
==> r6c6≠6
```

Trid-OR3-forcing-whip-elim[5]:

```
|| n6r6c8 -
|| n5r7c1 - partial-whip[2]: c5n5{r7 r1} - r1c6{n5 n6} -
|| n5r7c9 - partial-whip[2]: c5n5{r7 r1} - r1c6{n5 n6} -
==> r1c8≠6
```

t-whip[4]: r1n1{c1 c5} - r2c4{n1 n6} - r1n6{c6 c2} - r3c2{n6 .} ==> r1c1≠8
 t-whip[4]: c7n1{r3 r2} - r2c4{n1 n6} - r1n6{c6 c2} - r3c2{n6 .} ==> r3c7≠8
 naked-single ==> r3c7=1
 whip[7]: c4n6{r9 r2} - b3n6{r2c9 r3c9} - r3c2{n6 n8} - b3n8{r3c8 r1c8} - r8n8{c8 c1} -
 r8n5{c1 c8} - r3n5{c8 .} ==> r9c4≠8
 whip[8]: r5n4{c6 c5} - r5n1{c5 c4} - r2c4{n1 n6} - r1n6{c6 c2} - r3c2{n6 n8} -
 b4n8{r6c2 r4c1} - c7n8{r4 r9} - c3n8{r9 .} ==> r5c6≠8
 whip[3]: c7n8{r9 r4} - c6n8{r4 r6} - b4n8{r6c2 .} ==> r9c3≠8
 whip[4]: c1n5{r8 r7} - b7n8{r7c1 r8c2} - r8c4{n8 n2} - r7c5{n2 .} ==> r8c1≠3
 whip[6]: r9n8{c9 c6} - b8n5{r9c6 r7c5} - c1n5{r7 r8} - r8n8{c1 c2} - r6n8{c2 c8} -
 b3n8{r1c8 .} ==> r7c9≠8
 whip[7]: c1n5{r8 r7} - r7c5{n5 n2} - c4n2{r9 r5} - c3n2{r5 r1} - c3n8{r1 r5} -
 r5c9{n8 n3} - r7c9{n3 .} ==> r8c1≠2
 whip[7]: r2c7{n3 n2} - r1c8{n2 n8} - c3n8{r1 r5} - r5c9{n8 n2} - r7c9{n2 n5} -
 r7c5{n5 n2} - b5n2{r4c5 .} ==> r2c9≠3
 whip[8]: r9c3{n2 n3} - r8c2{n3 n8} - r7n8{c1 c4} - b8n3{r7c4 r8c4} - b8n2{r8c4 r9c4} -
 c4n6{r9 r2} - r1n6{c5 c2} - r3c2{n6 .} ==> r7c1≠2
 whip[8]: c9n7{r4 r6} - b6n6{r6c9 r6c8} - r6c5{n6 n2} - r7n2{c5 c4} - r7n8{c4 c1} -
 r7n3{c1 c9} - b6n3{r4c9 r4c7} - r4c1{n3 .} ==> r4c9≠2
 whip[8]: r7n8{c1 c4} - r7n3{c4 c9} - r7n2{c9 c5} - b5n2{r4c5 r5c4} - r8c4{n2 n3} -
 b7n3{r8c2 r9c3} - r5c3{n3 n8} - r5c9{n8 .} ==> r7c1≠5
 hidden-single-in-a-block ==> r8c1=5

;; Small cascade of OR_k ultra-persistence rules, due to the elimination(s) following the Single:

! 123	2368	238	! 4	156	56	! 7	238	9	!
! 1234	5	7	! 16	8	9	! 23	2346	246	!
! 48	68	9	! 7	3	2	! 1	458	4568	!
! 238	4	5	! 9	267	3678	! 238	1	3678	!
! 6	7	238	! 1238	124	34	! 5	9	238	!
! 9	238	1	! 5	267	378	! 4	2368	23678	!
! 38	9	4	! 238	25	1	! 6	7	235	!
! 5	238	6	! 238	47	47	! 9	238	1	!
! 7	1	23	! 236	9	3568	! 238	23458	23458	!

At least one candidate of a previous Trid-OR3-relation has just been eliminated.
 There remains a Trid-OR2-relation between candidates: n6r6c8 n5r7c9

At least one candidate of a previous Trid-OR3-relation has just been eliminated.
 There remains a Trid-OR2-relation between candidates: n6r6c8 n5r7c9

whip[8]: r9c3{n2 n3} - r9c7{n3 n8} - r8c8{n8 n3} - r1c8{n3 n8} - r1c3{n8 n2} -
 c1n2{r1 r4} - c7n2{r4 r2} - b3n3{r2c7 .} ==> r9c8≠2
 whip[8]: b9n4{r9c9 r9c8} - c8n5{r9 r3} - c9n5{r3 r7} - r7c5{n5 n2} - b5n2{r4c5 r5c4} -
 r5c9{n2 n8} - b3n8{r3c9 r1c8} - c3n8{r1 .} ==> r9c9≠3

OR2-forcing-gwhip-elim[2]:

```

|| n6r6c8 -
|| n5r7c9 - partial-gwhip[1]: c9n3{r7 r456} -
==> r6c8#3

whip[8]: b8n3{r9c4 r9c6} - r9c3{n3 n2} - r5c3{n2 n8} - r5c9{n8 n2} - b9n2{r7c9 r8c8} -
r8n3{c8 c2} - r6n3{c2 c9} - r7n3{c9 .} ==> r5c4#3
whip[1]: c4n3{r9 .} ==> r9c6#3
g-whip[6]: c9n5{r9 r3} - b3n6{r3c9 r2c789} - c4n6{r2 r9} - r9c6{n6 n8} - c7n8{r9 r4} -
c9n8{r4 .} ==> r9c8#5
hidden-single-in-a-column ==> r3c8=5
biv-chain[2]: b3n8{r3c9 r1c8} - c3n8{r1 r5} ==> r5c9#8
finned-x-wing-in-rows: n8{r7 r5}{c4 c1} ==> r4c1#8
whip[4]: r5c9{n3 n2} - r7c9{n2 n5} - r7c5{n5 n2} - b5n2{r4c5 .} ==> r6c9#3
whip[4]: r5c9{n3 n2} - r7c9{n2 n5} - r7c5{n5 n2} - b5n2{r4c5 .} ==> r4c9#3
t-whip[4]: r5n8{c3 c4} - c6n8{r6 r9} - c7n8{r9 r4} - b6n3{r4c7 .} ==> r5c3#3
whip[5]: c3n3{r1 r9} - c7n3{r9 r4} - c7n8{r4 r9} - r8c8{n8 n2} - b7n2{r8c2 .} ==>
r1c8#3
whip[1]: b3n3{r2c8 .} ==> r2c1#3
whip[5]: r1c8{n8 n2} - r2c7{n2 n3} - r9c7{n3 n2} - r9c3{n2 n3} - c8n3{r9 .} ==> r8c8#8
whip[1]: b9n8{r9c9 .} ==> r9c6#8
whip[1]: c6n8{r6 .} ==> r5c4#8
hidden-single-in-a-row ==> r5c3=8
naked-pairs-in-a-column: c6{r1 r9}{n5 n6} ==> r4c6#6
whip[1]: b5n6{r6c5 .} ==> r1c5#6
biv-chain[3]: r1c3{n3 n2} - b7n2{r9c3 r8c2} - r6c2{n2 n3} ==> r1c2#3
z-chain[3]: r5n2{c5 c9} - b6n3{r5c9 r4c7} - r4c1{n3 .} ==> r4c5#2
z-chain[4]: r1n8{c8 c2} - r8n8{c2 c4} - r8n2{c4 c2} - c3n2{r9 .} ==> r1c8#2
naked-single ==> r1c8=8
whip[1]: b3n2{r2c9 .} ==> r2c1#2
biv-chain[4]: r9n5{c9 c6} - c6n6{r9 r1} - r1c2{n6 n2} - b7n2{r8c2 r9c3} ==> r9c9#2
biv-chain[4]: r3c9{n4 n6} - b1n6{r3c2 r1c2} - r1c6{n6 n5} - r9n5{c6 c9} ==> r9c9#4
hidden-single-in-a-block ==> r9c8=4
biv-chain[4]: r4n2{c1 c7} - r2c7{n2 n3} - c8n3{r2 r8} - c2n3{r8 r6} ==> r6c2#2, r4c1#3
singles ==> r4c1=2, r6c2=3

```

OR2-forcing-gwhip-elim[2]:

```

|| n5r7c9 -
|| n6r6c8 - partial-gwhip[1]: b6n2{r6c8 r456c9} -
==> r7c9#2

whip[1]: r7n2{c5 .} ==> r8c4#2, r9c4#2
biv-chain[3]: b7n3{r7c1 r9c3} - r9n2{c3 c7} - r8c8{n2 n3} ==> r7c9#3
stte

```

14.16 OR_k-g-whips

The puzzle is this section (#53056 in the 63,137 list) illustrates the combined use of Trid-OR_k-g-whips and ultra-persistency of OR_k-relations, with ?*high-Tridagon-salience* again set to TRUE.

!	.	2	.	!	.	5	6	!	7	.	.	!
!	.	.	.	!	1	8	.	!	2	.	.	!
!	.	.	.	!	2	.	7	!	.	.	5	!
!	2	.	.	!	7	.	5	!	8	.	1	!
!	.	.	.	!	8	6	.	!	.	7	2	!
!	.	.	.	!	.	.	.	!	6	5	.	!
!	3	.	5	!	.	.	.	!	1	.	8	!
!	.	1	2	!	5	.	8	!	.	.	.	!
!	9	8	4	!	.	.	.	!	5	.	7	!

.2..567.....18.2.....2.7..52..7.58.1...86..72.....65.3.5...1.8.125.8...984...5.7;1093
2;206235 ; SER = 10.4

Resolution state after Singles and whips[1]:

!	148	2	1389	!	349	5	6	!	7	13489	349	!
!	4567	345679	3679	!	1	8	349	!	2	3469	3469	!
!	1468	3469	13689	!	2	349	7	!	349	134689	5	!
!	2	3469	369	!	7	349	5	!	8	349	1	!
!	145	3459	139	!	8	6	1349	!	349	7	2	!
!	1478	3479	13789	!	349	12349	12349	!	6	5	349	!
!	3	67	5	!	469	2479	249	!	1	2469	8	!
!	67	1	2	!	5	3479	8	!	349	3469	3469	!
!	9	8	4	!	36	123	123	!	5	236	7	!

171 candidates.

hidden-pairs-in-a-column: c8{n1 n8}{r1 r3} ==> r3c8≠9, r3c8≠6, r3c8≠4, r3c8≠3, r1c8≠9,
r1c8≠4, r1c8≠3

whip[1]: r3n6{c3 .} ==> r2c1≠6, r2c2≠6, r2c3≠6

130 g-candidates, 545 csp-glanks and 326 non-csp glanks

!	148	2	1389	!	349	5	6	!	7	18	349	!
!	457	34579	379	!	1	8	349	!	2	3469	3469	!
!	1468	3469	13689	!	2	349	7	!	349	18	5	!
!	2	3469	369	!	7	349	5	!	8	349	1	!
!	145	3459	139	!	8	6	1349	!	349	7	2	!
!	1478	3479	13789	!	349	12349	12349	!	6	5	349	!
!	3	67	5	!	469	2479	249	!	1	2469	8	!
!	67	1	2	!	5	3479	8	!	349	3469	3469	!
!	9	8	4	!	36	123	123	!	5	236	7	!

OR2-anti-tridagon[12] for digits 3, 4 and 9 in blocks:

b2, with cells: r1c4, r2c6, r3c5

b3, with cells: r1c9, r2c8, r3c7

b5, with cells: r6c4, r5c6, r4c5

b6, with cells: r6c9, r5c7, r4c8

with 2 guardians: n6r2c8 n1r5c6

Trid-OR2-whip[5]: r8c1{n7 n6} - c9n6{r8 r2} - OR2{{n6r2c8 | n1r5c6}} - b4n1{r5c1 r6c3} - r6n8{c3 .} ==> r6c1≠7

biv-chain[4]: c1n6{r3 r8} - b7n7{r8c1 r7c2} - r6n7{c2 c3} - b4n8{r6c3 r6c1} ==> r3c1≠8

Trid-OR2-ctr-whip[6]: c5n1{r9 r6} - c5n2{r6 r7} - c5n7{r7 r8} - r8c1{n7 n6} - c9n6{r8 r2} - OR2{{n1r5c6 n6r2c8 | .}} ==> r9c5≠3

Trid-OR2-whip[6]: c1n6{r3 r8} - c9n6{r8 r2} - OR2{{n6r2c8 | n1r5c6}} - b4n1{r5c1 r6c3} - r6n7{c3 c2} - r7c2{n7 .} ==> r3c1≠1

hidden-pairs-in-a-row: r3{n1 n8}{c3 c8} ==> r3c3≠9, r3c3≠6, r3c3≠3

hidden-single-in-a-column ==> r4c3=6

Trid-OR2-gwhip[6]: c3n7{r2 r6} - r6n8{c3 c1} - r6n1{c1 c456} - OR2{{n1r5c6 | n6r2c8}} - b9n6{r7c8 r8c9} - r8c1{n6 .} ==> r2c1≠7

singles ==> r8c1=7, r7c2=6, r3c1=6, r9c4=6, r7c5=7

hidden-pairs-in-a-column: c5{n1 n2}{r6 r9} ==> r6c5≠9, r6c5≠4, r6c5≠3

t-whip[5]: r9n3{c6 c8} - r8n3{c9 c5} - r4n3{c5 c2} - r3n3{c2 c7} - r5n3{c7 .} ==> r6c6≠3, r2c6≠3

whip[5]: c4n3{r6 r1} - r3n3{c5 c7} - r5n3{c7 c6} - r4n3{c5 c8} - r9n3{c8 .} ==> r6c2≠3

Trid-OR2-whip[8]: OR2{{n6r2c8 | n1r5c6}} - c6n3{r5 r9} - r9n1{c6 c5} - b8n2{r9c5 r7c6} - r7n4{c6 c4} - r1n4{c4 c1} - c1n1{r1 r6} - c1n8{r6 .} ==> r2c8≠4

z-chain[3]: b3n4{r2c9 r3c7} - c5n4{r3 r4} - c8n4{r4 .} ==> r8c9≠4

g-whip[8]: c9n4{r6 r123} - r3n4{c7 c5} - b2n3{r3c5 r1c4} - r6c4{n3 n9} - r4c5{n9 n3} - r4c2{n3 n9} - b6n9{r4c8 r5c7} - r3n9{c7 .} ==> r6c2≠4

whip[7]: r8n9{c9 c5} - r4n9{c5 c2} - r3n9{c2 c7} - r5n9{c7 c6} - r2n9{c6 c3} - r2n7{c3 c2} - r6c2{n7 .} ==> r7c8≠9

whip[1]: b9n9{r8c9 .} ==> r8c5≠9

biv-chain[3]: b2n3{r1c4 r3c5} - r8c5{n3 n4} - r7c4{n4 n9} ==> r1c4≠9

t-whip[6]: b2n3{r1c4 r3c5} - r8c5{n3 n4} - b9n4{r8c7 r7c8} - r4n4{c8 c2} - r3c2{n4 n9} - r1n9{c3 .} ==> r1c9≠3

t-whip[6]: c6n3{r5 r9} - r8c5{n3 n4} - b9n4{r8c7 r7c8} - r4n4{c8 c2} - r3n4{c2 c7} - r5n4{c7 .} ==> r5c6≠9, r5c6≠1

;;; OR_k ultra-persistency:

+-----+-----+-----+									
! 148	2	1389	! 34	5	6	! 7	18	49	!
! 45	34579	379	! 1	8	49	! 2	369	3469	!
! 6	349	18	! 2	349	7	! 349	18	5	!
+-----+-----+-----+									
! 2	349	6	! 7	349	5	! 8	349	1	!
! 145	3459	139	! 8	6	34	! 349	7	2	!
! 148	79	13789	! 349	12	1249	! 6	5	349	!
+-----+-----+-----+									
! 3	6	5	! 49	7	249	! 1	24	8	!
! 7	1	2	! 5	34	8	! 349	3469	369	!
! 9	8	4	! 6	12	123	! 5	23	7	!
+-----+-----+-----+									

At least one candidate of a previous Trid-OR2-relation has just been eliminated.

There remains a Trid-OR1-relation between candidates: n6r2c8

Trid-ORk-relation with only one candidate => r2c8=6

hidden-single-in-a-column ==> r8c9=6

whip[1]: b5n1{r6c6 .} ==> r6c1≠1, r6c3≠1

hidden-pairs-in-a-row: r6{n1 n2}{c5 c6} ==> r6c6≠9, r6c6≠4

biv-chain[3]: r5c6{n3 n4} - r2c6{n4 n9} - c5n9{r3 r4} ==> r4c5≠3

biv-chain[2]: c9n3{r2 r6} - r4n3{c8 c2} ==> r2c2≠3

biv-chain[2]: r1n3{c3 c4} - b5n3{r6c4 r5c6} ==> r5c3≠3

biv-chain[3]: r8c5{n3 n4} - r4c5{n4 n9} - c8n9{r4 r8} ==> r8c8≠3

finned-x-wing-in-columns: n3{c6 c8}{r9 r5} ==> r5c7≠3

x-wing-in-columns: n3{c5 c7}{r3 r8} ==> r3c2≠3

whip[1]: c2n3{r5 .} ==> r6c3≠3

biv-chain[3]: r5c7{n9 n4} - r5c6{n4 n3} - r6n3{c4 c9} ==> r6c9≠9

whip[1]: c9n9{r2 .} ==> r3c7≠9

biv-chain[2]: b5n9{r6c4 r4c5} - r3n9{c5 c2} ==> r6c2≠9

stte

14.17 Using OR_k-splitting rules

The puzzle in this section (#1182 in the 63,137 collection) illustrates the combined use of the ultra-persistency of OR_k-relations (defined in section 3.5.6) and of the OR_k splitting rules (defined in section 3.5.7). Again, **high-Tridagon-salience** is set to True. Due to this latter choice, it has two anti-tridagons almost at the start, with large numbers of guardians. In what follows, I've kept all the intermediate OR_k-relations produced by:

- either **OR_k-reduction** (due to the elimination of one of the guardians), the concrete implementation of **OR_k ultra-persistency**;
- or **OR_k-splitting** (due to the existence of an even c-chain between two guardians, proving that they have the same truth value).

In a normal publication, the useless ones should be discarded. (Note that this can't be done automatically in a no-look-ahead solver, because it can't know in advance what will be useful later.) But the purpose here is to show how these rules work.

```

+-----+-----+-----+
! . 2 . ! 4 . . ! . . !
! . . 7 ! . . ! . . 6 !
! 6 . 8 ! . . ! . 1 5 !
+-----+-----+-----+
! . . . ! 5 . 4 ! . 6 1 !
! . . . ! . 9 . ! . . 2 !
! . 6 . ! . 1 2 ! . 9 . !
+-----+-----+-----+
! . . . ! . . 5 ! 1 . . !
! 5 . . ! . . . ! . 2 4 !
! 9 . 1 ! 2 4 . ! . . . !
+-----+-----+-----+

```

.2.4.....7.....66.8....15...5.4.61....9...2.6..12.9.....51..5.....249.124....;236;
29694; SER = 11.7

Resolution state after Singles (and whips[1]):

+-----+-----+-----+									
! 13	2	359	! 4	35678	136789	! 3789	378	3789	!
! 134	13459	7	! 1389	2358	1389	! 23489	348	6	!
! 6	349	8	! 379	237	379	! 23479	1	5	!
+-----+-----+-----+									
! 2378	3789	239	! 5	378	4	! 378	6	1	!
! 13478	134578	345	! 3678	9	3678	! 34578	34578	2	!
! 3478	6	345	! 378	1	2	! 34578	9	378	!
+-----+-----+-----+									
! 23478	3478	2346	! 36789	3678	5	! 1	378	3789	!
! 5	378	36	! 136789	3678	136789	! 36789	2	4	!
! 9	378	1	! 2	4	3678	! 35678	3578	378	!
+-----+-----+-----+									

213 candidates.

hidden-pairs-in-a-column: c2{n1 n5}{r2 r5} ==> r5c2≠8, r5c2≠7, r5c2≠4, r5c2≠3, r2c2≠9, r2c2≠4, r2c2≠3

+-----+-----+-----+									
! 13	2	359	! 4	35678	136789	! 3789	378	3789	!
! 134	15	7	! 1389	2358	1389	! 23489	348	6	!
! 6	349	8	! 379	237	379	! 23479	1	5	!
+-----+-----+-----+									
! 2378	3789	239	! 5	378	4	! 378	6	1	!
! 13478	15	345	! 3678	9	3678	! 34578	34578	2	!
! 3478	6	345	! 378	1	2	! 34578	9	378	!
+-----+-----+-----+									
! 23478	3478	2346	! 36789	3678	5	! 1	378	3789	!
! 5	378	36	! 136789	3678	136789	! 36789	2	4	!
! 9	378	1	! 2	4	3678	! 35678	3578	378	!
+-----+-----+-----+									

The first anti-tridagon, with the splitting rules immediately applied twice to it:

OR9-anti-tridagon[12] for digits 7, 8 and 3 in blocks:

b5, with cells: r4c5, r5c6, r6c4

b6, with cells: r4c7, r5c8, r6c9

b8, with cells: r8c5, r9c6, r7c4

b9, with cells: r8c7, r9c9, r7c8

with 9 guardians: n6r5c6 n4r5c8 n5r5c8 n6r7c4 n9r7c4 n6r8c5 n6r8c7 n9r8c7 n6r9c6

Trid-OR9-relation between candidates n6r5c6, n4r5c8, n5r5c8, n6r7c4, n9r7c4, n6r8c5, n6r8c7, n9r8c7 and n6r9c6

+ same valence for candidates n6r9c6 and n6r8c7 via c-chain[2]: n6r9c6,n6r9c7,n6r8c7
==> Trid-OR9-relation can be split into two Trid-OR8-relations with respective lists of guardians:

n6r5c6 n4r5c8 n5r5c8 n6r7c4 n9r7c4 n6r8c5 n6r8c7 n9r8c7

and n6r5c6 n4r5c8 n5r5c8 n6r7c4 n9r7c4 n6r8c5 n9r8c7 n6r9c6 .

Trid-OR8-relation between candidates n6r5c6, n4r5c8, n5r5c8, n6r7c4, n9r7c4, n6r8c5, n9r8c7 and n6r9c6

+ same valence for candidates n9r8c7 and n9r7c4 via c-chain[2]: n9r8c7, n9r7c9, n9r7c4
 ==> Trid-OR8-relation can be split into two Trid-OR7-relations with respective lists of guardians:

n6r5c6 n4r5c8 n5r5c8 n6r7c4 n9r7c4 n6r8c5 n6r9c6
 and n6r5c6 n4r5c8 n5r5c8 n6r7c4 n6r8c5 n9r8c7 n6r9c6.

The second anti-tridagon, where no splitting rules can be applied at this point. Notice that it will not be used for any elimination, so that I could have completely deleted it, but this is what SudoRules finds.

OR12-anti-tridagon[12] for digits 7, 8 and 3 in blocks:

b5, with cells: r4c5, r5c6, r6c4

b6, with cells: r4c7, r5c8, r6c9

b8, with cells: r7c5, r9c6, r8c4

b9, with cells: r7c9, r9c8, r8c7

with 12 guardians: n6r5c6 n4r5c8 n5r5c8 n6r7c5 n9r7c9 n1r8c4 n6r8c4 n9r8c4 n6r8c7 n9r8c7 n6r9c6 n5r9c8

Now, a few easy "cleaning" steps:

biv-chain[3]: r1c1{n3 n1} - r2c2{n1 n5} - b2n5{r2c5 r1c5} ==> r1c5≠3

biv-chain[4]: r1c1{n3 n1} - r2c2{n1 n5} - b2n5{r2c5 r1c5} - b2n6{r1c5 r1c6} ==> r1c6≠3

biv-chain[4]: r1n1{c1 c6} - b2n6{r1c6 r1c5} - b2n5{r1c5 r2c5} - r2c2{n5 n1} ==> r2c1≠1

biv-chain[3]: r2c1{n3 n4} - r3n4{c2 c7} - b3n2{r3c7 r2c7} ==> r2c7≠3

whip[3]: r3n4{c7 c2} - r2c1{n4 n3} - b2n3{r2c4 .} ==> r3c7≠3

biv-chain[4]: r1n1{c6 c1} - r2c2{n1 n5} - b2n5{r2c5 r1c5} - b2n6{r1c5 r1c6} ==> r1c6≠7, r1c6≠8, r1c6≠9

biv-chain[3]: r8n1{c4 c6} - r1c6{n1 n6} - b5n6{r5c6 r5c4} ==> r8c4≠6

+-----+-----+-----+									
! 13	2	359	! 4	5678	16	! 3789	378	3789	!
! 34	15	7	! 1389	2358	1389	! 2489	348	6	!
! 6	349	8	! 379	237	379	! 2479	1	5	!
+-----+-----+-----+									
! 2378	3789	239	! 5	378	4	! 378	6	1	!
! 13478	15	345	! 3678	9	3678	! 34578	34578	2	!
! 3478	6	345	! 378	1	2	! 34578	9	378	!
+-----+-----+-----+									
! 23478	3478	2346	! 36789	3678	5	! 1	378	3789	!
! 5	378	36	! 13789	3678	136789	! 36789	2	4	!
! 9	378	1	! 2	4	3678	! 35678	3578	378	!
+-----+-----+-----+									

The previous OR12 relation can now be reduced (though this will be useless):

At least one candidate of a previous Trid-OR12-relation has just been eliminated.

There remains a Trid-OR11-relation between candidates: n6r5c6 n4r5c8 n5r5c8 n6r7c5 n9r7c9 n1r8c4 n9r8c4 n6r8c7 n9r8c7 n6r9c6 n5r9c8

One of the two OR7 relations found before (from splitting) can now also be split:

Trid-OR7-relation between candidates n6r5c6, n4r5c8, n5r5c8, n6r7c4, n9r7c4, n6r8c5 and n6r9c6

+ same valence for candidates n6r7c4 and n6r5c6 via c-chain[2]: n6r7c4, n6r5c4, n6r5c6
 ==> Trid-OR7-relation can be split into two Trid-OR6-relations with respective lists of guardians:

n6r5c6 n4r5c8 n5r5c8 n9r7c4 n6r8c5 n6r9c6
 and n4r5c8 n5r5c8 n6r7c4 n9r7c4 n6r8c5 n6r9c6.

Easy cleaning again:

z-chain[3]: r1n8{c9 c5} - c5n5{r1 r2} - r2n2{c5 .} ==> r2c7≠8
 biv-chain[4]: r1n5{c5 c3} - r2c2{n5 n1} - r1n1{c1 c6} - b2n6{r1c6 r1c5} ==> r1c5≠7, r1c5≠8
 whip[1]: r1n8{c9 .} ==> r2c8≠8
 whip[1]: r1n7{c9 .} ==> r3c7≠7
 naked-pairs-in-a-row: r2{c1 c8}{n3 n4} ==> r2c7≠4, r2c6≠3, r2c5≠3, r2c4≠3
 whip[1]: b2n3{r3c6 .} ==> r3c2≠3
 z-chain[3]: b1n3{r2c1 r1c3} - c3n9{r1 r4} - r4n2{c3 .} ==> r4c1≠3
 z-chain[3]: c2n3{r9 r4} - r4n9{c2 c3} - c3n2{r4 .} ==> r7c3≠3
 biv-chain[4]: r6n5{c7 c3} - r1n5{c3 c5} - b2n6{r1c5 r1c6} - r9n6{c6 c7} ==> r9c7≠5
 hidden-single-in-a-block ==> r9c8=5

With the eliminations implied by the last Single comes a new series of reductions for the previously found OR_k relations:

! 13	2	359	! 4	56	16	! 3789	378	3789	!
! 34	15	7	! 189	258	189	! 29	34	6	!
! 6	49	8	! 379	237	379	! 249	1	5	!
! 278	3789	239	! 5	378	4	! 378	6	1	!
! 13478	15	345	! 3678	9	3678	! 34578	3478	2	!
! 3478	6	345	! 378	1	2	! 34578	9	378	!
! 23478	3478	246	! 36789	3678	5	! 1	378	3789	!
! 5	378	36	! 13789	3678	136789	! 36789	2	4	!
! 9	378	1	! 2	4	3678	! 3678	5	378	!

At least one candidate of a previous Trid-OR6-relation has just been eliminated.
 There remains a Trid-OR5-relation between candidates: n6r5c6 n4r5c8 n9r7c4 n6r8c5 n6r9c6

At least one candidate of a previous Trid-OR6-relation has just been eliminated.
 There remains a Trid-OR5-relation between candidates: n4r5c8 n6r7c4 n9r7c4 n6r8c5 n6r9c6

At least one candidate of a previous Trid-OR7-relation has just been eliminated.
 There remains a Trid-OR6-relation between candidates: n6r5c6 n4r5c8 n6r7c4 n6r8c5 n9r8c7 n6r9c6

At least one candidate of a previous Trid-OR8-relation has just been eliminated.

There remains a Trid-OR7-relation between candidates: n6r5c6 n4r5c8 n6r7c4 n9r7c4 n6r8c5 n6r8c7 n9r8c7

Normal resolution resumes, with a new cascade of reductions due to candidate eliminations after the Singles:

```
z-chain[4]: c2n3{r9 r4} - r4n9{c2 c3} - c3n2{r4 r7} - c3n6{r7 .} ==> r8c3≠3
naked-single ==> r8c3=6
hidden-single-in-a-block ==> r9c7=6
```

+-----+-----+-----+											
! 13	2	359	! 4	56	16	! 3789	378	3789	!		
! 34	15	7	! 189	258	189	! 29	34	6	!		
! 6	49	8	! 379	237	379	! 249	1	5	!		
+-----+-----+-----+											
! 278	3789	239	! 5	378	4	! 378	6	1	!		
! 13478	15	345	! 3678	9	3678	! 34578	3478	2	!		
! 3478	6	345	! 378	1	2	! 34578	9	378	!		
+-----+-----+-----+											
! 23478	3478	24	! 36789	3678	5	! 1	378	3789	!		
! 5	378	6	! 13789	378	13789	! 3789	2	4	!		
! 9	378	1	! 2	4	378	! 6	5	378	!		
+-----+-----+-----+											

At least one candidate of a previous Trid-OR5-relation has just been eliminated. There remains a Trid-OR3-relation between candidates: n6r5c6 n4r5c8 n9r7c4

At least one candidate of a previous Trid-OR5-relation has just been eliminated. There remains a Trid-OR3-relation between candidates: n4r5c8 n6r7c4 n9r7c4

At least one candidate of a previous Trid-OR6-relation has just been eliminated. There remains a Trid-OR4-relation between candidates: n6r5c6 n4r5c8 n6r7c4 n9r8c7

At least one candidate of a previous Trid-OR7-relation has just been eliminated. There remains a Trid-OR5-relation between candidates: n6r5c6 n4r5c8 n6r7c4 n9r7c4 n9r8c7

Notice that until now, not much has been done in terms of resolution proper. Only easy resolution rules and their almost obvious consequences on OR_k-relations have been applied – nothing very harmful to a puzzle in T&E(3).

Here comes the OR_k-chains part, using only the first of the two OR3 relations:

```
z-chain[5]: b6n5{r6c7 r5c7} - b6n4{r5c7 r5c8} - r2n4{c8 c1} - r6n4{c1 c3} - r6n5{c3 .}
==> r6c7≠8, r6c7≠7, r6c7≠3<Fact-48574>
whip[6]: c4n6{r5 r7} - c5n6{r7 r1} - r1n5{c5 c3} - r5c3{n5 n4} - r6n4{c3 c7} -
r6n5{c7 .} ==> r5c4≠3
Trid-OR3-whip[6]: r3c2{n9 n4} - r2c1{n4 n3} - r2c8{n3 n4} - OR3{{n4r5c8 n9r7c4 |
n6r5c6}} - r1c6{n6 n1} - r1c1{n1 .} ==> r3c4≠9
```

```

Trid-OR3-whip[6]: b1n4{r2c1 r3c2} - b1n9{r3c2 r1c3} - c9n9{r1 r7} - OR3{{n9r7c4 n4r5c8 |
n6r5c6}} - r1c6{n6 n1} - c1n1{r1 .} ==> r5c1≠4
Trid-OR3-whip[6]: r3n4{c7 c2} - b1n9{r3c2 r1c3} - c9n9{r1 r7} - OR3{{n9r7c4 n4r5c8 |
n6r5c6}} - r1n6{c6 c5} - r1n5{c5 .} ==> r5c7≠4
finned-x-wing-in-rows: n4{r2 r5}{c8 c1} ==> r6c1≠4
whip[1]: b4n4{r6c3 .} ==> r7c3≠4
singles ==> r7c3=2, r4c1=2
hidden-pairs-in-a-row: r6{n4 n5}{c3 c7} ==> r6c3≠3
Trid-OR3-whip[6]: r3n4{c7 c2} - b1n9{r3c2 r1c3} - c9n9{r1 r7} - OR3{{n9r7c4 n4r5c8 |
n6r5c6}} - r1n6{c6 c5} - r1n5{c5 .} ==> r6c7≠4

```

The end is routine solving in W6:

```

singles ==> r6c7=5, r6c3=4, r5c8=4, r2c8=3, r2c1=4, r3c2=9, r4c3=9, r7c2=4, r3c7=4,
r2c7=2, r3c5=2
z-chain[5]: c5n6{r7 r1} - r1c6{n6 n1} - r1c1{n1 n3} - r7c1{n3 n7} - r7c8{n7 .} ==>
r7c5≠8
z-chain[5]: c5n6{r7 r1} - r1c6{n6 n1} - r1c1{n1 n3} - r7c1{n3 n8} - r7c8{n8 .} ==>
r7c5≠7
z-chain[4]: r7c5{n3 n6} - r1n6{c5 c6} - c6n1{r1 r2} - c6n9{r2 .} ==> r8c6≠3
z-chain[5]: r3c4{n7 n3} - r6c4{n3 n8} - r4c5{n8 n3} - r7c5{n3 n6} - c4n6{r7 .} ==>
r5c4≠7
biv-chain[4]: r5c4{n8 n6} - r7n6{c4 c5} - r1c5{n6 n5} - r2c5{n5 n8} ==> r4c5≠8, r2c4≠8
biv-chain[3]: r8n1{c6 c4} - r2c4{n1 n9} - c6n9{r2 r8} ==> r8c6≠7, r8c6≠8
t-whip[3]: r4n8{c7 c2} - c1n8{r6 r7} - c8n8{r7 .} ==> r1c7≠8
biv-chain[3]: c8n7{r7 r1} - r1n8{c8 c9} - c9n9{r1 r7} ==> r7c9≠7
whip[6]: r4n8{c7 c2} - r9n8{c2 c6} - r5n8{c6 c4} - r5n6{c4 c6} - c6n7{r5 r3} -
c6n3{r3 .} ==> r6c9≠8
whip[1]: b6n8{r5c7 .} ==> r8c7≠8
t-whip[4]: r4n8{c7 c2} - r6n8{c1 c4} - r8n8{c4 c5} - c5n7{r8 .} ==> r4c7≠7
z-chain[3]: r4n7{c5 c2} - r9n7{c2 c9} - b6n7{r6c9 .} ==> r5c6≠7
z-chain[3]: c5n3{r8 r4} - b5n7{r4c5 r6c4} - r3c4{n7 .} ==> r8c4≠3, r7c4≠3
whip[4]: b5n7{r4c5 r6c4} - r6c9{n7 n3} - r7n3{c9 c1} - c2n3{r8 .} ==> r4c5≠3
naked-single ==> r4c5=7
whip[1]: c2n7{r9 .} ==> r7c1≠7
whip[1]: c5n3{r8 .} ==> r9c6≠3
finned-x-wing-in-rows: n3{r9 r4}{c2 c9} ==> r6c9≠3
singles ==> r6c9=7, r5c1=7, r5c2=1, r2c2=5, r1c3=3, r1c1=1, r1c6=6, r1c5=5, r5c3=5,
r2c5=8, r8c5=3, r7c5=6, r5c4=6
finned-x-wing-in-rows: n8{r8 r6}{c4 c2} ==> r4c2≠8
stte

```

Note 1: with the introduction of OR_k-splitting rules comes a new control variable in the config file (?*allow-OR_k-splitting*), allowing to choose if you want to use these rules or not. Default value is TRUE.

Note 2: without the OR_k-splitting rules, the puzzle can still be solved, but in W7+OR5W8 (instead of W6+OR3W6).

Note 3: the ultra-persistence and the splitting rules have high priority, because one cannot know in advance when the new OR_k -relations they generate may be useful. In the present puzzle, they could have been postponed until after W4, but there can be no general reason to postpone them.

14.18 The part of the configuration file for OR_k -chains

This section gives all the necessary explanations about the part of the SudoRules configuration file not described in chapter 5, specific to all the rules related to the anti-tridagon pattern (it will be completed in the next chapter for rules based on more general 3-digit impossible patterns). You will see that it is extremely versatile. To be precise, this is the part starting with:

```

;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;
;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;
;;;
;;;          ALL THAT FOLLOWS IS FOR EXPERTS AND CAN BE COMPLETELY FORGOTTEN      ;;;
;;;                                     IF YOU ARE SOLVING ORDINARY PUZZLES          ;;;
;;;                                     ;;;
;;;                                     ;;;
;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;

```

It may be useful at this point to repeat that:

- activating the anti-tridagons will compute the Sudoku-specific OR_k -relations (in a format compatible with OR_k -chains);
- activating some of the OR_k -chains will allow these generic chains to use these application-specific OR_k -relations;
- the activation of any type of OR_k -chain CANNOT automatically activate anti-tridagons, because one cannot presume that these generic chains are not intended to be used with a different application-specific OR_k -relation; this activation must therefore be done explicitly.

14.18.1 General anti-tridagon settings

In the original default settings, the basic Tridagon elimination rule and the general anti-tridagon pattern detection rule had low priority (because they rely on 12 CSP-Variables); they were applied only after any ordinary chain of length < 12 (or any ordinary chain of length $< ?*all-chains-max-lengths*$). This had the advantage of avoiding the detection of anti-tridagons that will not be usable by SudoRules because they have too large sets of guardians. See the tables in section 14.12 for getting an idea of the return on investment when the number of guardians increases.

Alternatively, one can acknowledge the anti-tridagon pattern as an exotic one and a brittle one (it will not be detected if one of the 123-candidates is deleted) – and that

it should therefore be applied as soon as possible. One can also argue that mith's pre-filter (three digits and a block such that the three digits are not decided in any of the other blocks, see section 14.8.1) is the essential criterion, the rest being mere verification. In any case, long term usage proved this choice to be more effective and therefore, in SudoRules default behaviour, global variable *?*use-high-Tridagon-salience** is now set to TRUE. The two basic tridagon rules (Tridagon elimination and anti-tridagon detection) are available immediately after Subsets[3] – not earlier, because, when the anti-tridagon pattern is present, Subsets[3] may allow some significant cleaning of the resolution state.

The configuration file allows to set *?*use-high-Tridagon-salience** to FALSE. With this old setting (FALSE), in mith's database of 63,137 min-expand puzzles in T&E(3), no case has appeared where the anti-tridagon pattern would have been destroyed before being detected.

As previously mentioned, there's also a control variable *?*allow-ORk-splitting** to decide if you want to use splitting rules or not. Default is TRUE.

Finally, in the current default settings, OR_k -forcing-whips[n] have higher priority than OR_k -contrad-whips[n] and OR_k -whips[n] (and OR_k -forcing-g-whips[n] have higher priority than OR_k -contrad-g-whips[n] and OR_k -g-whips[n]). I think there's no real reason to prefer one over the other. It is therefore left to personal choices: you can change this default behaviour by setting global variable *?*ORk-Forcing-Whips-before-ORk-Whips** to FALSE. This variable will also change the way the OR_k -chains of length 1 will be displayed: either as OR_k -forcing-whips[1] or as OR_k -whips[1] – which are fundamentally the “same thing” viewed in different ways. For instance, in the example of section 14.9.5,

```
Trid-OR5-whip[1]:
  || n5r1c5
  || n5r2c6
  || n5r3c4
  || n5r3c8
  || n5r6c6
==> r3c6≠5
```

could as well appear as follows, if OR_k -whips were active (which was not the case in the above section) and of higher priority than OR_k -forcing-whips:

```
Trid-OR5-whip[1]: OR5{{n5r6c6 n5r3c8 n5r3c4 n5r2c6 n5r1c5 | .}} ==> r3c6≠5
```

14.18.2 The part of the configuration file for anti-tridagons

What's shown below is a typical choice of activations: all the types of OR_k -chains are chosen, with $k=5$ and with all the lengths (of general chains and of OR_k -chains) restricted to 8. Notice that, by default, the configuration file has no rule activated at

this level. I've added "<<<<<<<<<" signs where choices are made here which are not in the default config.

The general principle here is the independent activation of rules that create OR_k -relations and of rules that use them. If you want to use any of the OR_k -chain rules, do not forget to explicitly activate anti-tridagons that will feed them with OR_k -relations:

```

;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;
;;; 2.3 9x9 Sudoku-specific rules based on impossible patterns:
;;;   Tridagons and Eleven's set of 630 impossible patterns
;;;   These rules produce  $OR_k$ -relations that can be used with  $OR_k$ -chains
;;;   (for 9x9 puzzles only).
;;; This is highly specific to puzzles in T&E(3)
;;; Read section 3.5 and chapters 14 and 15 of the User Manual
;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;

;;; BEWARE: in this section 2.3 and in sections 2.4 and 2.5,
;;; general rules (Subsets, whips, ...) are supposed to be activated in sections 2.1
and 2.2.

;;; 2.3.1) Tridagons
;;; Use the simplest Tridagon elimination rule:
(bind ?*Tridagons* TRUE) ; <<<<<<<<

;;; Allow the use of  $OR_k$ -chains based on Tridagons
(bind ?*Anti-Tridagons* TRUE) ; <<<<<<<<

;;; By default, the Tridagon elimination rule and the anti-tridagon detection rule
have high priority,
;;; allowing their early use (i.e. they will be available immediately after
Subsets[3]).
;;; Give them lower priority here (not recommended):
; (bind ?*use-high-Tridagon-salience* FALSE)

```

Application-specific Tridagon-forcing-whips were defined before I had developed the generic OR_2 -forcing-whips. They are basically the same thing, with a single difference: instead of being counted as 1, the Tridagon part is counted as 12 in the global length. With usage, this proves to be much too constraining for an efficient use of the Tridagon OR_k -relations. This is why these chains are “deprecated”, meaning they could merely be discarded in a future release.

```

;;; 2.3.1a - (deprecated) Use Tridagon-Forcing-Whips (based on Tridagon-links):
;;; (Remember that Tridagon-Forcing-Whips => Tridagons)
;;; If you use Tridagon-Forcing-Whips,
;;; it is highly recommended to put a strict upper bound also on the lengths of all
the forcing-chains;
;;; 15 is a good starting points;
;;; try to increase these lengths progressively.
; (bind ?*Tridagon-Forcing-Whips* TRUE)
; (bind ?*tridagon-forcing-whips-max-length* 15)

```

```
;;; 2.3.2) Use eleven's 630-38 impossible patterns
```

For this part of the SudoRules configuration file, allowing to deal with impossible patterns other than tridagon (by creating associated OR_k -relations), see chapter 15.

We now reach the part that selects OR_k -chains to work with the above selected OR_k -relations. For each of the types of OR_k -chains and OR_k -g-chains, you can choose very finely which of them you want to use and up to which length. You can make either global or detailed choices for their lengths.

See section 5.4.3 for the implications that will be applied to your choices. Moreover, before applying all these implications, if `?*all-ORk-chains-max-length*` is defined, it overrides any other restrictions on any OR_k length. And, if `?*all-ORk-forcing-whips-max-length*` is defined, it overrides any definition of the individual values of `?*OR2-forcing-whips-max-length*` ... `?*OR6-forcing-whips-max-length*`. Similarly, if `?*all-ORk-contrad-whips-max-length*` is defined, it overrides any definition of the individual values of `?*OR2-contrad-whips-max-length*` ... `?*OR6-contrad-whips-max-length*`. And if `?*all-ORk-whips-max-length*` is defined, it overrides any definition of the individual values of `?*OR2-whips-max-length*` ... `?*OR6-whips-max-length*`. Similar rules apply to the OR_k -g-chains.

```
;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;
;;; 2.4 Combine Sudoku-specific rules producing ORk-relations
;;;   with generic ORk-chains
;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;

;;; IN ALL THE CASES BELOW (ORk-chains and eleven replacement: 2.4.2, 2.4.3, 2.4.4,
2.4.5, 2.4.6, 2.4.7, 2.5):
;;; - the impossible patterns detection rule must be selected explicitly in section
2.3.1;
;;; - it is highly recommended to restrict the max length of the basic chains rules,
;;; - and that must be done explicitly (it is NOT a consequence of restricting the ORk
chain rules);

;;; BEWARE: It is strongly recommended not to choose any ORk-chains for k > 8.

;;; 2.4.1) General settings:

;;; Choose if you want ORk-forcing-whips to be applied before or after ORk-whips
;;; (and simultaneously ORk-forcing-g-whips before or after ORk-g-whips).
;;; Default is before (i.e. ?*ORk-Forcing-Whips-before-ORk-Whips* = TRUE); change it
here:
; (bind ?*ORk-Forcing-Whips-before-ORk-Whips* FALSE)

;;; Allow the splitting of ORk relations via conjugacy-chains (now TRUE by default):
; (bind ?*allow-ORk-splitting* FALSE)
```

```
;;; Use any of the rules in this section, possibly with chains defined in the generic
part,
```

```
;;; with restricted lengths:
```

```
(bind ?*all-chains-max-length* 8) ; <<<<<<<<
```

```
;;; 2.4.2) Use ORk-Forcing-Whips in combination with the selected ORk-chains:
```

```
; (bind ?*OR2-Forcing-Whips* True)
```

```
; (bind ?*OR3-Forcing-Whips* True)
```

```
; (bind ?*OR4-Forcing-Whips* True)
```

```
; (bind ?*OR5-Forcing-Whips* True)
```

```
; (bind ?*OR6-Forcing-Whips* True)
```

```
;;; 2.4.3) Use ORk-Contrad-Whips in combination with the selected ORk-chains:
```

```
; (bind ?*OR2-Contrad-Whips* True)
```

```
; (bind ?*OR3-Contrad-Whips* True)
```

```
; (bind ?*OR4-Contrad-Whips* True)
```

```
(bind ?*OR5-Contrad-Whips* True) ; <<<<<<<<
```

```
; (bind ?*OR6-Contrad-Whips* True)
```

```
;;; 2.4.4) Use ORk-Whips in combination with the selected ORk-chains:
```

```
;;; (Remember that ORk-Whips[n] => ORk-Contrad-Whips[n] => Tridagons)
```

```
; (bind ?*OR2-Whips* True)
```

```
; (bind ?*OR3-Whips* True)
```

```
; (bind ?*OR4-Whips* True)
```

```
(bind ?*OR5-Whips* True) ; <<<<<<<<
```

```
; (bind ?*OR6-Whips* True)
```

```
;;; 2.4.5) Use ORk-Forcing-G-Whips in combination with the selected ORk-chains:
```

```
; (bind ?*OR2-Forcing-G-Whips* True)
```

```
; (bind ?*OR3-Forcing-G-Whips* True)
```

```
; (bind ?*OR4-Forcing-G-Whips* True)
```

```
; (bind ?*OR5-Forcing-G-Whips* True)
```

```
; (bind ?*OR6-Forcing-G-Whips* True)
```

```
;;; 2.4.6) Use ORk-Contrad-G-Whips in combination with the selected ORk-chains:
```

```
; (bind ?*OR2-Contrad-G-Whips* True)
```

```
; (bind ?*OR3-Contrad-G-Whips* True)
```

```
; (bind ?*OR4-Contrad-G-Whips* True)
```

```
; (bind ?*OR5-Contrad-G-Whips* True)
```

```
; (bind ?*OR6-Contrad-G-Whips* True)
```

```
;;; 2.4.7) Use ORk-G-Whips in combination with the selected ORk-chains:
```

```
; (bind ?*OR2-G-Whips* True)
```

```
; (bind ?*OR3-G-Whips* True)
```

```
; (bind ?*OR4-G-Whips* True)
```

```
; (bind ?*OR5-G-Whips* True)
```

```
; (bind ?*OR6-G-Whips* True)
```

```
;;; 2.4.8) If you use ORk chains or g-chains,
```

```
;;; it is highly recommended to put a strict upper bound on their lengths;
```

;;; 5 is a good starting point ; try to increase these lengths progressively.

;;; 2.4.8.a) restrict all the ORk-chains and ORk-g-chains at once;

;;; Notice that this global restriction will prevail on any of the individual restrictions further below.

```
(bind ?*all-ORk-chains-max-length* 8) ; <<<<<<<<
```

;;; 2.4.8.b) restrict all the ORk-chains and ORk-g-chains of each type;

;;; Notice that these semi-global restrictions will prevail on any of the individual restrictions further below.

```
(bind ?*all-ORk-forcing-whips-max-length* 8)
```

```
(bind ?*all-ORk-contrad-whips-max-length* 8)
```

```
(bind ?*all-ORk-whips-max-length* 8)
```

```
(bind ?*all-ORk-forcing-gwhips-max-length* 8)
```

```
(bind ?*all-ORk-contrad-gwhips-max-length* 8)
```

```
(bind ?*all-ORk-gwhips-max-length* 8)
```

;;; 2.4.8.c) restrict each ORk-chain and ORk-g-chain max lengths individually;

;;; notice that consistency preserving rules will be applied.

```
(bind ?*OR2-forcing-whips-max-length* 5)
```

```
(bind ?*OR3-forcing-whips-max-length* 5)
```

```
(bind ?*OR4-forcing-whips-max-length* 5)
```

```
(bind ?*OR5-forcing-whips-max-length* 5)
```

```
(bind ?*OR6-forcing-whips-max-length* 5)
```

```
(bind ?*OR2-contrad-whips-max-length* 5)
```

```
(bind ?*OR3-contrad-whips-max-length* 5)
```

```
(bind ?*OR4-contrad-whips-max-length* 5)
```

```
(bind ?*OR5-contrad-whips-max-length* 5)
```

```
(bind ?*OR6-contrad-whips-max-length* 5)
```

```
(bind ?*OR2-whips-max-length* 5)
```

```
(bind ?*OR3-whips-max-length* 5)
```

```
(bind ?*OR4-whips-max-length* 5)
```

```
(bind ?*OR5-whips-max-length* 5)
```

```
(bind ?*OR6-whips-max-length* 5)
```

```
(bind ?*OR2-contrad-gwhips-max-length* 5)
```

```
(bind ?*OR3-contrad-gwhips-max-length* 5)
```

```
(bind ?*OR4-contrad-gwhips-max-length* 5)
```

```
(bind ?*OR5-contrad-gwhips-max-length* 5)
```

```
(bind ?*OR6-contrad-gwhips-max-length* 5)
```

```
(bind ?*OR2-gwhips-max-length* 5)
```

```
(bind ?*OR3-gwhips-max-length* 5)
```

```
(bind ?*OR4-gwhips-max-length* 5)
```

```
(bind ?*OR5-gwhips-max-length* 5)
```

```
(bind ?*OR6-gwhips-max-length* 5)
```

```
;;; 2.5) Eleven's replacement technique:
;;; Allow the automatic use of eleven's replacement method based on tridagons.
;;; (Note that the method is much more general;
;;; here, the anti-tridaon structure is only used to define a starting point).
;;; The method will be applied only when no other rule is applicable.
; (bind ?*Anti-Tridagons* TRUE)
; (bind ?*Eleven-Replacement-in-Tridagons* TRUE)

;;; If you use Eleven-Replacement-in-Tridagons,
;;; it is highly recommended to put a strict upper bound on the lengths of all the
chains and ORk-chains;
;;; see above
```

14.18.3 Example with an OR_k-whip and with high Tridagons salience

Here is an example where setting `?*use-high-Tridagon-salience*` to `TRUE` provides a simpler solution. The puzzle is #5 in mith's list of 63,137 min-expands.

!	.	.	.	!	4	.	.	!	.	.	!
!	4	.	.	!	.	8	9	!	.	.	!
!	6	8	.	!	3	7	.	!	.	4	.

!	.	6	8	!	.	4	7	!	9	.	.
!	7	3	.	!	9	6	.	!	4	.	.
!	9	.	4	!	8	.	3	!	6	.	.

!	3	.	.	!	.	.	.	!	.	5	2
!	.	.	.	!	.	3	.	!	.	9	.
!	8	7	.	!	.	.	.	!	3	.	.

...4.....4...89...68.37..4..68.479..73.96.4..9.48.36..3.....52....3..
9.87....3...;3;396

Resolution state after Singles and whips[1]:

!	125	1259	123579	!	4	125	1256	!	12578	13678	136789	!
!	4	125	12357	!	1256	8	9	!	1257	1367	1367	!
!	6	8	1259	!	3	7	125	!	125	4	19	!

!	125	6	8	!	125	4	7	!	9	123	135	!
!	7	3	125	!	9	6	125	!	4	128	158	!
!	9	125	4	!	8	125	3	!	6	127	157	!

!	3	149	169	!	167	19	1468	!	178	5	2	!
!	125	1245	1256	!	12567	3	124568	!	178	9	14678	!
!	8	7	12569	!	1256	1259	12456	!	3	16	146	!

179 candidates.

! 125	6	8	! 125	4	7	! 9	123	135	!
! 7	3	125	! 9	6	125	! 4	128	158	!
! 9	125	4	! 8	125	3	! 6	127	157	!
+-----+			+-----+			+-----+			
! 3	149	6	! 7	19	48	! 18	5	2	!
! 125	1245	125	! 6	3	48	! 178	9	78	!
! 8	7	19	! 125	1259	125	! 3	6	4	!
+-----+			+-----+			+-----+			

```
tridagon for digits 1, 2 and 5 in blocks:
```

b1, with cells: r3c3 (target cell), r1c1, r2c2

b2, with cells: r3c6, r1c5, r2c4

b4, with cells: r5c3, r4c1, r6c2

b5, with cells: r5c6, r4c4, r6c5

$$\Rightarrow r_{3c3} \neq 1, 2, 5$$

stte

14.18.4 Example with an OR_k -g-whip and with high Tridagons salience

Here is an example where setting `?use-high-Tridagon-salience*` to `TRUE` and activating `ORk-g-whips` provides a short solution. The puzzle is #33,177 in mith’s list of 63,137 min-expands.

!	1	2	.	!	.	5	.	!	.	9	!
!	7	.	9	!	.	.	.	!	.	.	!
!	7	.	9	!	.	3	2	!	.	.	!
!	.	.	.	!	.	7	5	!	6	.	1
!	.	7	1	!	.	.	.	!	9	.	!
!	.	.	.	!	.	2	.	!	.	7	8
!	3	1	.	!	.	.	7	!	.	9	.
!	5	.	2	!	.	9	3	!	.	1	.
!	.	9	7	!	.	1	.	!	.	3	.

12..5...9.....7.9.32.....756.1.71...9.....2..7831...7.9.5.2.93.1..97.1..3.;6692
:132339

Resolution state after Singles and whips[1]:

!	1	2	3468	!	4678	5	468	!	347	468	9	!
!	468	34568	34568	!	146789	468	14689	!	123457	24568	23457	!
!	7	4568	9	!	1468	3	2	!	145	4568	45	!
!	2489	348	348	!	3489	7	5	!	6	24	1	!
!	2468	7	1	!	3468	468	468	!	9	245	2345	!
!	469	3456	3456	!	13469	2	1469	!	34	7	8	!
!	3	1	468	!	24568	468	7	!	2458	9	2456	!
!	5	468	2	!	468	9	3	!	478	1	467	!
!	468	9	7	!	24568	1	468	!	2458	3	2456	!

186 candidates.

hidden-pairs-in-a-column: c4{n2 n5}{r7 r9} ==> r9c4≠8, r9c4≠6, r9c4≠4, r7c4≠8, r7c4≠6, r7c4≠4

hidden-pairs-in-a-column: c6{n1 n9}{r2 r6} ==> r6c6≠6, r6c6≠4, r2c6≠8, r2c6≠6, r2c6≠4

152 g-candidates, 625 csp-glinks and 373 non-csp glinks

!	1	2	3468	!	4678	5	468	!	347	468	9	!
!	468	34568	34568	!	146789	468	19	!	123457	24568	23457	!
!	7	4568	9	!	1468	3	2	!	145	4568	45	!
!	2489	348	348	!	3489	7	5	!	6	24	1	!
!	2468	7	1	!	3468	468	468	!	9	245	2345	!
!	469	3456	3456	!	13469	2	19	!	34	7	8	!
!	3	1	468	!	25	468	7	!	2458	9	2456	!
!	5	468	2	!	468	9	3	!	478	1	467	!
!	468	9	7	!	25	1	468	!	2458	3	2456	!

OR3-anti-tridagon[12] for digits 6, 8 and 4 in blocks:

b1, with cells: r1c3, r2c1, r3c2

b2, with cells: r1c6, r2c5, r3c4

b7, with cells: r7c3, r9c1, r8c2

b8, with cells: r7c5, r9c6, r8c4

with 3 guardians: n3r1c3 n5r3c2 n1r3c4

z-chain[3]: r4n9{c4 c1} - c1n2{r4 r5} - r5n8{c1 .} ==> r4c4≠8

whip[1]: b5n8{r5c6 .} ==> r5c1≠8

whip[3]: c9n3{r2 r5} - r6c7{r3 n4} - b9n4{r7c7 .} ==> r2c9≠4

g-whip[4]: r3c9{n5 n4} - c8n4{r3 r456} - r6c7{n4 n3} - b3n3{r1c7 .} ==> r2c9≠5

whip[5]: r6c7{r3 n4} - r1c7{n4 n7} - r2n7{c9 c4} - r2n1{c4 c6} - r2n9{c6 .} ==> r2c7≠3

whip[5]: r6c7{n4 n3} - r1c7{r3 n7} - r2n7{c9 c4} - r2n1{c4 c6} - r2n9{c6 .} ==> r2c7≠4

Trid-OR3-gwhip[5]: c8n4{r5 r123} - r3c9{n4 n5} - r3c7{n5 n1} - OR3{n1r3c4 n5r3c2 | n3r1c3} - c7n3{r1 .} ==> r6c7≠4

singles ==> r6c7=3, r2c9=3, r1c3=3, r4c2=3, r5c4=3, r8c9=7

z-chain[2]: r8n6{c4 c2} - b1n6{r3c2 .} ==> r2c4≠6

hidden-triplets-in-a-row: r2{n1 n7 n9}{c6 c7 c4} ==> r2c7≠5, r2c7≠2, r2c4≠8, r2c4≠4

singles ==> r2c8=2, r4c8=4, r4c3=8, r4c4=9, r4c1=2, r6c6=1, r2c6=9, r5c8=5, r5c9=2, r6c1=9

whip[1]: b3n5{r3c9 .} ==> r3c2≠5

biv-chain[3]: r6c4{n4 n6} - r8n6{c4 c2} - r7c3{n6 n4} ==> r6c3≠4

finned-swordfish-in-rows: n4{r8 r6 r1}{c7 c2 c4} ==> r3c4≠4

finned-swordfish-in-rows: n4{r6 r8 r3}{c2 c4 c7} ==> r1c7≠4

singles ==> r1c7=7, r2c7=1, r2c4=7, r3c4=1

whip[1]: b3n4{r3c9 .} ==> r3c2≠4

whip[1]: b1n4{r2c3 .} ==> r2c5≠4

biv-chain[3]: b4n4{r6c2 r5c1} - c5n4{r5 r7} - c3n4{r7 r2} ==> r2c2≠4

biv-chain[3]: r5c1{n6 n4} - c2n4{r6 r8} - b7n8{r8c2 r9c1} ==> r9c1≠6

biv-chain[3]: b1n4{r2c3 r2c1} - c1n6{r2 r5} - r6c3{n6 n5} ==> r2c3≠5

singles ==> r2c2=5, r6c3=5

x-wing-in-rows: n6{r6 r8}{c2 c4} ==> r3c2≠6, r1c4≠6 ; stte

14.19 Ultra-persistency of the OR_k -relations vs degeneracy

As noticed in section 3.5.6, exotic patterns are often brittle: if some of their defining candidate(s) disappear(s) during resolution, what remains may be much more difficult to spot than the original pattern. This is true in particular of anti-tridagons.

Thanks to mith's additional criterion (section 14.8.1), the full anti-tridagon pattern (with the three defining digits in all of the twelve defining cells, plus possibly other "guardian" digits in them) is quite easy to find. However, if one allows missing candidates (which would make the corresponding degenerate trivalue-oddagon pattern contradictory in T&E(2)), mith's pre-filter no longer applies and the standard anti-tridagon detection rule no longer works. There's currently nothing in SudoRules to allow finding this degenerate pattern if it is already degenerate at the start of resolution. (I have indeed written a rule to detect degenerate cases, but its complexity is much too high to be useful in any way.)

However, if the degeneracy of an OR_k -relation occurs during resolution, CSP-Rules has no problem with this, because the previously found ***OR_k -relations are persistent: once proven, they remain TRUE forever.*** Moreover, as mentioned in section 3.5.6, ***CSP-Rules has generic rules for making any OR_k -relation ultra-persistent:*** if a guardian disappears – which makes this OR_k -relation unusable for the OR_k -chain rules (because this guardian was either the target of a required partial-whip or the end of a required link; and there can be no partial-whip with no target and no link with a missing end) –, an OR_j -relation for some j smaller than k will be automatically asserted for the remaining guardians, even if the underlying anti-tridagon has become degenerate. The following example shows how this works (it is difficult to find a puzzle where both degeneracy and ultra-persistency appear).

The puzzle is #48950 in mith's list of 63,137 T&E(3) min-expands. For definiteness, I have set `?*use-high-Tridagon-salience*` to TRUE (so that the OR_k -relations are found as soon as possible) and `?*ORk-Forcing-Whips-before-ORk-Whips*` to FALSE (so that OR_k -contrad-whips and OR_k -contrad-whips appear before OR_k -forcing-whips of same length). Note that OR_k -splitting rules are not selected (they would lead to a much simpler solution – see section 14.19.1).

```

+-----+-----+-----+
! 1 2 . ! . . 6 ! 7 8 . !
! . 5 . ! . . . ! 2 . 6 !
! . . . ! . . 2 ! . 1 5 !
+-----+-----+-----+
! 2 . 5 ! . 7 . ! . . . !
! . 1 . ! . . . ! . . . !
! 8 7 . ! 2 1 . ! . 6 . !
+-----+-----+-----+
! 5 . . ! 9 4 8 ! . . . !
! 7 8 . ! 3 6 . ! . . . !
! . . . ! . 2 7 ! 6 . 8 !
+-----+-----+-----+

```

12...678..5....2.6.....2.152.5.7.....1.....87.21..6.5..948...78.36.....276.8;1019
0;240260
SER = 10.4

Resolution state after Singles and whips[1]:

+-----+-----+-----+									
! 1	2	349	! 45	359	6	! 7	8	349	!
! 349	5	34789	! 1478	389	1349	! 2	349	6	!
! 3469	3469	346789	! 478	389	2	! 349	1	5	!
+-----+-----+-----+									
! 2	3469	5	! 468	7	349	! 13489	349	1349	!
! 3469	1	3469	! 4568	3589	3459	! 34589	234579	23479	!
! 8	7	349	! 2	1	3459	! 3459	6	349	!
+-----+-----+-----+									
! 5	36	1236	! 9	4	8	! 13	237	1237	!
! 7	8	1249	! 3	6	15	! 1459	2459	1249	!
! 349	349	1349	! 15	2	7	! 6	3459	8	!
+-----+-----+-----+									

177 candidates.

hidden-pairs-in-a-row: r5{n2 n7}{c8 c9} ==> r5c9#9, r5c9#4, r5c9#3, r5c8#9, r5c8#5,
r5c8#4, r5c8#3
whip[1]: c8n5{r9 .} ==> r8c7#5
hidden-pairs-in-a-column: c3{n7 n8}{r2 r3} ==> r3c3#9, r3c3#6, r3c3#4, r3c3#3, r2c3#9,
r2c3#4, r2c3#3

Because of our choice of high anti-tridagon salience, the anti-tridagon pattern is found here, after all the chain rules of length ≤ 2 and all the Subset rules of size ≤ 3 have been tried:

Resolution state RS1:

+-----+-----+-----+									
! 1	2	349	! 45	359	6	! 7	8	349	!
! 349	5	78	! 1478	389	1349	! 2	349	6	!
! 3469	3469	78	! 478	389	2	! 349	1	5	!
+-----+-----+-----+									
! 2	3469	5	! 468	7	349	! 13489	349	1349	!
! 3469	1	3469	! 4568	3589	3459	! 34589	27	27	!
! 8	7	349	! 2	1	3459	! 3459	6	349	!
+-----+-----+-----+									
! 5	36	1236	! 9	4	8	! 13	237	1237	!
! 7	8	1249	! 3	6	15	! 149	2459	1249	!
! 349	349	1349	! 15	2	7	! 6	3459	8	!
+-----+-----+-----+									

OR5-anti-tridagon[12] for digits 3, 4 and 9 in blocks:

- b1, with cells: r1c3, r2c1, r3c2
- b3, with cells: r1c9, r2c8, r3c7
- b4, with cells: r6c3, r5c1, r4c2
- b6, with cells: r6c9, r5c7, r4c8

with 5 guardians: n6r3c2 n6r4c2 n6r5c1 n5r5c7 n8r5c7

However, it will not be used in any OR_k -chain before other rules of higher salience:

```
biv-chain[3]: r1c4{n4 n5} - b8n5{r9c4 r8c6} - c6n1{r8 r2} ==> r2c6≠4
whip[1]: c6n4{r6 .} ==> r4c4≠4, r5c4≠4
biv-chain[4]: r7c7{n1 n3} - r7c2{n3 n6} - r4n6{c2 c4} - r4n8{c4 c7} ==> r4c7≠1
hidden-single-in-a-block ==> r4c9=1
whip[7]: r3n6{c1 c2} - r7c2{n6 n3} - r9c1{n3 n4} - b1n4{r3c1 r1c3} - r1c4{n4 n5} -
r9n5{c4 c8} - r9n3{c8 .} ==> r3c1≠9
whip[8]: r9n9{c3 c8} - c8n5{r9 r8} - b8n5{r8c6 r9c4} - r1c4{n5 n4} - r1c3{n4 n3} -
r6c3{n3 n4} - c9n4{r6 r8} - r8n2{c9 .} ==> r8c3≠9
whip[1]: r8n9{c9 .} ==> r9c8≠9
whip[8]: r6n5{c7 c6} - b8n5{r8c6 r9c4} - b8n1{r9c4 r8c6} - r8c7{n1 n4} - r9c8{n4 n3} -
r4c8{n3 n4} - b3n4{r2c8 r1c9} - r1c4{n4 .} ==> r6c7≠9

Trid-OR5-whip[8]: r7c7{n1 n3} - r7c2{n3 n6} - c3n6{r7 r5} - r4n6{c2 c4} - r4n8{c4 c7}
- OR5{{n8r5c7 n6r5c1 n6r4c2 n6r3c2 | n5r5c7}} - b5n5{r5c4 r6c6} - r8c6{n5 .} ==>
r8c7≠1
hidden-single-in-a-block ==> r7c7=1
Trid-OR5-whip[7]: c6n5{r6 r8} - r8n1{c6 c3} - c3n2{r8 r7} - c3n6{r7 r5} - c1n6{r5 r3}
- OR5{{n6r5c1 n5r5c7 n6r4c2 n6r3c2 | n8r5c7}} - r5c4{n8 .} ==> r5c5≠5
singles ==> r1c5=5, r1c4=4
```

+	1	2	39	+	4	5	6	+	7	8	39	+
!	349	5	78	!	178	389	139	!	2	349	6	!
!	346	3469	78	!	78	389	2	!	349	1	5	!
+				+				+				+
!	2	3469	5	!	68	7	349	!	3489	349	1	!
!	3469	1	3469	!	568	389	3459	!	34589	27	27	!
!	8	7	349	!	2	1	3459	!	345	6	349	!
+				+				+				+
!	5	36	1236	!	9	4	8	!	1	237	237	!
!	7	8	124	!	3	6	15	!	49	245	249	!
!	349	349	1349	!	15	2	7	!	6	3459	8	!
+				+				+				+

At this point, the anti-tridagon pattern starts degenerating: it loses candidates $n4r1c3$ and $n4r1c9$ (but it still has its 5 original guardians). Thanks to OR_k -persistency, this will not prevent using it again in the next $OR5$ -chains.

```
naked-pairs-in-a-row: r3{c3 c4}{n7 n8} ==> r3c5≠8
z-chain[7]: r8c7{n9 n4} - b3n4{r3c7 r2c8} - c8n9{r2 r8} - c8n5{r8 r9} - c4n5{r9 r5} -
c4n6{r5 r4} - r4n8{c4 .} ==> r4c7≠9
whip[7]: r3n6{c1 c2} - r7c2{n6 n3} - r9n3{c3 c8} - r9c1{n3 n9} - c2n9{r9 r4} -
r4c8{n9 n4} - b3n4{r2c8 .} ==> r3c1≠4

Trid-OR5-whip[5]: r3n4{c7 c2} - r3n6{c2 c1} - OR5{{n6r5c1 n8r5c7 n5r5c7 n6r3c2 |
n6r4c2}} - r4c4{n6 n8} - c7n8{r4 .} ==> r5c7≠4
whip[6]: r1c3{n9 n3} - r3c1{n3 n6} - b4n6{r5c1 r4c2} - b4n3{r4c2 r5c1} - r5c5{n3 n8} -
r4c4{n8 .} ==> r5c3≠9
```

Trid-OR5-whip[6]: r8c7{n9 n4} - r3n4{c7 c2} - r3n6{c2 c1} - OR5{{n6r5c1 n8r5c7 n5r5c7 n6r3c2 | n6r4c2}} - r4c4{n6 n8} - c7n8{r4 .} ==> r5c7≠9

biv-chain[3]: b6n9{r4c8 r6c9} - c9n4{r6 r8} - r8c7{n4 n9} ==> r8c8≠9

z-chain[3]: c8n9{r4 r2} - r1c9{n9 n3} - b9n3{r7c9 .} ==> r4c8≠3

whip[6]: r4c8{n9 n4} - r2n4{c8 c1} - c2n4{r3 r9} - c2n9{r9 r3} - r1n9{c3 c9} - b6n9{r6c9 .} ==> r4c6≠9

whip[6]: c7n8{r4 r5} - c7n5{r5 r6} - c7n3{r6 r3} - r3c5{n3 n9} - r5c5{n9 n3} - r4c6{n3 .} ==> r4c7≠4

whip[5]: r1n9{c3 c9} - r1n3{c9 c3} - r6c3{n3 n4} - b6n4{r6c9 r4c8} - c8n9{r4 .} ==> r9c3≠9

whip[5]: r5n4{c3 c6} - r4n4{c6 c8} - c8n9{r4 r2} - c6n9{r2 r6} - b6n9{r6c9 .} ==> r6c3≠4

naked-pairs-in-a-column: c3{r1 r6}{n3 n9} ==> r9c3≠3, r7c3≠3, r5c3≠3

whip[7]: r3n4{c2 c7} - r2n4{c8 c1} - b1n9{r2c1 r1c3} - b3n9{r1c9 r2c8} - r4n9{c8 c2} - r9n9{c2 c1} - b7n3{r9c1 .} ==> r3c2≠3

whip[7]: r4c8{n9 n4} - r2n4{c8 c1} - c2n4{r3 r9} - r9c3{n4 n1} - c4n1{r9 r2} - r2c6{n1 n3} - r4c6{n3 .} ==> r2c8≠9

hidden-single-in-a-column ==> r4c8=9

whip[1]: b6n4{r6c9 .} ==> r6c6≠4

biv-chain[3]: c1n6{r3 r5} - b4n9{r5c1 r6c3} - c3n3{r6 r1} ==> r3c1≠3

naked-single ==> r3c1=6

+-----+-----+-----+											
! 1	2	39	! 4	5	6	! 7	8	39	!		
! 349	5	78	! 178	389	139	! 2	34	6	!		
! 6	469	78	! 78	39	2	! 349	1	5	!		
+-----+-----+-----+											
! 2	346	5	! 68	7	34	! 38	9	1	!		
! 3469	1	46	! 568	389	3459	! 358	27	27	!		
! 8	7	39	! 2	1	359	! 345	6	34	!		
+-----+-----+-----+											
! 5	36	26	! 9	4	8	! 1	237	237	!		
! 7	8	124	! 3	6	15	! 49	245	249	!		
! 349	349	14	! 15	2	7	! 6	345	8	!		
+-----+-----+-----+											

At this point, what remains of the original anti-tridagon pattern is a highly degenerated form of it:

- number 3 is missing in r3c2, r4c8
- number 4 is missing in r1c3, r1c9, r6c3, r4c8
- number 9 is missing in r2c8, r4c2, r6c9, r5c7

Ten out of the twelve defining cells have a missing 123-candidate. Actually, cell r4c8 is even decided; i.e. we have the worst possible case of degeneracy. I don't think anyone (human or computer program) would be able to find this kind of degenerate pattern, without the knowledge of the preceding non-degenerate form.

The assertion of $n6r3c1$ implies two applications of ECP that successively delete two guardians; each deletion of a guardian activates the ultra-persistence rules (in spite of the high degeneracy):

!	1	2	39	!	4	5	6	!	7	8	39	!
!	349	5	78	!	178	389	139	!	2	34	6	!
!	6	469	78	!	78	39	2	!	349	1	5	!
!	2	346	5	!	68	7	34	!	38	9	1	!
!	349	1	46	!	568	389	3459	!	358	27	27	!
!	8	7	39	!	2	1	359	!	345	6	34	!
!	5	36	26	!	9	4	8	!	1	237	237	!
!	7	8	124	!	3	6	15	!	49	245	249	!
!	349	349	14	!	15	2	7	!	6	345	8	!

At least one candidate of a previous Trid-OR5-relation has just been eliminated.
There remains a Trid-OR4-relation between candidates: $n6r3c2$ $n6r4c2$ $n5r5c7$ $n8r5c7$

At least one candidate of a previous Trid-OR4-relation has just been eliminated.
There remains a Trid-OR3-relation between candidates: $n6r4c2$ $n5r5c7$ $n8r5c7$

Trid-OR3-whip[3]: $OR3\{\{n8r5c7\} \mid n6r4c2\} - r4n3\{c2\} - r4n4\{c6\} \implies r5c7\neq 3$

biv-chain[3]: $r5c7\{n5\} - r4n8\{c7\} - b5n6\{r4c4\} \implies r5c4\neq 5$
singles $\implies r9c4=5, r8c6=1, r2c4=1, r3c4=7, r3c3=8, r2c3=7, r2c5=8, r9c3=1, r8c8=5$
naked-pairs-in-a-column: $c8\{r2\} - r9\{n3\} \implies r7c8\neq 3$
finned-x-wing-in-rows: $n9\{r2\} - r5\{c1\} \implies r6c6\neq 9$
singles $\implies r6c3=9, r1c3=3, r1c9=9, r8c7=9$
biv-chain[2]: $c8n4\{r9\} - b1n4\{r2c1\} \implies r9c2\neq 4$
x-wing-in-rows: $n4\{r2\} - c8\{r9\} \implies r5c1\neq 4$
stte

Note: in the present case, there would still be a solution, but with final steps in W5, if the Trid-OR3-whip[3] was not found.

14.19.1 The effect of adding OR_k -splitting rules

With OR_k -splitting rules, degeneracy of the anti-tridagon pattern is still visible, but the solution becomes much simpler. Starting from resolution state RS1, the OR5 relation can be split twice:

Trid-OR5-relation between candidates $n6r3c2, n6r4c2, n6r5c1, n5r5c7$ and $n8r5c7$
+ same valence for candidates $n6r5c1$ and $n6r3c2$ via c-chain[2]: $n6r5c1, n6r3c1, n6r3c2$
 \implies Trid-OR5-relation can be split into two Trid-OR4-relations with respective lists of guardians:

$n6r3c2$ $n6r4c2$ $n5r5c7$ $n8r5c7$ and $n6r4c2$ $n6r5c1$ $n5r5c7$ $n8r5c7$.

biv-chain[3]: r1c4{n4 n5} - b8n5{r9c4 r8c6} - c6n1{r8 r2} ==> r2c6≠4
 whip[1]: c6n4{r6 .} ==> r4c4≠4, r5c4≠4
 biv-chain[4]: r7c7{n1 n3} - r7c2{n3 n6} - r4n6{c2 c4} - r4n8{c4 c7} ==> r4c7≠1
 hidden-single-in-a-block ==> r4c9=1

+-----+-----+-----+									
! 1	2	349	! 45	359	6	! 7	8	349	!
! 349	5	78	! 1478	389	139	! 2	349	6	!
! 3469	3469	78	! 478	389	2	! 349	1	5	!
+-----+-----+-----+									
! 2	3469	5	! 68	7	349	! 3489	349	1	!
! 3469	1	3469	! 568	3589	3459	! 34589	27	27	!
! 8	7	349	! 2	1	3459	! 3459	6	349	!
+-----+-----+-----+									
! 5	36	1236	! 9	4	8	! 13	237	237	!
! 7	8	1249	! 3	6	15	! 149	2459	249	!
! 349	349	1349	! 15	2	7	! 6	3459	8	!
+-----+-----+-----+									

Trid-OR4-relation between candidates n6r3c2, n6r4c2, n5r5c7 and n8r5c7

+ same valence for candidates n8r5c7 and n6r4c2 via c-chain[4]:

n8r5c7, n8r4c7, n8r4c4, n6r4c4, n6r4c2

==> Trid-OR4-relation can be split into two Trid-OR3-relations with respective lists of guardians:

n6r3c2 n6r4c2 n5r5c7 and n6r3c2 n5r5c7 n8r5c7 .

Trid-OR3-whip[5]: r7n1{c7 c3} - r7n6{c3 c2} - OR3{{n6r4c2 n6r3c2 | n5r5c7}} - b5n5{r5c4 r6c6} - r8c6{n5 .} ==> r8c7≠1

hidden-single-in-a-block ==> r7c7=1

Trid-OR3-whip[5]: c4n6{r5 r4} - OR3{{n6r4c2 n5r5c7 | n6r3c2}} - r7c2{n6 n3} - b9n3{r7c9 r9c8} - r9n5{c8 .} ==> r5c4≠5

naked-pairs-in-a-block: b5{r4c4 r5c4}{n6 n8} ==> r5c5≠8

whip[1]: c5n8{r3 .} ==> r2c4≠8, r3c4≠8

Trid-OR3-whip[5]: r7n2{c9 c3} - r7n6{c3 c2} - OR3{{n6r4c2 n6r3c2 | n5r5c7}} - b5n5{r5c5 r6c6} - r8n5{c6 .} ==> r8c8≠2

hidden-pairs-in-a-column: c8{n2 n7}{r5 r7} ==> r7c8≠3

Trid-OR3-whip[5]: b9n3{r9c8 r7c9} - r7c2{n3 n6} - OR3{{n6r4c2 n6r3c2 | n5r5c7}} - c5n5{r5 r1} - r1n3{c5 .} ==> r9c3≠3

Trid-OR3-whip[5]: b9n3{r9c8 r7c9} - r7c2{n3 n6} - OR3{{n6r4c2 n6r3c2 | n5r5c7}} - c5n5{r5 r1} - c4n5{r1 .} ==> r9c8≠5

singles ==> r8c8=5, r8c6=1, r9c4=5, r1c4=4, r3c4=7, r2c4=1, r3c3=8, r2c3=7, r2c5=8, r1c5=5, r9c3=1

z-chain[3]: r2n4{c1 c8} - r9n4{c8 c2} - b1n4{r3c2 .} ==> r5c1≠4

z-chain[4]: r8c7{n9 n4} - c9n4{r8 r6} - r6c3{n4 n3} - r1c3{n3 .} ==> r8c3≠9

whip[1]: r8n9{c9 .} ==> r9c8≠9

biv-chain[3]: c8n9{r4 r2} - r1c9{n9 n3} - b9n3{r7c9 r9c8} ==> r4c8≠3

biv-chain[3]: r4c8{n9 n4} - c9n4{r6 r8} - r8n9{c9 c7} ==> r4c7≠9, r5c7≠9, r6c7≠9

z-chain[4]: c8n9{r4 r2} - r2c6{n9 n3} - r4c6{n3 n4} - r4c8{n4 .} ==> r4c2≠9

z-chain[3]: r5c5{n3 n9} - b4n9{r5c1 r6c3} - r1c3{n9 .} ==> r5c3≠3

t-whip[3]: c5n9{r3 r5} - b4n9{r5c3 r6c3} - r1n9{c3 .} ==> r3c7≠9

hidden-single-in-a-column ==> r8c7=9

biv-chain[3]: r1n3{c3 c9} - r3c7{n3 n4} - r2n4{c8 c1} ==> r2c1≠3

```

finned-swordfish-in-columns: n3{c1 c5 c8}{r9 r5 r3} ==> r3c7≠3
singles ==> r3c7=4, r2c1=4
whip[1]: c7n3{r6 .} ==> r6c9≠3
x-wing-in-rows: n9{r2 r4}{c6 c8} ==> r6c6≠9, r5c6≠9
x-wing-in-rows: n9{r1 r6}{c3 c9} ==> r5c3≠9
x-wing-in-columns: n4{c2 c8}{r4 r9} ==> r4c6≠4
naked-pairs-in-a-block: b5{r4c6 r5c5}{n3 n9} ==> r6c6≠3, r5c6≠3
biv-chain[3]: r7c2{n6 n3} - r9c1{n3 n9} - c2n9{r9 r3} ==> r3c2≠6
hidden-single-in-a-block ==> r3c1=6

```

```

+-----+-----+-----+
! 1  2  39 ! 4  5  6 ! 7  8  39 !
! 4  5  7  ! 1  8  39 ! 2  39  6  !
! 6  39  8  ! 7  39  2  ! 4  1  5  !
+-----+-----+-----+
! 2  346  5  ! 68  7  39 ! 38  49  1  !
! 39  1  46  ! 68  39  45 ! 358  27  27  !
! 8  7  349 ! 2  1  45 ! 35  6  49  !
+-----+-----+-----+
! 5  36  236 ! 9  4  8  ! 1  27  237 !
! 7  8  24  ! 3  6  1  ! 9  5  24  !
! 39  349  1  ! 5  2  7  ! 6  34  8  !
+-----+-----+-----+

```

At least one candidate of a previous Trid-OR3-relation has just been eliminated.
There remains a Trid-OR2-relation between candidates: n6r4c2 n5r5c7

At least one candidate of a previous Trid-OR3-relation has just been eliminated.
There remains a Trid-OR2-relation between candidates: n5r5c7 n8r5c7

At least one candidate of a previous Trid-OR4-relation has just been eliminated.
There remains a Trid-OR3-relation between candidates: n6r4c2 n5r5c7 n8r5c7

```

Trid-OR2-whip[1]: OR2{{n8r5c7 n5r5c7 | .}} ==> r5c7≠3
finned-x-wing-in-rows: n3{r3 r5}{c5 c2} ==> r4c2≠3
naked-pairs-in-a-block: b4{r4c2 r5c3}{n4 n6} ==> r6c3≠4
naked-pairs-in-a-column: c3{r1 r6}{n3 n9} ==> r7c3≠3
finned-x-wing-in-rows: n3{r7 r1}{c9 c2} ==> r3c2≠3; stte

```

14.20 Update for a larger collection of T&E(3) puzzles

Most of this chapter was originally written when the largest known collection of T&E(3) min-expand puzzles was the above-mentioned one, with 63,137 elements; it has been the source of all the examples and the playground for all the statistical analyses so far in this chapter. Since then, mith has expanded his collection to 158,276 puzzles. The question arises whether this changes anything. Considering that the smaller collection coincides more or less with the initial part of the larger one, the best answer I can think of lies in the following table, computed for the larger collection. It shows the distribution function (expressed in %) of the W+Trid-OR5W

rating, for increasing initial slices of the collection (with all the ultra-persistencey and splitting rules active and with ?*max-guardians* = 8):

slice size	rating	1	2	3	4	5	6	7	8	>8
20,000		0	0	30.51	14.67	12.46	8.14	4.78	4.16	25.28
40,000		0	0	31.08	14.14	12.73	7.82	4.71	4.21	24.31
60,000		0	0	32.54	15.92	13.29	7.89	4.55	4.17	21.65
80,000		0	0	30.72	15.61	13.36	8.14	4.82	4.28	23.07
100,000		0	0	30.49	15.00	13.01	7.98	4.85	4.23	24.44
120,000		0	0	30.89	14.95	12.99	7.98	4.82	4.20	24.17
140,000		0	0	31.41	14.71	12.75	7.84	4.86	4.21	24.22
158,276		0	0	31.60	15.00	13.15	7.94	4.86	4.20	23.25

The table shows slight fluctuations from one slice to the next larger one (to be expected, considering the way the collection was generated, by vicinity search combined with expansion by Singles, which can lead to possibly large clusters of neighbouring puzzles), with no systematic trend, in particular no noticeable trend for puzzles being harder or easier when one goes from the first ones to the full list, though the 1-20,000 slice seems to be significantly harder in the mean and the 40,001-60,000 and 140001-158276 slices significantly easier. This observation may be useful for the comparative analysis of other impossible patterns in the next chapter.

One more interesting result appeared with calculations for the gW+Trid-OR5gW ratings, compared to the W+Trid-OR5W ones, for the first 10,000 puzzles:

rating	1	2	3	4	5	6	7	8	>8
W+OR5W	0	0	26.62	15.28	14.58	8.47	5.47	4.66	24.92
gW+OR5gW	0	0	26.99	15.58	14.53	8.92	5.33	4.85	23.80

Of course, the ratings involving g-candidates are always lower. What's noticeable however is, a difference happens much more often than in the controlled-bias collection. It happens for 3.69% of the puzzles (vs only 0.22% in the cbg-000 collection). What also happens is, 1.12% of the puzzles that are not solved in W8+OR5W8 get solved in gW8+OR5gW8.

Whether this larger difference brought by the use of g-chains is totally due to the puzzles being much harder than those in cbg-000 or whether this is somehow specifically related to the presence of the anti-tridagon pattern remains undecided at this point.

15. Dealing with large numbers of patterns

For 9×9 Sudoku, section 14.7.4 introduced a (probably complete) list of 630 different 3-digit impossible patterns in two bands, found by “eleven”. The question raised there was about the existence of impossible patterns, other than tridagon, that might require T&E(3) to be proven contradictory (none was found). With the same list of patterns in mind, this chapter will now tackle a very different question: how to use such patterns in practice for solving puzzles?

For each pattern individually, the answer is straightforward: write the rule that can identify it in a resolution state (together with the k candidates that “guard” against it) and make it assert an OR_k relation between these “guardians” (there can be no other general way to use impossible patterns); if $k=1$, the unique guardian will be asserted as the value of its cell; otherwise, the generic OR_k -chain rules (if selected) will be able to use any such OR_k relation – in exactly the same way as in the tridagon case.

However, the topic of this chapter is the large number of patterns and the material impossibility to write manually all the corresponding rules. Note that a few other impossible patterns are known that span three bands or three stacks, making the potential number of impossible 3-digit patterns much higher, but we shall ignore them here: 630 is already much too high to be dealt with manually and it will be enough for our present purposes.

15.1 Motivations

Section 14.7.4 has shown that:

- none of the 3-digit patterns in eleven’s 630 list can be proven contradictory in restricted T&E(1),
- all the patterns in this list can be proven contradictory in restricted T&E(2) (i.e. by using only candidates in the pattern) – except ten of them;
- all the patterns in this list can be proven contradictory in full T&E(2) – except one, the famous Tridagon;
- all the patterns in this list can be proven contradictory in restricted T&E(3).

Such results provide a first idea of what to expect of resolution rules based on them. If a pattern can be proven contradictory in T&E(n), it may be useful to solve puzzles that require T&E($n+1$) or more, but it will not be enough.

However, this doesn't provide much concrete help in solving real puzzles. The purpose of this chapter is therefore to analyse the different questions one must consider when faced with such large numbers of patterns, e.g.:

- how to classify them, e.g. which of them have row-column symmetry? Row-column symmetry is important because it is the only sudoku symmetry that can't be taken care of automatically in the patterns: contrary to generic rules such as whips, g-braids, OR_k -chains..., that are super-symmetric by construction, the OR_k -relations based on the patterns will be highly dependent on Sudoku-specific concepts such as rows, columns, blocks, bands, stacks (in the same way as they are in the case of Subset rules). When a pattern doesn't have row-column symmetry (the large majority of them), two rules will have to be written (not counting the easy activation rules);
- how to eliminate some of them *a priori* (see section 15.2);
- how to write associated detection rules for the remaining ones;
- how to select/eliminate some of them *a posteriori*, based on their resolution power with respect to some relevant collection of puzzles;
- how to define a “reasonable” number of guardians, above which the pattern is not taken into consideration: allowing rules that would assert OR_k -relations with too many guardians may lead to a lot of useless such relations.

15.2 Eliminating useless patterns

The first question to be asked is: can these patterns appear in any real puzzle, of course with guardians – but in their non-degenerate form, i.e. with all the k digits present in all the cells of the pattern? Note that this chapter will deal only with non-degenerate patterns – a decision consistent with the approach described in [PBCS]. This is important because degenerate forms:

- may be much harder to find (be it for the human solver or for the machine),
- may have a much higher computational complexity.

It first appears that patterns can be doubly impossible, if I dare say so. Notice that, in a non-degenerate k -digit pattern, the k digits of the pattern can appear as givens nowhere in any row, column or block that has a cell in the pattern. Let us call **free cells** those that remain after discarding all the previous ones. On the other hand, in any unique puzzle, at least 8 different digits must appear somewhere as givens. For a k -digit pattern not to be super-impossible, it must therefore have at least $k-1$ free cells.

In eleven's list of 630 3-digit patterns, because the patterns are all in two bands, there can be no pattern with only one or two free cells. But there are 38 with no free cell at all:

- none in the 10-cell list (among 31 patterns);
- none in the 12-cell list (among 38 patterns);

- 5 in the 13-cell list (among 290 patterns): 207 211 217 218 219
- 7 in the 14-cells list (among 159 patterns): 23 33 36 73 92 112 113
- 24 in the 15-cells list (among 102 patterns): 11 16 18 30 32 36 38 40 42 45 47 49 51 53 56 57 66 68 69 80 83 85 100 101
- 2 in the 16-cells list (among 10 patterns): 9 10

Example : #207 in 13-cells. It is easy to see that the X's span all the columns.

```

+-----+-----+-----+
! . . . ! . . . ! . . X !
! . . . ! . . X ! . . X !
! . . . ! X X . ! . X . !
+-----+-----+-----+
! . . . ! . . . ! . . X !
! . . X ! . . . ! X X . !
! X X . ! . . X ! . . . !
+-----+-----+-----+
! . . . ! . . . ! . . . !
! . . . ! . . . ! . . . !
! . . . ! . . . ! . . . !
+-----+-----+-----+
.....X.....X..X...XX..X.....X..X...XX.XX...X.....

```

Eliminating 38 patterns from 630 is a small step to the resolution of our problem, but there still remains 592 ones.

15.3 Elementary tools for analysing the patterns

The simplest tool for analysing patterns (used by some of the functions below) is the already known function ***pretty-print***: it works with a pattern-string (written with X's and dots and possibly o's) in the same way as it works with a puzzle-string.

SudoRules also has functions for normalising patterns or files of patterns: ***normalise-k-digit-pattern-string*** takes for its single argument a pattern-string of any length ≤ 81 , completes it to 81 characters by adding as many dots as necessary, and outputs it in a format with only X's and dots.

Function ***normalise-k-digit-pattern-file***, with 3 arguments (?file-length, ?file-in and ?file-out), transforms a file of patterns (?file-in) into one (?file-out) with the first ?file-length ones written in their above-defined normalized format. All the functions described in this chapter work on the normalized formats. (Some of them also accept the 01 format, but I avoid using it, because CLIPS sometimes tries to interpret this as an integer and 81 digits is too long for that.)

In addition to the functions described in chapter 14 for solving k-digit patterns and studying their T&E(n) classification, SudoRules has a function for a superficial preliminary analysis of a pattern: *browse-k-digit-pattern*, with syntax:

```
(browse-k-digit-pattern ?k ?pattern-string ?print-completed-pattern)
```

where ?k is the number of digits in the pattern, ?print-completed-pattern is a Boolean (i.e. TRUE or FALSE) for choosing if the result of the analysis must be printed and ?pattern-string is the string form of the pattern, such as (for tridagon, in its EL12c38 form):

```
.....X..X....X..X....X..X.....X..X....X..X.....X..X.....
```

Command:

```
(browse-k-digit-pattern 3
  ".....X..X....X..X....X..X.....X..X....X..X.....X..X....."
  TRUE)
```

will give (where the free cells are marked with an “o”):

```
9 cells free for pattern digits: (r7c1 r7c2 r7c3 r8c1 r8c2 r8c3 r9c1 r9c2 r9c3)
3 rows with no cell in the pattern: (r7 r8 r9)
3 columns with no-cell in the pattern: (c1 c2 c3)
5 blocks with no-cell in the pattern: (b1 b4 b7 b8 b9)
1 bands with no-cell in the pattern: (B3)
1 stacks with no-cell in the pattern: (S1)
```

```
+-----+-----+-----+
! . . . ! . . X ! . . X !
! . . . ! . X . ! . X . !
! . . . ! X . . ! X . . !
+-----+-----+-----+
! . . . ! . . X ! . . X !
! . . . ! . X . ! X . . !
! . . . ! X . . ! . X . !
+-----+-----+-----+
! o o o ! . . . ! . . . !
! o o o ! . . . ! . . . !
! o o o ! . . . ! . . . !
+-----+-----+-----+
```

```
.....X..X....X..X....X..X.....X..X....X..X.....X..X.000.....000.....000.....
```

Function *browse-k-digit-patterns-file*, with syntax:

```
(browse-k-digit-patterns-file ?k ?len ?pattern-file ?print-completed-pattern)
```

(where ?len is the length of the file) does the same job as the previous function for each pattern in ?pattern-file, but it prints all the results to the standard output.

15.4 Transforming all the patterns into rules asserting OR_k -relations

All the rules for detecting eleven's 630 (minus 38) 3-digit impossible patterns and asserting the corresponding OR_k -relations have been coded in SudoRules and tested in conjunction with the generic OR_k -chains that can use them.

To create the rules, I wrote an automatic generator (not included in the public release of CSP-Rules) that takes a pattern as input and produces four CLIPS rules as output: one activation rule, one pattern-detection rule and two similar rules for the row-column symmetric morph of the pattern. Activation rules are lightweight, but a pattern detection rule may have many conditions (indeed $3*c$ conditions for a pattern with c cells). That makes a total of $4*(630-38) = 2368$ new rules, all added and tested at once. (Note that there is some redundancy for the very few patterns, if any, that may have row-column symmetry, but this can't make much harm.)

A first question was: will adding so many rules, half of which have so many conditions, crash or crush CLIPS? But the answer is no; CLIPS is very resilient. Of course, computation times and memory requirements may be larger in a few rare cases. But they remain reasonable for most of the puzzles.

Another question was about how to test so many rules. This is however a very special case of testing:

- all the patterns have already been proven contradictory;
- all the rules are generated by the same rule generator;
- each rule may be quite long but it is indeed very elementary: successively for each cell in the pattern and for each of the three digits of the pattern, it only checks the presence of this candidate in this cell; of course, there are a few technical subtleties here, because each X in the given pattern corresponds to a fixed row, column, block, band and stack and each of these must be transformed into a variable name in order to ensure that the final conditions encompass all and only the isomorphic versions of the pattern (row-column symmetry aside);
- the conclusion of a rule is always the assertion of an OR_k -relation (plus the printing of the visual output for the user).

Checking manually the text of a few rules (for syntax, presence of the right conditions, assertion of the right OR_k -relation, ...) is therefore enough. This is straightforward and this has been complemented by checking all the rules together in SudoRules on a large collection of real puzzles.

15.4.1 Notation

A pattern in eleven's list is mentioned as **EL<xx>c<yy>(s)**, where “EL” stands for “eleven”, <xx> is the number of cells in the pattern, <yy> is its place in the original <xx> list, and “s” is present only for the row-column morph of the original pattern. When an OR_k -relation based on such a pattern is found, it appears as e.g.:

EL13c259-OR2-relation for digits: 2, 4 and 9

in cells (marked #): (r3c5 r1c2 r1c4 r2c7 r2c1 r2c6 r5c2 r4c7 r4c1 r4c5 r6c7 r6c3 r6c5)

with 2 guardians (in cells marked @) : n6r2c7 n1r6c5

+-----+-----+-----+									
! 12489	249#	3	!	249#	5	6	!	7	128 149
! 249#	5	7	!	1	8	249#	!	2469#@	23 3469
! 12489	6	2489	!	3	249#	7	!	5	128 149
+-----+-----+-----+									
! 249#	8	1	!	6	249#	3	!	249#	7 5
! 56	249#	56	!	249	7	8	!	1249	123 1349
! 7	3	249#	!	5	1249#@	1249	!	249#	6 8
+-----+-----+-----+									
! 35689	7	5689	!	89	169	159	!	136	4 2
! 2469	249	2469	!	7	3	1249	!	8	5 16
! 234568	1	24568	!	248	246	245	!	36	9 7
+-----+-----+-----+									

Cells "in the pattern" are automatically marked with a # and cells with a guardian are automatically marked with a @.

As for OR_k -chain rules, they appear in a resolution path in the same notation as in chapter 14, but with the prefix **EL<xx>c<yy>(s)-OR<k>-<chain-type>[<chain-length>]**, e.g.:

EL13c259-OR2-whip[3]: OR2{{n1r6c5 | n6r2c7}} - b9n6{r7c7 r8c9} - r8n1{c9 .} ==> r6c6≠1

15.4.2 Decisions already made before writing the Imp630 rules

It may be useful to recall here that, based on the experience with tridagons, I had made a very general decision much before the above 630 impossible patterns were discovered: parametric OR_k chain rules based on OR_k -relations (the rules that do the real elimination job) are generic and they are set at their natural place in the general rules hierarchy (see chapter 4), defined by their length. This place is independent of the internal complexity of the OR_k -relation they use, exactly as in the tridagon case. The justification for this is, they are intended for use with exotic patterns only.

Actually, OR_k chain rules don't make any difference between one OR_k -relation or another with the same k (and this will not change in CSP-Rules). OR_k -relation names,

such as Trid or EL15c97, are preserved by all the ultra-persistency and splitting rules (because it's interesting for the user to be able to track which patterns are used) but they are ignored by the OR_k -chain rules in terms of pattern-matching and when selecting which rule will be applied next; they are used only for printing the output.

15.4.3 Decisions to be made when writing the Imp630 rules

In the above general framework and before writing the rules generating the OR_k -relations, I had to make several specific decisions:

- should the rules allow degenerate forms of the patterns, i.e. missing candidates? The answer is currently no and it will not change (for complexity reasons);

- in the hierarchy of rules, where should the rules detecting the impossible patterns be? They are currently looked for after all the rules selected at level 2 and after S3, like tridagon (this may change in the future, but it's unlikely). The reason for searching for them so early is related to degeneracy: as it is not allowed, the patterns should be identified as soon as possible, before they have too many chances of degenerating. As for the more general reason for not setting them (much lower) at the place in the hierarchy of rules defined by the number of CSP-Variables they involve, i.e. the number of cells in the pattern, see also the discussion about the tridagon being an exotic and brittle pattern in section 14.8.1; the same arguments apply here. Conversely, one might argue that they should be given still higher priorities, e.g. just after whips[1] and I have no real argument against this, except that it would lead to still many more OR_k -relations being found at the start with still many more guardians and many more OR_k -ultra-persistency rules applied near the start; but I can't rule out the possibility that it might be useful in a few cases;

- should there be any preferences between the patterns? By default, patterns with fewer cells are looked for before patterns with more cells (this may be changed in the config file for a few special patterns that appeared to be more useful than others – see further on);

- as a very special example of the previous remark, tridagon (= EL12c38) is eliminated from the 630 patterns and all the remaining ones are looked for after it; tridagon is given a special status and must be selected independently in the configuration file;

- patterns with the same number of cells are looked for in no particular order (this may be changed by the user for a few patterns that appeared to be more useful than others);

- should there be a maximum number of “guardians” allowed for asserting an OR_k -relation? There is a parameter `?*max-guardians*`; its current default value is 8, but it can be changed by the user in the configuration file. Originally, I had set the default to 6, but that missed a few interesting cases. Even when an OR_k -relation can't be used directly by OR_k -chains (if k is too large), it can still be tackled by the ultra-

persistence and splitting rules. The negative counterpart of setting it higher is the larger number of useless OR_k -relations appearing in the resolution paths;

– should there also be a maximum number of “guardians” allowed in each cell? This is currently not implemented; I have seen no good reason to do it;

– should one define OR'_k -chains that would include more than one OR_k -relation in the stead of CSP-Variables, thus allowing different patterns to play a role in an elimination? This can’t be excluded on the basis of any general reason, except the complexity of doing it. CSP-Rules doesn’t do it currently (and this is very unlikely to ever change).

15.5 A rare example involving three impossible patterns (+ tridagon)

The following hard puzzle is #1375 in mith’s list of 63,137 T&E(3) min-expands (#1378 in his larger list of 158,276). It illustrates the use of 4 different impossible patterns (including tridagon) in a single puzzle. As several examples in the tridagon chapter, it also illustrates the use of the generic ultra-persistence rules and OR_k -splitting rules for the OR_k -relations.

Note that more OR_k -relations are found by SudoRules, but I’ve kept here only those that were useful for resolution.

Note that it is not necessary to use all this arsenal. But my purpose here is to illustrate some of the Imp630 rules derived from the 630 impossible patterns. While using only tridagons, the puzzle is not solved with chains of length 8, the solution that follows doesn’t use any chain of length larger than 6.

```

+-----+-----+-----+
! . . . ! . . 6 ! . . . !
! 4 . 6 ! 7 . . ! . 2 3 !
! 7 8 . ! . 3 2 ! . 6 4 !
+-----+-----+-----+
! 2 . 8 ! . 6 3 ! 4 . . !
! 3 4 . ! . 7 . ! 6 . . !
! . 6 7 ! . . 4 ! . . . !
+-----+-----+-----+
! . . . ! . . . ! . 9 5 !
! 8 . 4 ! . . . ! 2 . 6 !
! . . . ! . . 7 ! . 4 1 !
+-----+-----+-----+

```

.....6...4.67...2378..32.642.8.634...34..7.6...67..4.....958.4...2.6.....7.41;250;
105671
SER = 10.9

Let’s start as usual from the resolution state after Singles and whips[1]:

!	159	12359	12359	!	1459	1459	6	!	1579	1578	789	!
!	4	159	6	!	7	1589	1589	!	159	2	3	!
!	7	8	159	!	159	3	2	!	159	6	4	!
!	2	159	8	!	159	6	3	!	4	157	79	!
!	3	4	159	!	12589	7	1589	!	6	158	289	!
!	159	6	7	!	12589	12589	4	!	1359	1358	289	!
!	16	1237	123	!	123468	1248	18	!	378	9	5	!
!	8	13579	4	!	1359	159	159	!	2	37	6	!
!	569	2359	2359	!	235689	2589	7	!	38	4	1	!

172 candidates.

hidden-pairs-in-a-row: $r1\{n2\ n3\}\{c2\ c3\} \implies r1c3 \neq 9, r1c3 \neq 5, r1c3 \neq 1, r1c2 \neq 9, r1c2 \neq 5, r1c2 \neq 1$

In addition to tridagon, we now have a lot of OR_k -relations. Here are the only 3 that will be used (EL13c290 and EL13c234 are the most frequent ones).

OR5-anti-tridagon[12] for digits 1, 5 and 9 in blocks:

b1, with cells (marked #): r1c1, r2c2, r3c3

b2, with cells (marked #): r1c5, r2c6, r3c4

b4, with cells (marked #): r6c1, r4c2, r5c3

b5, with cells (marked #): r6c5, r4c4, r5c6

with 5 guardians (in cells marked @): n4r1c5 n8r2c6 n8r5c6 n2r6c5 n8r6c5

!	159#	23	23	!	1459	1459#@	6	!	1579	1578	789	!
!	4	159#	6	!	7	1589	1589#@	!	159	2	3	!
!	7	8	159#	!	159#	3	2	!	159	6	4	!
!	2	159#	8	!	159#	6	3	!	4	157	79	!
!	3	4	159#	!	12589	7	1589#@	!	6	158	289	!
!	159#	6	7	!	12589	12589#@	4	!	1359	1358	289	!
!	16	1237	123	!	123468	1248	18	!	378	9	5	!
!	8	13579	4	!	1359	159	159	!	2	37	6	!
!	569	2359	2359	!	235689	2589	7	!	38	4	1	!

EL13c290-OR3-relation for digits: 1, 5 and 9

in cells (marked #): (r1c1 r3c7 r3c4 r3c3 r2c7 r2c6 r2c2 r4c4 r4c2 r5c6 r5c3 r6c7 r6c1)

with 3 guardians (in cells marked @): n8r2c6 n8r5c6 n3r6c7

!	159#	23	23	!	1459	1459	6	!	1579	1578	789	!
!	4	159#	6	!	7	1589	1589#@	!	159#	2	3	!
!	7	8	159#	!	159#	3	2	!	159#	6	4	!

! 2	159#	8	! 159#	6	3	! 4	157	79	!
! 3	4	159#	! 12589	7	1589#@	! 6	158	289	!
! 159#	6	7	! 12589	12589	4	! 1359#@	1358	289	!
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+									
! 16	1237	123	! 123468	1248	18	! 378	9	5	!
! 8	13579	4	! 1359	159	159	! 2	37	6	!
! 569	2359	2359	! 235689	2589	7	! 38	4	1	!
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+									

EL13c234-OR3-relation for digits: 1, 5 and 9

in cells (marked #): (r5c3 r4c4 r4c2 r6c7 r6c1 r1c4 r1c1 r3c7 r3c4 r3c3 r2c7 r2c5 r2c2)

with 3 guardians (in cells marked @) : n3r6c7 n4r1c4 n8r2c5

! 159#	23	23	! 1459#@	1459	6	! 1579	1578	789	!
! 4	159#	6	! 7	1589#@	1589	! 159#	2	3	!
! 7	8	159#	! 159#	3	2	! 159#	6	4	!
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+									
! 2	159#	8	! 159#	6	3	! 4	157	79	!
! 3	4	159#	! 12589	7	1589	! 6	158	289	!
! 159#	6	7	! 12589	12589	4	! 1359#@	1358	289	!
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+									
! 16	1237	123	! 123468	1248	18	! 378	9	5	!
! 8	13579	4	! 1359	159	159	! 2	37	6	!
! 569	2359	2359	! 235689	2589	7	! 38	4	1	!
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+									

EL13c175-OR5-relation for digits: 1, 5 and 9

in cells (marked #): (r2c7 r2c2 r2c5 r3c7 r3c3 r3c4 r4c2 r4c4 r5c3 r5c6 r6c7 r6c1 r6c4)

with 5 guardians (in cells marked @) : n8r2c5 n8r5c6 n3r6c7 n2r6c4 n8r6c4

! 159	23	23	! 1459	1459	6	! 1579	1578	789	!
! 4	159#	6	! 7	1589#@	1589	! 159#	2	3	!
! 7	8	159#	! 159#	3	2	! 159#	6	4	!
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+									
! 2	159#	8	! 159#	6	3	! 4	157	79	!
! 3	4	159#	! 12589	7	1589#@	! 6	158	289	!
! 159#	6	7	! 12589#@	12589	4	! 1359#@	1358	289	!
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+									
! 16	1237	123	! 123468	1248	18	! 378	9	5	!
! 8	13579	4	! 1359	159	159	! 2	37	6	!
! 569	2359	2359	! 235689	2589	7	! 38	4	1	!
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+									

Note that, among all the other OR_k-relations available, there's one more EL13c234-OR3-relation, it differs from the previous one by only one cell and one guardian; but it won't be used in resolution:

in cells (marked #): (r5c3 r4c4 r4c2 r6c7 r6c1 r1c4 r1c1 r3c7 r3c4 r3c3 r2c7 r2c6 r2c2)

!	159#	23	23	!	1459#@	1459	6	!	1579	1578	789	!
!	4	159#	6	!	7	1589	1589#@	!	159#	2	3	!
!	7	8	159#	!	159#	3	2	!	159#	6	4	!
!	2	159#	8	!	159#	6	3	!	4	157	79	!
!	3	4	159#	!	12589	7	1589	!	6	158	289	!
!	159#	6	7	!	12589	12589	4	!	1359#@	1358	289	!
!	16	1237	123	!	123468	1248	18	!	378	9	5	!
!	8	13579	4	!	1359	159	159	!	2	37	6	!
!	569	2359	2359	!	235689	2589	7	!	38	4	1	!

;;; OR_k ultra-persistence:

!	159	23	23	!	4	159	6	!	1579	578	789	!
!	4	159	6	!	7	1589	1589	!	159	2	3	!
!	7	8	159	!	159	3	2	!	159	6	4	!

! 2	159	8	!	159	6	3	!	4	157	79	!
! 3	4	159	!	12589	7	1589	!	6	158	289	!
! 159	6	7	!	12589	12589	4	!	359	1358	289	!
+-----+			+-----+			+-----+			+-----+		
! 6	127	123	!	238	4	18	!	378	9	5	!
! 8	17	4	!	1359	159	159	!	2	37	6	!
! 59	2359	359	!	6	28	7	!	38	4	1	!
+-----+			+-----+			+-----+			+-----+		

At least one candidate of a previous Trid-OR5-relation between candidates n4r1c5 n8r2c6 n8r5c6 n2r6c5 n8r6c5 has just been eliminated.

There remains a Trid-OR4-relation between candidates: n8r2c6 n8r5c6 n2r6c5 n8r6c5

```
Trid-0R4-whip[3]: r2n8{c6 c5} - 0R4{{n8r6c5 n8r2c6 n8r5c6 | n2r6c5}} - r9c5{n2 .} ==>
r7c6≠8
```

singles ==> r7c6=1, r8c2=1, r7c2=7, r8c8=7, r4c9=7, r1c7=7, r6c8=3, r8c4=3

;;; OR_k ultra-persistence again, for two OR_k-relations:

!	159	23	23	!	4	159	6	!	7	58	89	!
!	4	59	6	!	7	1589	589	!	159	2	3	!
!	7	8	159	!	159	3	2	!	159	6	4	!
!	2	59	8	!	159	6	3	!	4	15	7	!
!	3	4	159	!	12589	7	589	!	6	158	289	!
!	159	6	7	!	12589	12589	4	!	59	3	289	!
!	6	7	23	!	28	4	1	!	38	9	5	!
!	8	1	4	!	3	59	59	!	2	7	6	!
!	59	2359	359	!	6	28	7	!	38	4	1	!

At least one candidate of a previous EL13c290-OR3-relation between candidates n8r2c6 n8r5c6 n3r6c7 has just been eliminated.

There remains an EL13c290-0R2-relation between candidates: n8r2c6 n8r5c6

At least one candidate of a previous EL13c175-OR5-relation between candidates n8r2c5 n8r5c6 n3r6c7 n2r6c4 n8r6c4 has just been eliminated.

There remains an EL13c175-0R4-relation between candidates: n8r2c5 n8r5c6 n2r6c4 n8r6c4

naked-pairs-in-a-column: $c2\{r2\ r4\}\{n5\ n9\} \Rightarrow r9c2 \neq 9, r9c2 \neq 5$

naked-pairs-in-a-block: $b7\{r7c3\ r9c2\}\{n2\ n3\} \implies r9c3 \neq 3$

;;; OR_k-splitting:

!	159	23	23	!	4	159	6	!	7	58	89	!
!	4	59	6	!	7	1589	589	!	159	2	3	!
!	7	8	159	!	159	3	2	!	159	6	4	!

!	2	59	8	!	159	6	3	!	4	15	7	!
!	3	4	159	!	12589	7	589	!	6	158	289	!
!	159	6	7	!	12589	12589	4	!	59	3	289	!
+-----+-----+-----+-----+												
!	6	7	23	!	28	4	1	!	38	9	5	!
!	8	1	4	!	3	59	59	!	2	7	6	!
!	59	23	59	!	6	28	7	!	38	4	1	!
+-----+-----+-----+-----+												

EL13c175-OR4-relation between candidates n8r2c5, n8r5c6, n2r6c4 and n8r6c4
+ same valence for candidates n8r5c6 and n8r2c5 via c-chain[2]: n8r5c6,n8r2c6,n8r2c5
==> EL13c175-OR4-relation can be split into two EL13c175-OR3-relations with respective
lists of guardians:
n8r2c5 n2r6c4 n8r6c4 and n8r5c6 n2r6c4 n8r6c4

EL13c175-OR3-whip[2]: OR3{{n8r6c4 n8r5c6 | n2r6c4}} - r7c4{n2 .} ==> r5c4#8
EL13c175-OR3-whip[3]: OR3{{n8r6c4 n2r6c4 | n8r2c5}} - c5n1{r2 r1} - c1n1{r1 .} ==>
r6c4#1

The end is easy:

x-wing-in-rows: n1{r1 r6}{c1 c5} ==> r2c5#1
hidden-single-in-a-row ==> r2c7=1
finned-x-wing-in-columns: n5{c7 c4}{r3 r6} ==> r6c5#5
finned-x-wing-in-columns: n9{c7 c4}{r3 r6} ==> r6c5#9
finned-x-wing-in-rows: n9{r4 r2}{c2 c4} ==> r3c4#9
whip[1]: c4n9{r6 .} ==> r5c6#9
biv-chain[3]: r4c8{n1 n5} - c7n5{r6 r3} - r3c4{n5 n1} ==> r4c4#1
hidden-single-in-a-row ==> r4c8=1
naked-pairs-in-a-row: r5{c6 c8}{n5 n8} ==> r5c9#8, r5c4#5, r5c3#5
finned-x-wing-in-rows: n5{r4 r2}{c2 c4} ==> r3c4#5
stte

15.6 How to select the most useful patterns

After running all the Imp630 rules + Tridagon on a small part of mith's large collection of 158,276 T&E(3) min-expand puzzles, two interesting results appeared:

- a lot of OR_k-relations are found, but most of them have large numbers of guardians; this has led me to restrict the OR_k-relations asserted by the rules to those that have no more than 8 guardians (note that there's a parameter *?*max-guardians**, with default value 8, that can be changed in the SudoRules configuration file);

- some patterns appear much more often than others. Indeed, in the first 1000 puzzles, I've seen only a few patterns lead to effective eliminations. Precisely which patterns probably depends in small part on their *a priori* relative priorities.

I've therefore started a systematic study of the added resolution power of the 630 (minus 38) impossible patterns (Imp630) with respect to the tridagon pattern. The first method was to compare the level Ln reached by the resolution paths in the following two selections of rules:

- SFin + Wn + OR5Wn + Trid (→ level called Lx below),

– SFin + Wn + OR5Wn + Trid + Imp630 (\rightarrow level called Ly below).

In both cases, I've limited n (the max length allowed for chains of any type) to 8, in order to keep computation times in reasonable bounds. If a puzzle is not solved, its level is 99. Of course, Lx is always larger than Ly (except possibly in very rare cases of non-confluence, not encountered in the list studied).

When this was done, I checked where the two ratings differ. I got something like:

70	99 > 3	102	99 > 3	116	99 > 3
71	99 > 4	103	99 > 5	117	99 > 3
75	5 > 3	104	99 > 3	118	99 > 3
76	99 > 8	105	99 > 6	119	99 > 3
77	5 > 3	106	99 > 6	120	99 > 3
88	99 > 6	107	99 > 3	121	99 > 3
94	99 > 3	108	99 > 3	122	99 > 3
95	99 > 5	109	99 > 3	123	99 > 3
96	99 > 3	110	99 > 3	124	99 > 5
97	99 > 3	111	99 > 5	125	99 > 3
98	99 > 3	112	99 > 3	126	99 > 3
99	99 > 6	113	99 > 5	127	99 > 3
100	99 > 3	114	99 > 3	133	99 > 4
101	99 > 3	115	99 > 3	146	99 > 3

where the number on the left side is the position in the list and the $Lx > Ly$ are the two ratings.

The cases potentially most interesting are those where $Lx = 99$ and Ly is as small as possible. They are cases where the Imp630 rules are the most effective.

It's interesting to note that, in the first 50,000 puzzles, only 13,252 (26.5 %) have different Lx and Ly levels. It means that the 630 patterns are globally useful, but not impressively much. Among these 13,252 puzzles, 7,510 (15.02% of the total) become solvable and 5,742 only get a smaller rating. This is for the mechanised part. It reduces 50,000 puzzles to 13,252. It could reduce it even more if I kept only the " $L99 > Ly$ " ones. As for the rest, i.e. finding which patterns are effective in a puzzle, it was very time consuming in this approach to do it all by hand.

I therefore switched to a different method. In the same list of 50,000 puzzles, for each puzzle, I recorded a list of "useful" patterns, i.e. of those that led to at least one elimination for this puzzle; I then joined all these small lists into a big one. This gives the number of puzzles in which each "useful" pattern is used. (I also tried the same thing restricted to puzzles that got solved, but the relative frequency results are not significantly different, so I'll stick to the previous definition of "useful"). Notice that in any puzzle, there are many more patterns detected than patterns "useful" for it: many of the OR_k -relations asserted (and printed) are not used by any OR_k -chain.

15.7 Four levels of “usefulness” and how meaningful they are

While applying the above defined method and after seeing the first results, I found it very natural to introduce an increasing series of four small subsets of patterns, each defined by different ranges of “usefulness”. These subsets will appear as possible selections of Imp630 rules in the SudoRules configuration file, via global variables `?*Imp630-Select1*`, `?*Imp630-Select2*`, `?*Imp630-Select3*` and `?*Imp630-Select4*`, in decreasing order of priorities assigned to their rules (see section 15.13 for details).

One may first ask why at all define small lists of patterns.

There’s a first reason based on what manual solvers can learn. A manual solver will not be able to remember long lists of patterns, let alone to find them in a real puzzle (with all the isomorphisms involved). The approach taken here (an increasing sequence of small subsets and comparison with tridagon, an easy pattern supposed to be already mastered by the user) allows progressive learning.

There’s also a technical reason: in some cases, loading all the Imp630 rules and allowing a large value for `?*max-guardians*` (say 8) entails lots of useless OR_k -relations being asserted. Combine this with allowing long OR_k -chains and you can have memory overflows if you have little RAM.

And there’s a readability reason: when lots of useless OR_k -relations appear in a resolution path, the possibility of selecting smaller subsets of patterns or even individual patterns provides an easy way of getting only the useful ones. To do this, at the end of resolution, ask the value of global variable `?*ORk-relations-used*` and restart the puzzle after selecting only the corresponding rules; this will give a much more readable resolution path.

Now, considering the way the above “useful” patterns were obtained, one may also ask how meaningful the four levels of usefulness are. Besides recalling that they are based only on the known T&E(3) puzzles, the only answer I can give is, when you look at the lists of patterns and the numbers of puzzles in which they were “useful”, the thresholds between the four levels seem to come naturally.

Remark 1: the subsets below are a small part of the complete list (the largest has only 28 patterns among 630). They don’t include patterns that appear only rarely.

Remark 2: from the subsets below and from an analysis of their patterns, it appears (see section 15.12) that a smaller number of cells missing wrt the tridagon pattern is not a major criterion for being more “useful”.

Remark 3: the subsets below were established based only on the first 50,000 puzzles in the 158,276 collection. See section 15.11 for an update of these tables based on the whole collection and for related comments.

Trid = 49089

Imp630-Select1 (total 27830):

EL13c290 = 10863
 EL14c30 = 6746
 EL14c159 = 4241
 EL14c13 = 3243
 EL14c1 = 2737

Imp630-Select2 (total +7643):

EL13c30 = 1409
 EL10c28 = 1375
 EL13c179 = 1295
 EL13c176 = 1159
 EL13c234 = 925
 EL13c171 = 742
 EL10c6 = 738

Imp630-Select3 (total +2986):

EL13c259 = 577
 EL10c8 = 509
 EL13c172 = 413
 EL13c187 = 378
 EL10c4 = 378
 EL13c175 = 371
 EL14c19 = 360

Imp630-Select4 (total +1282):

EL14c93 = 273
 EL15c97 = 234
 EL14c154 = 160
 EL10c10 = 157
 EL13c170 = 155
 EL13c168 = 153
 EL13c19 = 150

15.8 A very rare example

The example in section 15.5 required several impossible patterns and medium-sized OR_k -chains (of lengths ≤ 5). But it used only impossible patterns from the first three lists of the most frequent ones.

The question raised in this section is: can using more impossible patterns lead to a simpler solution? Puzzle # 20,119 of the same list of 158,276 T&E(3) min-expands has a solution in Trid + W4 and it also has a solution using only OR_k -chains of lengths ≤ 2 , in $S3 + W2 + (Trid + EL10c28 + EL10c10 + EL13c263) - OR3 - W2$. Note however that one of these patterns (EL10c10) is only in the lower Select4 list and another one (EL13c263) is not in any of the four lists. This puzzle is therefore a quite exceptional case. Indeed, pattern EL13c263 appeared to be “useful” in only 15 puzzles of the first 50,000 above-mentioned ones.

What follows is the full SudoRules output with all the Imp630 patterns activated. It is also noticeable that only the necessary ones appear in the resolution path (usually, many useless patterns appear in the resolution paths).

```

+-----+-----+-----+
! . 2 . ! . 5 6 ! 7 . . !
! . . . ! 1 8 . ! 2 . 6 !
! . . . ! 7 . 2 ! . . 5 !
+-----+-----+-----+
! 2 . 1 ! . . . ! . 6 . !
! 5 . 6 ! . . 7 ! 8 . 2 !
! . . . ! . . . ! . 5 . !
+-----+-----+-----+

```



```

      ! 3 . 4 ! . . . ! . . 1 !
      ! . . 2 ! . . . ! . . 8 !
      ! . 8 . ! . 7 1 ! . . . !
      +-----+-----+
.2..567.....18.2.6...7.2..52.1....6.5.6..78.2.....5.3.4.....1..2.....8.8..71...;4208
;153605      SER = 10.9

```

Resolution state after Singles and whips[1]:

```

+-----+-----+-----+-----+
! 1489   2       389   ! 349   5       6       ! 7       13489  349   !
! 479    34579  3579   ! 1      8       349    ! 2       349    6       !
! 14689  13469  389    ! 7      349    2       ! 1349   13489  5       !
+-----+-----+-----+-----+
! 2       3479   1      ! 34589  349   34589  ! 349    6       3479   !
! 5       349    6      ! 349    1349  7       ! 8       1349   2       !
! 4789    3479   3789   ! 23469  123469 349   ! 1349   5       3479   !
+-----+-----+-----+-----+
! 3       5679   4      ! 25689  269   589   ! 569    279    1       !
! 1679    15679  2      ! 34569  3469  3459  ! 34569  3479   8       !
! 69      8      59     ! 234569 7      1      ! 34569  2349   349    !
+-----+-----+-----+-----+

```

207 candidates

```

hidden-pairs-in-a-row: r6{n2 n6}{c4 c5} ==> r6c5≠9, r6c5≠4, r6c5≠3, r6c5≠1, r6c4≠9,
r6c4≠4, r6c4≠3
singles ==> r5c5=1, r6c7=1
hidden-pairs-in-a-block: b3{n1 n8}{r1c8 r3c8} ==> r3c8≠9, r3c8≠4, r3c8≠3, r1c8≠9,
r1c8≠4, r1c8≠3
hidden-pairs-in-a-row: r4{n5 n8}{c4 c6} ==> r4c6≠9, r4c6≠4, r4c6≠3, r4c4≠9, r4c4≠4,
r4c4≠3
tridagon for digits 3, 4 and 9 in blocks:
  b6, with cells (marked #): r6c9 (target cell, marked @), r5c8, r4c7
  b5, with cells (marked #): r6c6, r5c4, r4c5
  b3, with cells (marked #): r1c9, r2c8, r3c7
  b2, with cells (marked #): r1c4, r2c6, r3c5
==> r6c9≠3,4,9

```

```

+-----+-----+-----+-----+
! 1489   2       389   ! 349#   5       6       ! 7       18      349#   !
! 479    34579  3579   ! 1      8       349#    ! 2       349#    6       !
! 14689  13469  389    ! 7      349#    2       ! 349#    18      5       !
+-----+-----+-----+-----+
! 2       3479   1      ! 58     349#   58     ! 349#    6       3479   !
! 5       349    6      ! 349#    1      7      ! 8       349#    2       !
! 4789    3479   3789   ! 26     26     349#    ! 1       5       3479#@ !
+-----+-----+-----+-----+
! 3       5679   4      ! 25689  269   589   ! 569    279    1       !
! 1679    15679  2      ! 34569  3469  3459  ! 34569  3479   8       !
! 69      8      59     ! 234569 7      1      ! 34569  2349   349    !
+-----+-----+-----+-----+

```

```
singles ==> r6c9=7, r4c2=7, r8c1=7, r2c3=7, r2c2=5, r9c3=5, r8c2=1, r7c8=7, r9c8=2
```


EL13c263s-OR2-relation for digits: 3, 4 and 9

in cells (marked #): (r8c8 r9c4 r9c9 r9c7 r1c4 r2c6 r2c8 r5c4 r5c8 r6c6 r4c5 r4c9 r4c7)

with 2 guardians (in cells marked @) : n6r9c4 n6r9c7

+-----+-----+-----+									
! 1489	2	389	! 349#	5	6	! 7	18	349	!
! 49	5	7	! 1	8	349#	! 2	349#	6	!
! 14689	3469	389	! 7	349	2	! 349	18	5	!
+-----+-----+-----+									
! 2	7	1	! 58	349#	58	! 349#	6	349#	!
! 5	349	6	! 349#	1	7	! 8	349#	2	!
! 489	349	389	! 26	26	349#	! 1	5	7	!
+-----+-----+-----+									
! 3	69	4	! 25689	269	589	! 569	7	1	!
! 7	1	2	! 34569	3469	3459	! 34569	349#	8	!
! 69	8	5	! 3469#@	7	1	! 3469#@	2	349#	!
+-----+-----+-----+									

EL13c263s-OR2-whip[1]: OR2{{n6r9c7 n6r9c4 | .}} ==> r9c1#6

singles ==> r9c1=9, r2c1=4, r6c1=8, r1c1=1, r1c8=8, r3c8=1, r3c1=6, r7c2=6, r3c3=8

finned-x-wing-in-columns: n4{c8 c6}{r8 r5} ==> r5c4#4

t-whip[2]: c8n4{r8 r5} - r4n4{c9 .} ==> r8c5#4

biv-chain[2]: c5n4{r4 r3} - b3n4{r3c7 r1c9} ==> r4c9#4

x-wing-in-rows: n4{r3 r4}{c5 c7} ==> r9c7#4, r8c7#4

x-wing-in-rows: n4{r1 r9}{c4 c9} ==> r8c4#4

EL10c28s-OR2-whip[2]: OR2{{n6r8c5 | n5r8c6}} - b8n4{r8c6 .} ==> r9c4#6

hidden-single-in-a-row ==> r9c7=6

+-----+-----+-----+									
! 1	2	39	! 349	5	6	! 7	8	349	!
! 4	5	7	! 1	8	39	! 2	39	6	!
! 6	39	8	! 7	349	2	! 349	1	5	!
+-----+-----+-----+									
! 2	7	1	! 58	349	58	! 349	6	39	!
! 5	349	6	! 39	1	7	! 8	349	2	!
! 8	349	39	! 26	26	349	! 1	5	7	!
+-----+-----+-----+									
! 3	6	4	! 2589	29	589	! 59	7	1	!
! 7	1	2	! 3569	369	3459	! 359	349	8	!
! 9	8	5	! 34	7	1	! 6	2	34	!
+-----+-----+-----+									

At least one candidate **of** a previous EL10c10s-OR3-relation between candidates n6r8c5 n5r8c7 n6r8c7 has just been eliminated.

There remains an EL10c10s-OR2-relation between candidates: n6r8c5 n5r8c7

naked-triplets-in-a-column: c4{r1 r5 r9}{n4 n9 n3} ==> r8c4#9, r8c4#3, r7c4#9

finned-x-wing-in-columns: n9{c4 c9}{r1 r5} ==> r5c8#9

whip[1]: b6n9{r4c9 .} ==> r4c5#9

finned-x-wing-in-columns: n9{c4 c3}{r1 r5} ==> r5c2#9

hidden-single-in-a-row ==> r5c4=9

```
finned-x-wing-in-columns: n9{c8 c6}{r2 r8} ==> r8c5≠9
EL10c28s-OR2-whip[2]: OR2{{n5r8c6 | n6r8c5}} - r8c4{n6 .} ==> r8c7≠5
hidden-single-in-a-block ==> r7c7=5
```

!	1	2	39	!	34	5	6	!	7	8	349	!
!	4	5	7	!	1	8	39	!	2	39	6	!
!	6	39	8	!	7	349	2	!	349	1	5	!
!	2	7	1	!	58	34	58	!	349	6	39	!
!	5	34	6	!	9	1	7	!	8	34	2	!
!	8	349	39	!	26	26	34	!	1	5	7	!
!	3	6	4	!	28	29	89	!	5	7	1	!
!	7	1	2	!	56	36	3459	!	39	349	8	!
!	9	8	5	!	34	7	1	!	6	2	34	!

At least one candidate of a previous EL10c10s-OR2-relation between candidates n6r8c5 n5r8c7 has just been eliminated.
There remains an EL10c10s-OR1-relation between candidates: n6r8c5

```
EL10c10s-ORk-relation with only one candidate => r8c5=6
stte
```

A question that naturally arises for such a puzzle is: is there any real benefit in using all those impossible patterns, in particular the very rarely “useful” ones? In the present case, the most debatable pattern (EL13c263) is not necessary: there’s a solution in S3 + W3 + (Trid+EL10c28+EL10c10)-OR3-W3. Even pattern EL10c10 (in Select4) is not necessary: there’s a solution in S3 + W3 + (Trid+EL10c28)-OR2-W3. As already stated, there’s also a solution in Trid+W4.

To me personally, the answer is clear: the benefit of using other “useful” impossible patterns (especially the very rare EL13c263) is almost null in this case. Why then did I care to present this puzzle? Because it illustrates my previous hint that only few “useful” patterns are really needed in practice, even if they do produce eliminations. Quantifying this claim is logically the next thing to do and it will be investigated in section 15.10.

15.9 A rare example with the five patterns of Imp630-Select1

In the following puzzle, after a few trivial Pairs, the five patterns in Imp630-Select1 are present (in addition to Tridagon). Perhaps, *the most interesting point in this puzzle is to observe how many cells each of the five patterns share with the only tridagon present in the grid*. In order to make this easier, the tridagon cells will appear in bold in the five patterns below.

!	.	.	.	!	.	.	6	!	.	.	.	!
!	4	.	7	!	1	.	9	!	.	.	.	!
!	6	.	9	!	7	3	.	!	.	1	.	!
!	2	.	.	!	9	.	1	!	.	.	.	!
!	5	.	8	!	.	.	3	!	.	.	.	!
!	7	.	.	!	.	.	.	!	3	4	.	!
!	.	7	.	!	6	.	.	!	1	9	.	!
!	.	.	.	!	.	.	7	!	6	.	3	!
!	.	6	.	!	3	.	.	!	.	7	4	!

.....6...4.71.9...6.973...1.2...9.1...5.8..3...7.....34..7.6..19.....76.3.6.3...74;1264
7;283071
SER = 10.4

Resolution state after Singles and whips[1]:

!	138	12358	1235	!	2458	2458	6	!	245789	2358	25789	!
!	4	2358	7	!	1	258	9	!	258	23568	2568	!
!	6	258	9	!	7	3	2458	!	2458	1	258	!
!	2	34	346	!	9	45678	1	!	578	568	5678	!
!	5	149	8	!	24	2467	3	!	279	26	12679	!
!	7	19	16	!	258	2568	258	!	3	4	125689	!
!	38	7	2345	!	6	2458	2458	!	1	9	258	!
!	189	12458	1245	!	2458	124589	7	!	6	258	3	!
!	189	6	125	!	3	12589	258	!	258	7	4	!

186 candidates.

hidden-pairs-in-a-column: c5{n1 n9}{r8 r9} ==> r9c5≠8, r9c5≠5, r9c5≠2, r8c5≠8, r8c5≠5, r8c5≠4, r8c5≠2
hidden-pairs-in-a-row: r1{n7 n9}{c7 c9} ==> r1c9≠8, r1c9≠5, r1c9≠2, r1c7≠8, r1c7≠5, r1c7≠4, r1c7≠2
singles ==> r3c7=4, r7c6=4

Here are now the impossible patterns that will be used.

Trid-OR2-relation for digits 2, 5 and 8 in blocks:

- b2, with cells (marked #): r1c4, r2c5, r3c6
- b3, with cells (marked #): r1c8, r2c7, r3c9
- b8, with cells (marked #): r8c4, r7c5, r9c6
- b9, with cells (marked #): r8c8, r7c9, r9c7

with 2 guardians (in cells marked @): n4r1c4 n3r1c8

!	138	12358	1235	!	2458#@	2458	6	!	79	2358#@	79	!
!	4	2358	7	!	1	258#	9	!	258#	23568	2568	!
!	6	258	9	!	7	3	258#	!	4	1	258#	!

EL14c159-OR6-relation for digits: 2, 5 and 8

in cells (marked #): (r7c9 r7c5 r9c7 r9c6 r8c2 r8c8 r8c4 r2c9 r2c5 r1c2 r1c4 r3c2 r3c9 r3c6)

with 6 guardians (in cells marked @) : n1r8c2 n4r8c2 n6r2c9 n1r1c2 n3r1c2 n4r1c4

!	138	12358#@	1235	!	2458#@	2458	6	!	79	2358	79	!
!	4	2358	7	!	1	258#	9	!	258	23568	2568#@	!
!	6	258#	9	!	7	3	258#	!	4	1	258#	!
!	2	34	346	!	9	45678	1	!	578	568	5678	!
!	5	149	8	!	24	2467	3	!	279	26	12679	!
!	7	19	16	!	258	2568	258	!	3	4	125689	!
!	38	7	235	!	6	258#	4	!	1	9	258#	!
!	189	12458#@	1245	!	258#	19	7	!	6	258#	3	!
!	189	6	125	!	3	19	258#	!	258#	7	4	!

;;; This one will not be used:

EL14c13-OR4-relation for digits: 2, 5 and 8

in cells (marked #): (r1c4 r2c7 r2c9 r2c5 r3c2 r3c9 r3c6 r7c9 r7c5 r9c7 r9c6 r8c2 r8c8 r8c4)

with 4 guardians (in cells marked @) : n4r1c4 n6r2c9 n1r8c2 n4r8c2

!	138	12358	1235	!	2458#@	2458	6	!	79	2358	79	!
!	4	2358	7	!	1	258#	9	!	258#	23568	2568#@	!
!	6	258#	9	!	7	3	258#	!	4	1	258#	!
!	2	34	346	!	9	45678	1	!	578	568	5678	!
!	5	149	8	!	24	2467	3	!	279	26	12679	!
!	7	19	16	!	258	2568	258	!	3	4	125689	!
!	38	7	235	!	6	258#	4	!	1	9	258#	!
!	189	12458#@	1245	!	258#	19	7	!	6	258#	3	!
!	189	6	125	!	3	19	258#	!	258#	7	4	!

EL14c1s-OR4-relation for digits: 2, 5 and 8

in cells (marked #): (r6c9 r6c6 r6c4 r1c4 r3c9 r3c6 r2c7 r2c5 r7c9 r7c5 r9c7 r9c6 r8c8 r8c4)

with 4 guardians (in cells marked @) : n1r6c9 n6r6c9 n9r6c9 n4r1c4

!	138	12358	1235	!	2458#@	2458	6	!	79	2358	79	!
!	4	2358	7	!	1	258#	9	!	258#	23568	2568	!
!	6	258	9	!	7	3	258#	!	4	1	258#	!
!	2	34	346	!	9	45678	1	!	578	568	5678	!
!	5	149	8	!	24	2467	3	!	279	26	12679	!
!	7	19	16	!	258#	2568	258#	!	3	4	125689#@	!

Real resolution starts here:

!	138	258	1235	!	2458	2458	6	!	79	2358	79	!
!	4	2358	7	!	1	258	9	!	258	23568	2568	!
!	6	258	9	!	7	3	258	!	4	1	258	!
!	2	34	346	!	9	467	1	!	578	568	5678	!
!	5	149	8	!	24	467	3	!	279	26	12679	!
!	7	19	16	!	258	2568	258	!	3	4	129	!

!	38	7	235	!	6	258	4	!	1	9	258	!
!	189	12458	1245	!	258	19	7	!	6	258	3	!
!	189	6	125	!	3	19	258	!	258	7	4	!

At least one candidate of a previous EL14c159-OR5-relation between candidates n1r8c2 n4r8c2 n6r2c9 n1r1c2 n4r1c4 has just been eliminated.

There remains an EL14c159-OR4-relation between candidates: n1r8c2 n4r8c2 n6r2c9 n4r1c4

t-whip[5]: r5c4{n4 n2} - r6n2{c6 c9} - r6n9{c9 c2} - r6n1{c2 c3} - r5c2{n1 .} ==>
r5c5≠4

Trid-OR2-whip[4]: r4c2{n4 n3} - r2n3{c2 c8} - OR2{{n3r1c8 | n4r1c4}} - r5n4{c4 .} ==>
r4c3≠4

hidden-single-in-a-column ==> r8c3=4

As different impossible patterns generally share many cells and guardians, it should not be surprising that some eliminations delete guardians for several of them and that several OR_k-splitting rules apply at the same time:

!	138	258	1235	!	2458	2458	6	!	79	2358	79	!
!	4	2358	7	!	1	258	9	!	258	23568	2568	!
!	6	258	9	!	7	3	258	!	4	1	258	!
!	2	34	36	!	9	467	1	!	578	568	5678	!
!	5	149	8	!	24	67	3	!	279	26	12679	!
!	7	19	16	!	258	2568	258	!	3	4	129	!
!	38	7	235	!	6	258	4	!	1	9	258	!
!	189	1258	4	!	258	19	7	!	6	258	3	!
!	189	6	125	!	3	19	258	!	258	7	4	!

At least one candidate of a previous EL13c290-OR3-relation between candidates n3r1c8 n1r8c2 n4r8c2 has just been eliminated.

There remains an EL13c290-OR2-relation between candidates: n3r1c8 n1r8c2

At least one candidate of a previous EL13c290-OR3-relation between candidates n3r2c2 n1r8c2 n4r8c2 has just been eliminated.

There remains an EL13c290-OR2-relation between candidates: n3r2c2 n1r8c2

At least one candidate of a previous EL14c13-OR4-relation between candidates n4r1c4 n6r2c9 n1r8c2 n4r8c2 has just been eliminated.

There remains an EL14c13-OR3-relation between candidates: n4r1c4 n6r2c9 n1r8c2

At least one candidate of a previous EL14c159-OR4-relation between candidates n1r8c2 n4r8c2 n6r2c9 n4r1c4 has just been eliminated.

There remains an EL14c159-OR3-relation between candidates: n1r8c2 n6r2c9 n4r1c4

At least one candidate of a previous EL14c30-OR5-relation between candidates n4r1c4 n3r2c8 n6r2c8 n1r8c2 n4r8c2 has just been eliminated.

There remains an EL14c30-OR4-relation between candidates: n4r1c4 n3r2c8 n6r2c8 n1r8c2

```

EL13c290-OR2-whip[2]: OR2{{n3r2c2 | n1r8c2}} - c1n1{r8 .} ==> r1c1≠3
hidden-single-in-a-column ==> r7c1=3
EL14c159-OR3-whip[3]: r5n1{c9 c2} - OR3{{n1r8c2 n6r2c9 | n4r1c4}} - r5n4{c4 .} ==>
r5c9≠6
Trid-OR2-whip[4]: OR2{{n3r1c8 | n4r1c4}} - r5c4{n4 n2} - r8n2{c4 c2} - b1n2{r1c2 .}
==> r1c8≠2
whip[5]: c2n3{r2 r4} - r4n4{c2 c5} - r5c4{n4 n2} - b6n2{r5c7 r6c9} - b3n2{r2c9 .} ==>
r2c2≠2
Trid-OR2-ctr-whip[5]: r7n8{c9 c5} - b2n8{r1c5 r1c4} - b1n8{r1c1 r2c2} - b1n3{r2c2
r1c3} - OR2{{n3r1c8 n4r1c4 | .}} ==> r3c9≠8
Trid-OR2-whip[4]: OR2{{n3r1c8 | n4r1c4}} - r5c4{n4 n2} - b6n2{r5c7 r6c9} - r3c9{n2 .}
==> r1c8≠5
biv-chain[4]: r1c8{n8 n3} - b1n3{r1c3 r2c2} - r4c2{n3 n4} - c5n4{r4 r1} ==> r1c5≠8
EL14c159-OR3-whip[5]: r5c8{n6 n2} - r5c4{n2 n4} - OR3{{n4r1c4 n6r2c9 | n1r8c2}} -
r5c2{n1 n9} - r6c2{n9 .} ==> r4c9≠6
hidden-single-in-a-column ==> r2c9=6

```

+-----+-----+-----+											
! 18	258	1235	! 2458	245	6	! 79	38	79	!		
! 4	358	7	! 1	258	9	! 258	2358	6	!		
! 6	258	9	! 7	3	258	! 4	1	25	!		
+-----+-----+-----+											
! 2	34	36	! 9	467	1	! 578	568	578	!		
! 5	149	8	! 24	67	3	! 279	26	1279	!		
! 7	19	16	! 258	2568	258	! 3	4	129	!		
+-----+-----+-----+											
! 3	7	25	! 6	258	4	! 1	9	258	!		
! 189	1258	4	! 258	19	7	! 6	258	3	!		
! 189	6	125	! 3	19	258	! 258	7	4	!		
+-----+-----+-----+											

At least one candidate of a previous EL14c30-OR4-relation between candidates n4r1c4 n3r2c8 n6r2c8 n1r8c2 has just been eliminated.

There remains an EL14c30-OR3-relation between candidates: n4r1c4 n3r2c8 n1r8c2

```

EL14c30-OR3-whip[4]: r5n4{c2 c4} - OR3{{n4r1c4 n1r8c2 | n3r2c8}} - c2n3{r2 r4} -
r4n4{c2 .} ==> r5c2≠1
hidden-single-in-a-row ==> r5c9=1
whip[4]: b1n2{r1c3 r3c2} - r8n2{c2 c8} - r5n2{c8 c7} - r2n2{c7 .} ==> r1c4≠2
EL14c30-OR3-whip[5]: r4c2{n3 n4} - c5n4{r4 r1} - OR3{{n4r1c4 n3r2c8 | n1r8c2}} -
r6c2{n1 n9} - r5c2{n9 .} ==> r2c2≠3
Stte

```

Notice that many OR_k -whips have been used, but no chain has length greater than five.

15.10 Compared resolution power of the Select1 and Select2 sets of rules

The results in section 15.7 allowed to select four different subsets of impossible patterns, based on some measure of their “usefulness” in eliminating candidates. But, generally speaking, the elimination of one or several candidate(s) has unpredictable

consequences. As a complement to the above results, the following table gives the proportions of puzzles solved in $S_{Fin} + W_n + P\text{-OR}5W_n$ for various values to P and n . Because OR_k -relations are detected only after S_3 , the percentages are 0 for $n=1$ and $n=2$.

The table below clearly shows that:

- for any of the four P 's, increasing n brings diminishing returns – which we already knew from previous tables in the $P = \text{Trid}$ case;
- going from Trid to Select1 allows to solve significantly more puzzles, be it globally or at any length ≤ 6 ;
- going from Select1 to Select2 has a much smaller impact;
- going from Select2 to all of Imp630 doesn't bring much;
- as a result, doing intermediate computations for Select3 and Select4 would be of limited interest.

P	n	1	2	3	4	5	6	7	8	>8
Trid		0	0	32.54	15.92	13.29	7.89	4.55	4.17	21.65
Select1		0	0	38.29	20.45	15.69	8.69	4.68	3.35	8.86
Select2		0	0	39.46	21.07	15.55	8.38	4.37	3.12	8.05
Imp630		0	0	40.23	21.51	15.58	8.23	4.03	2.87	7.55

The associated table of cumulative distribution functions for the same values of P and n (expressed in percentages) also shows that increasing the maximal length (n) of chains by one is statistically much more useful than passing from Select1 to all of Imp630 or even to Select2 :

P	n	1	2	3	4	5	6	7	8	rest
Trid		0	0	32.54	48.46	61.75	69.64	74.19	78.35	21.65
Select1		0	0	38.29	58.74	74.43	83.12	87.8	91.15	8.85
Select2		0	0	39.46	60.53	76.08	84.46	88.83	91.95	8.05
Imp630		0	0	40.23	61.74	77.32	85.55	89.58	92.45	7.55

Note 1: there's no *a priori* reason why the Imp630 patterns wouldn't apply to puzzles in $T\&E(2)$. As of this writing, which of them would be "useful" and how much "useful" they would be in $T\&E(2)$ remains a totally open question.

Note 2: all the results in this section are about all the *known* puzzles in $T\&E(3)$ at the time of this writing. Because the way these puzzles were obtained is strongly biased, there's no guarantee that they can be extended to all the puzzles in $T\&E(3)$. In particular, all the *known* puzzles in $T\&E(3)$ have an anti-tridagon pattern and are

indeed in T&E(W2, 2), i.e. the low part of T&E(3); but we have no idea whether this is true of all the puzzles in T&E(3).

Note 3: moreover, all the percentages in this section were computed for the first 60,000 puzzles only. Because nothing guarantees any kind of randomness within the full 158,276 min-expand collection, the results may differ slightly if one uses the full collection instead. I think nevertheless that the above results are meaningful enough to help a CSP-Rules user make educated choices when selecting patterns from the Imp630 collection. They justify my global approach of how to deal with large sets of impossible patterns and my general guideline to first try with no additional pattern or with only a small set (Select1).

Update 1: The following updated tables are for the first 100,000 puzzles (keeping the same definitions of Select1 and Select2 as above); although they confirm the already noticed fact that the 40,000-60,000 slice is easier in the mean, they allow the same general conclusions as stated above for the first 60,000 puzzles.

p	n	1	2	3	4	5	6	7	8	rest
Trid		0	0	30.49	15.00	13.01	7.98	4.85	4.23	24.44
Select1		0	0	35.89	19.23	15.56	8.99	5.10	3.71	11.52
Select2		0	0	36.88	19.78	15.41	8.78	4.84	3.56	10.75
Imp630		0	0	37.59	20.11	15.45	8.64	4.59	3.36	10.26

p	n	1	2	3	4	5	6	7	8	rest
Trid		0	0	30.49	45.49	58.50	66.48	73.33	75.56	24.44
Select1		0	0	35.89	55.12	70.68	79.67	84.77	88.48	11.52
Select2		0	0	36.88	56.66	72.07	80.85	85.69	89.25	10.75
Imp630		0	0	37.59	57.70	73.15	81.79	86.38	89.74	10.26

Update 2: The following updated tables are for the full collection (still keeping the same definitions of Select1 and Select2); they allow the same general conclusions as stated above for the first 60,000 or 100,000 puzzles. The reason why I keep the previous partial results is, they show slight fluctuations in the results and they hint at what could be expected from larger lists of T&E(3) puzzles created according to the same general techniques.

p	n	1	2	3	4	5	6	7	8	rest
Trid		0	0	31.60	15.00	13.15	7.94	4.86	4.20	23.25
Select1		0	0	36.72	18.86	15.62	8.98	5.11	3.60	11.11
Select2		0	0	37.79	19.71	15.78	8.66	4.72	3.36	9.98
Imp630		0	0	38.47	20.06	15.79	8.51	4.51	3.20	9.46

P	n	1	2	3	4	5	6	7	8	rest
Trid		0	0	31.60	46.60	59.75	67.69	72.55	76.75	23.25
Select1		0	0	36.72	55.58	71.20	80.18	85.29	88.89	11.11
Select2		0	0	37.79	57.50	73.28	81.94	86.66	90.02	9.98
Imp630		0	0	37.79	58.54	74.32	82.83	87.34	90.54	9.46

15.11 Updated four levels of “usefulness” and how meaningful they are

One may now wonder whether the four levels of “usefulness” found in section 15.7 would have been significantly changed if we had used the full 158,276 min-expand collection to define them at the start.

The following table, based on the whole collection, mostly confirms the preliminary results obtained with the first 50,000 part, in particular the “natural existence” of four small groups of patterns. Select1 is particularly stable (though the last two patterns, EL14c13 and EL14c1, had to be permuted within it – but inner order is not that important). The other three groups needed more internal re-ordering. Moreover, patterns EL13c175 and EL13c187 had to be downgraded from Select3 to Select4. For consistency of the selection criteria, two more patterns had to be added to Select4 (EL13c136 and EL12c2), but we have seen that Select3 and Select4 are rarely useful in practice.

Trid = 152446

Total IMP630-EL<xxx>c<yyy> = 128584

Imp630-Select1 (total 86164, 67.01%):

EL13c290 = 29764
 EL14c30 = 22989
 EL14c159 = 14111
 EL14c1 = 10027
 EL14c13 = 9240

Imp630-Select2 (total +23789, +18.50%):

EL10c28 = 5486
 EL13c179 = 4834
 EL13c30 = 3200
 EL13c171 = 2768
 EL13c234 = 2598
 EL13c176 = 2475
 EL10c6 = 2428

Imp630-Select3 (total +7427, +5.78%):

EL13c259 = 2108
 EL10c8 = 1804
 EL13c172 = 1462
 EL14c19 = 1040
 EL10c4 = 1013

Imp630-Select4 (total +5309, +4.13%):

EL13c175 = 726
 EL13c136 = 656
 EL15c97 = 623
 EL13c187 = 581
 EL14c93 = 578
 EL12c2 = 448
 EL14c154 = 396
 EL13c19 = 389
 EL13c170 = 316
 EL13c168 = 307
 EL10c10 = 289

Note that SudoRules has been updated based on these final subsets. In particular, they are the subsets that now appear in the SudoRules configuration file.

The global answer to the question in the first paragraph is therefore no. Nothing would have turned out to be significantly different if the definitions of the four subsets of “useful” patterns had been based on the full 158,276 min-expand collection instead of on its first 50,000 puzzles.

As for the above claim that the inner ordering of each subset is not very important for our present purposes, it is justified because non-confluence happens only very rarely (see section 15.15). A different ordering of any of the four subsets can therefore not significantly change the above classification results.

The following results are also worth considering; they show the percentages of “useful” patterns covered by the 4 selected subsets (the “+” in the above tables are there to recall that the total numbers should be added to the previous table):
 Select1 = 67.01% Select2 = 85.51% Select3 = 91.29% Select4 = 95.42%.

It should now be recalled that the definition of a pattern being “useful” in a puzzle means that it allows some elimination in it; it doesn’t imply *a priori* that it makes the solution simpler. This concept was introduced as a preliminary step in the study of the 630 impossible patterns; it was necessary to distinguish a few patterns before we could start any classification results with rules that use them. The most meaningful results remain those given in the tables of section 15.10, showing that this “potential usefulness” doesn’t straightforwardly translate into “real usefulness” (in a sense that it would allow to lower the ratings). In practice, real usefulness can be restricted to Select2 or even to Select1 – to sum it up, from 630 patterns to 5 (or 12).

Finally, one may wonder whether there is any relation between being “useful” and requiring some depth of T&E to be proven contradictory. The answer is negative: among the 9 patterns other than tridagon (= EL12c38) that were found in section 14.7.4 to require either restricted T&E(3) or the full power of T&E(2) to be proven contradictory (i.e. EL13c171, EL13c180, EL13c181, EL15c56, EL15c66, EL15c97, EL16c5, EL16c6, EL16c9), only 2 appear (relatively low) in the four selected lists: EL13c171 at the middle of Select2 and EL15c97 in Select4.

15.12 The most useful patterns

The most useful patterns (according to the criterion defined in section 15.6) are shown below, in four “Select” groups, with their free cells marked with an “o”. Free cells are important when looking for impossible patterns.

For each pattern, I give two isomorphic forms: eleven’s original one, plus an isomorphic one that I manually tried to make look as close as possible to one of the three forms of tridagon recalled hereafter. Not surprisingly for mith’s list of 158,276

T&E(3) min-expands, most (but not all) of the most frequent impossible 3-digit patterns among eleven's 630 list look close to tridagon. When they appear in a puzzle, most of their X cells are shared with those of the tridagon.

Below, “-“ signs show the tridagon cells absent from the morph closest to the pattern and “Z” signs show the intruders (wrt the same morph). The three isomorphic forms of tridagon (= EL12c38) used as references for the X, Z and - markings, all symmetric with respect to the diagonal, are as follows:

<pre> +-----+-----+-----+ ! . . . ! . . X ! . . X ! ! . . . ! . X . ! . X . ! ! . . . ! X . . ! X . . ! +-----+-----+-----+ ! . . . ! X . . ! . . X ! ! . . . ! . X . ! . X . ! ! . . . ! . . X ! X . . ! +-----+-----+-----+ ! o o o ! . . . ! . . . ! ! o o o ! . . . ! . . . ! ! o o o ! . . . ! . . . ! +-----+-----+-----+ </pre>	<pre> +-----+-----+-----+ ! . . . ! . . X ! . . X ! ! . . . ! . X . ! . X . ! ! . . . ! X . . ! X . . ! +-----+-----+-----+ ! . . . ! . . X ! . . X ! ! . . . ! X . . ! . X . ! ! . . . ! . X . ! X . . ! +-----+-----+-----+ ! o o o ! . . . ! . . . ! ! o o o ! . . . ! . . . ! ! o o o ! . . . ! . . . ! +-----+-----+-----+ </pre>	<pre> +-----+-----+-----+ ! . . . ! . . X ! . . X ! ! . . . ! . X . ! . X . ! ! . . . ! X . . ! X . . ! +-----+-----+-----+ ! . . . ! . X . ! . . X ! ! . . . ! . . X ! . . X ! ! . . . ! X . . ! X . . ! +-----+-----+-----+ ! o o o ! . . . ! . . . ! ! o o o ! . . . ! . . . ! ! o o o ! . . . ! . . . ! +-----+-----+-----+ </pre>
--	--	--

15.7.1 Five patterns in ?*Imp630-Select1*

EL13c290: 2 cells missing, 3 added

<pre>X..X..X.X...X.X.X.....XX.....X..X..X.....X..... +-----+-----+-----+ ! . . . ! . . . ! . . X ! ! . . X ! . . X ! . X . ! ! . . X ! . X . ! X . . ! +-----+-----+-----+ ! . . . ! . . X ! X . . ! ! . . . ! . X . ! . X . ! ! . . X ! . . . ! . . X ! +-----+-----+-----+ ! . . . ! . . . ! . . . ! ! . . . ! . . . ! . . . ! ! . . . ! . . . ! . . . ! +-----+-----+-----+ </pre>	<pre> +-----+-----+-----+ ! . . . ! . . - ! . . X ! ! . . Z ! . X . ! . X . ! ! . . Z ! X . . ! X . . ! +-----+-----+-----+ ! . . Z ! . . - ! . . X ! ! . . . ! X . . ! . X . ! ! . . . ! . X . ! X . . ! +-----+-----+-----+ ! o o . ! . . o ! . . . ! ! o o . ! . . o ! . . . ! ! o o . ! . . o ! . . . ! +-----+-----+-----+ </pre>
---	--

EL14c30: 1 cell missing (will generally be a solved cell), 3 added

.....X.....XX.X...XX.X.....XX.....X...X...X.X...X.....	
+-----+-----+-----+	+-----+-----+-----+
! . . . ! . . . ! . . X !	! . . Z ! . . X ! . . X !
! . . . ! . X X ! . X . !	! . . . ! . X . ! . X . !
! . . X ! X . . ! X . . !	! . . . ! X . . ! X . . !
+-----+-----+-----+	+-----+-----+-----+
! . . . ! . . X ! X . . !	! . . . ! - . . ! . . X !
! . . . ! X . . ! . X . !	! . . . ! Z X . ! . X . !
! . . X ! . X . ! . . X !	! . . Z ! . . X ! X . . !
+-----+-----+-----+	+-----+-----+-----+
! o o . ! . . . ! . . . !	! o o . ! . . . ! . . . !
! o o . ! . . . ! . . . !	! o o . ! . . . ! . . . !
! o o . ! . . . ! . . . !	! o o . ! . . . ! . . . !
+-----+-----+-----+	+-----+-----+-----+

EL14c159: 2 cells missing, 4 added

.....X..X.....X.X...XX.X.....X..X..X...X...X..X.....	
+-----+-----+-----+	+-----+-----+-----+
! . . . ! . . X ! . . X !	! . . . ! . . X ! . . X !
! . . . ! . X . ! . X . !	! . . . ! . X . ! . X . !
! . . X ! X . . ! X . . !	! . . Z ! X . . ! X . . !
+-----+-----+-----+	+-----+-----+-----+
! . . . ! . . X ! . . X !	! . . . ! . . X ! . . X !
! . . X ! . . . ! X . . !	! . . Z ! - . Z ! . X . !
! . . X ! . . X ! . X . !	! . . Z ! - . ! X . . !
+-----+-----+-----+	+-----+-----+-----+
! o o . ! . . . ! . . . !	! o o . ! . . . ! . . . !
! o o . ! . . . ! . . . !	! o o . ! . . . ! . . . !
! o o . ! . . . ! . . . !	! o o . ! . . . ! . . . !
+-----+-----+-----+	+-----+-----+-----+

EL14c1: 1 cell missing (will generally be a solved cell), 3 added

.....X.....X.X..X.X.X.....XX.....X.X..X...XX.....X.....	
+-----+-----+-----+	+-----+-----+-----+
! . . . ! . . . ! . . X !	! . . Z ! . . X ! . . X !
! . . . ! . . X ! . . X !	! . . Z ! . . X ! . . X !
! . . X ! . X . ! X . . !	! . . . ! X . . ! X . . !
+-----+-----+-----+	+-----+-----+-----+
! . . . ! . . X ! X . . !	! . . ! . . - ! . . X !
! . . X ! . X . ! . X . !	! . . . ! X . . ! . X . !
! . . X ! X . . ! . . X !	! . . Z ! . X . ! X . . !
+-----+-----+-----+	+-----+-----+-----+
! o o . ! . . . ! . . . !	! o o . ! . . . ! . . . !
! o o . ! . . . ! . . . !	! o o . ! . . . ! . . . !
! o o . ! . . . ! . . . !	! o o . ! . . . ! . . . !
+-----+-----+-----+	+-----+-----+-----+

EL14c13: 1 cell missing (will generally be a solved cell), 3 added

.....X...XX.X...X..XX.....X.X.....X.X...XX...X.....	
+-----+-----+-----+	+-----+-----+-----+
! . . . ! . . . ! . . X !	! . . Z ! . . X ! . . X !
! . . . ! . . X X ! . . X !	! . . . ! . . X . ! . . X !
! . . X ! . . . X ! X . . !	! . . . ! X . . ! X . . !
+-----+-----+-----+	+-----+-----+-----+
! . . . ! . . X ! . . X !	! . . . ! . . - ! . . X !
! . . . ! . . X . ! X . . !	! . . . ! X Z . ! . . X !
! . . X ! X . . ! . . X !	! . . Z ! . . X . ! X . . !
+-----+-----+-----+	+-----+-----+-----+
! o o . ! . . . ! . . . !	! o o . ! . . . ! . . . !
! o o . ! . . . ! . . . !	! o o . ! . . . ! . . . !
! o o . ! . . . ! . . . !	! o o . ! . . . ! . . . !
+-----+-----+-----+	+-----+-----+-----+

*15.7.2 Seven additional patterns in ?*Imp630-Select2****EL10c28:** 6 cells missing, 4 added

.....X..X..X..X.X..X.....X.....X..X..X.....	
+-----+-----+-----+	+-----+-----+-----+
! . . . ! . . . ! . . . !	! . . Z ! . . - ! . . X !
! . . . ! . . X ! . . X !	! . . Z ! . . X . ! . . X !
! . . X ! . . X ! . . X !	! . . . ! - . . ! - . . !
+-----+-----+-----+	+-----+-----+-----+
! . . X ! . . . ! . . . !	! . . Z ! . . X ! . . X !
! . . X ! . . . ! . . . !	! . . . ! - Z . ! . . - !
! . X . ! . . X ! . . X !	! . . . ! . X . ! - . . !
+-----+-----+-----+	+-----+-----+-----+
! o . . ! o o . ! o . . !	! o . . ! o . o ! o . . !
! o . . ! o o . ! o . . !	! o . . ! o . o ! o . . !
! o . . ! o o . ! o . . !	! o . . ! o . o ! o . . !
+-----+-----+-----+	+-----+-----+-----+

EL13c179: 2 cells missing, 3 added

.....X..X..X..X.X..X.....XX.....X.....X..X..X.....	
+-----+-----+-----+	+-----+-----+-----+
! . . . ! . . . ! . . . !	! . . . ! . . X ! . . X !
! . . X ! . . X ! . . X !	! . . Z ! . . X . ! . . X !
! . . X ! . . X ! . . X !	! . . . ! X . . ! X . . !
+-----+-----+-----+	+-----+-----+-----+
! . . . ! . . X ! X . . !	! . . Z ! X . . ! . . X !
! . . . ! X . . ! . . X !	! . . Z ! . . X . ! . . X !
! . . X ! . . X ! . . X !	! . . . ! . . - ! . . - !
+-----+-----+-----+	+-----+-----+-----+
! o o . ! . . . ! . . . !	! o o . ! . . . ! . . . !
! o o . ! . . . ! . . . !	! o o . ! . . . ! . . . !
! o o . ! . . . ! . . . !	! o o . ! . . . ! . . . !
+-----+-----+-----+	+-----+-----+-----+

EL13c30: 3 cells missing, 4 added

.....X..X..X..X..X.....X..X..X..X..X..XX..X.....	
+-----+-----+-----+	+-----+-----+-----+
! . . . ! . . . ! . . . !	! . . . ! . . X ! . . X !
! . . . ! . . X ! . . X !	! . . Z ! . . X ! . . X !
! . . X ! . . X ! . . X !	! . . Z ! X . . ! X . . !
+-----+-----+-----+	+-----+-----+-----+
! . . . ! . . X ! . . X !	! . . . ! . . X ! . . X !
! . . X ! . . X ! . . X !	! . . Z ! - . Z ! . . X !
! . . X ! X . . ! X . . !	! . . . ! - . ! - . . !
+-----+-----+-----+	+-----+-----+-----+
! o o . ! . . . ! . . . !	! o o . ! . . . ! . . . !
! o o . ! . . . ! . . . !	! o o . ! . . . ! . . . !
! o o . ! . . . ! . . . !	! o o . ! . . . ! . . . !
+-----+-----+-----+	+-----+-----+-----+

EL13c171: 2 cells missing, 3 added

.....X..X..X..X..X.....X..X.....X..X..XX..X.....	
+-----+-----+-----+	+-----+-----+-----+
! . . . ! . . . ! . . . !	! . . . ! . . X ! . . X !
! . . X ! . . X ! . . X !	! . . . ! . . X ! . . X !
! . . X ! . . X ! . . X !	! . . Z ! X . . ! X . . !
+-----+-----+-----+	+-----+-----+-----+
! . . . ! . . X ! . . X !	! . . Z ! . . X ! . . X !
! . . . ! . . X ! . . X !	! . . Z ! . . X ! . . X !
! . . X ! X . . ! X . . !	! . . . ! - . . ! - . . !
+-----+-----+-----+	+-----+-----+-----+
! . . . ! . . . ! . . . !	! . . . ! . . . ! . . . !
! . . . ! . . . ! . . . !	! . . . ! . . . ! . . . !
! . . . ! . . . ! . . . !	! . . . ! . . . ! . . . !
+-----+-----+-----+	+-----+-----+-----+

EL13c234: 3 cells missing, 4 added

.....X.....X..X..X..X.....XX.....X..X..X..X..X.....	
+-----+-----+-----+	+-----+-----+-----+
! . . . ! . . . ! . . X !	! . . Z ! . . X ! . . X !
! . . . ! . . X ! . . X !	! . . Z ! . . X ! . . X !
! . . X ! . . . ! X . . !	! . . . ! - . Z ! X . . !
+-----+-----+-----+	+-----+-----+-----+
! . . . ! . . X ! X . . !	! . . . ! - . . ! . . X !
! . . X ! . . X ! . . X !	! . . . ! . . X ! . . X !
! . . X ! . . X ! . . X !	! . . Z ! - . . ! X . . !
+-----+-----+-----+	+-----+-----+-----+
! o o . ! o . . ! . . . !	! o o . ! o . . ! . . . !
! o o . ! o . . ! . . . !	! o o . ! o . . ! . . . !
! o o . ! o . . ! . . . !	! o o . ! o . . ! . . . !
+-----+-----+-----+	+-----+-----+-----+

EL13c176: 4 cells missing, 5 added

.....X..X..X..X.X..X.....X.X.....X..X..X..X.....	
+-----+-----+-----+	+-----+-----+-----+
! . . . ! . . . ! . . . !	! . . Z ! . . X ! . . X !
! . . X ! . . X ! . . X !	! . . . ! . - Z ! . . X !
! . . X ! . . X ! . . X !	! . . . ! X . . ! X . . !
+-----+-----+-----+	+-----+-----+-----+
! . . . ! . . X ! . . X !	! . . Z ! . - . Z ! . . X !
! . . . ! X . . ! X . . !	! . . Z ! . X . ! . . X !
! . . X ! . . X ! . . X !	! . . . ! . . - ! - . . !
+-----+-----+-----+	+-----+-----+-----+
! o o . ! . . . ! . . . !	! o o . ! . . . ! . . . !
! o o . ! . . . ! . . . !	! o o . ! . . . ! . . . !
! o o . ! . . . ! . . . !	! o o . ! . . . ! . . . !
+-----+-----+-----+	+-----+-----+-----+

EL10c6: 6 cells missing, 4 added

.....X..X..X.....X..X..X..X..X..X.....	
+-----+-----+-----+	+-----+-----+-----+
! . . . ! . . . ! . . . !	! . . Z ! . . X ! . . X !
! . . . ! . . . ! . . . !	! . . Z ! . X . ! . . X !
! . . X ! . . X ! . . X !	! . . . ! - . . ! - . Z !
+-----+-----+-----+	+-----+-----+-----+
! . . . ! . . . ! . . X !	! . . Z ! . . X ! . . X !
! . . X ! . . X ! . . X !	! . . . ! - . . ! - . . !
! . . X ! . . X ! . . X !	! . . . ! - . . ! - . . !
+-----+-----+-----+	+-----+-----+-----+
! o o . ! o . . ! o . . !	! o o . ! o . . ! o . . !
! o o . ! o . . ! o . . !	! o o . ! o . . ! o . . !
! o o . ! o . . ! o . . !	! o o . ! o . . ! o . . !
+-----+-----+-----+	+-----+-----+-----+

*15.7.3 Five additional patterns in ?*Imp630-Select3****EL13c259:** 3 cells missing, 4 added

.....X.....X.X..X.X.X.....X.....X.X..X..XX...X.....	
+-----+-----+-----+	+-----+-----+-----+
! . . . ! . . . ! . . X !	! . . . ! . . - ! . . X !
! . . . ! . . X ! . . X !	! . . . ! . X . ! . . X !
! . . X ! . . X ! . . X !	! . . Z ! X . . ! X . . !
+-----+-----+-----+	+-----+-----+-----+
! . . . ! . . X ! . . . !	! . . Z ! . . X ! . . X !
! . . X ! . . X ! . . X !	! . . Z ! X . . ! - Z !
! . . X ! X . . ! . . X !	! . . . ! . X . ! - . . !
+-----+-----+-----+	+-----+-----+-----+
! o o . ! . . . ! . . . !	! o o . ! . . . ! . . . !
! o o . ! . . . ! . . . !	! o o . ! . . . ! . . . !
! o o . ! . . . ! . . . !	! o o . ! . . . ! . . . !
+-----+-----+-----+	+-----+-----+-----+

EL10c8: 6 cells missing, 4 added

.....X..X..X.....X..X..X.X..X..XX.....	
+-----+-----+-----+	+-----+-----+-----+
! . . . ! . . . ! . . . !	! . . . ! . . - ! . . X !
! . . . ! . . . ! . . . !	! . . Z ! . . X . ! . X . !
! . . X ! . . X ! . . X !	! . . Z ! - Z . ! X . . !
+-----+-----+-----+	+-----+-----+-----+
! . . . ! . . . ! . . X !	! . . Z ! . . X . ! . . X !
! . . X ! . . X ! . . X . !	! . . . ! . . - ! . - . !
! . . X ! . . X ! X . . !	! . . . ! - . . ! - . . !
+-----+-----+-----+	+-----+-----+-----+
! . . . ! . . . ! . . . !	! . . . ! . . . ! . . . !
! . . . ! . . . ! . . . !	! . . . ! . . . ! . . . !
! . . . ! . . . ! . . . !	! . . . ! . . . ! . . . !
+-----+-----+-----+	+-----+-----+-----+

EL13c172: 4 cells missing, 5 added

.....X..X..X..X..X..X.....X..X.....X..X..X..X..X.....	
+-----+-----+-----+	+-----+-----+-----+
! . . . ! . . . ! . . . !	! . . Z ! . . Z - ! . . X !
! . . X ! . . X ! . . X !	! . . . ! . . X . ! . . X . !
! . . X ! . . X ! . . X !	! . . . ! X . . ! X . . !
+-----+-----+-----+	+-----+-----+-----+
! . . . ! . . X ! . . X . !	! . . Z ! . . Z - ! . . X !
! . . . ! . . X . ! X . . !	! . . Z ! X . . ! . . X . !
! . . X ! . . X ! . . X !	! . . . ! . . - . ! - . . !
+-----+-----+-----+	+-----+-----+-----+
! o o . ! o . . ! . . . !	! o o . ! . . o ! . . . !
! o o . ! o . . ! . . . !	! o o . ! . . o ! . . . !
! o o . ! o . . ! . . . !	! o o . ! . . o ! . . . !
+-----+-----+-----+	+-----+-----+-----+

EL14c19: 4 cells missing, 5 added

.....X.....XX..X..X..XX.....X..X.....X..X..X..X.....	
+-----+-----+-----+	+-----+-----+-----+
! . . . ! . . . ! . . X !	! . . . ! . . - ! . . X !
! . . . ! . . X X ! . . X . !	! . . Z Z ! . . - . ! . X . !
! . . X ! . . X ! X . . !	! . . Z ! - . Z ! X . . !
+-----+-----+-----+	+-----+-----+-----+
! . . X ! . . . ! . . X !	! . . . ! . . X ! . . X !
! . . X ! . . . ! X . . !	! . . Z ! X . . ! . . X . !
! X . . ! . . X ! . . X . !	! . . . ! . . X . ! X . . !
+-----+-----+-----+	+-----+-----+-----+
! . . . ! . . . ! . . . !	! . . . ! . . . ! . . . !
! . . . ! . . . ! . . . !	! . . . ! . . . ! . . . !
! . . . ! . . . ! . . . !	! . . . ! . . . ! . . . !
+-----+-----+-----+	+-----+-----+-----+

EL10c4: 6 cells missing, 4 added

.....X..X..X.....X.....XXX...XXX.....	
+-----+-----+-----+	+-----+-----+-----+
! . . . ! . . . ! . . . !	! . . . ! . . . - ! . . X !
! . . . ! . . . ! . . . !	! . . . ! . . X . ! Z X . !
! . . X ! . . X ! . . X !	! . . Z ! X . Z ! - . . !
+-----+-----+-----+	+-----+-----+-----+
! . . . ! . . . ! . . X !	! . . Z ! . X . ! . . X !
! . . . ! . . X ! X X . !	! . . . ! . . - ! . . - !
! . . X ! X X . ! . . . !	! . . . ! . . - ! . . - !
+-----+-----+-----+	+-----+-----+-----+
! o o . ! . . . ! . . . !	! o o . ! . . . ! . . . !
! o o . ! . . . ! . . . !	! o o . ! . . . ! . . . !
! o o . ! . . . ! . . . !	! o o . ! . . . ! . . . !
+-----+-----+-----+	+-----+-----+-----+

*15.7.6 Eleven additional patterns in ?*Imp630-Select4****EL13c175:** 4 cells missing, 5 added

.....X..X..X..X..X.....X..X.....X..X...XX...X.....	
+-----+-----+-----+	+-----+-----+-----+
! . . . ! . . . ! . . . !	! . . . ! . . X ! . . X !
! . . X ! . . X ! . . X !	! . . . ! . . X . ! . . X . !
! . . X ! . . X . ! . . X . !	! . . Z ! - . Z ! X . . !
+-----+-----+-----+	+-----+-----+-----+
! . . . ! . . X ! . . X . !	! . . Z ! X . . ! . . X !
! . . . ! . . X . ! X . . !	! . . Z ! . - Z ! . . X . !
! . . X ! X . . ! . . X . !	! . . . ! . . - ! . . - !
+-----+-----+-----+	+-----+-----+-----+
! o o . ! . . . ! . . . !	! o o . ! . . . ! . . . !
! o o . ! . . . ! . . . !	! o o . ! . . . ! . . . !
! o o . ! . . . ! . . . !	! o o . ! . . . ! . . . !
+-----+-----+-----+	+-----+-----+-----+

EL13c136: 3 cells missing, 4 added

.....X..XX..X..X..X.....XX.....X...X..XX..X.....	
+-----+-----+-----+	+-----+-----+-----+
! . . . ! . . . ! . . . !	! . . . ! Z . - ! . . X !
! . . . ! . . X ! . . X X !	! . . . ! . . X . ! . . X . !
! . . X ! . . X . ! X . . !	! . . Z ! X . . ! X . . !
+-----+-----+-----+	+-----+-----+-----+
! . . . ! . . X ! X . . !	! . . . ! . Z X ! . . X !
! . . . ! . . X . ! . . X !	! . . Z ! X . . ! . . X . !
! . . X ! X . . ! X . . !	! . . . ! . - . ! - . . !
+-----+-----+-----+	+-----+-----+-----+
! o o . ! . . . ! . . . !	! o o . ! . . . ! . . . !
! o o . ! . . . ! . . . !	! o o . ! . . . ! . . . !
! o o . ! . . . ! . . . !	! o o . ! . . . ! . . . !
+-----+-----+-----+	+-----+-----+-----+

EL15c97: 1 cell missing (probably solved), 4 added.

.....X..X..X..X..X..X.....X..X..XX..X..X..X.....															
+-----+-----+-----+				+-----+-----+-----+											
! . . . ! . . X ! . . X !				! . . . ! . . X ! . . X !											
! . . X ! . . . ! . X . !				! . . Z ! . - . ! . X . !											
! . X . ! . X . ! X . . !				! . Z . ! X . . ! X . . !											
+-----+-----+-----+				+-----+-----+-----+											
! . . . ! . X . ! . . X !				! . . . ! X . . ! . . X !											
! . . X ! . . X ! X . . !				! . Z . ! . X . ! . X . !											
! . X . ! X . . ! . X . !				! . . Z ! . . X ! X . . !											
+-----+-----+-----+				+-----+-----+-----+											
! o . . ! . . . ! . . . !				! o . . ! . . . ! . . . !											
! o . . ! . . . ! . . . !				! o . . ! . . . ! . . . !											
! o . . ! . . . ! . . . !				! o . . ! . . . ! . . . !											
+-----+-----+-----+				+-----+-----+-----+											

EL13c187: 3 cells missing, 4 added

.....X.....X..X..X..X.....X..X..X..X..XX..X.....															
+-----+-----+-----+				+-----+-----+-----+											
! . . . ! . . . ! . . X !				! . . . ! . . X ! . . X !											
! . . . ! . . . ! . . X !				! . . Z ! . X . ! . X . !											
! . . X ! . . X ! . X . !				! . . Z ! X . . ! X . . !											
+-----+-----+-----+				+-----+-----+-----+											
! . . . ! . . X ! . . X !				! . . . ! . - . ! . . X !											
! . . X ! . X . ! . X . !				! . . Z ! . . X ! . X . !											
! . . X ! X . . ! X . . !				! . . . ! - . . ! - . Z !											
+-----+-----+-----+				+-----+-----+-----+											
! o o . ! . . . ! . . . !				! o o . ! . . . ! . . . !											
! o o . ! . . . ! . . . !				! o o . ! . . . ! . . . !											
! o o . ! . . . ! . . . !				! o o . ! . . . ! . . . !											
+-----+-----+-----+				+-----+-----+-----+											

EL14c93: 2 cells missing, 4 added

.....X..X..X..X..X..X.....XX.....X..X..X..X.....X.....															
+-----+-----+-----+				+-----+-----+-----+											
! . . . ! . . . ! . . X !				! . . . ! . . - ! . . X !											
! . . X ! . . X ! . X . !				! . . Z ! . X . ! . X . !											
! . . X ! . X . ! X . . !				! . . Z ! X . . ! X . . !											
+-----+-----+-----+				+-----+-----+-----+											
! . . . ! . . X ! X . . !				! . . Z ! . . - ! . . X !											
! . . . ! X . X ! . X . !				! . . . ! X Z . ! . X . !											
! . . X ! . . . ! . . X !				! . . . ! . X . ! X . . !											
+-----+-----+-----+				+-----+-----+-----+											
! o o . ! . o . ! . . . !				! o o . ! . . o ! . . . !											
! o o . ! . o . ! . . . !				! o o . ! . . o ! . . . !											
! o o . ! . o . ! . . . !				! o o . ! . . o ! . . . !											
+-----+-----+-----+				+-----+-----+-----+											

EL12c2: 6 cells missing, 6 added

.....X..X..X.X...X.X...X.X...X..X.....	
+-----+-----+-----+	+-----+-----+-----+
! . . . ! . . . ! . . . !	! . . . ! . Z - ! . . X !
! . . . ! . . . ! . . X !	! . . Z ! . X . ! . X . !
! . . X ! . . X ! . X . !	! . . Z ! X . . ! - . Z !
+-----+-----+-----+	+-----+-----+-----+
! . . X ! . . X ! . . . !	! . Z . ! . X . ! . . X !
! . . X ! . X . ! . . X !	! . . Z ! . . - ! . - . !
! . X . ! . . X ! . . X !	! . . . ! - . . ! - . . !
+-----+-----+-----+	+-----+-----+-----+
! o . . ! o . . ! o . . !	! o . . ! . . o ! o . . !
! o . . ! o . . ! o . . !	! o . . ! . . o ! o . . !
! o . . ! o . . ! o . . !	! o . . ! . . o ! o . . !
+-----+-----+-----+	+-----+-----+-----+

EL14c154: 3 cells missing, 5 added

.....X..X...X..X...X.XX.....X..X...X...X..X...X.....	
+-----+-----+-----+	+-----+-----+-----+
! . . . ! . . X ! . . X !	! . . . ! . . X ! . . X !
! . . . ! . X . ! . X . !	! . . . ! . X . ! . X . !
! . . X ! . . X ! X . . !	! . . Z ! - . Z ! X . . !
+-----+-----+-----+	+-----+-----+-----+
! . . . ! . X . ! . X . !	! . . Z ! - Z . ! . . X !
! . . X ! . . . ! X . . !	! . . . ! . X . ! . X . !
! . . X ! . X . ! . . X !	! . . Z ! . . - ! X . . !
+-----+-----+-----+	+-----+-----+-----+
! o o . ! o . . ! . . . !	! o o . ! o . . ! . . . !
! o o . ! o . . ! . . . !	! o o . ! o . . ! . . . !
! o o . ! o . . ! . . . !	! o o . ! o . . ! . . . !
+-----+-----+-----+	+-----+-----+-----+

EL13c19: 3 cells missing, 4 added

.....X..X..X...XX...X...X.X...X.X...XX.....	
+-----+-----+-----+	+-----+-----+-----+
! . . . ! . . . ! . . . !	! . . . ! . . X ! . . X !
! . . . ! . . X ! . . X !	! . . Z ! . X . ! . X . !
! . . X ! . . . ! X X . !	! . . Z ! X . . ! X . . !
+-----+-----+-----+	+-----+-----+-----+
! . . X ! . . . ! . . X !	! . . Z ! . - . ! . . X !
! . X . ! . . X ! . X . !	! . . . ! . . X ! Z X . !
! X . . ! . . X ! X . . !	! . . . ! - . . ! - . . !
+-----+-----+-----+	+-----+-----+-----+
! . . . ! o o . ! . . . !	! . . . ! o o . ! . . . !
! . . . ! o o . ! . . . !	! . . . ! o o . ! . . . !
! . . . ! o o . ! . . . !	! . . . ! o o . ! . . . !
+-----+-----+-----+	+-----+-----+-----+

EL13c170: 3 cells missing, 4 added

.....X..X..X..X.X..X.....X.X.....X..X..X..XX.....															
+-----+-----+-----+				+-----+-----+-----+											
! . . . ! . . . ! . . . !				! . . . ! . . X ! . . X !											
! . . X ! . . X ! . . X !				! . . . ! . . X ! . . X !											
! . . X ! . . X ! . . X !				! . . Z ! - Z ! . X ! . !											
+-----+-----+-----+				+-----+-----+-----+											
! . . . ! . . X ! . . X !				! . . Z ! . . X ! . . X !											
! . . . ! . . X ! . . X !				! . . Z ! . . X ! . . X !											
! . . X ! . . X ! . X ! . !				! . . . ! - . . ! _ . . !											
+-----+-----+-----+				+-----+-----+-----+											
! o o . ! o . . ! . . . !				! o o . ! o . . ! . . . !											
! o o . ! o . . ! . . . !				! o o . ! o . . ! . . . !											
! o o . ! o . . ! . . . !				! o o . ! o . . ! . . . !											
+-----+-----+-----+				+-----+-----+-----+											

EL13c168: 3 cells missing, 4 added

.....X..X..X..X.X..X.....X..X.X..X..X..XX.....															
+-----+-----+-----+				+-----+-----+-----+											
! . . . ! . . . ! . . . !				! . . . ! . . - ! . . X !											
! . . X ! . . X ! . . X !				! . . Z ! . X ! . ! . X !											
! . . X ! . . X ! . . X !				! . Z ! . X ! . ! . X !											
+-----+-----+-----+				+-----+-----+-----+											
! . . . ! . . . ! . . X !				! . . Z ! . X ! . ! . X !											
! . . X ! . . X ! . . X !				! . . Z ! . X ! . ! . X !											
! . X ! . . . X ! . X ! . !				! . . . ! . . - ! - . . !											
+-----+-----+-----+				+-----+-----+-----+											
! o . . ! o . . ! . . . !				! o . . ! . . o ! . . . !											
! o . . ! o . . ! . . . !				! o . . ! . . o ! . . . !											
! o . . ! o . . ! . . . !				! o . . ! . . o ! . . . !											
+-----+-----+-----+				+-----+-----+-----+											

EL10c10: 7 cells missing, 5 added

.....X..X..X.....X.X.....X..X..X..X.....															
+-----+-----+-----+				+-----+-----+-----+											
! . . . ! . . . ! . . . !				! . . . ! . . X ! . . X !											
! . . . ! . . . ! . . . !				! . . . ! . . X ! . . X !											
! . . X ! . . X ! . . X !				! . . Z ! - . Z ! - Z ! . !											
+-----+-----+-----+				+-----+-----+-----+											
! . . . ! . . X ! . . X !				! . . . ! - . . ! . . - !											
! . . . ! . . X ! . . X !				! . . . ! . - . ! . - . !											
! . . X ! . . X ! . . X !				! . . Z ! . . X ! - Z ! . !											
+-----+-----+-----+				+-----+-----+-----+											
! o o . ! o . . ! o . . !				! o o . ! o . . ! o . . !											
! o o . ! o . . ! o . . !				! o o . ! o . . ! o . . !											
! o o . ! o . . ! o . . !				! o o . ! o . . ! o . . !											
+-----+-----+-----+				+-----+-----+-----+											

15.13 How to use the associated OR_k -chain rules in SudoRules

OR_k pattern detection rules derived from the Imp630 impossible patterns can be selected in the SudoRules configuration file. Exactly like rules for detecting the tridagon pattern, they are selected independently of the OR_k -chain resolution rules that may use them.

What was described in chapter 14 as the tridagon section of the configuration file has been extended as follows to allow more choices; you can set `?*max-guardians*` as you like in order to get more or fewer OR_k -relations. A better value than the current default of 8 may be 6. Note that the restriction defined by this variable doesn't apply to the tridagon case.

Note that selecting individual impossible patterns will not only select them, it will also set the priorities of the corresponding rules generating OR_k relations higher than those of the other rules in the Imp630 sets when they are simultaneously selected. The relative priorities between the special cases is the order in which they are listed below (first is higher); all are after tridagon.

```
;;; 2.3.2) Use eleven's 630-38 impossible patterns
;;; Note that ?*Tridagons* and ?*Anti-Tridagons* must still be independently set to
TRUE:
;;; they are given higher salience and they are not included in the following lists.

;;; Restrict all the rules that produce  $OR_k$  relations between "guardians" to a maximum
number of guardians:
; (bind ?*max-guardians* 6) ; default is 8

;;; 2.3.2a) Allow the use of the most frequently found impossible patterns,
;;; by order of decreasing priorities:
;;; - either a small set of them (4 possibilities, in increasing order):
; (bind ?*Imp630-Select1* TRUE)
; (bind ?*Imp630-Select2* TRUE)
; (bind ?*Imp630-Select3* TRUE)
; (bind ?*Imp630-Select4* TRUE)

;;; - or members of each of the above subsets, one by one:
;;; five members of ?*Imp630-Select1* :
; (bind ?*EL13c290* TRUE)
; (bind ?*EL14c30* TRUE)
; (bind ?*EL14c159* TRUE)
; (bind ?*EL14c1* TRUE)
; (bind ?*EL14c13* TRUE)

;;; seven additional members of ?*Imp630-Select2* :
; (bind ?*EL10c28* TRUE)
; (bind ?*EL13c179* TRUE)
; (bind ?*EL13c30* TRUE)
```

Now, to further answer the title of this section, here is the recommended way of using all these rules for puzzles supposed to be in T&E(3):

- A very large part of the T&E(3) puzzles will be solved at this point. If your puzzle is not yet solved, try to increase the maximal lengths of chains and/or k and/or *max-guardians* and/or to add progressively *Imp630-<xx>c*, with <xx> from 10 to 16.

Finally, as already mentioned, in order to clean the resolution path from all the useless patterns that may have been detected but not used, ask the value of global variable `?*ORk-relations-used*` and restart the puzzle after selecting only the corresponding rules.

15.14 Using CSP-Rules as a research tool

As I said at the start of this book, CSP-Rules was originally developed as a (non-published) research tool for:

- experimenting with the generic resolution rules defined in my books ([HLS], [CRT] and [PBCS]);
- assessing their absolute or relative resolution power (as appeared e.g. in chapter 6 of [PBCS]), concluding on the central role of whips and of the W-rating as the backbone for any rating system in T&E(1);
- finding interesting or exceptional examples of their application, such as extreme cases, non-subsumption cases, non-confluence cases, cases of different ratings when different sets of rules are used...;
- answering some conjectures suggested by the statistical results.

When I decided to publish CSP-Rules, I first added the necessary global variables and a configuration file for each application and I invested time turning it into a software easily usable by anyone (provided he is able to read a user manual and to delete a few semi-colons in a configuration file).

The months after publication were devoted to introducing (elementary) additional functionalities more or less directly justified by requests from readers of my books or ordinary users. As a result, the first two Parts of this book show how to use CSP-Rules in easy ways as a general pattern-based CSP solver for the specific types of logic puzzles defined in Part II. Chapter 13 shows how to deal with more complex additional requirements in the Sudoku case.

The recently added chapters 14 and 15 are somehow different from the rest. They should show more clearly how the original function of CSP-Rules as a research tool works along the lines stated in the first paragraph of this section. The way these chapters are written deliberately sticks to the historical development of these topics, even mentioning rules that should be “deprecated”. These two chapters look more like research notebooks than parts of a User Manual.

Unlike Athena, whips were not born out of my forehead, fully grown and in a full set of armour: as I explained in [CRT] or [PBCS], they originated from xy-chains and developed via (3D) bivalued-chains, z-chains and t-whips. ([HLS] keeps track of this development path but [CRT] and [PBCS] largely abstract from it.) Similarly, the OR_k-

chain and other rules introduced here to deal with the recently found puzzles in T&E(3) followed their own progressive path of discovery.

Of course, the details of the development were quite different: partial-whips (and all the statistical analyses that go with them) were already there and defining OR_k -chains or OR_k -g-chains using them as building blocks was a very natural step; also, the equality of the W and B ratings except in very rare cases and the rarity of non-confluence cases in whips suggested that, in terms of added resolution power, it was not worth coding OR_k -braids or OR_k -g-braids. But new challenges appeared on the way, such as defining the proper place of OR_k -detection rules in the existing hierarchy of rules. While chapter 14 keeps track of my original hesitations about their place, my opinion on this topic was settled when I wrote chapter 15.

However, what played a role similar to the whips development case and what makes in particular SudoRules totally different from any existing Sudoku solver was:

- the constant guideline that a few generic (i.e. application-independent) resolution rules must play a prominent role as a resolution backbone and that no *ad hoc* patches of reasoning should be needed to apply any rule;
- the constant guideline that the complexity of a resolution rule must be defined by the number of CSP-Variables its condition pattern uses;
- the use of large collections of puzzles to assess the real resolution power of rules and their (“exponential”) computational complexity dependence on length;
- the “exotic” exception to the above second guideline. This exception was previously used only for rare cases: rules based on the assumption of uniqueness in Sudoku, strong-ascending-chains in Futoshiki, loops and extended-loops in Slitherlink. Although OR_k -detection rules are not resolution rules and are therefore not an “exception” strictly speaking, their conditions should be added to OR_k -chains if one wanted to turn these into standalone resolution rules (which would also make them application-specific). But experiments with large collections of puzzles show it’s much more efficient to consider OR_k -relations as exotic and to find them as soon as possible.

15.15 Exceptional cases of non-confluence in OR_k -whips

Another example of the research topics one can tackle with CSP-Rules is the question of confluence for OR_k -whips. [PBCS] has shown how essential the confluence property is for a resolution theory, how the T-braid resolution theories have it if T has it, how rarely the W and B ratings differ, and how rare cases of non-confluence for whip resolution theories are (such a rare case was given for W4 in [PBCS, section 5.10.3]). The same question naturally arises about OR_k -whips.

The OR_k -relations have already been made ultra-persistent in order to avoid as many cases as possible of non-confluence that could otherwise be due to the

!	1	2	349	!	349	5	6	!	37	8	479	!
!	349	5	7	!	1	8	349	!	23	3469	2469	!
!	6	349	8	!	7	349	2	!	13	5	149	!

186 candidates.

```
finned-x-wing-in-columns: n5{c7 c3}{r8 r6} ==> r6c1≠5
```

with 4 guardians (in cells marked @): n5r7c1 n6r8c4 n2r9c3 n1r9c5

with 4 guardians (in cells marked @) : n7r6c1 n6r8c4 n1r9c5 n2r9c3

!	1	2	349#	!	349#	5	6	!	37	8	479	!
!	349#	5	7	!	1	8	349#	!	23	3469	2469	!
!	6	349#	8	!	7	349#	2	!	13	5	149	!
!	2345	348	2345	!	2346	7	3458	!	9	1	568	!
!	2579	89	259	!	269	169	1589	!	4	67	3	!
!	3479#@	1	6	!	349#	349#	34589	!	58	2	578	!

!	3459	7	1	!	8	2	349	!	6	349	459	!
!	23459	349#	23459	!	3469#@	13469	13479	!	58	3479	1245789	!
!	8	6	2349#@	!	5	1349#@	13479	!	1237	3479	12479	!
+-----+-----+-----+-----+												

EL13c179-OR4-relation for digits: 3, 4 and 9

in cells (marked #): (r8c8 r8c4 r8c2 r7c8 r7c6 r7c1 r1c4 r1c3 r3c5 r3c2 r2c8 r2c6 r2c1)

with 4 guardians (in cells marked @) : n7r8c8 n6r8c4 n5r7c1 n6r2c8

!	1	2	349#	!	349#	5	6	!	37	8	479	!
!	349#	5	7	!	1	8	349#	!	23	3469#@	2469	!
!	6	349#	8	!	7	349#	2	!	13	5	149	!
+-----+-----+-----+-----+												
!	2345	348	2345	!	2346	7	3458	!	9	1	568	!
!	2579	89	259	!	269	169	1589	!	4	67	3	!
!	3479	1	6	!	349	349	34589	!	58	2	578	!
+-----+-----+-----+-----+												
!	3459#@	7	1	!	8	2	349#	!	6	349#	459	!
!	23459	349#	23459	!	3469#@	13469	13479	!	58	3479#@	1245789	!
!	8	6	2349	!	5	1349	13479	!	1237	3479	12479	!
+-----+-----+-----+-----+												

z-chain[4]: r4n6{c4 c9} - r5c8{n6 n7} - r6n7{c9 c1} - r6n3{c1 .} ==> r4c4≠3

z-chain[4]: r4n6{c4 c9} - r5c8{n6 n7} - r6n7{c9 c1} - r6n4{c1 .} ==> r4c4≠4

z-chain[5]: c4n2{r5 r4} - b5n6{r4c4 r5c5} - r5c8{n6 n7} - r6n7{c9 c1} - r6n9{c1 .} ==> r5c4≠9

naked-pairs-in-a-block: b5{r4c4 r5c4}{n2 n6} ==> r5c5≠6

hidden-single-in-a-column ==> r8c5=6

With the elimination of n6r8c4 (following the assertion of n6r8c5), all the numbers of guardians are reduced:

!	1	2	349	!	349	5	6	!	37	8	479	!
!	349	5	7	!	1	8	349	!	23	3469	2469	!
!	6	349	8	!	7	349	2	!	13	5	149	!
+-----+-----+-----+-----+												
!	2345	348	2345	!	26	7	3458	!	9	1	568	!
!	2579	89	259	!	26	19	1589	!	4	67	3	!
!	3479	1	6	!	349	349	34589	!	58	2	578	!
+-----+-----+-----+-----+												
!	3459	7	1	!	8	2	349	!	6	349	459	!
!	23459	349	23459	!	349	6	13479	!	58	3479	1245789	!
!	8	6	2349	!	5	1349	13479	!	1237	3479	12479	!
+-----+-----+-----+-----+												

At least one candidate of a previous Trid-OR4-relation between candidates n5r7c1 n6r8c4 n2r9c3 n1r9c5 has just been eliminated.

There remains a Trid-OR3-relation between candidates: n5r7c1 n2r9c3 n1r9c5

At least one candidate of a previous EL13c290s-OR4-relation between candidates n7r6c1 n6r8c4 n1r9c5 n2r9c3 has just been eliminated.
There remains an EL13c290s-OR3-relation between candidates: n7r6c1 n1r9c5 n2r9c3

At least one candidate of a previous EL13c179-OR4-relation between candidates n7r8c8 n6r8c4 n5r7c1 n6r2c8 has just been eliminated.
There remains an EL13c179-OR3-relation between candidates: n7r8c8 n5r7c1 n6r2c8

t-whip[5]: r6c7{n5 n8} - c9n8{r6 r8} - r8n1{c9 c6} - r8n7{c6 c8} - b6n7{r5c8 .} ==> r6c9≠5
EL13c290s-OR3-whip[5]: r8n1{c9 c6} - r8n7{c6 c8} - b6n7{r5c8 r6c9} - OR3{{n7r6c1 n1r9c5 | n2r9c3}} - b9n2{r9c7 .} ==> r8c9≠9, r8c9≠8
singles ==> r8c7=8, r6c7=5

! 1	2	349	! 349	5	6	! 37	8	479	!
! 349	5	7	! 1	8	349	! 23	3469	2469	!
! 6	349	8	! 7	349	2	! 13	5	149	!
! 2345	348	2345	! 26	7	3458	! 9	1	68	!
! 2579	89	259	! 26	19	1589	! 4	67	3	!
! 3479	1	6	! 349	349	3489	! 5	2	78	!
! 3459	7	1	! 8	2	349	! 6	349	459	!
! 23459	349	23459	! 349	6	13479	! 8	3479	12457	!
! 8	6	2349	! 5	1349	13479	! 1237	3479	12479	!

At least one candidate of a previous EL13c179s-OR5-relation between candidates n5r6c6 n8r6c6 n7r6c1 n2r9c3 n5r7c1 has just been eliminated.
There remains an EL13c179s-OR4-relation between candidates: n8r6c6 n7r6c1 n2r9c3 n5r7c1

Trid-OR3-whip[4]: r8n1{c6 c9} - c9n5{r8 r7} - OR3{{n5r7c1 n1r9c5 | n2r9c3}} - b9n2{r9c7 .} ==> r9c6≠1
t-whip[5]: r8n7{c9 c6} - b8n1{r8c6 r9c5} - r5c5{n1 n9} - b4n9{r5c1 r6c1} - r6n7{c1 .} ==> r9c9≠7

;;; This is the resolution state where the two paths diverge:

! 1	2	349	! 349	5	6	! 37	8	479	!
! 349	5	7	! 1	8	349	! 23	3469	2469	!
! 6	349	8	! 7	349	2	! 13	5	149	!
! 2345	348	2345	! 26	7	3458	! 9	1	68	!
! 2579	89	259	! 26	19	1589	! 4	67	3	!
! 3479	1	6	! 349	349	3489	! 5	2	78	!
! 3459	7	1	! 8	2	349	! 6	349	459	!
! 23459	349	23459	! 349	6	13479	! 8	3479	12457	!
! 8	6	2349	! 5	1349	3479	! 1237	3479	1249	!

;;; 1) Path without EL13c179, in W5:

EL13c290s-OR3-whip[5]: r8n1{c9 c6} - **r8n7{c6 c8}** - b6n7{r5c8 r6c9} - OR3{{n7r6c1 n1r9c5 | n2r9c3}} - b9n2{r9c7 .} ==> r8c9≠5
hidden-single-in-a-block ==> r7c9=5

+-----+-----+-----+									
! 1	2	349	! 349	5	6	! 37	8	479	!
! 349	5	7	! 1	8	349	! 23	3469	2469	!
! 6	349	8	! 7	349	2	! 13	5	149	!
+-----+-----+-----+									
! 2345	348	2345	! 26	7	3458	! 9	1	68	!
! 2579	89	259	! 26	19	1589	! 4	67	3	!
! 3479	1	6	! 349	349	3489	! 5	2	78	!
+-----+-----+-----+									
! 349	7	1	! 8	2	349	! 6	349	5	!
! 23459	349	23459	! 349	6	13479	! 8	3479	1247	!
! 8	6	2349	! 5	1349	3479	! 1237	3479	1249	!
+-----+-----+-----+									

At least one candidate of a previous Trid-OR3-relation between candidates n5r7c1 n2r9c3 n1r9c5 has just been eliminated.

There remains a Trid-OR2-relation between candidates: n2r9c3 n1r9c5

Trid-OR2-whip[3]: r8n1{c9 c6} - OR2{{n1r9c5 | n2r9c3}} - b9n2{r9c7 .} ==> r8c9≠4, r8c9≠7

biv-chain[4]: r5c5{n9 n1} - c6n1{r5 r8} - r8n7{c6 c8} - r5n7{c8 c1} ==> r5c1≠9

biv-chain[4]: r6n8{c6 c9} - b6n7{r6c9 r5c8} - r8n7{c8 c6} - c6n1{r8 r5} ==> r5c6≠8

hidden-single-in-a-row ==> r5c2=8

z-chain[3]: c2n9{r3 r8} - c4n9{r8 r6} - b4n9{r6c1 .} ==> r1c3≠9

biv-chain[4]: r5n7{c1 c8} - r6c9{n7 n8} - r4n8{c9 c6} - b5n5{r4c6 r5c6} ==> r5c1≠5

naked-triplets-in-a-row: r5{c1 c4 c8}{n7 n2 n6} ==> r5c3≠2

biv-chain[4]: r8c9{n2 n1} - c6n1{r8 r5} - r5n5{c6 c3} - r8n5{c3 c1} ==> r8c1≠2

whip[1]: b7n2{r9c3 .} ==> r4c3≠2

t-whip[4]: c9n6{r2 r4} - r5c8{n6 n7} - b9n7{r9c8 r9c7} - c7n2{r9 .} ==> r2c9≠2

hidden-single-in-a-block ==> r2c7=2

finned-swordfish-in-rows: n3{r2 r7 r6}{c1 c8 c6} ==> r4c6≠3

whip[1]: b5n3{r6c6 .} ==> r6c1≠3

Trid-OR2-ctr-whip[4]: c3n2{r9 r8} - c3n9{r8 r5} - r5c5{n9 n1} - OR2{{n2r9c3 n1r9c5 | .}} ==> r9c3≠4, r9c3≠3

biv-chain[4]: r9c3{n9 n2} - c9n2{r9 r8} - r8n1{c9 c6} - b8n7{r8c6 r9c6} ==> r9c6≠9

biv-chain[5]: r5c8{n6 n7} - r8n7{c8 c6} - c6n1{r8 r5} - c6n5{r5 r4} - r4n8{c6 c9} ==> r4c9≠6

silngles ==> r4c9=8, r6c9=7, r5c8=6, r5c4=2, r4c4=6, r5c1=7, r4c1=2, r8c1=5, r2c9=6, r1c7=7, r6c6=8

finned-swordfish-in-rows: n4{r2 r7 r6}{c1 c8 c6} ==> r4c6≠4

singles ==> r4c6=5, r5c3=5, r6c1=9, r3c2=9

naked-pairs-in-a-column: c5{r3 r6}{n3 n4} ==> r9c5≠4, r9c5≠3

naked-pairs-in-a-block: b7{r7c1 r8c2}{n3 n4} ==> r8c3≠4, r8c3≠3

x-wing-in-rows: n9{r2 r7}{c6 c8} ==> r9c8≠9, r8c8≠9, r8c6≠9, r5c6≠9

stte

;;; 2) Path with EL13c179, in W6:

```
EL13c179-OR3-whip[5]: r5c8{n7 n6} - OR3{{n6r2c8 n7r8c8 | n5r7c1}} - b9n5{r7c9 r8c9} -
r8n1{c9 c6} - r8n7{c6 .} ==> r9c8≠7
t-whip[5]: c6n1{r8 r5} - r5c5{n1 n9} - b4n9{r5c1 r6c1} - c1n7{r6 r5} - c8n7{r5 .} ==>
r8c6≠7 ; singles ==> r9c6=7, r1c7=7
Trid-OR3-whip[5]: c1n7{r5 r6} - c9n7{r6 r8} - r8n1{c9 c6} - OR3{{n1r9c5 n5r7c1 |
n2r9c3}} - b9n2{r9c7 .} ==> r5c1≠5
;;; Part of the resolution path in W6:
EL13c290s-OR3-ctr-whip[6]: c9n7{r8 r6} - r5c8{n7 n6} - r2n6{c8 c9} - c9n2{r2 r9} -
b9n1{r9c9 r9c7} - OR3{{n2r9c3 n1r9c5 n7r6c1 | .}} ==> r8c9≠4
EL13c290s-OR3-ctr-whip[6]: c9n7{r8 r6} - r5c8{n7 n6} - r2n6{c8 c9} - c9n2{r2 r9} -
b9n1{r9c9 r9c7} - OR3{{n2r9c3 n1r9c5 n7r6c1 | .}} ==> r8c9≠5
hidden-single-in-a-block ==> r7c9=5
```

!	1	2	349	!	349	5	6	!	7	8	49	!
!	349	5	7	!	1	8	349	!	23	3469	2469	!
!	6	349	8	!	7	349	2	!	13	5	149	!
!	2345	348	2345	!	26	7	3458	!	9	1	68	!
!	279	89	259	!	26	19	1589	!	4	67	3	!
!	3479	1	6	!	349	349	3489	!	5	2	78	!
!	349	7	1	!	8	2	349	!	6	349	5	!
!	23459	349	23459	!	349	6	1349	!	8	3479	127	!
!	8	6	2349	!	5	1349	7	!	123	349	1249	!

At least one candidate of a previous Trid-OR3-relation between candidates n5r7c1 n2r9c3 n1r9c5 has just been eliminated.

There remains a Trid-OR2-relation between candidates: n2r9c3 n1r9c5

```
Trid-OR2-whip[3]: OR2{{n2r9c3 | n1r9c5}} - r5n1{c5 c6} - r5n5{c6 .} ==> r5c3≠2
hidden-triplets-in-a-row: r5{n2 n6 n7}{c1 c4 c8} ==> r5c1≠9
Trid-OR2-whip[3]: r8n1{c9 c6} - OR2{{n1r9c5 | n2r9c3}} - b9n2{r9c7 .} ==> r8c9≠7
singles ==> r8c8=7, r5c8=6, r4c9=8, r6c9=7, r5c4=2, r4c4=6, r5c1=7, r5c2=8, r6c6=8,
r2c9=6, r2c7=2
hidden-pairs-in-a-column: c1{n2 n5}{r4 r8} ==> r8c1≠9, r8c1≠4, r8c1≠3, r4c1≠4, r4c1
≠3
Trid-OR2-whip[2]: OR2{{n2r9c3 | n1r9c5}} - r9c7{n1 .} ==> r9c3≠3
finned-swordfish-in-rows: n3{r2 r7 r6}{c1 c8 c6} ==> r4c6≠3
whip[1]: b5n3{r6c5 .} ==> r6c1≠3
finned-swordfish-in-columns: n3{c1 c8 c6}{r7 r2 r9} ==> r9c5≠3
whip[1]: r9n3{c8 .} ==> r7c8≠3
finned-swordfish-in-rows: n4{r2 r7 r6}{c1 c8 c6} ==> r4c6≠4
singles ==> r4c6=5, r4c1=2, r8c1=5, r5c3=5, r6c1=9
x-wing-in-rows: n9{r2 r7}{c6 c8} ==> r9c8≠9, r8c6≠9, r5c6≠9
stte
```

So, why did a solution in W5 fail to be obtained in the second case? The key to such a solution in the first case was the OR3-whip[5]:

```
EL13c290s-OR3-whip[5]: r8n1{c9 c6} - r8n7{c6 c8} - b6n7{r5c8 r6c9} - OR3{{n7r6c1
n1r9c5 | n2r9c3}} - b9n2{r9c7 .} ==> r8c9≠5
```

But this whip is destroyed in the second path by the t-whip[5]:

```
t-whip[5]: c6n1{r8 r5} - r5c5{n1 n9} - b4n9{r5c1 r6c1} - c1n7{r6 r5} - c8n7{r5 .} ==>
r8c6≠7
```

which eliminates its second left-linking candidate n7r8c6.

15.16 Comparing files

Let's not forget this is also a User Manual. It must therefore be mentioned that SudoRules has functions for comparing files: “*compare-level-files*”, with syntax: (compare-level-files ?file1 ?file2 ?file-length). (compare-level-files “Trid-OR5W-levels.txt” “Select1-OR5W-levels.txt” 5) will output the lines (and only the lines) that have differences between ?file1 and ?file2:

```
70 99 > 3
71 99 > 4
75 5 > 3
76 99 > 8
77 5 > 3
```

where the first number in each line is the puzzle number and the other ones are the two ratings (“99” means “not solved with the underlying set of rules”). See section 6.3 for how to print the corresponding puzzles.

Note that all the classification results of this chapter and the previous one are available on GitHub, so that you can use the above functions for selecting interesting examples by comparing the ratings of puzzles with respect to different sets of rules (see [TE3-CLASSIF]).

16. Miscellanea

16.1 Examples and large scale studies

In the original releases of CSP-Rules-V2.1, a set of examples was included, in an “Examples” sub-folder of CSP-Rules-V2.1, itself including one sub-folder for each application. The purpose was not to provide an extensive set of cases, but to give users a more concrete idea of the various puzzles and their resolution paths, with more cases than can be mentioned in book form. Nor was the purpose to replace the original websites from which the puzzles originated; it was to direct the user to them for more examples of the same kinds.

A new independent GitHub repository has now been created ([CSP-RULES-EXAMPLES]), into which the previous set of examples has been moved. This is because examples were starting to take too much place inside the CSP-Rules-V2.1 project and I don’t want to consider any addition of an example as a change to CSP-Rules itself. This also allows to have a top-level README.md file specifically dedicated to describing the Examples. Beware: when installed as described on GitHub, and contrary to the previous Examples folder, this CSP-Rules-Examples folder is in the CSP-Rules folder but not in its CSP-Rules/CSP-Rules-V2.1 sub-folder. A new global variable `?*CSP-Rules-Examples-Dir*` has been added to CSP-Rules-V2.1, referring to this new folder of examples if it has been installed at the proper place. This allows you to re-run the examples with the commands written with them (generally for full files of examples).

Most of these examples have been run with CSP-Rules V2.1 on a MacBookPro from mid-2012 with 16 GB of RAM, so that you can be sure the resolution times you will get on your machines are much smaller than those appearing at the end of the paths (unless your PC is still older). Don’t consider these runtimes as absolutes, because some puzzles were solved while I was running other processes and may therefore have taken longer than if they had run alone. Nevertheless, they provide useful approximative indications about the relative times you can expect for each puzzle.

Unless otherwise stated, all the examples have been run with the “standard” configuration of their application.

The Examples folder for each application includes several folders, with names corresponding to the origins of the puzzles. Thus, an “ATK” folder means “from the `atksolutions.com`” website; a “Puzzle-loop” folder means “from the “puzzle-

loop.com” website... Instead of a website, it can be the name of a puzzle creator, e.g. “Tarek”. It can also be both, e.g. “Tatham”, which means both the person Tatham and the website “tatham.com”. If you compare the puzzles from different sources, you will generally observe that they have different characteristics. For instance, the Slitherlink puzzles from puzzle-loop.com slither more than those on grids of same size from kakuro-online.com and they therefore make a more intensive use of the Quasi-loop rules.

See the “README.md” file of the “CSP-Rules-Examples” repository on GitHub for more specific details.

The resolution paths given in all the examples are generally the raw output from CSP-Rules, with some of the printout options on. Of course, if such a path was to be published in a book, some manual cleaning would be necessary. I am thinking of Slitherlink in particular (but not only), where interminable sequence of whips[1] appear. Most of these could be considered as trivial and merely deleted, keeping only assertions of H, V and P values. Similarly, long sequences of colour rules could be replaced by a single line “colours => xxx in, yyy out, ... $H_{ij} = 0$, ... $V_{kl} = 1$...”

With time, the SudoRules part of the CSP-Rules-Examples repository tends to include much more than mere examples. It also includes full results of large scale studies of puzzle collections with specific properties, such as:

- the cbg-000 controlled-biased collection, containing detailed classification results with respect to many different ratings and their comparisons;
- eleven’s list of 3-digit patterns and SudoRules results on extracting the only one that could potentially require T&E(3) to be proven contradictory;
- mith’s database of 63,137 min-expand puzzles in T&E(3), with e.g. proofs of contradiction in T&E(3) and lots of classification results.
- mith’s larger database of 158,276 min-expand puzzles in T&E(3), with lots of classification results.

While the ordinary examples illustrate the “general CSP solver” side of CSP-Rules, such additions illustrate its “research tool” side.

16.2 Questions and answers

Any question can be asked via GitHub or via any publisher of any of my books.

One interesting question asked by a reader of [PBCS] and user of CSP-Rules is: “In a single sentence, of all the ideas introduced in your books and implemented in CSP-Rules/SudoRules, which would you name as the most innovative?”

As this may help clarify the [PBCS] and CSP-Rules approach, I’ll answer it with a single character, after listing possible contenders:

- Contender #1: the idea that solving Constraint Satisfaction Problems could be done in a general pattern-based way (the standard approach to CSP is based on looking for fast algorithms); the whole framework for doing it: epistemic logic (here reducible to intuitionistic logic), with a formal definition of candidates, resolution rules (with precise conditions sufficient to prove their conclusion generically, once and for all, without any additional *ad hoc* reasoning in each instantiation), resolution theories, resolution paths within these theories, all this allowing to prove precise results. Not sure it's a main contender, as all the rest can be understood informally without it, but it remains the fundamental theoretical background for all the rest.
- Contender #2: the view of a pattern, especially a chain pattern, as a “static” pattern visible on the current resolution state; this view, based only on CSP-Variables and (direct contradiction) links, was since the beginning and still is in a radical opposition to the classical view of a chain as a “chain of inferences”. Of course, a “static” chain pattern can be the support of inferences, but it is not, in and of itself, a chain of inferences. See #3 to #5 for very concrete consequences of this.
- Contender #3: the idea of the z- and t-candidates in chains. However, in isolation, this is not enough to make it the main innovative idea: in a sense, T&E implicitly uses z- and t- candidates; similarly, Sudoku Explainer (SE) implicitly uses z- and t-candidates in its forcing chains. The innovative idea is that such candidates are not part of the chains as I've defined them. This is justified on two grounds: firstly, because z- and t- candidates have no impact on the possibilities of extending a partial-chain; secondly, because they can disappear before the chain is applied, without changing it in the least. A practical consequence is, any whip/braid... can be drawn exactly as a bivalued-chain with no added, useless complications; as a result, a very long whip can be written as two lines of text, when it will require more than two pages to write the corresponding chain in SE.
- Contender #4: some specific types of chains: whips (the most important of all the chains), g-whips, braids, g-braids; the precise definition of T&E (a procedure that is neither BFS nor DFS); the clear relationship between T&E, braids, whips or between gT&E, g-braids, g-whips. Such precisely defined chains have very specific properties wrt to the vague “contradiction chains [of inferences]” and considering that they can be reduced to such chains would be utter nonsense.
- Contender #5: the definition of the complexity of a pattern as the number of CSP-Variables its definition involves. This applies consistently to Subsets, any types of chains, any exotic patterns...

This definition heavily relies on the previous 4 points, it can be formulated in pure logic terms, which guarantees the essential property that the associated ratings are invariant under isomorphism.

Notice that this point is what distinguishes most radically the various ratings defined in [PBCS] from the “number of nodes” (i.e. number of inference steps) used in Sudoku Explainer and in all the other solvers based on “(forcing) contradiction chains [of inferences]”. This is also what reduces to utter nonsense any claim (by

people who don't really understand them) that whips or braids can be reduced to such previously existing chains or forcing nets.

- Contender #6: the simplest-first strategy. This can be considered as a new search strategy, based on the notion of complexity of a pattern defined in point #5.
- Contender #7: the definition of the confluence property and the various theorems about several resolution theories having it. These theorems allow to find the simplest solution after following a single resolution path. This is the most important results in practice and they justify using the simplest-first strategy. This fundamentally relies on point #5.
- Contender #8: the introduction of additional CSP-Variables. In Sudoku, this appears as the super-symmetric view, in which all the types of CSP-Variables (rc-, rn-, cn, and bn-) are considered on the same footing. This is a very natural idea in the two cases where it is applied: variables “dual” to the natural ones (as the rn, cn and bn variables in Sudoku, dual to the rc ones) or variables allowing to re-write the naturally given constraints as binary ones (e.g. the sum constraints in Kakuro re-written using the hrc and vrc variables).

This is just a quick list of contenders, without thinking too much about it. With more time, I should be able to find more (e.g. the universal T&E(n) classification of instances). But let's do with this. Notice that all these ideas were already in [HLS, 2007].

Now my answer to the question in a single character, as promised : 5.

16.3 Reporting bugs

Any bug found in CSP-Rules or in CSP-Rules-Examples should preferably be reported via GitHub.

16.4 Improving CSP-Rules

The present manual does not say anything about how to modify CSP-Rules. Until I have written further manuals, you can contact me via GitHub if you want to discuss some improvements, extensions or modifications.

One way of improving the speed of the generic part and of all the applications would be to extend CLIPS. CLIPS lacks complex data structures such as (sparse) binary matrices or low density graphs or a-lists (association lists *à la* Lisp) that would allow to have a more efficient implementation of binary links with a quick access to them.

See the “CONTRIBUTING” file on github.com for other suggestions.

16.5 CSP-Rules-V2.1 main updates

Since the first public release of CSP-Rules-V2.1 (2020, Aug 19), which included all the currently existing applications and the first edition of the "Basic User Manual for CSP-Rules-V2.1", a certain number of updates have been published. Notice that, apart from minor details, this core of CSP-Rules has remained unchanged. All the updates described below are indeed additions of functionalities. This is why the version number (V2.1) has not changed.

16.5.1 Preliminary remarks

1) Only the main updates to the original publication (in reverse time order) are listed below. In particular, cosmetic changes (such as minor changes in the way things are printed) are not mentioned; trivial additions to the global variables, saliences or print functions (which may be necessary when new resolution rules are added) are not mentioned.

2) All the meaningful changes since the original publication are indeed additions of functionalities; in particular:

- no basic data structure has been changed;
- no fundamental generic resolution rule (i.e. bivalued-chains, z-chains, t-whips, whips, g-bivalued-chains, g-whips, braids, g-braids), as they have originally been defined in [CRT] or [PBCS], has been changed (though the files that contain them may have been split into partial-chain extension rules and chain elimination rules (e.g. because newly added rules may also use the pre-existing partial-chains);
- no application-specific resolution rule, as defined in [CRT] or [PBCS] – such as Subsets in Sudoku or any application that has them, ascending-chains in Futoshiki, loops in Slitherlink... – has been changed (though their "blocked" and "unblocked" versions may have been fused);
- no bug has been found since the first publication (note that this software had been largely tested (on millions of instances) before the first publication).

3) Because they reflect changes to the software (almost) as soon as such changes are published, updates of the User Manual are not mentioned *per se*, except in case of a major update.

16.5.2 Major updates (in reverse time order)

====> 2023 July 14 (SudoRules):

* Update of the four subsets of selected impossible patterns, taking into account the latest classification results of all the known T&E(3) puzzles.

====> 2023 July 10 (Generic):

* OR_k -whips[1] now have a blocked version. It is selected by the same global variable `?*blocked-Whips[1]*` as ordinary whips[1].

====> 2023 Apr 1 (SudoRules):

* Fine tune the four pre-selections of impossible patterns, based on their “usefulness” (details were introduced in release 5 of the “Augmented User Manual”), a major step in finding the really useful patterns.

====> 2023 Mar 16 (Docs):

* Update the “Augmented User Manual” with a full new chapter about the impossible patterns and the general question of how to deal with large numbers of patterns.

====> 2023 Mar 16 (SudoRules):

* Add the 2488 automatically generated rules that can detect all the patterns in eleven's list of 630-38 impossible patterns in two bands (or two stacks). The output of these rules (OR_k -relations) can be used by all the generic OR_k -chain rules.

* Complete the SudoRules configuration file with many options for activating all or part of the impossible patterns.

====> 2023 Mar 10 (Generic):

* Allow OR_k chains and g-chains to track which OR_k -relations they have effectively used (introduce global variables `?*ORk-relations-used*` and `?*all-ORk-relations-used-in-list*` for respectively a puzzle and a file of puzzles). This was not useful when there was only one OR_k -relation (tridagon) but it allows to make statistics about which OR_k -relations are the most frequently used.

====> 2023 Mar 10 (SudoRules):

* Add functions to normalise patterns, to do some elementary analysis of them and to pretty-print them with additional information (free cells...).

* Note that the Sudoku-specific part of the "candidate" template in SudoRules has been extended with two slots (band and stack) for easier writing of the rules detecting the 630 impossible patterns in two bands. This has strictly no impact on anything existing before this change (especially on generic chain rules, which never use any application-specific slot, or on rules such as Subsets that do use Sudoku-specific slots, but continue not to use the two new ones).

====> 2023 Feb 04 (SudoRules):

* Add functions for the analysis of k and kl digit patterns in SudoRules/Advanced; they allow in particular to find which 3-digit patterns are in T&E(2) – both restricted form (already published before) and full form (that's the new part).

====> 2023 Jan 23 (Generic):

* Add the OR_k -splitting rules, for $k \leq 12$, allowing to reduce the number of guardians in an OR_k -relation and possibly to solve with shorter OR_k -chains.

====> 2022 Dec 29 (Generic):

* Add the OR_k -contrad-g-whips, for $k = 6$

* Add the full OR_k -g-whips for $k \leq 6$.

* Add the OR_k -forcing-g-whips, for $k \leq 6$.

This completes the set of OR_k chain and g-chain rules, now all defined for $2 \leq k \leq 6$.

====> 2022 Dec 19 (Generic):

* Add the OR_k -contrad-g-whips, for $k \leq 5$ (and corresponding global variables allowing to use them in the SudoRules config file).

* Split the G-Whip files into G-Whip and Partial-G-Whip files (for easier use with OR_k -Contrad-Whips). This implies no change for the ordinary G-Whips.

====> 2022 Dec 07 (Generic):

* All the OR_k -relations of size ≤ 20 are now ultra-persistent. (Previously, size for applying persistency was limited to 12, but there are rare anti-tridagons with 20 guardians).

* Add Forcing2-T&E and Forcing3-T&E. They had been mentioned in the User Manual for a long time, but I had forgotten to post the code.

====> 2022 Nov 28 (Generic):

* Faster OR_k -Whips for $k > 3$ (irrelevant for $k=2$ or 3). They are about 30% to 50% faster (depending on many contextual factors) and they also use less memory.

For technical reasons, these improvements work only when OR_k -forcing-whips are not active. Which version is used is automatic: the new faster one if OR_k -forcing-whips are not active, the original one otherwise.

====> 2022 Nov 08 (Generic):

* New, extended and largely restructured version of the user manual: "Augmented User Manual".

====> 2022 Nov 08 (SudoRules):

* addition of the TRIDAGON- OR_k -W and TRIDAGON- OR_k -CHAINS sets of preferences;

* addition of control variables related to Tridagons in the configuration file, in particular to choose the priority of Tridagon elimination and anti-tridagon detection rules.

====> 2022 Nov 08 (Generic):

* addition of OR_k -whips, $k \leq 6$.

====> 2022 Nov 05:

- * addition of an UPDATES.md file to the GitHub project.

====> 2022 Sept 11 (SudoRules):

- * addition of the TRIDAGON-OR_k-FW and TRIDAGON-OR_k-CW sets of preferences.

====> 2022 Sept 07 (Generic):

- * addition of OR_k-Contrad-Whips, $k=2,\dots,6$;

- * addition of OR₆-Forcing-Whips (OR_k-Forcing-Whips, $k=1,\dots,5$, were already available).

====> 2022 Aug 28 (SudoRules):

- * functions "solve-k-digit-pattern-string", "solve-n-grids-after-first-p-from-k-digit-pattern-string-file" and "solve-n-grids-after-first-p-from-k-digit-pattern-string-file-excluding" now also work in combination with DFS.

====> 2022 Aug 28 (Generic):

- * focusing now also works with DFS.

====> 2022 Aug 19 (SudoRules):

- * addition of Forcing2-Whips (equivalent to Forcing-Whips) and Forcing3-Whips, based on the general OR_k-Forcing-Whips and with (3D) bivalued or trivalued cells as starting points;

- * addition of rules for automatically applying eleven's replacement method in the context of an anti-tridagon pattern.

====> 2022 Aug 07 (Generic):

- * addition of OR_k-forcing-whips ($k \leq 5$).

====> 2022 May 07 (SudoRules):

- * addition of functions related to k-digit patterns: "solve-k-digit-pattern-string", "solve-n-grids-after-first-p-from-k-digit-pattern-string-file" and "solve-n-grids-after-first-p-from-k-digit-pattern-string-file-excluding".

Given a k-digit pattern (in string format) or a file containing a sequence of such patterns, these functions allow to solve them (e.g. to prove that they are contradictory). When T&E is involved, they restrict the candidates that may be tried at each level to those in the pattern, thus taking advantage of the new generic feature of T&E. By avoiding to try unproductive candidates, this makes these procedures thousands to millions of times faster than standard T&E (depending on T&E-depth).

====> 2022 May 07 (Generic):

* all the generic T&E procedures (at depths 1, 2 and 3) are now sensitive to restrictions on the candidates they may try (at each level). They are totally unchanged in the default case. In and of itself, this only allows new possibilities, but doesn't offer them readily.

====> 2022 Apr 25 (SudoRules):

* addition of two separate sets of preferences: TRIDAGONS and TRIDAGON-FW;
 * addition of functions for solving with preferences whole files of puzzles;
 * addition of functions for applying manually the eleven replacement technique;
 * in the SudoRules configuration file, addition of global variables related to the above additions;
 * addition of rules for automatically applying eleven replacement techniques in cases "not too far" from to the trivalued oddagon impossible pattern.

====> 2022 Apr 16 (Examples):

* replacement of the CSP-Rules EXAMPLES folder by an independent "CSP-Rules-Examples" repository: <https://github.com/denis-berthier/CSP-Rules-Examples>.

====> 2022 Apr 07 (SudoRules):

* addition of the tridagon-forcing-whips and of the TRIDAGONS set of preferences.

====> 2022 Mar 14 (SudoRules):

* addition of the Tridagon elimination rule.

====> 2022 Feb 09 (Publications):

* addition of my book "Pattern-Based Constraint Satisfaction and Logic Puzzles (Third Edition)" to the Publications folder.

====> 2021 Nov 21 (Publications/Docs):

* addition of the "Basic User Manual for CSP-Rules-V2.1 (Second Edition)".

====> 2021 Nov 21 (Generic):

* introduction of sets of preferences and of function "solve-with-preferences" (also "solve-w-prefs"). Original sets of preferences are:

-- generic: BIVALUE-CHAINS, REVERSIBLE-CHAINS, REVERSIBLE-PATTERNS

-- Sudoku-specific: S4Fin.

====> 2021 Oct 27 (Generic):

* addition of "blocked" versions for z-chains (typed or not) and oddagons.

====> 2021 Aug 17 (SudoRules):

* update of the fewer-steps solving function, allowing to find shorter resolution paths; it can now take into account all the generic chain rules (except t-whips) and all the Subsets and Finned Fish.

====> 2021 Aug 06 (all applications with Subsets and/or Finned Fish):

* "blocked" and "non-blocked" versions of Subsets are merged,
 * Subset rules become compatible with focusing (i.e. with function "try-to-eliminate").

(This is a major boost for focused eliminations and for reducing the number of steps).

====> 2021 Jul 29 (SudoRules):

* add functions for reducing the number of steps in a resolution path.

====> 2021 June 25 (LatinRules):

* add the Pandiagonal variant.

====> 2021 June 01 (SudoRules):

* add functions "find-1-steppers" and "find-2-steppers" for the fully automated search for 1- or 2- step solutions.

====> 2021 Apr 06 (SudoRules):

* add all the rules and functions necessary for looking for 1- or 2- step solutions.

====> 2021 Apr 06 (SudoRules/Goodies):

* add functions: "pretty-print-sudoku-string" (also "pretty-print"), "pretty-print-sukaku-list" and "random-shuffle-9x9-puzzle".

====> 2021 Mar 11 (SudoRules):

* add functions for printing the rc, rn, cn and bn views first introduced in [HLS 2007]:

- "print-current-resolution-state" (also "print-RS"),
- "print-current-resolution-state-rn-view" (also "print-RS-rn"),
- "print-current-resolution-state-cn-view" (also "print-RS-cn"),
- "print-current-resolution-state-bn-view" (also "print-RS-bn"),
- "print-current-resolution-state-all-views" (also "print-RS-all").

====> 2021 Mar 11 (SudoRules):

* add function "find-sudoku-anti-backdoor-pairs" and first application to find a 2-step solution in Sudoku.

====> 2021 Mar 11 (Generic):

* add function "find-anti-backdoor-pairs".

====> 2021 Feb 11 (SudoRules):

* add function "find-sudoku-anti-backdoors" and first application of focused eliminations to find a 1-step solution in Sudoku.

====> 2021 Feb 11 (Generic):

* add functions "find-backdoors" and "find-anti-backdoors".

====> 2021 Feb 09 (Generic):

* focused eliminations now also work for z-chains (typed or not).

====> 2021 Feb 08 (Generic):

* focused eliminations now also work for bivalued-chains (typed or not).

====> 2020 Dec 24 (SudoRules):

* addition of the full set of functions:

- "init-sudoku-string" (also "init"),
- "init-sudoku-list",
- "init-sudoku-grid",
- "solve-sudoku-string" (also "solve"),
- "solve-sudoku-list",
- "solve-sudoku-grid"
- and similar functions for sukakus.

====> 2020 Dec 18 (SudoRules):

* the resolution state is now printed at the end of the resolution path when a full solution is not found; combined with "solve-sukaku-list" or "solve-sukaku-grid", this allows resolution in stages.

====> 2020 Dec 12 (Generic):

* add function "try-to-eliminate-candidates" (focused eliminations); works for:

- oddagons, whips (untyped), braids (untyped), g-whips (untyped) and g-braids (untyped),
- forcing-whips, forcing-braids, forcing-g-whips and forcing-g-braids (where the focus is not applied to eliminated or asserted candidates but to the bivalued starting points).

====> 2020 Sept 03 (SudoRules):

* add functions "solve-sukaku-list" and "solve-sukaku-grid".

====> 2020 Aug 26 (SlitherRules):

* add pre-computed backgrounds (making resolution much faster for pre-computed square grids).

====> 2020 Aug 24 (SlitherRules):

* add isolated chains and extended-loops.

====> 2020 Aug 19 (CSP-Rules):

* First public release of CSP-Rules-V2.1.

References

Books and articles

Note: the starred publications, together with the present book, can be found both in the CSP-Rules-V2.1 “Publications” folder of [CSP-RULES] and on ResearchGate (<https://www.researchgate.net/profile/Denis-Berthier/research>).

[Apt 2003]: APT K., *Principles of Constraint Programming*, Cambridge University Press, 2003.

*[Berthier 2007a]: BERTHIER D., *The Hidden Logic of Sudoku*, First Edition, Lulu.com Publishers, May 2007.

*[Berthier 2007b]: BERTHIER D., *The Hidden Logic of Sudoku, Second Edition*, Lulu.com Publishers, November 2007.

*[Berthier 2008a]: BERTHIER D., From Constraints to Resolution Rules, Part I: Conceptual Framework, *International Joint Conferences on Computer, Information, Systems Sciences and Engineering (CISSE 08)*, December 5-13, 2008, Springer. Published as a chapter of *Advanced Techniques in Computing Sciences and Software Engineering*, Khaled Elleithy Editor, pp. 165-170, Springer, 2010.

*[Berthier 2008b]: BERTHIER D., From Constraints to Resolution Rules, Part II: chains, braids, confluence and T&E, *International Joint Conferences on Computer, Information, Systems Sciences and Engineering (CISSE 08)*, December 5-13, 2008, Springer. Published as a chapter of *Advanced Techniques in Computing Sciences and Software Engineering*, Khaled Elleithy Editor, pp. 171-176, Springer, 2010.

*[Berthier 2009]: BERTHIER D., Unbiased Statistics of a CSP - A Controlled-Bias Generator, *International Joint Conferences on Computer, Information, Systems Sciences and Engineering (CISSE 09)*, December 4-12, 2009, Springer. Published as a chapter of *Innovations in Computing Sciences and Software Engineering*, Khaled Elleithy Editor, pp. 11-17, Springer, 2010.

*[Berthier 2011]: BERTHIER D., *Constraint Resolution Theories*, Lulu.com Publishers, October 2011.

*[Berthier 2012]: BERTHIER D., *Pattern-Based Constraint Satisfaction and Logic Puzzles*, Lulu.com Publishers, July 2012.

*[Berthier 2015]: BERTHIER D., *Pattern-Based Constraint Satisfaction and Logic Puzzles (Second Edition)*, Lulu.com Publishers, November 2015.

*[Berthier 2020]: BERTHIER D., *Basic User Manual for CSP-Rules-V2.1* (First Edition), Lulu Press, August 2020.

*[Berthier 2021a]: BERTHIER D., *Basic User Manual for CSP-Rules-V2.1 (Second Edition)*, Lulu Press, November 2021.

*[Berthier 2021b]: BERTHIER D., *Pattern-Based Constraint Satisfaction and Logic Puzzles (Third Edition)*, Lulu Press, November 2021.

[BUM1], [BUM2], [BUM]: respectively, abbreviations for [Berthier 2020], [Berthier 2021a], or for any of the two.

[CRT]: abbreviation for [Berthier 2011].

[Dechter 2003]: DECHTER R., *Constraint Processing*, Morgan Kaufmann, 2003.

[Freuder et al. 1994]: FREUDER E. & MACKWORTH A., *Constraint-Based Reasoning*, MIT Press, 1994.

[Früwirth et al. 2003]: FRÜWIRTH T. & SLIM A., *Essentials of Constraint Programming*, Springer, 2003.

[HLS1], [HLS2], [HLS]: respectively, abbreviations for [Berthier 2007a], [Berthier 2007b] or for any of the two.

[Guesguen et al. 1992]: GUESGUEN H.W. & HETZBERG J., *A Perspective of Constraint-Based Reasoning*, Lecture Notes in Artificial Intelligence, Springer, 1992.

[Kumar 1992]: KUMAR V., Algorithms for Constraint Satisfaction Problems: a Survey, *AI Magazine*, Vol. 13 n° 1, pp. 32-44, 1992.

[Lecoutre 2009]: LECOUTRE C., *Constraint Networks: Techniques and Algorithms*, ISTE/Wiley, 2009.

[Marriot et al. 1998]: MARRIOT K. & STUCKEY P., *Programming with Constraints: an Introduction*, MIT Press, 1998.

[Newell 1982]: NEWELL A., The Knowledge Level, *Artificial Intelligence*, Vol. 59, pp 87-127, 1982.

[PBCS1], [PBCS2], [PBCS3], [PBCS]: respectively, abbreviations for [Berthier 2012], [Berthier 2015], [Berthier 2021] or for any of the three.

[Riley 2008]: RILEY G., *CLIPS documentation*, 2008, available at <http://clipsrules.sourceforge.net/OnlineDocs.html>.

[Rossi et al. 2006]: ROSSI F., VAN BEEK P. & WALSH T., *Handbook of Constraint Programming*, Foundations of Artificial Intelligence, Elsevier, 2006.

[Stuart 2007]: STUART A., *The Logic of Sudoku*, Michael Mepham Publishing, 2007.

[Van Hentenryck 1989]: VAN HENTENRYCK P., *Constraint Satisfaction in Logic Programming*, MIT Press, 1989.

Websites

[Angus www]: ANGUS J. (Simple Sudoku), <http://www.angusj.com/sudoku/>, 2005-2007, the classical reference for the most basic Sudoku techniques.

[askmarilyn www]: <http://www.parade.com/askmarilyn/index.html>, the “official” place for Numbrix® puzzles.

[Atkin & al. 1983]: <https://www.sciencedirect.com/science/article/pii/089812218390130X>

[atksolutions www]: <http://www.atksolutions.com>, the most interesting source for Futoshiki and Kakuro puzzles.

[Bartlett 2012]:

http://web.math.ucsb.edu/~padraic/mathcamp_2012/latin_squares/MC2012_LatinSquares_lecture6.pdf

[Berthier www]: BERTHIER D., <https://denis-berthier.pagesperso-orange.fr>. This is where supplements to my books can be found. Permanent address: <http://carva.org/denis.berthier>.

[Brouwer 2006]: BROUWER A., Solving Sudokus,
<https://homepages.cwi.nl/~aeb/games/sudoku/>, 2006.

[CLIPS core]: <https://sourceforge.net/p/clipsrules/code/HEAD/tree/branches/63x/core/>

[edhelper www]: <http://www.edhelper.com/puzzles.htm>, a website with instances of various difficulty levels for many different logic puzzles.

[Hodoku www]: <http://hodoku.sourceforge.net>, one of the best Sudoku solvers, with an explanation of the Sudoku specific rules.

[Mebane 2012]: MEBANE P.,
https://mellowmelon.files.wordpress.com/2012/05/pack03hidato_v3.pdf, the hardest and most interesting Hidato® puzzles.

[Nikoli www]: <http://www.nikoli.com/>, Probably the most famous reference in logic puzzles.

[slinker www]: <https://github.com/timhutton/slinker> (last version as of this writing: 0.1.1).

[Smithsonian www]: <http://www.smithsonianmag.com/games/hidato.html>, the “official” place for Hidato® puzzles.

[Sternen www]: STERTEN (alias dukuso), <http://magictour.free.fr/sudoku.htm>, a famous collection of hard Sudoku puzzles;

[Sternen 2005]: STERTEN (alias dukuso), *suexg*, <http://www.setbb.com/phpbb/viewtopic.php?t=206&mforum=sudoku>, 2005, a top-down Sudoku generator;

[Tatham www]: <http://www.chiark.greenend.org.uk/~sgtatham/puzzles/>, one of the classical references in logic puzzles, with generally rather easy instances.

[Werf www]: van der WERF R., Sudocue, Sudoku Solving Guide, <http://www.sudocue.net/guide.php>, 2005-2007.

Software

[CSP-RULES]: <https://github.com/denis-berthier/CSP-Rules-V2.1>

[CSP-RULES-EXAMPLES]: <https://github.com/denis-berthier/CSP-Rules-Examples>

[CBG]: https://github.com/denis-berthier/Controlled-bias_Sudoku_generator_and_collection

[TE3-CLASSIF]: <https://github.com/denis-berthier/Classifications-of-TE3-Sudokus>

