

# Automatic WordNet Construction using Cross-lingual Embeddings

Line 1 - FullName1, FullName2

Line 2 - Name of organization1

Line 3 - City1, Country1

Line 4 - Author1, Author2@domain.edu

**Abstract**—Low-resource languages often lack structured text representations (taxonomies, ontologies and lexical databases). In this paper we propose a method for constructing WordNets from Princeton WordNet without translation engines or parallel corpora. The proposed method uses cross-lingual word embeddings and outperforms translation-based techniques in F1-score. We also publish automatically constructed general truncated WordNets and collocation WordNets for 44 languages (including non-European ones)<sup>1</sup>.

## I. INTRODUCTION

There are numerous structured information representations containing texts as titles, descriptions or definitions: e.g. ontologies, taxonomies, and lexical databases. Among such databases we can highlight WordNet Miller [1995]. WordNet is a lexical database covering various types of relations between words: both semantical and lexical. Semantic concepts called synsets are connected in accordance to the semantical and lexical relations between them. The database has found a very broad usage for many natural language processing and machine learning applications Kutuzov et al. [2018]; Mao et al. [2018]. There have been many attempts by researchers to automatically convert WordNet from English into other languages. Most attempts were focused on using machine translation engines, extensive bilingual dictionaries or parallel corpora Khodak et al. [2017]; Neale [2018] which are often lacking for low-resource languages.

In this paper we propose a method for constructing WordNets using cross-lingual embeddings. Unlike previous attempts our method does not require translation engines or parallel corpora. There have been already works using word embeddings for extending existing WordNets Sand et al. [2017]; Al tarouti and Kalita [2016] in monolingual settings. However, these methods could not be used for creating a WordNet for another language from scratch.

Word embeddings proved to be a powerful tool for dense text representations after papers by Bengio Bengio et al. [2003] and Mikolov Mikolov et al. [2013a]. However, the first word vector representation models were monolingual only. Soon researchers proposed cross-lingual word embeddings Mikolov et al. [2013b]. There followed several improvements to the original model. In 2016 Arxetxe et al. found that Procrustes refinement gets better results than the original linear transformation method by Mikolov. Besides, most earlier methods suffered from the "hubness problem" where some words (es-

pecially low frequency ones) appear in the top neighbour lists of many other words.

Alexis Conneau et al. in (2017) offered a method called cross-domain similarity local scaling (CSLS) to overcome this problem. They reached 81.7% accuracy for English-Spanish and 83.7% for Spanish-English pairs for top-1500 source queries in a completely unsupervised mode. For English-Russian and Russian-English their results are not as high and they achieved accuracy of 51.7% and 63.7% respectively. Their FastText embeddings were trained on Wikipedia datasets for each language respectively. They have published aligned embeddings for 30 languages<sup>2</sup>. Joulin et al. in (2018) found that convex relaxation of the CSLS loss improves the quality of bilingual word alignment. They have also published aligned FastText vectors with vocabularies of more than 2 million words and phrases<sup>3</sup> (Fig. 1).

Many researchers have used a similar method for detecting new hypernyms-hyponyms relations beyond WordNet for English. The work by Sanchez and Riedel [2017] has provided an overview of such methods. Such models may achieve up to 81.2 %accuracy after removing noise samples.

## II. CROSS-LINGUAL EMBEDDINGS

MUSE is based on the work by Conneau et al. Conneau et al. [2017]. It consists of two algorithms. The first one which is used only in unsupervised scenarios is a pair of adversarial neural networks. The first neural network is trained to predict from which distribution  $\{X, Y\}$  embeddings come. The second neural networks is trained to modify embeddings  $X$  multiplying it by matrix  $W$  to prevent the first neural network from making accurate discriminations. Thus, at the end of the training we get a matrix  $WX$  which is aligned with matrix  $Y$ .

The second method is supervised and the aim is to find a linear mapping  $W$  between embedding spaces  $X$  and  $Y$  which can be solved using Orthogonal Procrustes problem:

$$W^* = \operatorname{argmin}_W ||WX - Y||_F = UV^T$$

where  $UV^T$  is derived using singular value decomposition  $\operatorname{SVD}(YX^T) = U\Sigma V^T$ . This method is used iteratively with the default number of iterations in MUSE equal to 5. As

<sup>1</sup>the link is removed to stay anonymous for the review process

<sup>2</sup><https://github.com/facebookresearch/MUSE>

<sup>3</sup><https://fasttext.cc/docs/en/aligned-vectors.html>

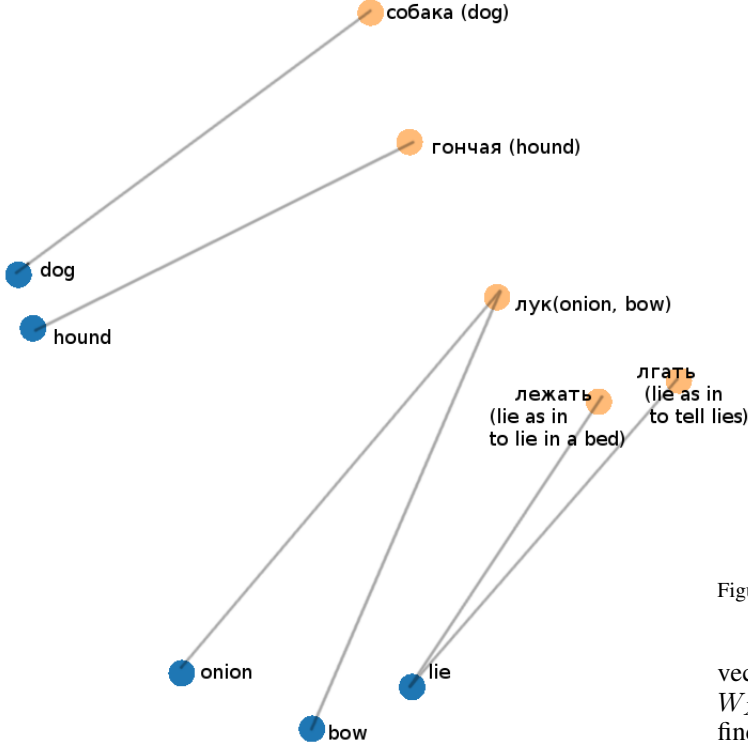


Figure 1. PCA visualization of aligned word embeddings for Russian and English

Søgaard, Ruder and Vulić state, Procrustes refinement relies on frequent word pairs serving as reliable anchors.

Conneau et al. also apply cross-domain similarity local scaling to lessen the extent of hubness problem which cross-lingual embeddings are prone to Dinu et al. [2015]. It uses cosine similarity between a source embedding vector  $x$  and  $k$  target nearest embeddings  $\mathcal{N}$  (the default  $k$  in MUSE is 10) to generate a dictionary.

$$sim(x, y) = \frac{1}{k} \sum_{i=1}^K \cos(x, \mathcal{N}_{x_i});$$

$$\mathcal{N}_X \in Y = \{y_1, \dots, y_n\}$$

$$CSLS(x, y) = 2 \cos(x, y) - sim_{source}(x, y) - sim_{target}(y, x)$$

Vecmap Artetxe et al. [2018] is close in its idea to the Procrustes refinement, it computes SVD-factorization  $SVD(YX^T) = U\Sigma V^T$  and replaces  $X$  and  $Y$  with new matrices  $X' = U$  and  $Y' = V$ . The authors also propose normalization and whitening (sphering) transformation. After applying whitening new matrices are equal to:  $X' = (X^T X)^{-\frac{1}{2}}$  and  $Y' = (Y^T Y)^{-\frac{1}{2}}$

Jawanpuria et al. [2018] propose a method which is, likewise, based on SVD-factorization but in smooth Riemannian manifolds instead of Euclidean space.

Joulin et al. in (2018) introduced a reformulation of CSLS that can be generalized to convex functions (Relaxed CSLS loss). Due to the orthogonality constraint on  $W$  and FastText

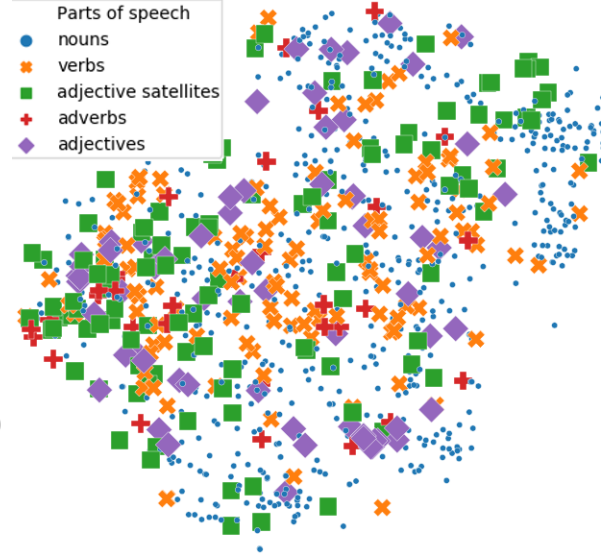


Figure 2. t-SNE visualisation of WordNet synset SIF-embeddings

vectors being  $\ell_2$ -normalized  $\cos(Wx, y) = x^T W^T y$  and  $\|y - W_{X_i}\|_2^2 = 2 - 2x^T W^T y$ . The problem can be reformulated to find the  $k$  elements of  $Y$  which have the largest dot product with  $W_{X_i}$ . Thus, RCSLS can be written down as:

$$\begin{aligned} \min_{W \in O_d} & \frac{1}{n} \sum_{i=1}^n -2x_i^T W^T y_i \\ & + \frac{1}{k} \sum_{y_j \in \mathcal{N}_Y(W_{X_i})} x_i^T W^T y_j \\ & + \frac{1}{k} \sum_{W_{X_j} \in \mathcal{N}_X(y_i)} x_j^T W^T y_i \end{aligned}$$

Thus, RCSLS can be solved using manifold optimization tools Boumal et al. [2014].

### III. PROPOSED METHOD

We reformulated the problem of synset finding as a binary classification problem. The task is to predict for the given synset-lemma pair whether they are related or not. As the training/validation data we used English Princeton WordNet Miller [1995] provided by the NLTK package Bird [2006]. It contains 117,659 synsets. As positive examples we use true lemma-synset pairs. As negative examples lemmas from other synsets with the same root are used (chicken.n.01 vs. chicken.n.02). We also added some random words because of scarcity of negative examples. There were also attempts at augmenting training data with synsets from other languages besides English using the Open Multilingual WordNet Bond and Paik [2012]; Bond and Foster [2013]. Unfortunately, only three models from the Open Multilingual WordNet contain 100% of core Princeton WordNet word senses (5000 most popular synsets): the Finnish, the Chinese and the Croatian. In our experiments we used only Finnish Open WordNet because besides being 100% full it allows to avoid implicit bias towards Indo-European languages used for testing.

Table I. TRAINING DATA FOR CHICKEN.N.01 (THE FLESH OF A CHICKEN USED FOR FOOD)

Word	Synset	Target
chicken	chicken.n.01	1
poulet	chicken.n.01	1
yellow	chicken.n.01	0
chickenhearted	chicken.n.01	0
visible	chicken.n.01	0

Synset embeddings were calculated using an averaged synset lemma embedding and the definition embedding. As lemma and definitions are in English, MUSE or RCSLS pretrained English models were employed for embeddings generation. We used averaging weights 0.2 for the lemma and 0.8 for the definition (best at the validation dataset). SIF (smooth inverse frequency) and TF-IDF (term frequency-inverse document frequency) averaging schemes were employed for definition embeddings. SIF Arora et al. [2017] embeddings use pre-trained word vectors. For each sentence  $s$  this model first creates a vectorized averaged representation  $V_s$ .

$$V_s = \frac{1}{|s|} \sum_{w \in s} \frac{a}{a + p(w)} V_w$$

where  $V_w$  is the word unigram probability and  $a$  is a scalar (set to 1e-3 by default). After that all sentence embeddings are grouped into a matrix where  $u$  is its first singular vector. The final sentence embedding is computed using this singular vector  $u$ .

$$V_s = V_s - uu^T V_s$$

For each lemma we used its embedding from the corresponding cross-lingual pre-trained model (Conneau et al. [2017] or Joulin et al. [2018]) for the language.

Each synset embedding vector was augmented with a one-hot vector representing its part of speech and the synset number from the Princeton WordNet, empirically it was found that it provides a tiny boost to the final score.

Predicting synset relations is not a trivial task even in a monolingual setting. A simple linear model is unlikely to help in this case as we failed to get any meaningful cluster representation for synsets using t-SNE (t-Distributed Stochastic Neighbor Embedding) van der Maaten and Hinton [2008] (Fig. 2). Moreover, there is not much training data and models are prone to overfitting in such circumstances. Thus, we introduced an ensemble of 4 LightGBM-models (Gradient Boosting Machine) Ke et al. [2017] and 4 dense 3-layered fully-connected neural networks with dropout as regularization Srivastava et al. [2014] (Fig. 3). LightGBM is an efficient, fast and easy to use Gradient Boosting model Natekin and Knoll [2013].

In the neural network ReLU's (rectified linear units) were used for activations of hidden fully-connected layers ( $f(x) = \max(0, x)$ ). Sigmoid activation was used for the output layer ( $f(x) = \frac{e^x}{e^x + 1}$ ). Dropout rates were set as (0.2, 0.2, 0.1). As the loss function we used binary cross validation which can be derived from cross validation:

$$CE = - \sum_i^C y_i \log(\hat{y}_i)$$

where  $y$  are true and  $\hat{y}$  are predicted labels. For the binary case cross validation transforms into:

$$CE = - \sum_i^2 y_i \log(\hat{y}_i)$$

$$y_2 = 1 - y_1; \hat{y}_2 = 1 - \hat{y}_1$$

$$CE = -(y_1 \log(\hat{y}_1) + (1 - y_1) \log(1 - \hat{y}_1))$$

All models prediction probabilities were averaged. After that classes were inferred using the threshold computed on the validation set. A more sophisticated ensemble approach might have improved results, but voting and individual model weighting schemes showed worse results in our case.

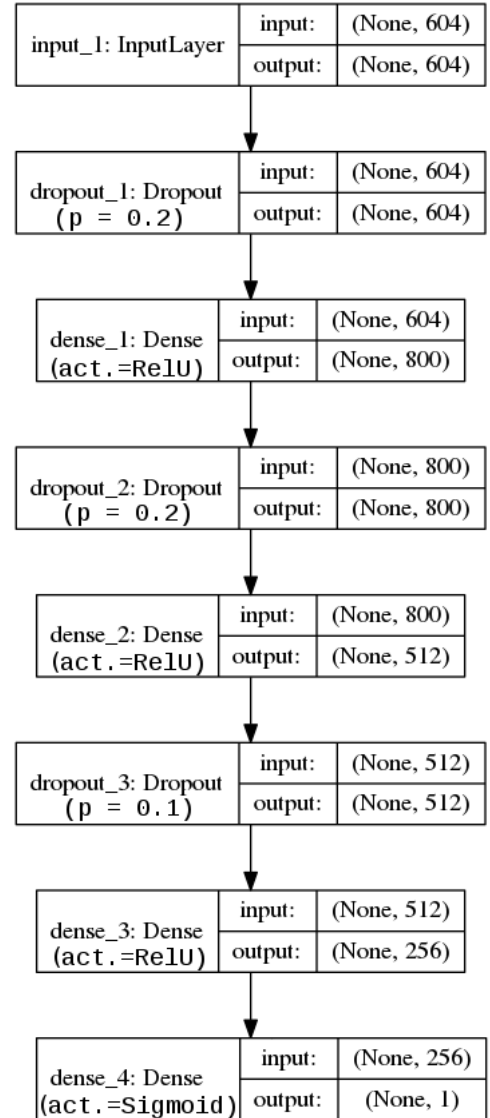


Figure 3. Keras model

In our case parameters fine-tuning of the model classification threshold (e.g. the threshold to distinguish between two classes was not 0.5 but 0.42) using half of test data of the target language for validation (and removing it from the final test dataset) not only did not bring any benefit to the final

score, but even decreased it significantly (about 3 F1-score points).

We also attempted to fine tune input data using PCA (principal component analysis) and UMAP (Uniform Manifold Approximation and Projection) McInnes et al. [2018] but it did not provide any gains.

For testing there were used two manually annotated datasets provided in the paper Khodak et al. [2017] for Russian and French languages respectively. Each dataset consists of 600 target language words from three parts of speech (nouns, verbs and adjectives). Each word has some true senses (synsets) and false ones (Table II). The original test procedure did not penalize models if some synsets were absent from the model and could not be predicted. In our case the RCSLS-model has the full coverage of the dataset, thus we were able to give predictions even for the rarest synsets.

#### IV. WORDNET CONSTRUCTION

In line with previous works Vossen [2013]; Tufis et al. [2006] we extend an existing WordNet and match words from the target language to existing Princeton WordNet synsets. For this we use our ensemble model: for every word we predict its synsets.

Despite being easy to train, WordNet construction imposes significant computational problems in our case because we need to compare each word from the vocabulary with every possible synset. Luckily matrix calculus and modern machine-learning frameworks allow us to predict all synsets for several words in a single batch. However, to ease computation requirements we used several heuristics. 1) removed strings with punctuation besides the underscore symbol. 2) identified the language using the model from Joulin et al. [2016] for each string (FastText embeddings are noisy and contain a lot of samples from other languages). All computations were vectorized. Ensemble methods also are easy to parallelize using the multiprocessing realization in Python and using bufferized numpy-arrays allows to increase the batch size and avoid copying data Gorelick and Ozsvald [2014].

Candidate synsets were preselected using a simple model with a low threshold (0.2). However, we still had to limit the size of our WordNets. That is why we publish automated WordNets for all collocations and most common 10000 lemmas for 44 languages. To increase the quality of the generated models it was decided to sacrifice recall for the sake of precision and we increased the model confidence threshold to 0.6.

#### V. MULTIWORD EXPRESSIONS

##### VI. WORDNET GENERATION PIPELINE

We generated not only truncated WordNets but also WordNets for multiword expressions. Multiword expressions (MWE) are notoriously difficult to process and to model Sag et al. [2002]. A typical phrasing scheme used by Mikolov in Word2Vec (2013a) is a very simple and rather efficient way to take phrase context into consideration and not just consider it as an average of its constituents 4.

$$score(w_i, w_j) = \frac{count(w_i w_j) - \delta}{count(w_i) * count(w_j)}$$

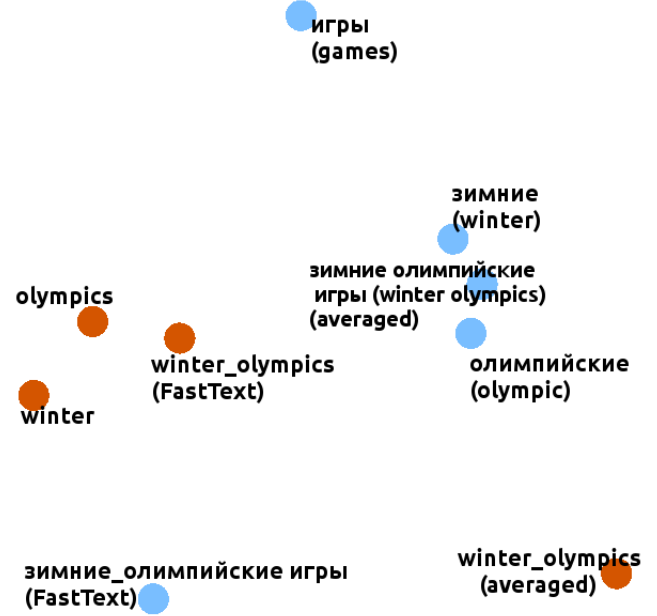


Figure 4. t-SNE visualisation of averaged and FastText induced embeddings for MWE

Other metrics such as PMI Bouma [2009] or a special model for identifying MWE using a corpus like PARSEME Savary et al. [2018] might have been preferable. Yet in this work we were constrained by the multi-word expression scheme used in pretrained embeddings.

Another problem with FastText MWE is that the model is trained using the Wikipedia corpora. This leads to many artifact multi-word expressions corresponding to Wikipedia categories (Fig III). Besides some synsets tend to be too general or of a wrong part of speech (Fig. IV). Still we decided to publish WordNet for this collocations as many of them are still relevant and correspond to multi-part verbs and real collocations (e.g. 'take notes', 'take away'). It also highlights the importance of another approach for MWE in word embedding models. Also some language embeddings do not contain any collocations (e.g. Korean).

#### VII. RESULTS

As can be seen from the table V cross-lingual embedding methods outperform translation methods in most categories except Russian nouns without being fine-tuned on the test dataset (as in the work by Khodak). Moreover, what we find amusing is that English validation set results are similar to the results for the test set. Actually, f1-score fine-tuning using the validation set even decreased the test set. In addition, cross-lingual methods are reported to work in a completely unsupervised way. Even in the unsupervised mode they are easier to come by because they require only a limited bilingual dictionary. High-quality translation engines are still inadequate for low-resource languages (and for many rare languages they reportedly outperform Transformer-based models Conneau et al. [2018]).

Using information from another language is also helpful. It provides up to 1.5 F1-score point performance boost for

Table II. TEST DATA BY KHODAK ET AL. [2017]

Word	Target	Synset	Definition
адрес	1	address.n.01	(computer science) the code that identifies where a piece of information is stored
	0	address.n.03	the act of delivering a formal spoken communication to an audience
aise	1	comfortable.a.01	providing or experiencing physical well-being or relief
	0	comfortable.s.03	more than adequate; Example 1: the home team had a comfortable lead

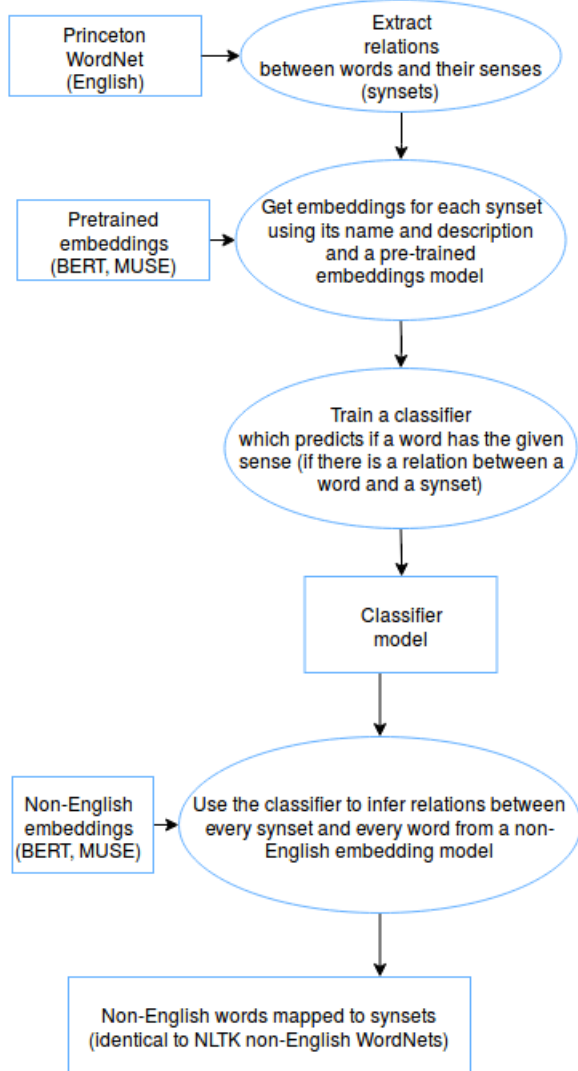


Figure 5. The pipeline showing WordNet generation using cross-lingual embeddings

Table III. MWE EXAMPLES FOR THE ALIGNED ENGLISH RCSLS EMBEDDINGS

nearest_city
fiscal_code
architectural_style
population_metro
winners_share
third_team
people_from_new_orleans
parent_agency

Table IV. SYNSET MATCHING FOR MWE

MWE	Synsets
Тоталитарная секта (totalitarian cult) (Russian)	terrorization.n.02
	cult.n.04
	revolutionary_organization_17_november.n.01
zweiter weltkrieg (German)	nazify.v.01
	blitzkrieg.v.01
gospodarska regija (economic region) (Croatian)	economic_geography.n.01
	zone.v.01

some parts of speech. However, the English-only model also outperforms previous works for French and is slightly better than our best-performing model in verb representation. It should also be noted that in the experiments with MUSE-embeddings (not tested for RCSLS embeddings) data from other languages with smaller WordNets (e.g. Polish) from the Extended Open Multilingual WordNet decreased the results by 1.2 - 2 accuracy points for the validation dataset.

The SIF embedding scheme provides an advantage of 3.5 F1-score points in comparison with simple TF-IDF averaging.

MUSE-embeddings perform slightly worse than RCSLS. However, it should also be noted that the vocabulary for MUSE embeddings is only 200'000 words vs 2'000'000 for RCSLS. Yet this should not have substantially influenced test results because of the chosen test procedure (scores are not lowered if the given model lacks the synset lemma).

Ensembling gives a major performance boost. However, it may be partially attributed to our lack of investment into fine-tuning of individual models. Individual models are also almost as performant for French as previous multi-stepped procedures that used translation engines and clustering. However, they fail for Russian which can be attributed to overfitting to the original English dataset. Simple averaging between models helps to mitigate it.

## VIII. CONCLUSION

Cross-lingual embeddings turned out to be an efficient method for cross-lingual WordNet extension. This approach outperforms translation-based methods in F1-score. It also does not require costly translation engines and parallel corpora. This technique is not limited to WordNet construction, and can also be used for other types of similar structures (e.g. taxonomies and ontologies). Our approach can also be used for comparing various cross-lingual embedding models Bakarov [2018].

We see that in our case RCSLS-embeddings consistently outperform MUSE. The same is true for SIF-embeddings which outperform unweighted and TFIDF-weighted embeddings.

We also published truncated and collocation WordNets for 44 languages which can be used in future research.

Table V. RESULTS FOR WORDNET-SYNSET PREDICTION

Method	POS	F1 French	F1 Russian
Extended Open Multilingual Wordnet Bond and Foster [2013]	Adj.	40.8	41.3
	Noun	43.8	53.1
	Verb	29.4	34.8
	Total	38.0	43.1
Synset Representation + Linear-WSI Khodak et al. [2017]	Adj.	62.5	64.9
	Noun	66.0	<b>67.61</b>
	Verb	55.9	49.7
	Total	61.5	60.7
SIF + Non-English data + RCSLS	Adj.	<b>62.8</b>	<b>65.0</b>
	Noun	<b>71.8</b>	65.1
	Verb	60.0	<b>54.8</b>
	Total	<b>64.1</b>	<b>61.0</b>
SIF + <b>Only-English</b> data + RCSLS	Adj.	62.3	64.6
	Noun	70.9	63.6
	Verb	<b>60.3</b>	53.6
	Total	63.9	60.1
SIF + Non-English data + <b>MUSE</b>	Adj.	61.0	64.8
	Noun	71.3	64.1
	Verb	59.0	54.3
	Total	63.9	60.5
<b>TFIDF</b> + Non-English data + RCSLS	Adj.	62.3	63.0
	Noun	68.1	59.5
	Verb	53.9	48.0
	Total	60.7	56.5

An interesting direction of improvement would be to use fully-unsupervised models that do not rely on any parallel data at all. As WordNets contain hyponym-hypernym relations, it would also be of interest to change the embeddings training process to incorporate hierarchical information Alsuhailani et al. [2019].

## REFERENCES

- Feras Al tarouti and Jugal Kalita. 2016. Enhancing Automatic Wordnet Construction Using Word Embeddings. In *Proceedings of the Workshop on Multilingual and Cross-lingual Methods in NLP*, pages 30–34, Stroudsburg, PA, USA. Association for Computational Linguistics.
- Mohammed Alsuhailani, Takanori Maehara, and Danushka Bollegala. 2019. Joint Learning of Hierarchical Word Embeddings from a Corpus and a Taxonomy. pages 1–19.
- Sanjeev Arora, Yingyu Liang, and Tengyu Ma. 2017. A Simple but Tough-to-Beat Baseline for Sentence Embeddings. *ICLR*, pages 1–14.
- Mikel Artetxe, Gorka Labaka, and Eneko Agirre. 2016. Learning principled bilingual mappings of word embeddings while preserving monolingual invariance. In *Proceedings of the 2016 Conference on Empirical Methods in Natural Language Processing*, pages 2289–2294.
- Mikel Artetxe, Gorka Labaka, and Eneko Agirre. 2018. A robust self-learning method for fully unsupervised cross-lingual mappings of word embeddings.
- Amir Bakarov. 2018. A Survey of Word Embeddings Evaluation Methods.
- Y Bengio, R Ducharme, and P Vincent. 2003. A neural probabilistic language model. *Journal of Machine Learning Research*, 3:1137–1155.
- Steven Bird. 2006. NLTK: the natural language toolkit. In *Proceedings of the COLING/ACL 2006 Interactive Presentation Sessions*, pages 69–72. Association for Computational Linguistics.
- Francis Bond and Ryan Foster. 2013. Linking and Extending an Open Multilingual Wordnet. In *Proceedings of the 51st Annual Meeting of the Association for Computational Linguistics (ACL)*, pages 1352–1362.
- Francis Bond and Kyonghee Paik. 2012. A Survey of WordNets and their Licenses. In *Proceedings of the 6th Global WordNet Conference (GWC 2012)*, pages 64–71, Matsue.
- Gerlof Bouma. 2009. Normalized (pointwise) mutual information in collocation extraction. *Proceedings of GSCL*, pages 31–40.
- Nicolas Boumal, Bamdev Mishra, P-A Absil, and Rodolphe Sepulchre. 2014. Manopt, a Matlab toolbox for optimization on manifolds. *The Journal of Machine Learning Research*, 15(1):1455–1459.
- Alexis Conneau, Guillaume Lample, Marc’Aurelio Ranzato, Ludovic Denoyer, and Hervé Jégou. 2017. Word Translation Without Parallel Data.
- Alexis Conneau, Guillaume Lample, Ruty Rinott, Adina Williams, Samuel R. Bowman, Holger Schwenk, and Veselin Stoyanov. 2018. XNLI: Evaluating Cross-lingual Sentence Representations. *arxiv.org*.
- Georgiana Dinu, Angeliki Lazaridou, and Marco Baroni. 2015. Improving zero-shot learning by mitigating the hubness problem. In *Proceedings of the 3rd International Conference on Learning Representations (ICLR2015), workshop track*.
- Micha Gorelick and Ian Ozsvald. 2014. *High Performance Python: Practical Performant Programming for Humans*. "O’Reilly Media, Inc."
- Pratik Jawanpuria, Arjun Balgovind, Anoop Kunchukuttan, and Bamdev Mishra. 2018. Learning Multilingual Word Embeddings in Latent Metric Space: A Geometric Approach.
- Armand Joulin, Piotr Bojanowski, Tomas Mikolov, Hervé

- Jégou, and Edouard Grave. 2018. Loss in translation: Learning bilingual word mapping with a retrieval criterion. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 2979–2984.
- Armand Joulin, Edouard Grave, Piotr Bojanowski, and Tomas Mikolov. 2016. Bag of Tricks for Efficient Text Classification.
- Guolin Ke, Qi Meng, Thomas Finley, Taifeng Wang, Wei Chen, Weidong Ma, Qiwei Ye, and Tie-yan Liu. 2017. LightGBM : A Highly Efficient Gradient Boosting Decision Tree. In *Advances in Neural Information Processing Systems 30 (NIPS 2017)*, pages 3149–3157.
- Mikhail Khodak, Andrej Risteski, Christiane Fellbaum, and Sanjeev Arora. 2017. Automated WordNet Construction Using Word Embeddings. In *Proceedings of the 1st Workshop on Sense, Concept and Entity Representations and their Applications*, pages 12–23, Stroudsburg, PA, USA. Association for Computational Linguistics.
- Andrey Kutuzov, Mohammad Dorgham, Oleksiy Oliynyk, Chris Biemann, and Alexander Panchenko. 2018. Learning Graph Embeddings from WordNet-based Similarity Measures.
- Laurens van der Maaten and Geoffrey Hinton. 2008. Visualizing data using t-SNE. *Journal of machine learning research*, 9(Nov):2579–2605.
- Rui Mao, Guanyi Chen, Ruizhe Li, and Chenghua Lin. 2018. ABDN at SemEval-2018 Task 10: Recognising Discriminative Attributes using Context Embeddings and WordNet. In *Proceedings of The 12th International Workshop on Semantic Evaluation*, pages 1017–1021, Stroudsburg, PA, USA. Association for Computational Linguistics.
- Leland McInnes, John Healy, and James Melville. 2018. UMAP: Uniform Manifold Approximation and Projection for Dimension Reduction.
- Tomas Mikolov, Kai Chen, Greg Corrado, and Jeffrey Dean. 2013a. Distributed Representations of Words and Phrases and their Compositionality. *Nips*, pages 3111–3119.
- Tomas Mikolov, Quoc V. Le, and Ilya Sutskever. 2013b. Exploiting Similarities among Languages for Machine Translation.
- George A. Miller. 1995. WordNet: a lexical database for English. *Communications of the ACM*, 38(11):39–41.
- Alexey Natekin and Alois Knoll. 2013. Gradient boosting machines, a tutorial. *Frontiers in neurorobotics*, 7:21.
- Steven Neale. 2018. A Survey on Automatically-Constructed WordNets and their Evaluation: Lexical and Word Embedding-based Approaches. In *Proceedings of the Eleventh International Conference on Language Resources and Evaluation (LREC 2018)*, Miyazaki, Japan. European Language Resources Association (ELRA).
- Ivan A Sag, Timothy Baldwin, Francis Bond, Ann Copestake, and Dan Flickinger. 2002. Multiword expressions: A pain in the neck for NLP. In *International Conference on Intelligent Text Processing and Computational Linguistics*, pages 1–15. Springer.
- Ivan Sanchez and Sebastian Riedel. 2017. How Well Can We Predict Hypernyms from Word Embeddings? A Dataset-Centric Analysis. In *Proceedings of the 15th Conference of the European Chapter of the Association for Computational Linguistics: Volume 2, Short Papers*, pages 401–407.
- Heidi Sand, Erik Velldal, and Lilja Øvrelid. 2017. Wordnet extension via word embeddings: Experiments on the Norwegian Wordnet. In *Proceedings of the 21st Nordic Conference on Computational Linguistics*, pages 298–302.
- Agata Savary, Marie Candito, V Barbu Mititelu, Eduard Bejček, Fabienne Cap, and M van Gompel. 2018. PARSEME multilingual corpus of verbal multiword expressions.
- Nitish Srivastava, Geoffrey Hinton, Alex Krizhevsky, Ilya Sutskever, and Ruslan Salakhutdinov. 2014. Dropout: A Simple Way to Prevent Neural Networks from Overfitting. *Journal of Machine Learning Research*, 15:1929–1958.
- Dan Tufis, Verginica Barbu Mititelu, Luigi Bozianu, and Catalin Mihaila. 2006. Romanian wordnet: New developments and applications. In *Proceedings of the 3rd Conference of the Global WordNet Association*, pages 337–344.
- Piek. Vossen. 2013. *EuroWordNet: A multilingual database with lexical semantic networks*. Kluwer Academic.