
Лабораторная 10

1.activity_main_xml

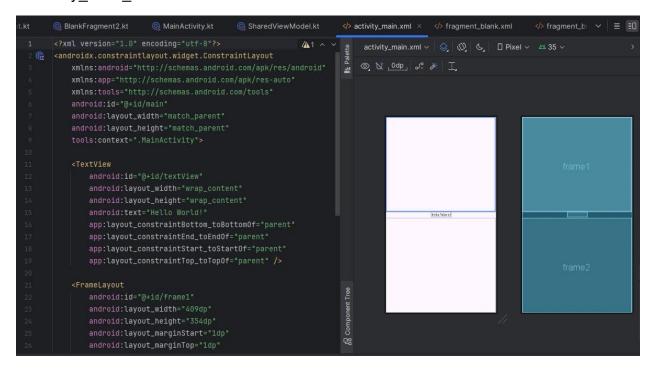

2.MainActivity.kt

```
R SharedViewModel.kt
      RlankFragment2.kt
                             @ MainActivity.kt ×
                                                                                               fragment_blank.x
        package com.example.a10_android
12 ▷� class MainActivity : AppCompatActivity() {
          💡 lateinit var binding: ActivityMainBinding
            private lateinit var sharedViewModel: SharedViewModel
                 super.onCreate(savedInstanceState)
                 binding = ActivityMainBinding.inflate(layoutInflater)
                 setContentView(binding.root)
                 <u>sharedViewModel</u> = ViewModelProvider( owner: this).get(SharedViewModel::class.jανα)
                openFragment(BlankFragment(), R.id.frame1)
                openFragment(BlankFragment2(), R.id. frame2)
            private fun openFragment(f: Fragment, idHolder: Int) {
                     .beginTransaction()
                     .replace(idHolder, f)
                     .commit()
```