

Software Requirements Specification (SRS)

Web Based ML Model Evaluator

Project: Web Based ML Model Evaluator

Version: 1.1

Team: Team 5

Authors: Denis Mangla (PES2UG24CS151), R P Pranav (PES2UG24CS917), Chellamani Adithya Iyer (PES2UG24CS129), Disha Bose (PES2UG24CS160)

Course: Software Engineering

Date: 05-09-2026

Status: Ready for Submission

Revision history

Version	Date	Author	Change summary	Approval
1.0	02-09-2026	Team 5	Initial SRS with functional, non-functional and security requirements, two UML use-case diagrams and the RTM	Reviewed
1.1	05-09-2026	Team 5	SRS for Web Based ML Model Evaluator	Approved

Approvals

Role	Name	Signature / Email	Date
Course Coordinator			

Table of Contents

1. Introduction
2. Overall description
3. External interfaces
4. System features (detailed)
5. Non-functional requirements (detailed)
6. Quality attributes & Acceptance tests
7. UML Use-Case Diagram
8. Requirements Traceability Matrix (RTM)

1. Introduction

1.1 Purpose

This document is a Software Requirements Specification for the Web Based ML Model Evaluator, a browser-based application that lets a user upload a tabular dataset, configure a preprocessing pipeline, train one or more machine-learning models on it, and compare the resulting evaluation metrics side by side. It states the functional, non-functional and security requirements of the system together with the acceptance criteria against which each requirement will be verified.

1.2 Scope

The system covers dataset upload and validation, column profiling, preprocessing configuration, supervised model selection and hyperparameter entry, background training execution, computation of evaluation metrics, comparison of completed runs, report generation and CSV export, administration of user accounts, and management of the dataset catalogue.

The following are outside the scope of this release: deep-learning workloads requiring GPU acceleration; unsupervised learning; image, audio, video and free-text datasets; automated feature engineering; publishing trained models as inference endpoints; and any billing functionality. These exclusions are stated so that acceptance is judged against the declared boundary rather than an assumed one.

1.3 Audience

The four developers of Team 5, the course coordinator and evaluators for the Software Engineering course, and any future maintainer of the system.

1.4 Definitions

- SRS — Software Requirements Specification.
- FR / NFR — Functional Requirement / Non-Functional Requirement.
- RTM — Requirements Traceability Matrix.
- Run — one execution of a selected algorithm over a prepared dataset, together with its stored configuration and metrics.
- Pipeline — the ordered set of preprocessing operations applied to a dataset before training.
- Target column — the column that a model is trained to predict.
- MAE, MSE, RMSE — Mean Absolute Error, Mean Squared Error, Root Mean Squared Error.
- TLS — Transport Layer Security.

2. Overall description

2.1 Product perspective

The product is a new, self-contained web application. It is organised as a Django project made of cooperating apps — accounts, datasets, pipeline, models, runs, evaluation, reports and administration — with training executed by a background worker inside the same process. Dataset files are held on the server file system under a per-user directory, while user accounts, run configurations, metrics and audit records are held in the relational database. The system replaces no existing software and integrates with no external institutional system.

2.2 Major product functions (detailed)

- Register, authenticate and manage user accounts under two roles.

- Upload, validate and profile tabular CSV datasets.
- Configure a preprocessing pipeline: target selection, missing-value handling, encoding, scaling and train/test split.
- Select a supervised algorithm and set its hyperparameters.
- Execute training in the background and report job state.
- Compute and display the evaluation metrics appropriate to the problem type.
- Compare multiple completed runs on one dataset in a single table.
- Generate an evaluation report and export a comparison as CSV.
- Administer user accounts and manage the dataset catalogue.

2.3 User roles and characteristics (expanded)

- Registered User — a student or analyst who understands basic machine-learning vocabulary but is not expected to write code; wants to reach a comparison of models quickly and to trust that the numbers are reproducible.
- Administrator — manages user accounts and the dataset catalogue; needs to act on accounts without needing to read the contents of another user's datasets.
- Training Engine — an internal background worker/component that executes queued training runs, computes evaluation metrics and reports job progress back to the application. It is an implementation component inside the system, not an external actor in the UML use-case diagrams.

2.4 Operating environment

Server: Python 3.11 with Django, using pandas and scikit-learn for the data and modelling layer, and an internal background worker thread for training execution. Data is held in SQLite during development and may be moved to PostgreSQL for deployment without application change, since access is through the Django ORM. Uploaded files are stored on the local file system. Client: current versions of Chrome, Firefox and Edge on a desktop browser at a minimum viewport width of 1024 pixels, with the interface rendered by Django templates and Bootstrap and charts drawn by Chart.js.

2.5 Constraints

- Training executes on CPU only; no GPU is assumed to be available.
- An individual upload is limited to 50 MB and an individual training job to 10 minutes of wall-clock time.
- Only supervised classification and regression on tabular data are supported in this release.
- Only libraries under a permissive open-source licence may be used.
- The system must run on a single ordinary development machine; no cluster or managed cloud service is assumed.
- The project is delivered within one academic semester by a team of four.

3. External interface requirements

3.1 User interfaces

A browser interface presenting a linear primary workflow — dataset, pipeline, model, run, results — with the current stage always visible. Job state updates without a manual page refresh. Metrics are presented as numeric tables, and every chart is accompanied by the equivalent table so that no information depends on the chart alone. Colour is never the sole carrier of meaning, and every form control carries a text label reachable by keyboard.

3.2 Hardware interfaces

The system requires no special-purpose hardware and interacts with the host only through standard file-system and network calls. Its resource use is bounded by the upload size limit and the training time limit stated in section 2.5.

3.3 Software interfaces

- Browser to server: HTTP over TLS, with HTML pages rendered by Django templates and a small JSON endpoint used for polling job state.
- Application to worker: an in-process job record identified by a job key, carrying state, timing and error reason.
- Worker to modelling libraries: pandas and scikit-learn, invoked in-process.
- Application to database: the Django ORM over SQLite in development, or PostgreSQL when deployed.
- Application to file system: authenticated read and write of uploaded datasets under a per-user directory.

3.4 Communications

All traffic to a deployed instance uses TLS 1.2 or higher, with plain HTTP redirected to HTTPS. Failures are reported with standard HTTP status codes and a message the user can act on. A training job whose worker terminates unexpectedly is marked Failed with a reason rather than being left in an indefinite Running state.

4. System features (detailed)

Each requirement below carries an acceptance criterion and a reference test case. Functional identifiers follow the pattern MLE-F-###.

4.1 Account and access management

Description: registration, authentication and the separation of user and administrator capability.

Req ID	Requirement (shall...)	Type	Priority	Source / Stakeholder	Acceptance criteria / Test case ref	Comments / Dependencies
MLE-F-001	The system shall allow a new user to register with a unique email address and a password of at least eight characters.	Functional	High	Project Team	AC: Registration succeeds for a unique email; a duplicate email is rejected with an explanatory message. Test: TC-ACC-01	Django auth
MLE-F-002	The system shall authenticate a registered user by email and password before granting access to any dataset, run or report.	Functional	High	Security	AC: An unauthenticated request to a protected page is redirected to login. Test: TC-ACC-02	See MLE-SR-003
MLE-F-003	The system shall support the roles Registered User and Administrator, and shall restrict administrative pages to Administrators.	Functional	High	Project Team	AC: A Registered User opening an admin page receives HTTP 403. Test: TC-ACC-03	Basis of §4.7

4.2 Dataset upload and validation

Description: accepting a tabular dataset, proving that it is safe and usable, and profiling it for the user.

Req ID	Requirement (shall...)	Type	Priority	Source / Stakeholder	Acceptance criteria / Test case ref	Comments / Dependencies
MLE-F-010	The system shall allow an authenticated user to upload a tabular dataset in CSV format of size up to 50 MB.	Functional	High	Project Team	AC: A 50 MB file is accepted; a larger file is rejected with a size message. Test: TC-DS-01	—
MLE-F-011	The system shall validate the extension and parsed structure of every uploaded file, and shall reject any file that is not well-formed CSV or that has fewer than 20 rows or 2 columns.	Functional	High	Security	AC: An executable renamed to .csv and a 19-row file are both rejected and neither is stored. Test: TC-DS-02	Implements MLE-SR-004
MLE-F-012	The system shall profile an accepted dataset and display row count, column count, inferred data type and missing-value percentage for each column.	Functional	High	Data Analyst	AC: The displayed profile matches the pandas-computed reference profile for the sample dataset. Test: TC-DS-03	Input to §4.3
MLE-F-013	The system shall associate every uploaded dataset with the owning user account and shall make it inaccessible to any other non-administrative user.	Functional	High	Security	AC: User B requesting User A's dataset identifier receives HTTP 403. Test: TC-DS-04	Implements MLE-SR-003

4.3 Preprocessing pipeline

Description: turning a raw dataset into a training matrix through explicit, recorded and reproducible transformations.

Req ID	Requirement (shall...)	Type	Priority	Source / Stakeholder	Acceptance criteria / Test case ref	Comments / Dependencies
MLE-F-020	The system shall allow the user to nominate one column as the prediction target and to mark each remaining column as a feature or as excluded.	Functional	High	Data Analyst	AC: Excluded columns are absent from the training matrix of the resulting run. Test: TC-PP-01	Requires MLE-F-012
MLE-F-021	The system shall provide per-column missing-value strategies of mean, median, mode and row deletion.	Functional	High	Data Analyst	AC: Each strategy produces the value computed by the reference implementation. Test: TC-PP-02	—
MLE-F-022	The system shall provide categorical encoding by one-hot or label encoding, and numeric scaling by standardisation or min-max normalisation.	Functional	High	Data Analyst	AC: Encoded and scaled output matches reference values within 1e-6. Test: TC-PP-03	—

Req ID	Requirement (shall...)	Type	Priority	Source / Stakeholder	Acceptance criteria / Test case ref	Comments / Dependencies
MLE-F-023	The system shall split the prepared dataset into training and testing subsets at a user-specified ratio between 50:50 and 90:10, using a random seed that is recorded with the run.	Functional	High	Project Team	AC: Re-running with the same seed reproduces an identical split. Test: TC-PP-04	Supports MLE-F-042

4.4 Model selection and configuration

Description: choosing a supervised algorithm appropriate to the problem and configuring its hyperparameters.

Req ID	Requirement (shall...)	Type	Priority	Source / Stakeholder	Acceptance criteria / Test case ref	Comments / Dependencies
MLE-F-030	The system shall offer at least five classification algorithms: Logistic Regression, Decision Tree, Random Forest, K-Nearest Neighbours and Support Vector Machine.	Functional	High	Project Team	AC: All five appear in the selector and each completes a training run. Test: TC-MS-01	scikit-learn
MLE-F-031	The system shall offer at least three regression algorithms: Linear Regression, Decision Tree Regressor and Random Forest Regressor.	Functional	High	Project Team	AC: All three appear in the selector and each completes a training run. Test: TC-MS-02	scikit-learn
MLE-F-032	The system shall expose the editable hyperparameters of the selected algorithm with validated ranges and documented default values.	Functional	Medium	Data Analyst	AC: An out-of-range value is refused before the job is queued. Test: TC-MS-03	—

4.5 Training and job execution

Description: running training in the background without blocking the interface, and recording enough state to reproduce any run.

Req ID	Requirement (shall...)	Type	Priority	Source / Stakeholder	Acceptance criteria / Test case ref	Comments / Dependencies
MLE-F-040	The system shall execute a training request in the background and shall return control to the user interface without waiting for the run to finish.	Functional	High	Project Team	AC: The page responds within 1 s while the job state is still Queued or Running. Test: TC-TR-01	Worker thread + Job model
MLE-F-041	The system shall display the job state as Queued, Running, Completed or Failed, refreshed at intervals of no more than 5 seconds, and shall show the error reason for a failed run.	Functional	High	Data Analyst	AC: A state change is visible within 5 s; a deliberately broken run shows its reason. Test: TC-TR-02	—

Req ID	Requirement (shall...)	Type	Priority	Source / Stakeholder	Acceptance criteria / Test case ref	Comments / Dependencies
MLE-F-042	The system shall persist for every completed run the dataset reference, preprocessing configuration, algorithm, hyperparameters and random seed, sufficient to reproduce the run.	Functional	High	Assessment	AC: Re-executing a stored run reproduces its metrics exactly. Test: TC-TR-03	Requires MLE-F-023

4.6 Evaluation, metrics and comparison

Description: computing the metrics appropriate to the problem type and comparing runs — the central purpose of the product.

Req ID	Requirement (shall...)	Type	Priority	Source / Stakeholder	Acceptance criteria / Test case ref	Comments / Dependencies
MLE-F-050	The system shall compute and display accuracy, precision, recall, F1-score and a confusion matrix for every completed classification run.	Functional	High	Data Analyst	AC: Metrics match scikit-learn reference values within 1e-6. Test: TC-EV-01	—
MLE-F-051	The system shall compute and display MAE, MSE, RMSE and the coefficient of determination for every completed regression run.	Functional	High	Data Analyst	AC: Metrics match scikit-learn reference values within 1e-6. Test: TC-EV-02	—
MLE-F-052	The system shall allow a user to select two or more completed runs on the same dataset and shall present their metrics side by side in one comparison table.	Functional	High	Data Analyst	AC: A comparison of three runs shows all three metric sets in a single table. Test: TC-EV-03	Core project objective

4.7 Reporting, export and administration

Description: exporting results for external use, administering user accounts, and managing the dataset catalogue.

Req ID	Requirement (shall...)	Type	Priority	Source / Stakeholder	Acceptance criteria / Test case ref	Comments / Dependencies
MLE-F-060	The system shall generate a downloadable evaluation report containing the dataset summary, preprocessing configuration, algorithm, hyperparameters and all computed metrics.	Functional	High	Assessment	AC: The report contains every listed element for a completed run. Test: TC-RP-01	Requires MLE-F-042
MLE-F-061	The system shall export a run comparison as a CSV file whose values match the on-screen comparison table.	Functional	Medium	Data Analyst	AC: The downloaded CSV opens without error and its values match the table. Test: TC-RP-02	Extends MLE-F-052

Req ID	Requirement (shall...)	Type	Priority	Source / Stakeholder	Acceptance criteria / Test case ref	Comments / Dependencies
MLE-F-062	The system shall provide an administrator page to list user accounts and to deactivate or reactivate an account.	Functional	Medium	Operations	AC: A deactivated account cannot log in until it is reactivated. Test: TC-AD-01	Requires MLE-F-003
MLE-F-063	The system shall provide an administrator function to list dataset catalogue entries and remove catalogue entries when permitted by administrative policy.	Functional	Medium	Operations	AC: An Administrator can list catalogue entries and remove an allowed entry; the removed entry no longer appears in the catalogue. Test: TC-AD-02	Requires MLE-F-003

5. Non-functional requirements (detailed)

The requirements below are measurable on the project development machine and each is tied to a test in the acceptance plan. Identifiers follow the pattern MLE-NF-####.

Req ID	Requirement (shall...)	Category	Priority	Acceptance criteria / Measurement
MLE-NF-001	The 95th-percentile response time of pages that do not perform training shall not exceed 2 seconds under a load of 10 concurrent users.	Performance	High	95th percentile ≤ 2 s in a 10-user load test lasting 5 minutes. Test: TC-PERF-01
MLE-NF-002	The system shall complete a training run on a dataset of 50,000 rows and 30 columns, using default hyperparameters, within 120 seconds on the project development machine.	Performance	High	Median of five runs on the reference dataset ≤ 120 s. Test: TC-PERF-02
MLE-NF-003	A failed or abandoned training job shall not render the application unusable; the job shall be marked Failed with a reason within 10 seconds and other functions shall remain available.	Reliability	High	A deliberately failing job is marked Failed within 10 s while other pages continue to respond. Test: TC-REL-01
MLE-NF-004	A first-time user shall complete upload, training and metric review within 5 minutes without consulting documentation, and every form control shall carry a text label reachable by keyboard.	Usability	Medium	Three of three trial participants finish within 5 min; keyboard-only walkthrough reaches every control. Test: TC-UX-01
MLE-NF-005	The preprocessing, model-selection and evaluation modules shall each maintain at least 60% unit-test line coverage.	Maintainability	Medium	The coverage report shows $\geq 60\%$ line coverage for each of the three modules. Test: TC-MNT-01
MLE-NF-006	The system shall retain the run history and audit records for the full duration of the project, with all timestamps recorded in UTC.	Audit / Data retention	Medium	Runs created at the start of the project remain retrievable at project close; sampled timestamps are UTC. Test: TC-OPS-01

5.1. Security

5.1.1 Security Objectives

SO-1 Confidentiality of user data. An uploaded dataset, the artefacts derived from it and its evaluation results shall be readable only by the account that owns them and by an administrator acting in an administrative capacity.

SO-2 Integrity and accountability of results. Every action that changes state shall be authenticated, authorised and recorded, so that a stored run cannot be altered silently and every administrative action can be attributed to an individual.

SO-3 Safe execution of untrusted input. A file or configuration supplied by a user shall not be able to execute arbitrary code on the server or exhaust the resources shared with other users.

5.1.2 Security Requirements

Req ID	Requirement (shall...)	Type	Priority	Acceptance criteria / Test case ref
MLE-SR-001	The system shall serve all traffic over TLS 1.2 or higher when deployed, and shall redirect plain HTTP to HTTPS.	Security	High	The deployed host answers only over HTTPS and a TLS check reports no protocol below 1.2. Test: TC-SEC-01 Objective SO-1
MLE-SR-002	The system shall store user passwords only as salted one-way hashes produced by the framework password hasher, and shall never store or log them in reversible form.	Security	High	Database inspection shows only hashes; application logs contain no credential material. Test: TC-SEC-02 Objective SO-1
MLE-SR-003	The system shall check the role and the resource ownership on the server for every request that reads or modifies a dataset, run or report, independently of any control applied in the browser.	Security	High	Every cross-user identifier tried in the access-control test returns HTTP 403. Test: TC-SEC-03 Objectives SO-1, SO-2
MLE-SR-004	The system shall validate the extension, size and parsed structure of every uploaded file before processing it, and shall never load a user-supplied pickle or joblib file.	Security	High	A crafted pickle payload is rejected and no code from it executes on the server. Test: TC-SEC-04 Objective SO-3
MLE-SR-005	The system shall run each training job in a separate worker constrained by a wall-clock limit of 10 minutes and by the dataset size limit, and exceeding either shall terminate only that job.	Security	High	A deliberately long job is terminated at the limit while concurrent jobs complete normally. Test: TC-SEC-05 Objective SO-3
MLE-SR-006	The system shall write an audit record of actor, action, resource, UTC timestamp and outcome for login, upload, deletion and administrative actions, and the application shall provide no means of editing it.	Security	High	Each listed action produces exactly one audit record and no application route can modify it. Test: TC-SEC-06 Objective SO-2

6. Quality attributes & Acceptance tests

Exit criteria for acceptance: every high-priority functional requirement is implemented and verified; no security requirement is outstanding; no non-functional requirement fails its stated measurement; and the traceability matrix in section 8 shows a status of Accepted against every listed test case.

Acceptance test suites: Account and access (TC-ACC-*), Dataset handling (TC-DS-*), Preprocessing (TC-PP-*), Model selection (TC-MS-*), Training execution (TC-TR-*), Evaluation and comparison (TC-EV-*), Reporting and administration (TC-RP-*, TC-AD-*), Performance (TC-PERF-*), Reliability (TC-REL-*), Usability (TC-UX-*), Maintainability (TC-MNT-*), Operations (TC-OPS-*) and Security (TC-SEC-*).

Verification methods: automated unit and integration tests for functional behaviour, a scripted ten-user load test for performance, a fault-injection test for failure isolation, a timed walkthrough with three trial participants for usability, a coverage report for maintainability, and a manual checklist covering the six security requirements.

7. System models and diagrams

7.1 UML Use-Case diagram

Two use-case diagrams are provided. Figure 1 covers the stages that precede training: gaining access to the system, bringing a dataset in and proving it is usable, shaping it through the preprocessing pipeline, and choosing the algorithm to be trained. Validating the file is an unconditional part of every upload and is therefore modelled with «include», the arrow running from the base use case to the one it includes. Handling missing values and tuning hyperparameters happen only when the user chooses to intervene, and are modelled with «extend», the arrow running from the optional behaviour back to the base use case it extends.

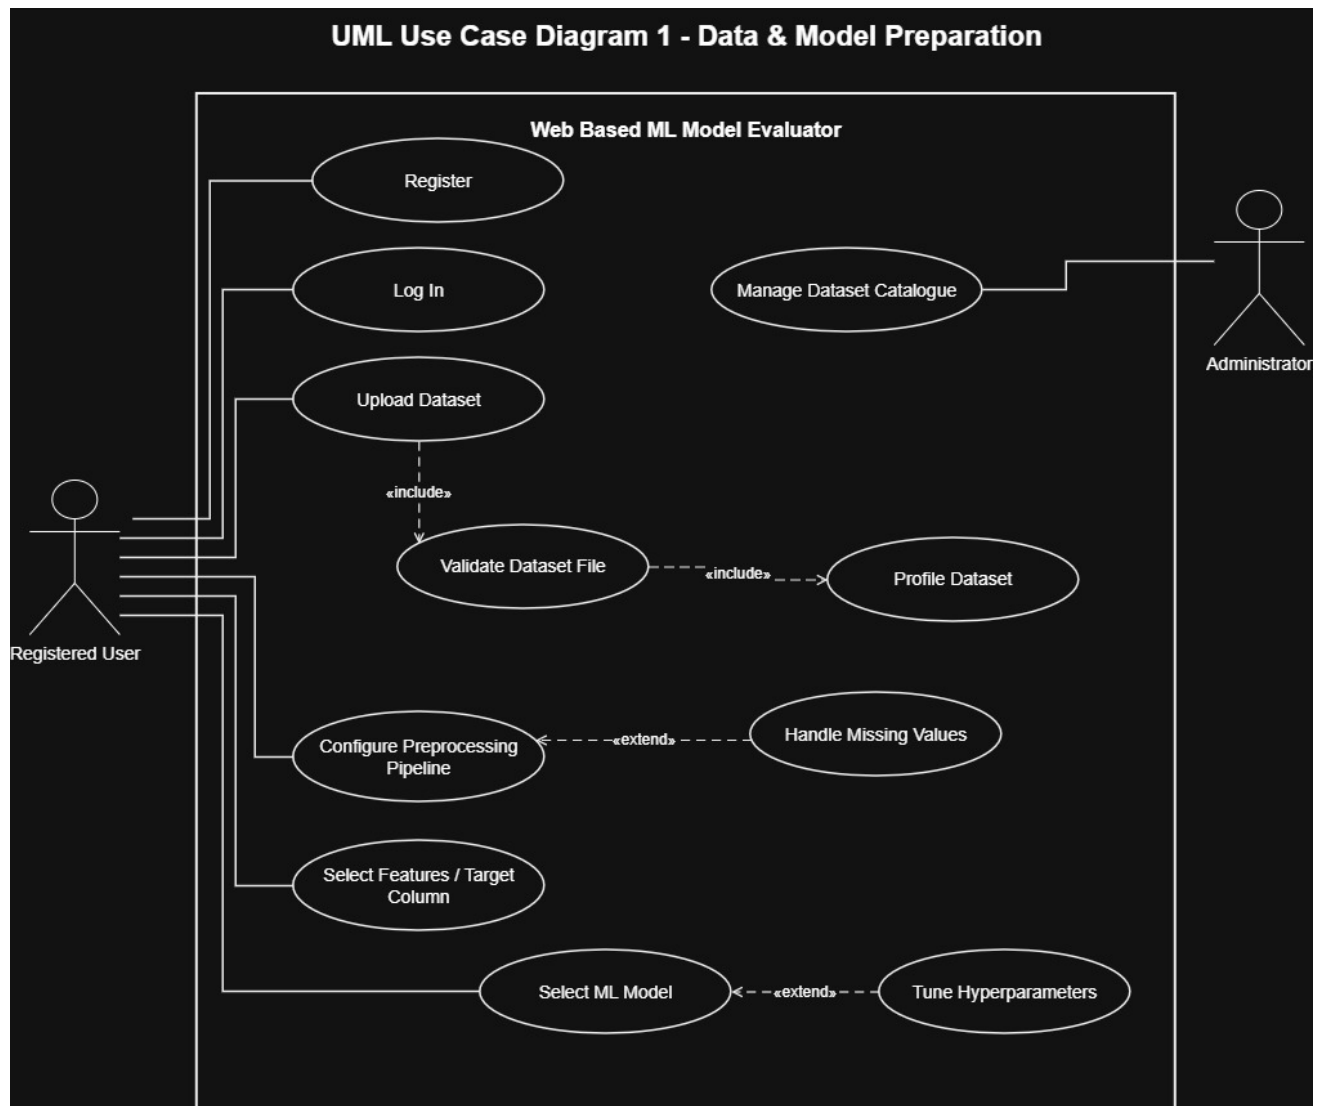


Figure 1 — Use-case diagram: Data and Model Preparation

Figure 2 covers execution and everything downstream of it. The Registered User starts and monitors training and consumes evaluation results, while the training work is performed by the internal background worker described in Section 2.3. Computing the evaluation metrics is an unconditional part of every training job and is modelled with «include». Exporting a comparison as CSV is optional behaviour extending Compare Model Runs and is modelled with «extend».

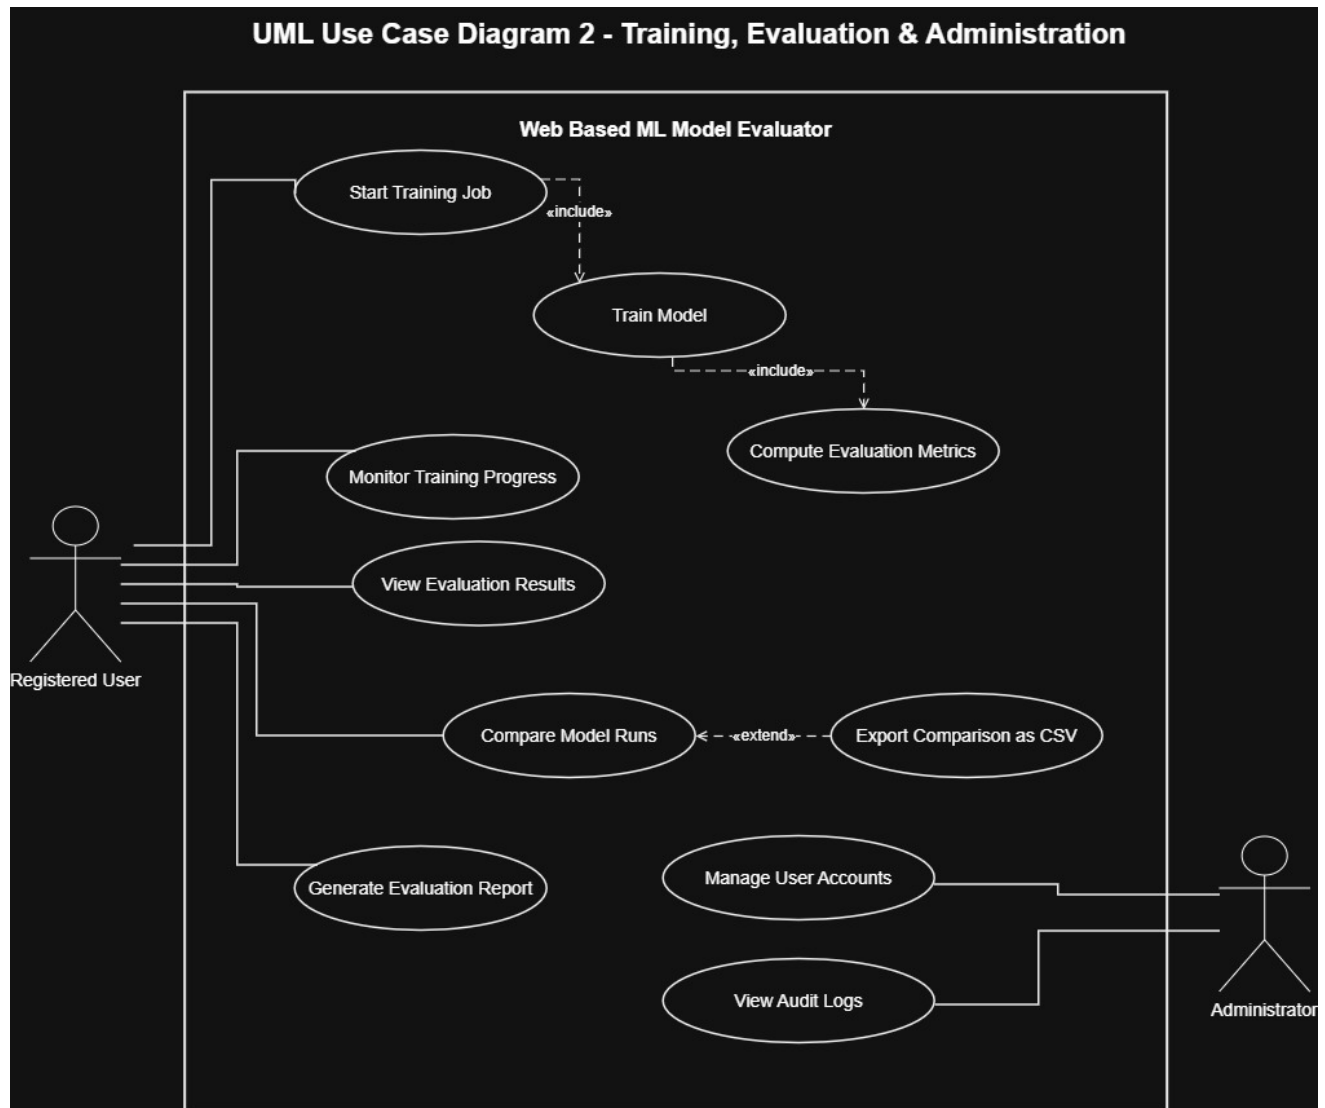


Figure 2 — Use-case diagram: Training, Evaluation and Administration

8. Requirements Traceability Matrix (RTM)

Status codes: N — Not started, P — In progress, A — Accepted.

Req ID	Requirement (short)	Section ref / Design spec	Module	Test case(s)	Status (N/P/A)	Comments
MLE-F-001	Register account	4.1 / DS-Auth-01	AccountsApp	TC-ACC-01	N	
MLE-F-002	Authenticate user	4.1 / DS-Auth-02	AccountsApp	TC-ACC-02	N	
MLE-F-003	Role-based pages	4.1 / DS-Auth-03	AccountsApp	TC-ACC-03	N	
MLE-F-010	Upload CSV dataset	4.2 / DS-Data-01	DatasetsApp	TC-DS-01	N	
MLE-F-011	Validate uploaded file	4.2 / DS-Data-02	DatasetsApp	TC-DS-02	N	
MLE-F-012	Profile dataset	4.2 / DS-Data-03	DatasetsApp	TC-DS-03	N	
MLE-F-013	Dataset ownership	4.2 / DS-Data-04	DatasetsApp	TC-DS-04	N	
MLE-F-020	Target and features	4.3 / DS-Prep-01	PipelineApp	TC-PP-01	N	
MLE-F-021	Missing-value handling	4.3 / DS-Prep-02	PipelineApp	TC-PP-02	N	
MLE-F-022	Encoding and scaling	4.3 / DS-Prep-03	PipelineApp	TC-PP-03	N	
MLE-F-023	Train / test split	4.3 / DS-Prep-04	PipelineApp	TC-PP-04	N	
MLE-F-030	Classification models	4.4 / DS-Model-01	ModelsApp	TC-MS-01	N	
MLE-F-031	Regression models	4.4 / DS-Model-02	ModelsApp	TC-MS-02	N	
MLE-F-032	Hyperparameter entry	4.4 / DS-Model-03	ModelsApp	TC-MS-03	N	
MLE-F-040	Background training	4.5 / DS-Train-01	RunsApp / Worker	TC-TR-01	N	
MLE-F-041	Job status display	4.5 / DS-Train-02	RunsApp	TC-TR-02	N	
MLE-F-042	Reproducible run	4.5 / DS-Train-03	RunsApp	TC-TR-03	N	
MLE-F-050	Classification metrics	4.6 / DS-Eval-01	EvaluationApp	TC-EV-01	N	
MLE-F-051	Regression metrics	4.6 / DS-Eval-02	EvaluationApp	TC-EV-02	N	
MLE-F-052	Compare runs	4.6 / DS-Eval-03	EvaluationApp	TC-EV-03	N	
MLE-F-060	Evaluation report	4.7 / DS-Rep-01	ReportsApp	TC-RP-01	N	
MLE-F-061	CSV export	4.7 / DS-Rep-02	ReportsApp	TC-RP-02	N	
MLE-F-062	Manage accounts	4.7 / DS-Adm-01	AdminApp	TC-AD-01	N	
MLE-NF-001	Response time	5 / DS-Perf-01	WebUI	TC-PERF-01	N	
MLE-NF-002	Training time	5 / DS-Perf-02	Worker	TC-PERF-02	N	
MLE-NF-003	Failure isolation	5 / DS-Rel-01	RunsApp / Worker	TC-REL-01	N	
MLE-NF-004	Usability	5 / DS-Ux-01	WebUI	TC-UX-01	N	
MLE-NF-005	Test coverage	5 / DS-Mnt-01	Core modules	TC-MNT-01	N	

Req ID	Requirement (short)	Section ref / Design spec	Module	Test case(s)	Status (N/P/A)	Comments
MLE-NF-006	Retention	5 / DS-Ops-01	AuditLog	TC-OPS-01	N	
MLE-SR-001	TLS enforced	5.1.2 / DS-Sec-01	Deployment	TC-SEC-01	N	
MLE-SR-002	Password hashing	5.1.2 / DS-Sec-02	AccountsApp	TC-SEC-02	N	
MLE-SR-003	Ownership checks	5.1.2 / DS-Sec-03	All apps	TC-SEC-03	N	
MLE-SR-004	Safe file handling	5.1.2 / DS-Sec-04	DatasetsApp	TC-SEC-04	N	
MLE-SR-005	Job limits	5.1.2 / DS-Sec-05	Worker	TC-SEC-05	N	
MLE-SR-006	Audit logging	5.1.2 / DS-Sec-06	AuditLog	TC-SEC-06	N	
MLE-F-063	Manage dataset catalogue	4.7 / DS-Adm-02	AdminApp	TC-AD-02	N	