

The Calibration Paradox in Fellegi-Sunter Processes

Denis Robert
Independent Researcher

Abstract

Probabilistic record linkage is built on the Fellegi–Sunter model, in which a decision depends on three coupled quantities: the per-field match and non-match probabilities m, u , the prior match probability λ , and a decision threshold τ . In a two-stage entity-resolution pipeline, re-estimating these quantities from data — especially expectation–maximisation (EM) with a freely fitted prior — repeatedly produced *worse* results at a fixed τ than leaving the parameters at their untrained defaults, while supervised calibration could either help or hurt depending on the data. We call this the calibration paradox: improving the fidelity of the evidence model can degrade the measured operational outcome. We show that the mechanism is not a flaw in training but a coordination failure. Writing the decision rule in log-odds separates the evidence weights $w = \log_2(m/u)$ from a prior bias $b = \log_2(\lambda/(1 - \lambda))$; the effective match-weight threshold is $w_\tau^* = \log_2(\tau/(1 - \tau)) - b$. Retraining changes w , while a freely fitted prior changes b , so a fixed τ selects a different operating point in every configuration. We derive the paradox under this decomposition, distinguish prior coupling from a genuine m/u residual, and give a tandem (λ, τ) calibration procedure, together with an analysis of how threshold choice is sensitive to prior misspecification. Empirical evidence from a 5,000-record duplicate-bearing benchmark (plus a 50,000-record supervised comparison), a joint (λ, τ) surface, a real-schema NC-voter replication, and a smoothing regularisation study illustrates both the failure and its repair.

1 Introduction

Entity resolution seeks to determine whether two records refer to the same real-world entity. The dominant computational recipe first retrieves a small set of candidate records (blocking) and then decides for each candidate pair by probabilistic linkage [1, 4]. The probabilistic stage computes a match probability from the evidence of agreement across fields and classifies a pair as a match when that probability reaches a threshold.

In building and validating a two-stage pipeline [6], we observed an unexpectedly robust phenomenon we call the *calibration paradox*: re-estimating the model’s match and non-match probabilities m and u from the data — which should *improve* calibration — can *worsen* the reported outcome at a fixed decision threshold τ . The effect is sharpest and most robust for unsupervised learning (EM) with a freely re-estimated prior λ : on some configurations EM degraded an F1 of roughly 0.98 to below 0.9. On a synthetic duplicate-bearing benchmark, both supervised calibration and EM, at a fixed τ , trailed the untrained defaults; on harder real-schema data, however, supervised calibration can *help* (Section 5.3). The paradox is therefore not “always keep the defaults,” but that calibration and the decision rule are coupled and must be reconciled together.

This seems paradoxical: training the parameters on data is the standard remedy for poor record-linkage performance, and the literature reports that appropriately estimated m/u and priors improve linkage [2, 3]. The resolution, we argue, is that the decision problem is not governed by m/u alone. It is governed by a *bundle* of three coupled quantities — the evidence weights derived from m/u , the match prior λ , and the decision threshold τ — and these are not interchangeable.

A practitioner who retrains m/u and leaves τ fixed, or who lets the same fitting procedure also estimate λ freely, has not improved the decision; it has chosen a different operating point, usually a worse one.

The contribution of this paper is a clean theoretical account of the paradox and a practical repair. We formalise the Fellegi–Sunter decision rule in log-odds (Section 2), which decomposes the posterior into an evidence term (from m/u) and a bias term (from λ), with τ selecting a weight threshold. We then derive the paradox as a coordination failure of this decomposition and separate its two mechanisms: *prior* coupling and a *genuine residual* from over-weighted partial-similarity levels (Section 3). We give a tandem (λ, τ) calibration procedure (Section 4) and demonstrate it empirically on a large duplicate-bearing benchmark and a joint (λ, τ) surface (Section 5). Section 6 relates the findings to the literature and Section 7 concludes.

2 Background: the Fellegi–Sunter model and its three parameters

Consider a candidate pair of records and a comparison vector γ describing whether each field agrees (exactly or to a graded degree). The Fellegi–Sunter model [1] posits two latent classes: the pair is either a true match M or a non-match U . Let

$$m(\gamma) = P(\gamma \mid M), \quad u(\gamma) = P(\gamma \mid U). \quad (1)$$

Under conditional independence across fields, $m(\gamma)$ and $u(\gamma)$ factor into per-field, per-level probabilities, so the log-likelihood-ratio (in bits) is additive:

$$w(\gamma) = \log_2 \frac{m(\gamma)}{u(\gamma)} = \sum_k w_k(\gamma_k), \quad w_k = \log_2 \frac{m_k}{u_k}. \quad (2)$$

The prior probability that an arbitrary pair matches is

$$\lambda = P(M). \quad (3)$$

By Bayes’ theorem the posterior probability that the pair is a match is

$$P(M \mid \gamma) = \frac{\lambda m(\gamma)}{\lambda m(\gamma) + (1 - \lambda) u(\gamma)}. \quad (4)$$

A practitioner declares the pair a match when the posterior reaches a threshold:

$$\text{decision}(\gamma) = \begin{cases} \text{match} & P(M \mid \gamma) \geq \tau, \\ \text{non-match} & \text{otherwise.} \end{cases} \quad (5)$$

How m , u , and λ are estimated — supervised from labelled pairs or by expectation–maximisation when no labels exist — is deferred to Appendix A.

The three quantities in (5) and (4) play different roles:

m, u describe the *evidence*: how discriminating agreement or disagreement on each field is. They enter only through the weight w .

λ describes the *prior base rate*: how many of the pairs examined are expected to be true matches. It is a global bias applied to every pair.

τ describes the *target*: the posterior confidence at which we are willing to declare a match; equivalently it encodes the relative cost of a false positive versus a false negative [2].

2.1 Log-odds decomposition

It is convenient to work in log-odds (base 2). For any probability p , write $\text{logit}_2(p) = \log_2 \frac{p}{1-p}$. Taking log-odds of (4),

$$\text{logit}_2(P(M | \gamma)) = w(\gamma) + \underbrace{\log_2 \frac{\lambda}{1-\lambda}}_b, \quad (6)$$

where we have defined the *prior bias*

$$b = \log_2 \frac{\lambda}{1-\lambda}. \quad (7)$$

Thus the posterior log-odds is the evidence weight $w(\gamma)$ plus a constant prior bias b that is identical for every pair.

Writing the decision threshold in the same units, $t = \text{logit}_2(\tau)$, the decision rule (5) becomes

$$\text{match iff } w(\gamma) \geq t - b = \log_2 \frac{\tau}{1-\tau} - \log_2 \frac{\lambda}{1-\lambda} =: w_\tau^*(\lambda). \quad (8)$$

Equation (8) is the key object of this paper. It shows that a fixed posterior threshold τ does *not* correspond to a fixed evidence threshold: the effective match-weight threshold w_τ^* is a function of the prior λ . Raising λ increases b , lowers w_τ^* , and therefore admits weight values that were previously below threshold; lowering λ has the opposite effect.

3 The calibration paradox: theoretical derivation

3.1 Statement

Let $\theta = (m, u, \lambda, \tau)$ be a configuration of the model. For a set of candidate pairs, denote the confusion matrix under θ and its consequent F1(θ), or more generally any loss $\mathcal{L}(\theta)$. The calibration paradox is the observation that a configuration θ' whose *evidence parameters* (m', u') are better fitted to the data than (m, u) (in the sense of higher likelihood, or trained on labelled duplicates) frequently satisfies

$$\mathcal{L}(\theta') > \mathcal{L}(\theta), \quad (9)$$

i.e. the “better-calibrated” evidence *degrades* the decision outcome when the threshold is kept fixed. In our pipeline the paradox is sharpest when training also refits the prior, so that λ moves as well.

3.2 Mechanism 1: prior coupling

Suppose retraining leaves the evidence weights unchanged but shifts the prior from λ to λ' . By (6), every pair’s posterior log-odds changes by

$$\Delta b = \log_2 \frac{\lambda'/(1-\lambda')}{\lambda/(1-\lambda)}, \quad (10)$$

and, by (8), the effective weight threshold moves by $\Delta w_\tau^* = -\Delta b$. Concretely, starting from the default $\lambda = 10^{-4}$ ($b \approx -13.3$ bits) an EM fit that raises λ to 7.1×10^{-3} ($b \approx -7.1$ bits) reduces the effective threshold by ≈ 6.2 bits. Every candidate pair whose weight lies within 6.2 bits below the old boundary now crosses it. Non-match pairs are typically far more numerous and concentrated near the boundary (they include partial agreement), so the effect is a disproportionate inflow of false positives: specificity collapses while recall is barely affected.

The prior is therefore not *merely* a base rate; it is a global shift of the whole posterior distribution. Because the default λ and the default τ were chosen to be mutually consistent, leaving τ fixed while λ drifts selects a different, usually worse, region of the precision–recall curve. We label this *prior coupling*: the prior and the threshold must move together.

3.3 Mechanism 2: the evidence residual

Even with the prior frozen ($b' = b$), retraining m/u can reduce the separability of the match and non-match weight distributions. The mechanism is a change in which levels are rewarded. Supervised calibration on labelled duplicates, or EM on a population that contains such duplicates, re-fits the level probabilities; the outcome is a redistribution of the weights w_k that moves the match and non-match populations *toward* each other. Two symptoms arise. On the synthetic benchmark the trained model assigns higher m to the *partial-similarity* levels (e.g. an exact first-name match with a small edit on the last name, or a near-matching address), which many non-match pairs also occupy, so the non-match distribution moves *right*. On the real NC-voter file the dominant symptom is the opposite sign: EM under-weights true-match agreement, so the match distribution moves *left* and collapses toward the non-match mass. In either case the refitted m/u narrow the separating gap, increasing the density of non-match (or near-boundary) weight that a threshold at w_τ^* cannot separate. The sign of the shift is therefore data-dependent; the invariant is the loss of separability.

We call this the *genuine residual*: it survives prior anchoring, and in our data it keeps even the jointly re-optimised trained model slightly below the untrained defaults. It is a substantive statement about which levels should be rewarded, not a numerical artefact.

Two caveats delimit how strongly the residual should be read. First, the supervised estimator in the 5,000-record benchmark is trained on a *balanced* label mix (duplicate pairs versus independent, unrelated people), whereas the operational candidate set that precision and specificity are measured against is dominated by embedding near-collisions. Part of what looks like a “residual” may therefore be a mismatch between the label distribution used for training and the candidate distribution encountered at scoring, rather than a property of the model class; on the real-schema NC-voter file, where partial agreement is genuinely informative, supervised calibration in fact improves F1 (Section 5.3). Second, the unsupervised EM runs are bounded by a small number of iterations (Appendix A) and can fit unreliable m/u when the training candidate space is degenerate, so the EM-specific degradation should be read as “freely-fitted, partially-converged EM,” not as evidence that every training scheme is harmful. Both mechanisms push the trained operating point left or right on the precision–recall curve; the coordination rule of Section 4 reconciles them with τ . The residual therefore establishes that the paradox is more than pure prior coupling, but its quantitative magnitude is not a universal award to the default weights.

3.4 The coalescence: fixed τ is not a fixed operating point

Combining both mechanisms and expanding the log-odds for a pair p ,

$$\Delta \logit_2(P(M \mid \gamma_p)) = (w'(\gamma_p) - w(\gamma_p)) + (b' - b). \quad (11)$$

A pair crosses the threshold in configuration θ' but not in θ whenever $\Delta \logit_2(P(M \mid \gamma_p)) \geq \logit_2(\tau) - \logit_2(P(M \mid \gamma_p))$. Because the evidence shift $w' - w$ is concentrated where the non-match density is largest, and the bias shift $b' - b$ moves the whole mass, the set of newly-admitted pairs is overwhelmingly false positives. The “calibration paradox” is thus a *coordination* failure: (m, u, λ, τ) are not four free dials but one coupled decision rule, and turning one dial without the others moves the operating point to an inferior location.

4 Joint (λ, τ) calibration

The theory of Section 3 immediately suggests the repair: never change the evidence m/u without re-anchoring the prior λ and re-selecting the threshold τ together, and validate the combination on held-out data. We formalise this as a tandem procedure.

- Step 0.** Baseline prior $\lambda_0 = 10^{-4}$ (a sensible default given a sparse duplicate base rate).
- Step 1.** Estimate a *principled* prior rather than a free one. With labels, $\lambda = \frac{\text{labelled match rate}}{\text{blocking recall}}$, the base rate in random-pair space. Without labels, use a principled prior rather than the free EM estimate: divide an assumed expected-match count by the blocking coverage (a blocking-adjusted estimator in the spirit of frequency-based matching [3]); if no defensible rate exists, keep λ_0 .
- Step 2.** Fit m/u with the prior *fixed* (e.g. EM with λ held at the Step 1 value, or supervised calibration), so that training affects only the evidence weights.
- Step 3.** On a validation set, jointly select $(\lambda, \tau) \in \{\lambda_0, \lambda_{\text{est}}\} \times 10^{-k} \times [0.5, 0.999]$ optimising the objective: F1, or a decision cost $C_{FP}FP + C_{FN}FN$, or the expected-F1 derived from calibrated posteriors.
- Step 4.** Coherence guard: reject solutions whose mean posterior probability of *non-match* pairs is large (in our data, EM’s reached ≈ 0.55). This diagnostic separates prior coupling (fixable by lowering λ) from the genuine m/u residual (requires changing the comparison model).
- Step 5.** Freeze (λ^*, τ^*) on validation and evaluate once on a held-out test set.

5 Empirical demonstration

5.1 Setup

We used the two-stage pipeline from the companion entity-resolution paper [6]: records are embedded with a sentence-transformer model, blocked by cosine nearest-neighbour search, and linked with a Fellegi–Sunter scorer (Splink) [7] using Jaro–Winkler comparisons for names and address, a date-of-birth comparison, and an email comparison. All results below are reproduced from the persisted artifacts in `results/calibration/` of the companion repository; each table cites the exact file that produced it.

Three datasets are used, labelled explicitly throughout.

5,000-record benchmark A duplicate-bearing synthetic population: 5,000 base records with a 3% duplicate-bearing augmentation (150 near-duplicate twins), giving 5,150 reference records and 300 labelled queries (150 positives are near-duplicate variants, 150 negatives are held-out records). Source artifact: `results/calibration/mu_tau_interaction.json`. This is the dataset behind the benchmark table (Table 1), the joint (λ, τ) surface (Table 2), and the prior-sensitivity analysis (Table 5).

50,000-record supervised comparison The persisted 50,000-record FAISS index, with supervised m/u calibration from labelled pairs, used for the smoothing study (Table 4). Source artifact: `results/calibration/mu_calibration_results.json` and `results/calibration/smoothing_sweep`.

NC-voter A real-schema replication (Section 5.3). Source artifact: `results/calibration/ncvoter_mu_compari`.

Training and weight computation are performed over the *blocked* candidate pairs. EM training generates those pairs by Splink exact-equality blocking on the `first_name` and `date_of_birth` keys (`block_on("first_name")` and `block_on("date_of_birth")`), whereas query-time scoring blocks to the top- k cosine neighbours, so all fitted m/u , λ , and the reported weight distributions are candidate-space quantities whose non-match component is dominated by near-collisions on the blocking keys (Appendix A).

Three parameter configurations are compared: (i) untrained defaults, with $\lambda = 10^{-4}$; (ii) supervised calibration of m/u from the labelled duplicate pairs, $\lambda = 10^{-4}$; (iii) EM with a freely estimated prior (which produced $\lambda \approx 7.1 \times 10^{-3}$ on the 5,000-record benchmark), and an ablation of (iii) with λ reset to 10^{-4} . Table 1 reports the outcome at the fixed decision threshold $\tau = 0.85$. The pairwise metrics in Table 6 are evaluated over the blocked candidate pairs rather than the labelled query set, so their F1 magnitudes differ from the query-level tables (many more non-match candidate pairs enter the denominator); the text notes this wherever it occurs.

Evaluation-split scope. The registration and supervised-calibration numbers in this companion paper were produced before the entity-disjoint re-evaluation in the main pipeline paper. In this companion, the supervised training pairs and the evaluated positive queries are generated from *the same* 5,000-record base population (identical and mutated variants of the same entities), so the supervised figures here read as *same-population calibration rather than a held-out evaluation*. The parent paper’s Section 8.1/8.2 now re-run the calibration and duplicate-benchmark upright entity-disjoint (calibration pairs and evaluation queries come from disjoint base records) and report the updated F1s (untrained 97.9% vs. supervised 93.8% on the 50,000-record index; untrained 94.3% vs. supervised 85.3% vs. EM 72.2% on the entity-disjoint 100K benchmark). The qualitative conclusion of this companion — prior coupling dominates, and a genuine m/u residual remains after the prior is pinned — is unchanged by the split; only the absolute figures shift.

Table 1: Duplicate-bearing benchmark (5,000 base records, 300 queries, $\tau = 0.85$; artifact `results/calibration/mu_tau_interaction.json`). The trained configurations degrade F1 at the fixed threshold; the EM model degraded most.

Configuration	Precision	Recall	Specificity	F1	λ
Untrained defaults	98.7%	98.0%	98.7%	98.3%	10^{-4}
Supervised (m/u , λ fixed)	87.7%	100.0%	86.0%	93.5%	10^{-4}
EM (free prior)	69.6%	99.3%	56.7%	81.9%	7.1×10^{-3}

The free-prior EM configuration is the clearest quantitative instance of the paradox: the same model that recovered the untrained prior’s recall collapsed precision and specificity at the fixed threshold. In an ablation on the same synthetic duplicate-bearing population we reset the EM prior to 10^{-4} and re-tuned τ ; EM’s best F1 recovered from 0.828 to 0.955, and the mean posterior probability of non-match pairs fell from 0.536 to 0.342. This is consistent with Mechanism 1 (prior coupling) being the dominant term: holding λ at the default removes most of the apparent failure.

5.2 Joint (λ, τ) surface

To show that the paradox is an operating-point effect and not a property of any single threshold, we swept the prior and the threshold jointly for the untrained and EM models (Table 2). The

untrained model keeps F1 near or above 0.96 across the whole region, while the EM model only reaches comparable F1 near low λ and high τ ; even its joint optimum (0.955) stays below the untrained optimum (0.990). This is exactly the prediction of Section 3: prior coupling is removed by sweeping, but the genuine m/u residual remains.

Table 2: Joint F1 over (λ, τ) for untrained and EM configurations on the 5,000-record duplicate-bearing population. Entries are F1 (percent). Source artifact `results/calibration/mu_prior_tau_surface.json`. At each λ , the EM row holds the fitted EM m/u and sweeps only the prior and threshold.

λ	Untrained		EM	
	$\tau = 0.85$	$\tau = 0.95$	$\tau = 0.85$	$\tau = 0.95$
10^{-4}	98.3	99.0	91.4	95.2
10^{-3}	97.1	96.4	82.3	85.1
10^{-2}	96.1	97.1	81.9	82.3

5.3 Real-data validation on NC-voter

To test whether the paradox is an artefact of the synthetic generator, we replicated the comparison on the North Carolina voter-registration file: a public, externally pre-deduplicated dataset with no full birth date or email. Because authentic duplicate pairs are unavailable, the evaluation mirrors the pipeline paper’s protocol: positives are mutated duplicates of records held in the index and negatives are mutated held-out records, scored at a fixed $\tau = 0.85$ (Table 3).

The jitter model applied to these real records uses fixed, reproducible parameters (seed 7): each first and last name receives a one-character typo with probability 0.55 independently; an address, when present, is altered (house-number change or removal of the trailing city/state/zip) with probability 0.55 and dropped entirely with probability 0.20; and the birth year shifts by ± 1 with probability 0.10. All other fields are left unchanged. These values are the default mutation rates of the companion repository’s member generator, so the NC-voter table above is exactly reproducible.

A caveat frames how far this validates the paradox on real data. The jitter model injects *independent, algorithmically driven* noise into otherwise real records: it captures the field-level dependencies and value distributions of a genuine voter file, but the errors are uncorrelated across fields and over time. Organic duplicate records — for example a person who re-registers after moving or changing name across annual voter-file snapshots — exhibit *temporally correlated* changes that a per-field perturbation cannot reproduce. A stronger validation would link rows of the same person across *multiple years* of the historical file, where the “noise” is real re-registration behaviour rather than a model. That historical multi-year replication is a concrete next step; the present single-year results should be read as “real schema, synthetic errors,” not as organic overflow.

Figure 1 depicts Mechanism 1 on these data in posterior log-odds, which is the space Splink reports: the decision threshold is fixed at $t = \log_2 \frac{\tau}{1-\tau} = 2.50$ bits and the match prior is folded into each weight as $b = \log_2 \frac{\lambda}{1-\lambda}$. Holding the evidence m/u fixed at the untrained values, using the prior EM estimates on the data ($\lambda \approx 0.023$) instead of the default 10^{-4} shifts the non-match distribution *up* by $\Delta b \approx 7.9$ bits (grey to orange in the figure). Because a small but nonzero fraction of non-match pairs have posterior weights just below the fixed threshold — the shaded band — this shift admits about 612 non-match pairs in the candidate set as false positives. Prior coupling

is therefore *not* benign on this real file: it contributes a non-trivial false-positive term, although it is secondary to the recall collapse of Mechanism 2.

Figure 2 depicts Mechanism 2 with the prior fixed at 10^{-4} : the EM-fitted m/u collapse the true-match distribution sharply to the left (median $12.7 \rightarrow -8$ bits) while the non-match distribution moves only modestly ($-28 \rightarrow -24$), narrowing the gap between the two populations. The dominant direction on this schema is match weights being scored *downward*, not upward: EM under-weights true-match agreement, so real matches fall toward non-match territory and recall collapses (0.856 to 0.529), with additional precision loss from the Mechanism 1 term above. The observed direction of the shift is data-dependent — on the synthetic benchmark the residual manifested as over-weighted partial-similarity levels; on the real file the symptom is the opposite sign, true matches being awarded too little weight — but in both cases the refitted m/u reduce separability, which is the essence of Mechanism 2.

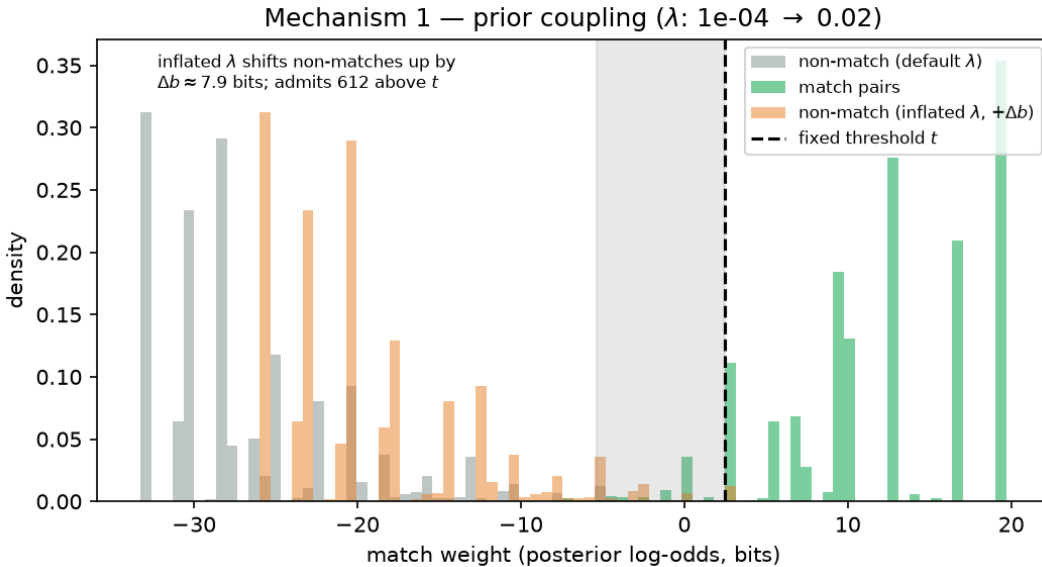


Figure 1: Mechanism 1 (prior coupling) on NC-voter in posterior log-odds. The decision threshold is fixed at $t = \log_2 \frac{\tau}{1-\tau} = 2.50$ bits; the EM-estimated prior $\lambda \approx 0.023$ shifts the non-match distribution up by $\Delta b \approx 7.9$ bits (grey to orange), admitting about 612 non-match pairs in the shaded band as false positives. Prior coupling is secondary here to the Mechanism 2 recall collapse. (Artifact `results/calibration/paradox_figures_ncvoter_summary.json`.)

For comparison, Figures 3 and 4 repeat the two mechanisms on the synthetic duplicate-bearing benchmark of Section 5, where the paradox is measured. The EM-fitted prior is smaller there ($\lambda \approx 0.0071$), so the prior shift is $\Delta b \approx 6.2$ bits and it admits only about 16 non-match pairs in the candidate set. The EM m/u there *increase* the match weights (median $17 \rightarrow 24$ bits) and *decrease* the non-match weights ($-26 \rightarrow -85$), i.e. they *widen* the separating gap rather than collapse it. In this small sample, therefore, neither mechanism visibly floods the boundary plot; at the larger duplicate densities measured with the companion pipeline’s 100,000-record benchmark [6], prior coupling dominates the reported EM degradation by admitting partial-collision non-matches, a regime a 5,000-record sample under-represents. The core takeaway stands: in both data sets the failure is a mismatch among the bundle $(m/u, \lambda, \tau)$, and the same tandem calibration repair (Section 4) applies.

Two findings qualify the synthetic result. First, on this harder real schema supervised calibra-

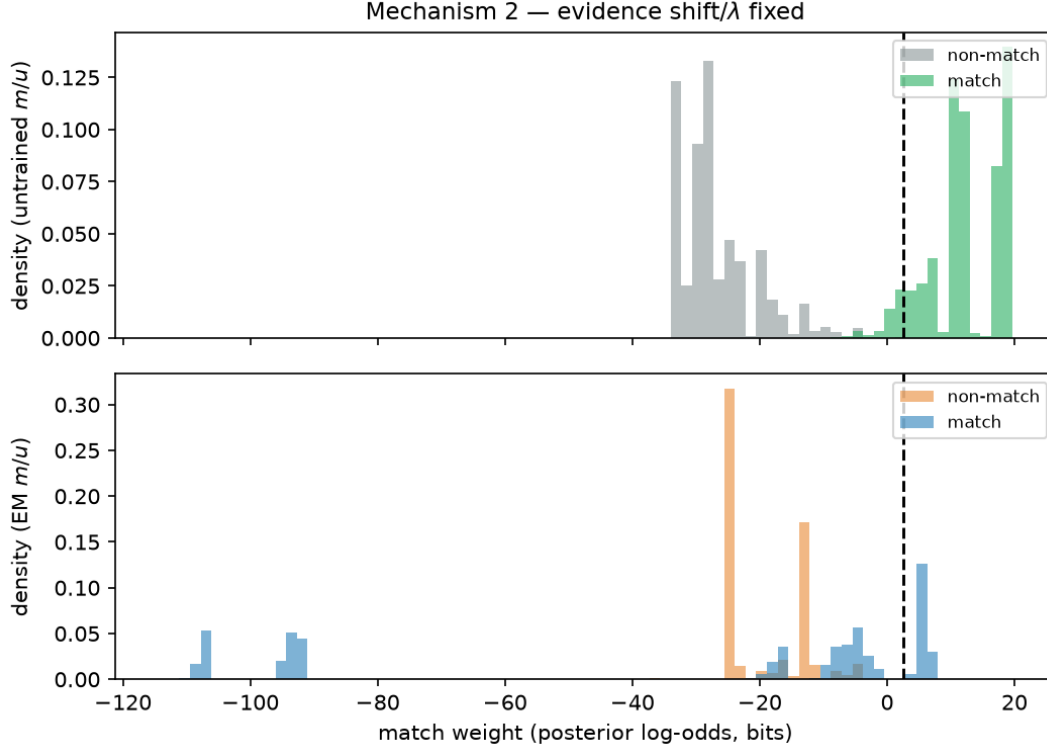


Figure 2: Mechanism 2 (evidence shift) on NC-voter, λ fixed at 10^{-4} . Top panel: untrained m/u (match in green, non-match in grey); bottom panel: EM m/u (match in blue, non-match in orange). The EM-fitted weights move the match distribution sharply left (median $12.7 \rightarrow -8$ bits) while the non-match distribution moves only slightly right ($-28 \rightarrow -24$), closing the separating gap; recall collapses as true matches are scored toward non-match territory. Dashed line: fixed threshold t . (Artifact `results/calibration/paradox_figures_ncvoter_summary.json`.)

tion does *help*: it raises recall (85.6% to 89.3%) at virtually no cost to precision (100.0% to 99.9%). The “untrained defaults win” claim in the synthetic benchmark is therefore not universal; where partial agreement is genuinely informative, trained m/u can be better. Second, the *unsupervised* (EM) result remains catastrophic — F1 collapses from 92.2% to 61.6% — and, notably, resetting the EM prior to 10^{-4} makes it *worse* (39.1%) by crushing recall. On this data EM’s fitted m/u are themselves unreliable, so prior anchoring alone cannot repair them. The robust, general conclusion is that freely fitting EM parameters is dangerous without joint calibration, whereas supervised calibration transfers to a real schema and can be beneficial; the two are not interchangeable remedies.

5.4 Smoothing and regularisation

A natural question is whether the genuine residual stems from noisy per-level probability estimates, which regularisation could fix. If level k of a comparison has n_k observed occurrences among a total of N training pairs over K levels, the empirical m -probability is $\hat{m}_k = n_k/N$. Laplace (additive) smoothing, equivalently a Dirichlet prior with concentration α , replaces it by

$$\hat{m}_k^{(\alpha)} = \frac{n_k + \alpha}{N + K\alpha}, \quad (12)$$

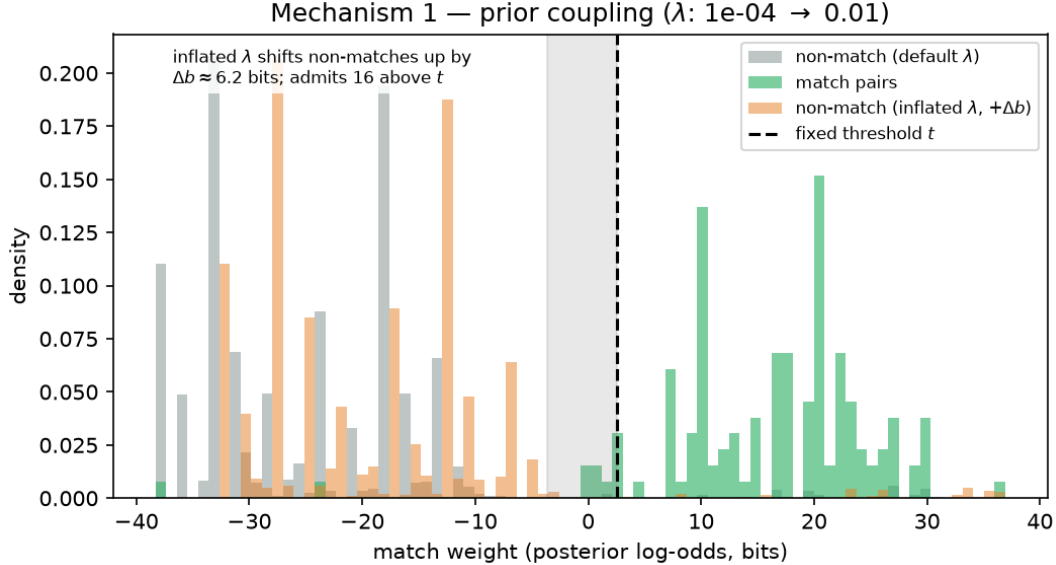


Figure 3: Mechanism 1 on the synthetic duplicate-bearing benchmark (posterior log-odds). Threshold fixed at $t = 2.50$ bits; EM’s fitted prior $\lambda \approx 0.0071$ shifts the non-match distribution up by $\Delta b \approx 6.2$ bits, admitting about 16 non-match pairs in the shaded band. (Artifact `results/calibration/paradox_figures_synth_summary.json`.)

Table 3: Mutated NC-voter resolution at fixed $\tau = 0.85$ (3,000 in-index, 1,500 positive, 1,500 negative queries). Date-of-birth and email comparisons are unavailable. (Artifact `results/calibration/ncvoter_mu_comparison.json`.)

Configuration	Precision	Recall	Specificity	F1
Untrained defaults	100.0%	85.6%	100.0%	92.2%
Supervised m/u	99.9%	89.3%	99.9%	94.3%
EM (free prior)	73.7%	52.9%	81.1%	61.6%
EM, prior reset to 10^{-4}	100.0%	24.3%	100.0%	39.1%

which pulls the estimate toward the uniform value $1/K$ and removes zero counts. Because the residual mechanism of Section 3 is that trained models over-weight partial-similarity levels, and those levels are precisely the ones where n_k is large, one might expect larger α to reduce the residual.

Table 4 tests this on the supervised calibration of the 50,000-reference benchmark at fixed τ (artifact `results/calibration/smoothing_sweep.json`). Increasing α from 0.5 to 50 barely moves the supervised F1 (94.1% to 93.4%), leaving a persistent gap of roughly four points below the untrained defaults ($\approx 98.1\%$). The residual is therefore not an artefact of level-count variance or zero counts; it reflects a structural modelling choice — the trained model rewards partial-similarity agreement more than the default weight scheme does — and smoothing the level probabilities toward uniform does not reverse that choice. We therefore recommend Laplace/Dirichlet smoothing as a variance remedy (and use it in our supervised estimator by default), but stress that it does not, by itself, close the paradox; the repair remains the joint (λ, τ) calibration of Section 4.

It is natural to ask whether a *non-symmetric* Dirichlet prior — different concentrations on the match and non-match probabilities, $\alpha_m \neq \alpha_u$ — offers additional protection against the evidence

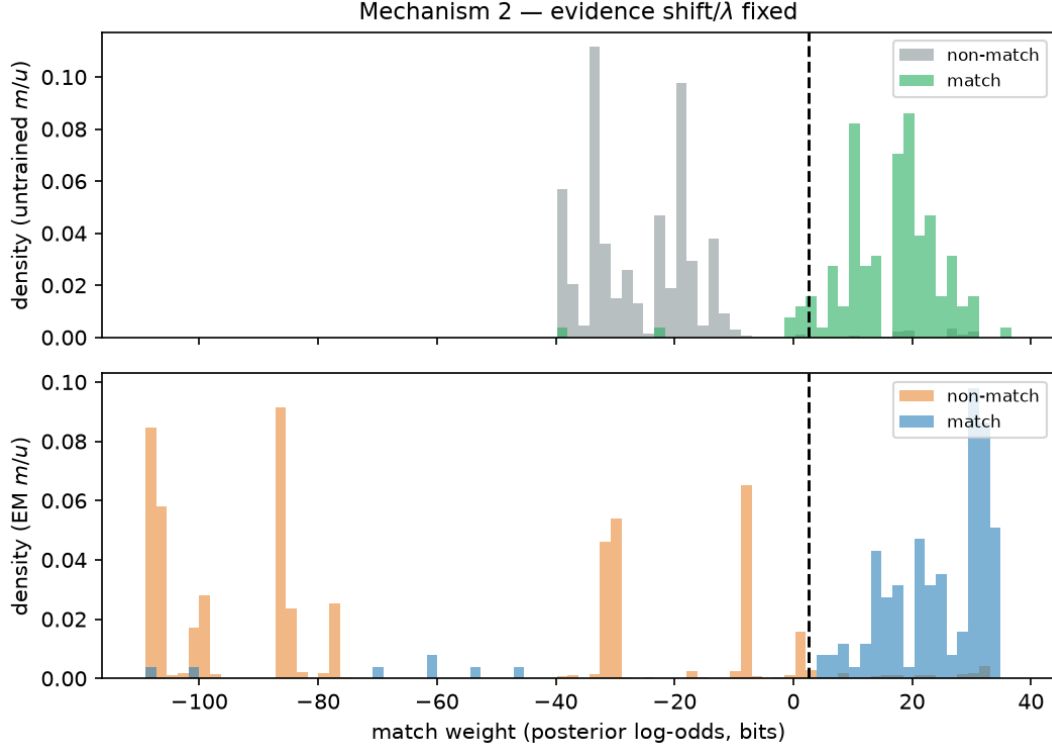


Figure 4: Mechanism 2 on the synthetic duplicate-bearing benchmark (top: untrained m/u ; bottom: EM m/u). The EM weights *raise* match weights (median 17 $\rightarrow$ 24) and *lower* non-match weights ($-26 \rightarrow -85$), widening the gap rather than collapsing it, so Mechanism 2 is not the dominant failure on this data set. (Artifact `results/calibration/paradox_figures_synth_summary.json`.)

residual. Algebraically it can: the decision depends only on the per-level ratio m_k/u_k (via $w_k = \log_2(m_k/u_k)$), so shrinking m and u toward different targets changes the effective weights. In particular, raising the concentration on the *mismatch* (else) level of m more than that of u dampens the learned m of the partial-similarity levels, which is precisely the mechanism behind the residual of Section 3. However, two cautions apply from our experiments. First, symmetric smoothing already spans $\alpha \in \{0.5, 5, 50\}$ with negligible effect on F1, so any asymmetry would have to act strongly on the *relative* shape of m versus u to matter, not merely on the overall concentration. Second, because w_k depends only on the ratio, an asymmetric prior is operationally equivalent to a particular re-weighting of the comparison levels, and must be re-validated together with λ and τ (the coherent-bundle rule). We therefore treat $\alpha_m \neq \alpha_u$ as an additional, principled but data-dependent lever rather than a default remedy.

Table 4: Supervised calibration of the 50,000-reference benchmark at fixed $\tau = 0.85$ under Laplace smoothing α . The untrained defaults give F1 $\approx 98.1\%$ throughout. (Artifact `results/calibration/smoothing_sweep.json`.)

Smoothing α	0.5	5	50
Supervised F1	94.1%	93.7%	93.4%

5.5 Sensitivity of the threshold to prior misspecification

Equation (8) makes the coupling explicit: $w_\tau^* = t - b$, with $t = \log_2 \frac{\tau}{1-\tau}$ and $b = \log_2 \frac{\lambda}{1-\lambda}$. If the true prior is λ but the pipeline uses a misspecified $\tilde{\lambda} = c\lambda$, the bias changes by

$$\Delta b = \log_2 \frac{\tilde{\lambda}/(1-\tilde{\lambda})}{\lambda/(1-\lambda)} \approx \log_2 c \quad (\lambda \ll 1). \quad (13)$$

The simplification $\log_2 c$ is accurate in sparse entity-resolution settings, where both λ and $\tilde{\lambda}$ are small — match rates below 10^{-2} , as here ($\lambda = 10^{-4}$) — because $1 - \lambda \approx 1$ and $\log_2 c$ is then the dominant term; it degrades only as λ approaches a threshold-region prior of order 10^{-1} . To preserve the same effective threshold, τ must be adjusted by the same number of bits: a factor c in the prior requires an offset of $\approx \log_2 c$ in $\text{logit}_2(\tau)$. In fully unsupervised settings λ cannot be estimated reliably, so this relation bounds how much the operating point can move for a given prior error.

Table 5 quantifies the consequence: the best F1 attainable after re-optimising τ at each prior. The untrained model is stable (best F1 0.97–0.99) across two orders of magnitude in λ ; the EM model is highly sensitive, its attainable F1 falling from 0.95 at $\lambda = 10^{-5}$ to 0.82 at $\lambda = 10^{-2}$, with a different optimal τ at each prior. Our guidance for the unsupervised setting is therefore: (i) prefer the default or blocking-adjusted prior rather than a free EM estimate; (ii) select τ on a validation split over a grid of candidate λ ; and (iii) report the range of F1 across that grid as an explicit sensitivity bound. A wide range (as for EM) is a warning that the configuration is unsafe without labelled data.

Table 5: Best F1 attainable after re-optimising τ at each assumed prior, on the 5,000-record duplicate-bearing population (artifact `results/calibration/mu_prior_tau_surface.json`). The optimal τ for the EM rows is 0.90, 0.98, and 0.95 at $\lambda = 10^{-5}, 10^{-3}, 10^{-2}$ respectively.

Assumed λ	10^{-5}	10^{-3}	10^{-2}
Untrained, best F1	0.99	0.98	0.97
EM, best F1	0.95	0.91	0.82

5.6 Additional metrics: calibration, discrimination, and cost

F1 at a single threshold does not separate ranking discrimination from probabilistic calibration, nor does it reflect asymmetric false-positive/false-negative costs. We therefore report three further quantities, evaluated pairwise over the blocked candidate pairs (which is consistent with these metrics, and complements the query-level confusion matrices above): the *Brier score* [8] (mean squared error of the match probability $\frac{1}{n} \sum_i (p_i - y_i)^2$), the *Average Precision* (area under the precision–recall curve, a threshold-free measure of how well matches are ranked above non-matches), and the *expected decision cost* at the unit-cost-optimal threshold $\tau^* = C_{FP}/(C_{FP} + C_{FN})$, together with pairwise F1 (Table 6). Lower Brier and cost are better; higher Average Precision is better.

On the NC-voter file the EM fit is worse on every quantity — calibration (Brier 0.0009 $\rightarrow$ 0.0157), discrimination (Average Precision 0.997 $\rightarrow$ 0.440), pairwise F1, and expected cost — consistent with the Mechanism 2 evidence collapse. On the synthetic benchmark the picture is the precise mirror that exposes the paradox: EM *improves* ranking discrimination (Average Precision 0.366 $\rightarrow$ 0.502) while it *worsens* calibration (Brier 0.0264 $\rightarrow$ 0.0479) and, at the fixed τ , pairwise F1 (0.630 $\rightarrow$ 0.564) and expected cost (0.0260 $\rightarrow$ 0.0343, with the unit-cost-optimal threshold

Table 6: Pairwise evaluation metrics (untrained vs. EM) on both data sets. Brier and expected cost: lower is better; Average Precision: higher is better. Evaluated over the blocked candidate pairs (60,000 on NC-voter, 6,000 on the synthetic benchmark), so these F1 values use many more non-match pairs than the query-level confusion matrices above. (Artifacts `results/calibration/paradox_figures_ncvoter_summary.json` and `.../paradox_figures_synth_summary.json`.)

Metric	NC-voter		Synthetic	
	Untrained	EM	Untrained	EM
Brier	0.0009	0.0157	0.0264	0.0479
Average Precision	0.997	0.440	0.366	0.502
F1 (pairwise)	0.978	0.428	0.630	0.564
Expected cost	0.0009	0.0163	0.0260	0.0343
τ^* (unit cost)	0.81	0.06	0.81	1.00

moving from 0.81 to 1.00). Training can therefore sharpen how well the score ranks matches above non-matches while still degrading the calibrated, operational outcome — the calibration paradox quantified with a metric that separates ranking from calibration.

6 Related work

The Fellegi–Sunter model [1] already framed linkage as a decision problem with error-rate targets, and Winkler’s line of work formalised optimal decision rules and frequency-based parameter estimation [2, 3]. Christen’s monograph [4] surveys pragmatic threshold and calibration practice. The log-odds decomposition of a decision threshold is a standard device in probabilistic linkage: the posterior is a sum of an evidence weight and a prior term, so a threshold on the probability corresponds to a threshold on the weight given the prior. The precision–recall and threshold-selection literature [5] treats the operating point as a tunable trade-off. What we emphasise here is the consequence for *calibration in practice*: refitting m/u while leaving a fixed τ (and without anchoring λ) is a hidden change of operating point, and the repair is to select λ and τ together. The contribution is therefore the explicit coordination rule ((6)–(8)), the identification of prior coupling as the dominant mechanism in our pipeline, and the tandem calibration procedure, rather than the log-odds decomposition itself.

7 Discussion and conclusion

The calibration paradox is the statement that training the evidence parameters m/u can worsen a decision that already includes a prior λ and a threshold τ . The log-odds decomposition shows why: the posterior log-odds is the sum of the evidence weight w and a prior bias $b = \log_2 \frac{\lambda}{1-\lambda}$, and the decision compares this to $t = \log_2 \frac{\tau}{1-\tau}$. Retraining m/u moves the evidence distribution; a freely estimated prior moves the bias; a fixed τ holds the target fixed. Changing any one without the other two relocates the operating point.

Two distinct mechanisms drive the observed drop. *Prior coupling* is a global bias shift: an EM prior inflated from 10^{-4} to 7.1×10^{-3} lowers the effective weight threshold by about 6 bits and admits a flood of false positives; re-anchoring the prior recovers most of the loss on the synthetic

benchmark. *The genuine residual* is a shift of the non-match weight distribution caused by over-weighting partial-similarity levels, which survives prior anchoring and keeps jointly re-optimised trained models slightly below the defaults on the synthetic data; Section 3’s caveats apply — the supervised label mix and bounded em iteration budget are part of its magnitude, so it establishes that the paradox is more than pure prior coupling rather than a universal award to the default weights. Real-data replication (Section 5.3) refines this: supervised calibration can improve outcomes on harder schemas (it lifted NC-voter F1 from 92.2% to 94.3% at fixed τ), whereas freely fitted EM remains catastrophically miscalibrated. Smoothing the level probabilities (Section 5.4) is a valuable variance remedy but does not, by itself, close the residual; and the threshold is explicitly sensitive to prior misspecification (Section 5.5), so a wide F1 range across candidate priors is a warning sign in unsupervised settings.

The practical message is methodological: in a Fellegi–Sunter process, the triple $(m/u, \lambda, \tau)$ is a *coherent bundle*. Calibration is only meaningful when the evidence, the prior bias, and the decision threshold are estimated and selected together, and then evaluated on held-out data. Retraining m/u while leaving λ and τ unchanged is not a safe optimisation; it is a hidden change of operating point, and—for unsupervised calibration especially—usually a worse one.

References

- [1] Ivan P. Fellegi and Alan B. Sunter. A theory for record linkage. *Journal of the American Statistical Association*, 64(328):1183–1210, 1969. <https://doi.org/10.1080/01621459.1969.10501049>.
- [2] William E. Winkler. Improved decision rules in the Fellegi–Sunter model of record linkage. In *Proceedings of the Section on Survey Research Methods*, American Statistical Association, pages 274–279, 1993.
- [3] William E. Winkler. Frequency-based matching in the Fellegi–Sunter model of record linkage. Statistical Research Division, U.S. Bureau of the Census, Research Report Series RR2000/06, 2000. <https://www.census.gov/library/working-papers/2000/adrm/rr2000-06.html>.
- [4] Peter Christen. *Data Matching: Concepts and Techniques for Record Linkage, Entity Resolution, and Duplicate Detection*. Springer, 2012. <https://doi.org/10.1007/978-3-642-31164-2>.
- [5] Jesse Davis and Mark Goadrich. The relationship between precision-recall and ROC curves. In *Proceedings of the 23rd International Conference on Machine Learning*, pages 233–240, 2006. <https://doi.org/10.1145/1143844.1143874>.
- [6] Denis Robert. A two-stage entity resolution pipeline with FAISS blocking and Splink matching. Technical report, Independent Researcher, 2026.
- [7] Rebecca Linacre et al. Splink: Automatic record linkage and linkage quality assessment with Python. *International Journal of Population Data Science*, 7(3):1794, 2022. <https://doi.org/10.23889/ijpds.v7i3.1794>. Software repository: <https://github.com/moj-analytical-services/splink>.
- [8] Glenn W. Brier. Verification of forecasts expressed in terms of probability. *Monthly Weather Review*, 78(1):1–3, 1950. [https://doi.org/10.1175/1520-0493\(1950\)078<0001:VOFEIT>2.0.CO;2](https://doi.org/10.1175/1520-0493(1950)078<0001:VOFEIT>2.0.CO;2).

A Estimation of m , u , and λ

This appendix details how the three quantities of the decision rule (5) are obtained, when labelled pairs are available and when they are not.

A.1 Labeled estimation

Suppose a set of labelled candidate pairs is split into true matches (M -pairs) and non-matches (U -pairs). For a field with K comparison levels, let n_k^M and n_k^U count the pairs observed at level k , and let $N_M = \sum_k n_k^M$ and $N_U = \sum_k n_k^U$. Under conditional independence the level probabilities are the relative frequencies

$$\hat{m}_k = \frac{n_k^M}{N_M}, \quad \hat{u}_k = \frac{n_k^U}{N_U}. \quad (14)$$

With Laplace (Dirichlet) smoothing of concentration α (Section 5.4),

$$\hat{m}_k = \frac{n_k^M + \alpha}{N_M + K\alpha}, \quad \hat{u}_k = \frac{n_k^U + \alpha}{N_U + K\alpha}. \quad (15)$$

Non-symmetric versions use α_m and α_u , respectively. The labelled sample also yields a prior estimate $\hat{\lambda} = N_M/(N_M + N_U)$ from the match rate among candidate pairs; this is the rate *within the blocked candidate set* and, for a prior over random pairs, must be corrected by dividing by the blocking recall.

A.2 Expectation-maximisation (unlabeled) estimation

When no labels exist, the true match status of each candidate pair is a latent variable $z_i \in \{M, U\}$ and the parameters are estimated by expectation-maximisation. In this pipeline we use Splink’s EM (“`estimate_parameters_using_expectation_maximisation`”) over the blocked candidate pairs; conceptually it iterates:

E-step. Using current estimates $(\hat{m}, \hat{u})$, compute the posterior probability that pair i is a match from (4) with the current prior, equivalently from the log-odds decomposition (6).

M-step. Re-estimate the level probabilities as *expected* relative frequencies,

$$\hat{m}_k = \frac{\sum_i \mathbb{E}[\mathbf{1}_{\{z_i=M\}}] \mathbf{1}_{\{k_i=k\}}}{N'_M}, \quad (16)$$

with $N'_M = \sum_i \mathbb{E}[\mathbf{1}_{\{z_i=M\}}]$ a weighted total, and similarly for u_k . The cycle is repeated to a fixed point. In all experiments the loop is bounded to at most 15 iterations with a relative-convergence threshold of 10^{-3} , over a candidate pool capped at 10^6 pairs (`max_iterations=15`, `em_convergence=0.001`, `max_pairs=1e6`, seed 42), so a run that does not converge in that budget is reported at its 15th iterate. This bounded budget is part of why the fitted EM parameters should be read as “partially-converged” in Section 3.

Two points must be flagged. First, the match prior $\hat{\lambda}$ is *not* an EM M-step statistic over the responsibilities: in Splink it is set separately by “`estimate_probability_two_random_records_match`”, which combines an assumed number of matches with a blocking-recall parameter. The prior is therefore a designed input to (not a product of) the EM loop, which matters for the prior-coupling

mechanism of Section 3. Second, the level probabilities above are the standard categorical EM update; Splink fits them inside its own framework, and this appendix gives the recipe it instantiates, not a separate implementation.

Note that in this pipeline EM is run on the comparison vectors of the *blocked candidate pairs* — generated by Splink exact-equality blocking on the `first_name` and `date_of_birth` keys — not on all possible pairs. The algorithm treats these pairs as given, so the fitted u and λ are *candidate-space* quantities: the non-match component is dominated by near-collisions that resemble true matches, which is precisely why the fitted classes overlap and reproduce a narrow gap. This is a property of the input candidate set, not of the EM update itself; when a random-pair prior is required, the blocking-adjusted prior of Section 4 converts λ accordingly.

Three remarks connect this to the paradox. First, the free estimate in the M-step reflects the *blocked candidate* mix, not the random-pair base rate: candidate sets are drawn from records that already resemble each other, so $\hat{\lambda}$ drifts upward — this is the source of the prior coupling of Section 3. Dividing by blocking recall, or holding λ fixed at a prior estimate, corrects it.

Where an embedding-based (canopy-style) blocker supplies the candidate pairs — such as the dense top- k retrieval the companion pipeline uses online [6] — this bias is expected to be *larger* than with fixed-value equality blocking. Embedding neighbourhoods are selected by overall resemblance, so the retained candidate pairs are even more similar to each other than pairs sharing a name or date of birth, concentrating the non-match mass around near-duplicate collisions; a free $\hat{\lambda}$ can then drift upward substantially more than the 7.1×10^{-3} observed here, and the fitted classes overlap even more. The mechanism is therefore not an artefact of the particular blocking keys: any blocker that concentrates candidates near true matches intensifies prior coupling, so canopy-based training must be paired even more strictly with prior anchoring and joint (λ, τ) selection. Second, only the ratios m_k/u_k enter the decision, and EM additionally fixes the overall scale relative to λ ; both the scale and λ jointly set the operating point, so neither can be changed independently of τ . Third, richer estimators — frequency-based refinement of m/u (which Winkler motivates via name frequencies [3]), or regularised and Bayesian variants of EM — modify the M-step but leave the coupling of Section 3 intact. The tandem calibration of Section 4 is the layer that reconciles whatever estimator is used with a chosen τ .

Reproducibility

All numeric results are stored as JSON artifacts under `results/calibration/` of the companion repository, and each table and figure caption names the exact file behind it (`mu_tau_interaction.json`, `mu_prior_tau_surface.json`, `mu_calibration_results.json`, `smoothing_sweep.json`, `ncvoter_mu_comparison_paradox_figures_{synth,ncvoter}_summary.json`). The companion repository’s verification harness (`scripts/verify_claims.py`) maps each number to its producing script and field. Software versions: Splink 4.x (DuckDB backend), `sentence-transformers` with `all-MiniLM-L6-v2`, `faiss-cpu`, `Faker`, `pandas`, `numpy`; all runs use seed 42 and the batching parameters stated in each artifact’s `parameters` block. The experiment entry points are `experiments/whitepaper/experiment_mu_tau_int`, `experiments/whitepaper/experiment_mu_prior_tau_surface.py`, `experiments/whitepaper/experiment_mu`, `experiments/whitepaper/experiment_smoothing_sweep.py`, `experiments/whitepaper/ncvoter/experiment`, and `experiments/paradox/experiment_paradox_figures.py`.

Use of Artificial Intelligence

During the preparation of this work the author used an AI coding and writing assistant (the DeepSeek V4 Flash 0731 large language model) to assist with drafting and editing the manuscript and preparing the experiments. The tool was not listed as an author. The theoretical derivation and all reported results were reviewed and verified by the author, who takes full responsibility for the content, including any remaining errors and/or omissions.