

## Documentação myTapp API

Todas as requisições são via REST usando JSON no modelo da troca de dados, as únicas rotas que receberão um retorno via JSON serão as de adição de credito e a de cadastro de usuario seguindo o padrão de retorno: **{info:**'Mensagem de erro ou sucesso', **success:**true/false, **error:** 'esse parametro só vai existir se houver algum erro para poder debugar o que houve'}

Rotas:

**GET**

**IP/api/status/:id**

Parâmetros obrigatórios no corpo da requisição:

**id (String)** - Documento ou telefone da pessoa

**Retorno:** EX: <http://localhost:5000/api/status/08627300909>

```
{
  "success": true,
  "dados": {
    "document": "08627300909",
    "name": "Leandro",
    "surname": "Marques",
    "phone": "4899516607",
    "email": "leandro1992@gmail.com",
    "birthdate": null,
    "gender": "Masculino",
    "visits": [
      {
        "visit_id": 4,
        "consumptions": [
          {
            "tap_id": 1,
            "total": 0,
            "ml": 0,
            "consumption_end": "2016-03-24T11:42:22.997Z"
          },
          {
            "tap_id": 1,
            "total": 0.01,
            "ml": 1,
            "consumption_end": "2016-03-24T11:42:46.741Z"
          },
          {
            "tap_id": 1,
            "total": 1.13,
            "ml": 113,
            "consumption_end": "2016-03-24T11:42:58.858Z"
          }
        ]
      }
    ],
    "credit": {
      "credit": 23.86
    }
  }
}
```

```
},
"movements": [
  {
    "value": 25,
    "movement_type": "Crédito Dinheiro",
    "created": "2016-03-24T11:41:28.190Z"
  }
]
}
```

=====

## POST

IP/api/updateData

OBS: sempre enviar todos os parametros mesmo que não tenham alterações.

### Exemplo:

The screenshot shows the Postman application interface. The top bar includes the Runner, Import, and Builder tabs. The main workspace displays a POST request to `http://localhost:5000/api/updateData`. The request body is configured as `x-www-form-urlencoded` with the following fields:

key	value
document	08627300909
name	Leandrom
surname	maques
phone	4899516608
email	leandro1992@gmail.com
birthDate	17/10/1992
gender	Masculino

The response is shown in the bottom pane, indicating a status of 200 OK and a time of 213 ms. The response body is a JSON object:

```
{
  "info": "Usuário atualizado com sucesso",
  "success": true,
  "data": {
    "document": "08627300909",
    "name": "Leandrom",
    "surname": "maques"
  }
}
```

=====

## POST

### IP/api/credito (Inserção de créditos)

Parâmetros obrigatórios no corpo da requisição:

<b>document</b>	(String)
<b>value</b>	(Float) - Valor a ser acrescentado ao crédito atual

**Retorno:** {**info**: 'Mensagem de erro ou sucesso', **success**: true/false}

=====

The screenshot shows the Postman application interface. The top bar includes tabs for Runner, Import, Builder, and Team Library. The main workspace displays a POST request to `http://localhost:5000/api/credito`. The request body is configured with the `x-www-form-urlencoded` format, containing two fields: `document` with the value `08627300909` and `value` with the value `15`. The response status is `200 OK` with a time of `997 ms`. The response body is displayed in JSON format: `{info: "Crédito inserido com sucesso", success: true}`. The left sidebar shows a history of requests, with the current request highlighted. The bottom of the image shows the Windows taskbar with various application icons and the system clock indicating 13:52 on 25/04/2016.

## POST

### IP/api/cadastro

Parâmetros obrigatórios no corpo da requisição:

**document:** (String)

**name:** (String)

**surname:** (String)

**phone:** (String) - favor não enviar caracteres especiais, somente numeros para facilitar na busca.

**birthdate:** (String ou Date)

**email:** (String),

**gender:** (String) - Somente 3 parâmetros ('Masculino', 'Feminino', 'Indefinido')

**Retorno:** {**info:**'Mensagem de erro ou sucesso', **success:**true/false}

Obs: Serão retornadas as mensagens informando quais erros, caso ocorram.

RunnerImport

BuilderTeam Library

IN SYNCLeandro M...

Search

HistoryCollections

Save to collection

Today

POSThttp://localhost:5000/api/cadastro

POSThttp://localhost:5000/api/cadastro

POSThttp://localhost:5000/api/cadastro

POSThttp://localhost:5000/api/cadastro

POSThttp://localhost:5000/api/cadastro

POSThttp://localhost:5000/api/cadastro

POSThttp://localhost:5000/api/credito

POSThttp://localhost:5000/api/credito

POSThttp://localhost:5000/api/credito

POSThttp://localhost:5000/api/credito

POSThttp://localhost:5000/api/credito

http://localhost:5000/api/c

No environment

POSThttp://localhost:5000/api/cadastro

Params

Send

Save

Authorization

Headers

Body

Pre-request Script

Tests

Generate Code

form-data

x-www-form-urlencoded

raw

binary

document08627300905

nameLeandro

phone4899516606

emailleandro1992@gmail.com

birthdate"10/10/1992"

genderMasculino

surnameTeste

keyvalue

Bulk Edit

Body

Cookies

Headers (6)

Tests

Status: 200 OK

Time: 1197 ms

Pretty

Raw

Preview

JSON


1{

2  "info": "Cliente cadastrado com sucesso",

3  "success": true

4}

=====

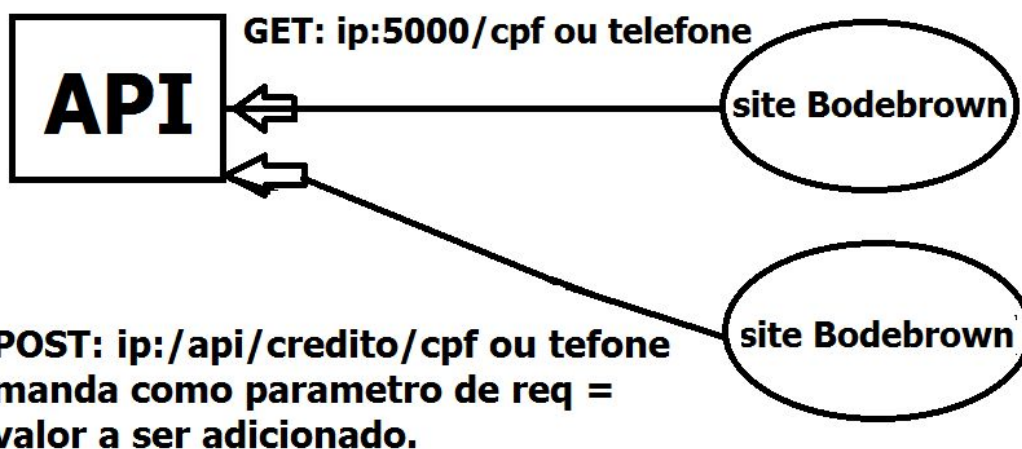

**API só aceita requisições do domínio  
www.bodebrown.com.br**