

# Efficient Long-Text Understanding with Short-Text Models

Maor Ivgi    Uri Shaham    Jonathan Berant

The Blavatnik School of Computer Science, Tel-Aviv University

{maor.ivgi, uri.shaham, joberant}@cs.tau.ac.il

## Abstract

Transformer-based pretrained language models (LMs) are ubiquitous across natural language understanding, but cannot be applied to long sequences such as stories, scientific articles and long documents, due to their quadratic complexity. While a myriad of efficient transformer variants have been proposed, they are typically based on custom implementations that require expensive pretraining from scratch. In this work, we propose **SLED: SLiding-Encoder and Decoder**, a simple approach for processing long sequences that re-uses and leverages battle-tested short-text pretrained LMs. Specifically, we partition the input into overlapping chunks, encode each with a short-text LM encoder and use the pretrained decoder to fuse information across chunks (*fusion-in-decoder*). We illustrate through controlled experiments that SLED offers a viable strategy for long text understanding and evaluate our approach on SCROLLS, a benchmark with seven datasets across a wide range of language understanding tasks. We find that SLED is competitive with specialized models that are up to 50x larger and require a dedicated and expensive pretraining step.

## 1 Introduction

Transformer-based pretrained language models (Vaswani et al., 2017; Devlin et al., 2019; Lewis et al., 2020; Raffel et al., 2020b; Brown et al., 2020) have been widely successful across all areas of natural language understanding (NLU). However, applying them over long texts (such as stories, scripts, or scientific articles) is prohibitive due to their quadratic complexity in the input length. To bridge this gap, recent work has developed more efficient transformer variants (Kitaev et al., 2020a; Beltagy et al., 2020; Zaheer et al., 2020a; Guo et al., 2021) and applied them over

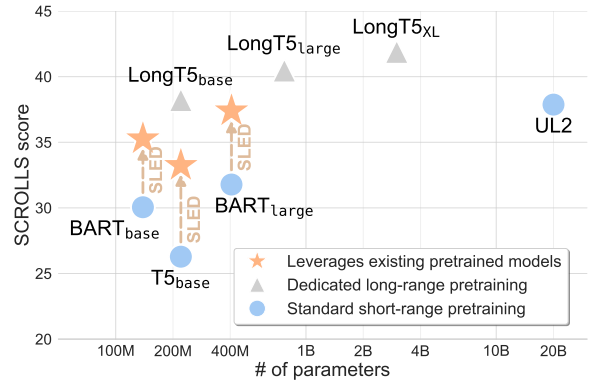


Figure 1: Models’ SCROLLS score (Shaham et al., 2022) as a function of parameter count. Plugging existing pretrained LMs into the SLED framework dramatically improves their SCROLLS score (arrows from blue circles to pink stars). Gray triangles indicate models with dedicated pretraining for capturing long-range dependencies. BART<sub>large</sub>-SLED is competitive with LongT5<sub>base</sub> (Guo et al., 2021) and UL2 (Tay et al., 2022b) (which has 50x more parameters), and slightly lags behind larger LongT5 models.

long-range language understanding tasks (Mehta et al., 2022; Shaham et al., 2022).

However, most efficient transformers use specialized architectures with custom implementations that are not guaranteed to scale as well as vanilla transformers (Tay et al., 2022a). Moreover, they require an expensive pretraining step and do not exploit off-the-shelf pretrained LMs that were trained for short texts. To date, the performance of efficient transformers on long texts has not matched the success of their short-range counterparts.

In this work, we present **SLED: SLiding-Encoder and Decoder**, a simple yet powerful method for applying off-the-shelf pretrained encoder-decoder models on long text problems, with a linear time and space dependency. Specifically (see Fig. 2), we partition long documents into overlapping chunks of tokens of constant length

and encode each chunk independently with an already-pretrained encoder. Then, a pretrained decoder attends to all contextualized input representations to generate the output. Our main assumption is that input tokens can be contextualized through their local surrounding (using a short-text LM), and any global cross-chunk reasoning can be handled by the decoder, similar to fusion-in-decoder (Izacard and Grave, 2021).

We evaluate SLED on a wide range of language understanding tasks. To substantiate SLED’s adequacy for text processing, we perform controlled experiments over modified versions of SQuAD 1.1 (Rajpurkar et al., 2016) and HotpotQA (Yang et al., 2018) to show that SLED can (a) find relevant information that is embedded within a long text sequence and (b) fuse information from chunks that were encoded separately.

Our main evaluation is over SCROLLS, a recently-released benchmark that includes 7 long-range tasks across Question Answering (QA), summarization, and Natural Language Inference (NLI). We show (Fig. 1) that taking a pre-trained encoder-decoder model, such as BART (Lewis et al., 2020) or T5 (Raffel et al., 2020b), and embedding it into SLED’s framework results in dramatic improvement in performance (6 points on average across models). Moreover, BART<sub>large</sub>-SLED’s performance is within one point difference from LongT5<sub>base</sub> (Guo et al., 2021), a model that was specifically pretrained to handle long-range dependencies, and UL2 (Tay et al., 2022b), which contains 50x more parameters. Importantly, SLED-based models can use any future pretrained LM out-of-the-box without requiring additional pretraining to further improve performance.

Due to its simplicity, SLED can also be used as a diagnostic tool for analyzing long-range benchmarks. We analyze the seven datasets in SCROLLS through the lens of SLED and show which datasets require the input to be contextualized with remote tokens. Specifically, we find that in QA and NLI tasks, relatively local contextualization is sufficient for high performance.

To summarize, our main contributions are:

1. We present SLED, a simple and effective approach for processing long texts that leverages off-the-shelf encoder-decoder LMs based on fusion-in-decoder.
2. We demonstrate SLED’s efficacy in both controlled experiments, as well as on the

SCROLLS benchmark, which leads to competitive results compared to specialized models that include up to 10x more parameters.

3. We use SLED as a diagnostic tool for analyzing the long-range properties of datasets in the SCROLLS benchmark.
4. We provide an open-source implementation of SLED,<sup>1</sup> which can be seamlessly integrated into the Transformers library (Wolf et al., 2020).

## 2 Background

Recent advances in natural language processing have been by and large fueled by the transformer architecture (Vaswani et al., 2017). A core component of the transformer is the self-attention layer where every input token “attends” to every other token to produce its contextualized representation. This results in quadratic time and space dependency w.r.t. the length of the input, limiting the ability of transformers to process long sequences.

This long-text limitation has sparked ample interest in developing efficient transformer variants. One prominent family of methods is based on *sparse attention*, where each token attends to a constant number of other tokens, overcoming the quadratic dependency. Tokens typically attend either to their *local* surrounding (Zaheer et al., 2020a; Beltagy et al., 2020; Ainslie et al., 2020; Gupta and Berant, 2020) or to tokens that are semantically similar (Kitaev et al., 2020b; Roy et al., 2021). Moreover, a constant number of *global tokens* that attend to and are attended by all input tokens are often added to each attention sub-layer. Recent analyses (Xiong et al., 2022) have shown that sparse transformers with local attention are competitive with other variants on multiple language understanding tasks.

Our method, SLED, falls into the family of local sparse attention variants. However, unlike prior work, SLED re-uses and extends existing short-range encoder-decoder models, and does not require specialized pretraining or dedicated CUDA implementations.

In most local attention variants, e.g., LED (Beltagy et al., 2020), attention is local *per-layer*, but the receptive field of tokens grows *across layers*. In SLED, which we describe next, tokens have access to the same number of tokens, independent of

<sup>1</sup><https://github.com/Mivg/SLED>

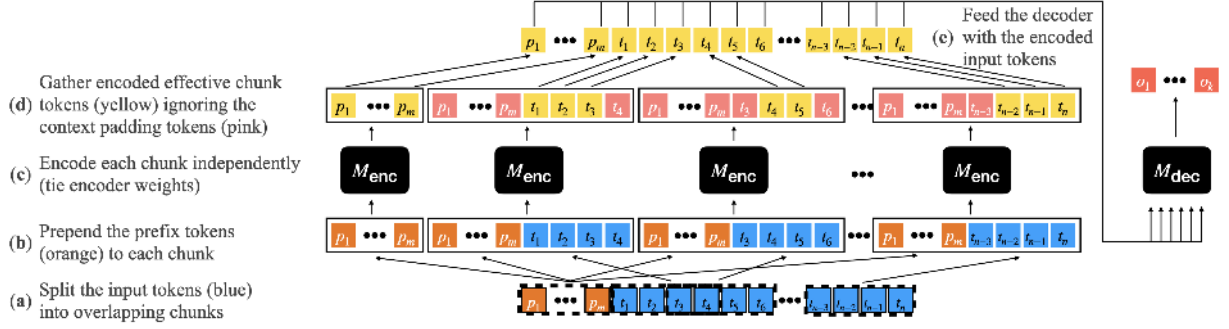


Figure 2: Overview of SLED. (a) Input tokens  $(t_1, \dots, t_n)$  are chunked into  $C$  overlapping chunks of length  $c$  (here,  $c = 4$ ). Each chunk is made of  $P := \frac{\rho \times c}{2}$  context padding tokens at the right and left edges of the chunk, and  $(1 - \rho) \times c$  effective chunk tokens in the middle (here,  $\rho = 0.5$ ,  $P = 1$ ). (b) We prepend the prefix tokens  $(p_1, \dots, p_m)$  to each chunk ( $m \ll n$ ). (c) Each chunk is encoded independently using the already pretrained backbone encoder  $M_{\text{enc}}$ . (d) We gather the encoded effective chunks tokens (yellow) and discard the context padding tokens (pink) (e) We pass the encoded input to the decoder to generate the final output sequence  $(o_1, \dots, o_k)$ .

a layer’s depth, which enables better parallelization. For a survey on the families of efficient transformers, see [Tay et al. \(2020\)](#).

### 3 Method

In this work, we propose a simple approach for avoiding transformer’s quadratic complexity, motivated by the *Locality of information assumption*:

In an encoder-decoder architecture, the encoder can effectively contextualize input tokens with local context only, leaving long-range dependencies to be handled by the decoder.

SLED relies on said modeling assumption to encode shorter chunks independently and perform fusion of information in the decoder ([Izacard and Grave, 2021](#)). We now describe the SLED model in detail.

**Input** SLED uses a pretrained encoder-decoder model  $M$  as a backbone. SLED receives a tokenized document of length  $n$  (blue squares in Fig. 2), and an optional short tokenized prefix of length  $m \ll n$ , typically representing a question about the document, an instruction to perform some generation task, or a hypothesis (orange squares in Fig. 2).

**Steps** SLED follows the following steps:

- (a) Document tokens are split into  $C$  chunks of length  $c$  (In Fig. 2,  $c = 4$ ). The *middle*  $(1 - \rho) \times c$  tokens in each chunk are contextualized from both the left and right by  $P := \frac{\rho \times c}{2}$  tokens, where  $\rho \in [0, 0.5]$  ( $\rho = 0.5$

in Fig. 2). We call these middle tokens *the effective chunk*, since they will constitute the output of the encoder, and term the tokens on each side by *context padding*.

- (b) Each chunk is prepended by (optional) prefix tokens (Fig. 2(b)).
- (c) Each chunk is encoded independently, using the backbone encoder  $M_{\text{enc}}$  (see Fig. 2(c)).
- (d) To create a contextualized representation for each token, we keep from each chunk only the tokens from the *effective chunk*, and concatenate them (Fig. 2(d)).
- (e) To give the decoder access to prefix tokens, we encode the prefix tokens with  $M_{\text{enc}}$ , and prepend the result to the contextualized representation (leftmost chunk in Fig. 2(a)-(d)).
- (f) Finally, we generate the output with the backbone decoder,  $M_{\text{dec}}$ , which uses standard cross-attention over the  $m + n$  encoded tokens (Fig. 2(e)).

SLED requires handling a few edge cases, namely, dealing with the first and last chunk that do not have bidirectional context. We refer to App. A.1 for these details.

**SLED’s Complexity** SLED divides an input of length  $n$  to  $C$  chunks of size  $c$ . Since  $\rho \in [0, 0.5]$ , it follows that  $C \in [\frac{n}{c}, \frac{2n}{c}]$ . While the complexity of encoding each chunk is quadratic in  $c$  due to self-attention,  $c \ll n$  is constant and thus the

memory and compute dependency is linear in  $n$ .<sup>2</sup> In particular, the complexity to encode the input with a model of  $l$  attention layers is:

$$\mathcal{O}\left(l \times c^2 \times \frac{2n}{c}\right) = \mathcal{O}(l \times c \times n).$$

Decoding is done as proposed by Vaswani et al. (2017), thus requiring  $\mathcal{O}(nk + k^2)$  memory. Assuming a constant output sequence length  $k \ll n$ , this remains linear in  $n$ .

#### 4 Efficacy of Fusion in Decoder

As mentioned (§3), SLED relies on the assumption that chunks can be encoded independently and fusion across them can be delegated to the decoder (*Locality of information assumption*). This is similar to the Fusion in Decoder (FiD) approach, introduced by Izacard and Grave (2021) for open-domain question answering (ODQA). However, there, the encoder-decoder receives a set of independent passages and needs to generate an answer that can typically be extracted from a single passage. Here, we extend the scope of FiD by applying it over a single, long, and coherent input that potentially requires global contextualization.

To demonstrate the viability of FiD for long text language tasks, we design two controlled experiments that quantify the extent to which FiD can perform two operations at the heart of long-text processing. First, can FiD find a “needle-in-a-haystack”, i.e., locate a piece of short information embedded in long text, disregarding irrelevant information. Second, can FiD “piece the puzzle” and fuse two pieces of information that are encoded independently when generating an output.

##### 4.1 Needle in a haystack

To check if SLED can ignore irrelevant text and locate a single piece of information, we cast SQuAD 1.1 (Rajpurkar et al., 2016) as a sequence-to-sequence task with long input. SQuAD is a question answering dataset, where given a question-paragraph pair the goal is to generate the answer (which lies within the paragraph). For each question-paragraph pair, we randomly sample 9 other paragraphs from the the dataset and concatenate them to form a long document.<sup>3</sup> We then fine-

<sup>2</sup>We assume the prefix length ( $m$ ) is negligible compared to the input length  $n$  and thus its effect on asymptotic complexity is negligible.

<sup>3</sup>We only consider paragraphs that are not within the gold document and do not contain the gold answer.

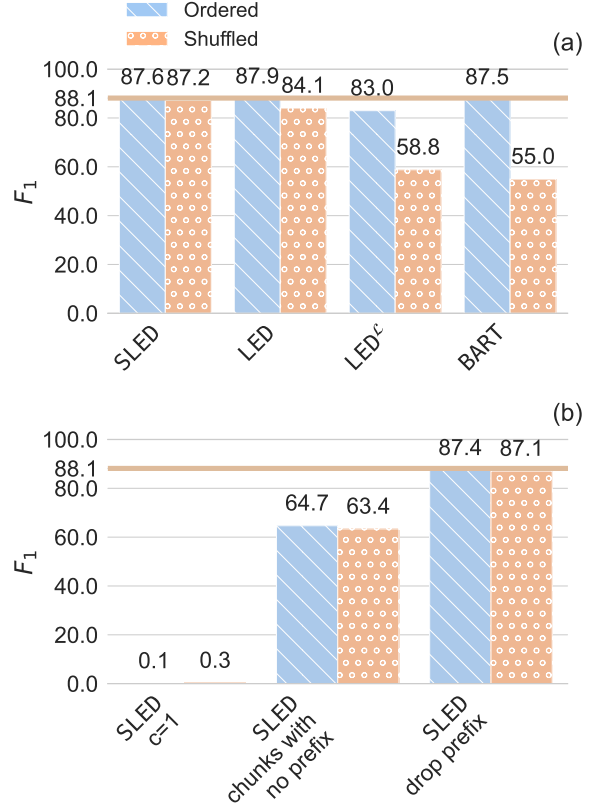


Figure 3:  $F_1$  results on our modified SQuAD 1.1’s (Rajpurkar et al., 2016) development set evaluation: (a) the horizontal line gives the performance of an oracle  $\text{BART}_{\text{base}}$  given the gold paragraph only. SLED matches oracle performance in both the ordered and shuffled setting (see text). LED slightly underperforms SLED in the shuffled setup. Both BART (given only the first 1K tokens) and LED with no global tokens ( $\text{LED}^c$ ) performs poorly in the shuffled setup. (b) Ablations on SLED’s architecture, see §4.3 for details.

tune and evaluate our models in two settings: a) *Ordered Distractors*: the gold paragraph is the first one, and all other distractors are concatenated after it. b) *Shuffled Distractors*: we randomly shuffle the order of all paragraphs so the answer can be anywhere in the input document. Since this is a QA task, the prefix is the question.

We use  $\text{BART}_{\text{base}}$  (Lewis et al., 2020) as our backbone model,  $M$ , throughout §4, and compare SLED to an *oracle*  $\text{BART}_{\text{base}}$  that is given the gold paragraph only with no distractor paragraphs. this is an oracle setup since  $\text{BART}_{\text{base}}$  can take 1,024 tokens as input and all gold paragraphs are shorter. If SLED can match the oracle performance, we can infer that indeed the decoder can find a needle in a haystack. In addition, we compare SLED to  $\text{BART}_{\text{base}}$  which is given



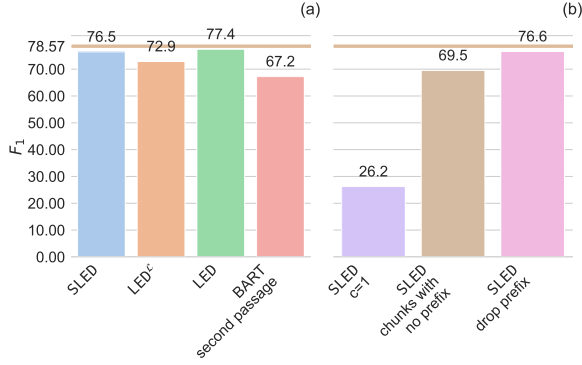


Figure 4:  $F_1$  results on our HotpotQA’s development set evaluation (Yang et al., 2018). (a) SLED reaches an  $F_1$  that is close to the oracle BART<sub>base</sub> (horizontal line), outperforming a model with access to the paragraph that contains the answer (“second paragraph”). This shows that SLED effectively fuses information from two chunks. See text for further explanation on each model. (b) Ablations on SLED’s architecture, see §4.3 for details.

only the first 1K tokens and to LED (Beltagy et al., 2020), which uses local sparse attention, similar to SLED (LED has the same backbone BART<sub>base</sub>). However, as explained in §2, the receptive field of LED layers linearly grows with the number of layers, and thus information can be fused in the encoder, unlike SLED where cross-chunk fusion must be delegated to the decoder. Last, for QA tasks, LED defines the question tokens as *global tokens*, and as an additional sanity test we evaluate LED<sup>L</sup>, where no global tokens are used. For both LED and SLED we use a chunk size  $c = 256$ .

**Results** Fig 3(a) shows the results of our evaluation on the development set. SLED almost matches the performance of an oracle BART<sub>base</sub> that is not given any distractor paragraphs, reaching an  $F_1$  score of 87.6 compared to the oracle  $F_1$  of 88.1 (horizontal line in the figure). LED also achieves high performance (but lower than SLED in the shuffled setup), showing both models learn to ignore distracting information and find a needle in a haystack. As expected, both LED<sup>L</sup> and BART suffers a significant drop in performance when the passages are shuffled, as the gold paragraph is not contextualized with the question.

## 4.2 Piecing a puzzle

We now verify that SLED can fuse pieces of information from different chunks. To this end, we modify HotpotQA (Yang et al., 2018), a multi-hop question answering dataset, in which every

question relies on two pieces of information (located in different paragraphs). While in the original setting, each input in HotpotQA has two gold paragraphs and 8 distractor paragraphs, we include only the two gold paragraphs in our experiments. To ensure SLED and LED encode the relevant two pieces of information in *separate* chunks, we set the chunk size to  $c = 128$ .

Similar to §4.1, we compare SLED to an oracle BART<sub>base</sub> with full attention over 1,024 tokens,<sup>4</sup> to LED, and to LED<sup>L</sup>. Finally, past work has shown that many examples in HotpotQA can be answered with access to the “second” gold paragraph only, which contains the answer (Jiang and Bansal, 2019). Thus, we also evaluate a BART model that is given the second passage only.

**Results** Fig. 4(a) shows that indeed, SLED’s decoder can effectively fuse information from two separately encoded chunks, reaching an  $F_1$  of 76.5, slightly lower than the oracle  $F_1$  of 78.6. Notably, SLED substantially outperforms a BART model with access to the entire second paragraph, showing that information is fused by the decoder. LED slightly outperforms SLED, but when denied access to global tokens (LED<sup>L</sup>) its performance drops sharply. This shows that the large receptive field of deep LED layers does not suffice for information fusion and interaction between the question and text is crucial for the decoder.

To summarize, our two controlled experiments show that SLED can perform the operations of retrieving and fusing information, which are fundamental for long text language tasks.

## 4.3 Ablations of design choices

We leverage our controlled experimental setup to further investigate the components of SLED.

**Efficacy of the encoder** While §4.2 shows that SLED can fuse separate pieces of information in the decoder, it is not clear to what extent local contextualization is necessary. To check whether it is possible for all fusion to occur in the decoder, we finetune SLED with a chunk size of  $c = 1$ , such that input tokens do not observe any context in the encoder. As can be seen in the leftmost bars in Fig. 3(b) and Fig. 4(b), removing local contextualization results in poor performance, illustrating the importance of local contextualization on the encoder side.

<sup>4</sup>All examples have  $\leq 1,024$  tokens, including the prefix.

**Contextualizing chunks with a prefix** As explained, SLED does not use global tokens, but instead contextualizes each chunk with a prepended prefix. To verify this is indeed necessary, we finetune a SLED model that treats the prefix as another chunk and does not prepend it to document chunks.<sup>5</sup> The second bar in Fig. 3(b) and Fig. 4(b) shows a significant drop in performance for all settings, suggesting the prefix is needed during encoding.

As expected, there is practically no difference between the *Ordered* and *Shuffled* settings in Fig. 3(b). In contrast,  $\text{LED}^{\mathcal{L}}$  which is similar in concept (due to the lack of global tokens) shows a significant drop when paragraphs are shuffled. This shows the possible effectiveness of the increased receptive field in LED, but only when the gold paragraph is relatively close to the prefix.

**Encoding the prefix** After showing the prefix is crucial for the encoder, we ask whether the decoder also needs access to the prefix or whether relevant information from the prefix can be infused into the chunk representations. To test that, we finetune SLED as usual, but remove the prefix tokens from the final representation given to the decoder. The last bar in Fig. 3(b) and Fig. 4(b) shows that providing the decoder with prefix representations makes little difference if any at all, suggesting that indeed the encoder infuses the important information from the prefix into the encoded document tokens.

## 5 Experiments

We evaluate SLED on SCROLLS (Shaham et al., 2022), a recently-proposed benchmark for evaluating long text understanding. SCROLLS contains seven benchmarks that span three different language understanding tasks:

1. Summarization: *GovReport* (Huang et al., 2021) is a summarization task over reports from the Congressional Research Service; *SummScreenFD* (Chen et al., 2021) is a summarization dataset over TV scripts; *QMSum* (Zhong et al., 2021) is a query-based summarization dataset over meeting transcripts from various domains. While *GovReport* and *SummScreenFD* do not contain a prefix, for *QMSum* we consider the query as the prefix.

2. Question answering (QA): *Qasper* (Dasigi et al., 2021) is a QA benchmark that contains questions over NLP papers; *NarrativeQA* (Kočíský et al., 2018) contains questions over entire books and movie scripts; *QuALITY* (Pang et al., 2021) is a multiple-choice QA dataset over books and articles. In *Qasper* and *NarrativeQA*, we set the question as the prefix, and in *QuALITY* we use the question concatenated to the four answer options.
3. Natural language inference: *ContractNLI* (Koreeda and Manning, 2021) contains short legal hypotheses (set as the prefix) and legal documents as the premise. Models are tasked to predict whether the premise entails, contradicts or is neutral w.r.t. to the hypothesis.

For each task, we use the official evaluation metrics defined in SCROLLS, which are based on the metrics from the original datasets.

### 5.1 Settings

We evaluate SLED with both BART (Lewis et al., 2020) and T5 (Raffel et al., 2020b) as backbone models. For each backbone model, we compare performance within SLED, which can consume long sequences, vs. the backbone models alone that are fed with the first 1,024 tokens.

For each model-dataset pair, we run hyperparameter tuning (detailed in app. A.2) based on the development set. Additionally, we submit generated predictions over the test set to SCROLLS leaderboard,<sup>6</sup> and compare to the reported performance of other models at the time of submission.

### 5.2 Results

Tab. 1 reports results over SCROLLS development and test sets. Taking short-range pre-trained LMs like BART and T5 and casting them into SLED’s framework allows them to process long documents effectively, improving the average SCROLLS score by 5.3-7 points. Examining  $\text{BART}_{\text{base}}\text{-SLED}$ , we see a large improvement compared to  $\text{LED}_{\text{base}}^{\mathcal{L}}$  (29.2→35.3), and competitive performance on multiple tasks compared to  $\text{LongT5}_{\text{base}}$  and UL2. Moreover, adding SLED to  $\text{BART}_{\text{large}}$  results in a high-performing model with results that are similar to  $\text{LongT5}_{\text{base}}$  and

<sup>5</sup>We add masked padding after the prefix to ensure chunking of the document remains identical.

<sup>6</sup><https://www.scrolls-benchmark.com/leaderboard>

Model	(Chunk/Input)	#Params	Avg	GovRep ROUGE-1/2/L	SumScr ROUGE-1/2/L	QMSum ROUGE-1/2/L	Qspr F1	Nrtv F1	QALIT EM-T/H	CNLI EM
Development Scores										
T5 <sub>base</sub>	(1K/1K)	220M	-	32.8/11.7/20.2	22.2/3.7/15.3	26.1/6.6/19.8	13.2	14.9	35.1	76.8
T5 <sub>base</sub> -SLED	(256/16K)	220M	-	47.0/20.2/25.2	25.3/5.0/16.6	29.9/8.7/21.4	38.2	18.2	34.6	82.4
BART <sub>base</sub>	(1K/1K)	139M	-	47.7/18.5/22.3	30.1/7.0/18.3	32.2/9.3/21.1	23.3	15.9	33.8	78.4
BART <sub>base</sub> -SLED	(256/16K)	139M	-	55.7/24.8/25.8	33.6/8.5/19.2	34.4/11.5/22.7	35.8	21.3	33.7	<b>85.3</b>
BART <sub>large</sub>	(1K/1K)	406M	-	50.6/19.8/23.5	32.1/7.4/18.7	33.3/9.4/21.6	24.5	17.9	36.1	79.3
BART <sub>large</sub> -SLED	(256/16K)	406M	-	<b>56.8/25.7/27.0</b>	<b>35.3/8.8/19.5</b>	<b>36.3/12.2/23.3</b>	<b>42.5</b>	<b>23.6</b>	<b>37.2</b>	<b>85.3</b>
Test Scores										
T5 <sub>base</sub>	(1K/1K)	220M	26.3	33.2/12.1/20.4	21.4/3.6/15.0	24.2/5.9/18.6	16.3	15.0	31.9/28.6	76.3
T5 <sub>base</sub> -SLED	(256/16K)	220M	33.3	46.6/20.1/25.1	24.5/4.6/16.5	28.4/8.7/20.5	43.0	18.9	31.2/29.4	81.4
BART <sub>base</sub>	(1K/1K)	139M	30.0	48.4/19.0/23.0	29.6/6.1/17.7	29.3/8.3/19.7	26.8	15.8	31.5/31.3	77.0
BART <sub>base</sub> -SLED	(256/16K)	139M	35.3	56.4/25.3/26.2	32.3/7.4/18.3	<b>33.1/11.4/22.5</b>	39.5	21.3	29.9/30.8	85.7
BART <sub>large</sub>	(1K/1K)	406M	31.8	51.2/20.3/23.9	30.5/6.0/17.5	30.5/8.7/20.3	29.0	18.0	<b>34.2/33.1</b>	79.9
BART <sub>large</sub> -SLED	(256/16K)	406M	<b>37.4</b>	<b>58.0/26.9/27.6</b>	<b>33.8/8.0/18.5</b>	32.1/10.2/21.0	<b>46.3</b>	<b>23.6</b>	33.6/ <b>33.7</b>	<b>87.0</b>
LED <sub>base</sub> <sup>†</sup>	(1K/16K)	162M	29.2	<b>56.2/26.6/28.8</b>	24.2/4.5/15.4	25.1/6.7/18.8	26.6	18.5	25.8/25.4	71.5
LongT5 <sub>base</sub> <sup>†</sup>	(255/16K)	220M	38.2	53.5/27.3/29.3	34.8/ <b>9.6/21.1</b>	33.9/11.0/22.8	46.6	23.0	37.9/36.6	85.6
LongT5 <sub>large</sub> <sup>†</sup>	(255/16K)	770M	40.5	54.2/27.8/29.8	35.6/9.2/ <b>21.2</b>	35.1/ <b>12.0/23.3</b>	52.3	27.2	40.6/38.6	87.3
LongT5 <sub>XL</sub> <sup>†</sup>	(255/16K)	3B	<b>41.9</b>	54.7/ <b>28.2/30.2</b>	<b>35.8/9.6/21.1</b>	<b>34.9/11.8/23.5</b>	<b>53.1</b>	<b>29.3</b>	<b>46.0/42.1</b>	88.2
UL2 <sup>†</sup>	(2K/2K)	20B	37.9	53.6/26.1/28.8	32.9/7.8/19.4	31.1/8.5/20.4	37.6	24.2	45.8/40.7	<b>88.7</b>

Table 1: Main results on the SCROLLS benchmark. Chunk/Input refers to the chunk size used ( $c$ ) and to the maximal input length ( $n$ ). Avg is the average SCROLLS score as described in Shaham et al. (2022). Development scores for QuALITY are only for the full set (T). † indicates reported results from SCROLLS public leaderboard.<sup>6</sup> LED<sub>base</sub><sup>†</sup> (Beltagy et al., 2020) scores were reported by Shaham et al. (2022), while the results for LongT5 (Guo et al., 2021) and UL2 (Tay et al., 2022b) were submitted by their authors.

UL2 (less than one point difference on the average SCROLLS score), despite UL2’s large parameter count (50x larger), and with no need for expensive pretraining geared towards long-range tasks. BART<sub>large</sub>-SLED’s performance is moderately lower than the larger LongT5 models.

Barring QuALITY, SLED significantly improves performance across all tasks compared to the corresponding backbone models. All summarization datasets (GovReport, SummScreenFD and QMSum) show impressive gains of up to 35% compared to their baseline scores, across all metrics (Rouge-1/Rouge-2/Rouge-L (Lin, 2004)) and for all three backbone models. Similarly, on ContractNLI (Koreeda and Manning, 2021) we see large relative improvements. As the performance of the baseline models was already high, this boost in performance is even more significant. Finally, the QA datasets Qasper and NarrativeQA show the largest gains, improving by an average of 60%.

**QuALITY** In stark contrast to other datasets lies the multi-choice QA dataset QuALITY (Pang et al., 2021). While the performance of BART<sub>large</sub>-SLED is above chance, it barely improves the performance of its backbone model (BART<sub>large</sub>), which observes only the first 1K to-

kens, with a similar trend in other backbone models. Analyzing test scores in Tab. 1, we see that increasing model size consistently improves performance (up to 46% exact match), but increasing input length has a negligible effect. Since reported human accuracy on QuALITY is high (93.5%), this hints that QuALITY might require commonsense reasoning and knowledge that are absent from models with a lower parameter count.

**Summary** We have shown that taking off-the-shelf pretrained LMs and embedding them into SLED leads to competitive performance on SCROLLS. Importantly, any future pretrained LM can be easily plugged into SLED, without the need for an expensive pretraining step.

### 5.3 Datasets analysis

SLED’s simplicity and modularity allow it to be used as a useful tool for dataset analyses. Specifically, we can vary the chunk size,  $c$ , and the number of tokens,  $n$ , across datasets to analyze a) how local are individual pieces of relevant information, and b) how far into the document is relevant information located.

**Locality of information** SLED relies on an assumption that information can be contextualized

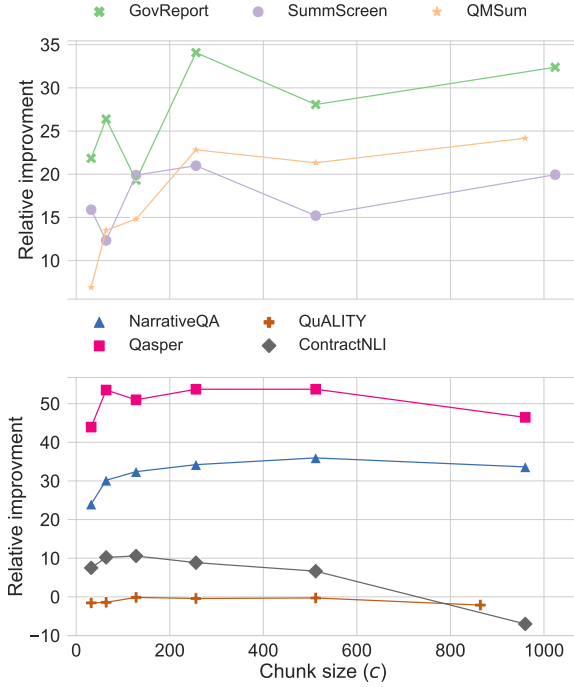


Figure 5: BART<sub>base</sub>-SLED relative improvement compared to BART<sub>base</sub> results, when varying the SLED’s chunk size (i.e.  $c$ ), fixing the maximum input length to 16K. **Top:** Summarization datasets. The y-axis measures relative improvement of Rouge-2. **Bottom:** QA and NLI datasets. The y-axis measures relative improvement of exact match for QuALITY and ContractNLI and F<sub>1</sub> for NarrativeQA and Qasper.

locally at encoding time. To analyze locality, we vary the chunk size,  $c$ , which defines the attention window, and measure the effect on SCROLLS datasets with input length 16K. Fig. 5 shows the results of this experiment, where the y-axis shows the relative improvement compared to BART<sub>base</sub> on a target metric as a function of the chunk size  $c$  for all datasets. We observe that in all datasets the best performing chunk size is relatively small (up to 256), and further increasing  $c$  even hurts the performance in some cases. However, the summarization datasets show a much larger gain in performance when increasing  $c$  up to that threshold. This coincides with a common hypothesis that QA and NLI require relatively local context, and thus increasing  $c$  can add noise and hurt optimization, while summarization may require a more high-level view of information.

**Distance from start of document** We now analyze whether indeed the entire document is required for tasks in SCROLLS by varying the maximum document length,  $n$ . Fig. 6 shows the

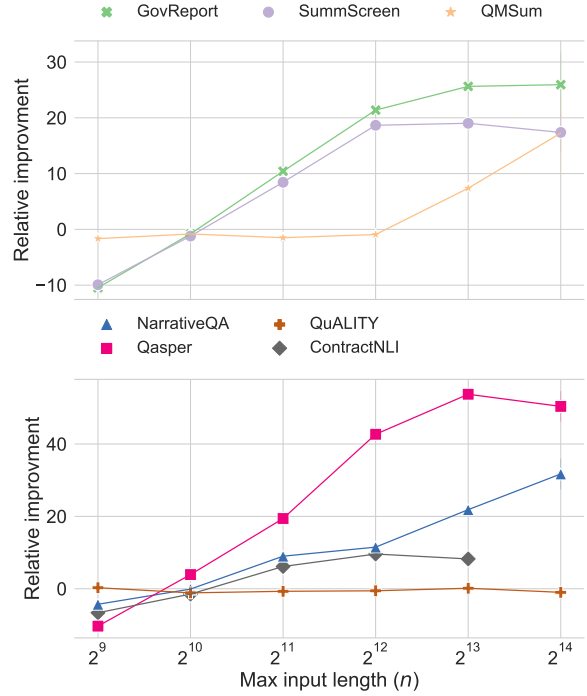


Figure 6: BART<sub>base</sub>-SLED relative improvement compared to BART<sub>base</sub> results, when varying the input length fed to SLED, fixing  $c = 256$ . **Top:** Summarization datasets. The y-axis measures relative improvement of Rouge-2. **Bottom:** QA and NLI datasets. The y-axis measures relative improvement of exact match for QuALITY and ContractNLI and F<sub>1</sub> for NarrativeQA and Qasper.

results of this experiment, where the y-axis shows relative improvement of BART<sub>base</sub>-SLED compared to BART<sub>base</sub> as a function of the first  $n$  tokens from the document (chunk size  $c = 256$ ). As expected, all datasets (except QuALITY) show a roughly monotonic improvement in performance with  $n$ . This shows that (a) SLED is able to effectively use all of the information in a long sequence (up to 16K tokens)<sup>7</sup>, and that (b) observing the entire inputs from the SCROLLS datasets improves performance.

#### 5.4 Effect of context padding

In all experiments thus far, we used a conservative padding value  $\rho = 0.5$ , that is, for every chunk of length  $c$ , the effective chunk size is  $\frac{c}{2}$  and we use  $\frac{c}{4}$  context padding tokens on each side. Since both memory and, more importantly, the number of forwards passes through the encoder are linear in the number of chunks, a natural question is how much

<sup>7</sup>For ContractNLI, we do not show results for over 8K tokens, as the length of over 95% of the tokenized examples is less than 8K.



padding and overlap are necessary to achieve satisfactory results.

To explore this, we finetune BART<sub>base</sub>-SLED on four datasets from the three dataset categories of SCROLLS, varying the value of  $\rho$ , and fixing  $c = 256$ . Tab. 2 shows the results of this experiment, where we compare relative gain compared to BART<sub>base</sub> across different  $\rho$  values as well as the effect on training time in hours.

As expected, decreasing the padding factor and consequently the number of chunks reduces training time significantly. When  $\rho = 0.25$  or  $\rho = 0.05$  training is faster by 2x-2.5x. Moreover, relative gain (i.e., improvement relative to the baseline results) is often similar or even higher with less padding (perhaps due to better encoding or more stable optimization). Thus, one can improve the efficiency and performance of SLED by tuning the hyperparameter  $\rho$  for optimal behaviour, which we leave for future work.

Padding ( $\rho$ )	Relative Gain		Train Time (hrs.)	
	QMSum	Qasper	QMSum	Qasper
50%	22.8%	53.7%	8.5	7.0
25%	17.9%	54.7%	3.6	3.0
5%	23.5%	52.0%	3.0	2.8
	CNLI	SumScr	CNLI	SumScr
50%	8.9%	21.0%	6.0	4.1
25%	10.1%	19.0%	3.4	2.8
5%	7.4%	15.9%	3.2	2.5

Table 2: Context padding ablations results. BART<sub>base</sub>-SLED relative improvement compared to BART<sub>base</sub> when varying  $\rho$ . In all cases the maximum input length is 16K and  $c = 256$ . For QMSum and SummScreen (SumScr) we measure relative improvement of Rouge-2, for ContractNLI we measure the gain in exact match, and for Qasper in  $F_1$ .

## 6 Related Work

**Efficient transformers** Many efficient attention variants were proposed in recent years, to alleviate the quadratic complexity of dense attention (Tay et al., 2020; Fournier et al., 2021). Among those are clustering vectors to distinct buckets, calculating attention only within each one (Kitaev et al., 2020a), attending only to a fixed number of hidden vectors (Ma et al., 2021), using random features to approximate the attention matrix (Choromanski et al., 2021; Peng et al., 2021), and using low-rank factorizations (Wang et al., 2020). Despite achieving respectable performance when finetun-

ing these models on the Long Range Arena benchmark (Tay et al., 2021), many of them were not yet proven to work well as a backbone for pretrained language models. In fact, recent work (Xiong et al., 2021) on encoder-only models found many do *not* outperform a simple local attention sliding window on downstream language tasks. We discuss such methods next.

**Sparse attention variants** A popular and simple solution for allowing attention-based models to process long sequences is to use local attention, where each token attend to a local window around it. Longformer (Beltagy et al., 2020), GMAT (Gupta and Berant, 2020), and ETC (Ainslie et al., 2020) use short windows of full attention, combined with full attention to a small number of predefined global input tokens. BigBird (Zaheer et al., 2020b) shares the local and global features, and additionally randomly samples tokens to attend to. Finally, the recently proposed LongT5 (Guo et al., 2021) extends T5 (Raffel et al., 2020a) with local and global attention components based on ETC, relieving the need to manually specify global tokens. In this work, we demonstrate that a simple sliding window with off-the-shelf models without any modifications is a strong alternative for multiple generative tasks that require processing long documents.

**Beyond transformers** As an alternative to transformers for processing long sequences, Gu et al. (2021) proposed the Structured State Space (S4) architecture showing dramatic gains over transformers on the LRA benchmark (Tay et al., 2021). State space models are now an active research field (Gupta, 2022; Mehta et al., 2022), but their efficacy on long-range language understanding tasks has not been tested yet.

**Fusion-in-Decoder** Izacard and Grave (2021) proposed to encode multiple independent passages separately, and concatenate the encodings prior to the decoding phase. Despite encouraging empirical evidence (Amouyal et al., 2022; Yavuz et al., 2022), we are the first (to our knowledge) to analyze FiD’s feasibility and limitations in a controlled setting. Importantly, we test FiD on long-range tasks over a single long document, rather than a collection of independent passages.

**Pretrained models with sliding windows** Wrapping a BERT encoder within a sliding

window was proposed by Cui and Hu (2021) in the context of a specialized architecture for summarization. Wang et al. (2019) showed that sliding BERT across text improves performance on several QA datasets. In this work, we propose a sliding window approach that can be easily plugged into any existing encoder-decoder model without additional parameters or task-specific training, and show its efficacy for long-range text understanding.

## 7 Limitations

We present SLED as a simple and effective method to extend the capabilities of pretrained short-text models to long-text tasks. Despite its impressive empirical performance on SCROLLS, SLED suffers from two disadvantages which may limit its applicability to some long-range tasks.

**Long output** To obtain linear complexity, SLED assumes the output length  $k$  is constant. This is since the decoder uses quadratic self-attention over the output, on top of  $\mathcal{O}(nk)$  cross-attention between the output and input. While most current long-text tasks follow this assumption, future tasks may include long text generation such as script writing, stories generation, etc. This limitation is not unique to SLED and affects other existing long-range efficient transformers including LongT5 and LED. Aside from fine-tuning on tasks that require long-text generation, this also affects pretraining long-range models on long inputs with self-supervised losses such as span-corruption (Raffel et al., 2020b) or denoising Lewis et al. (2020), which require the decoder to process an output that is linear in the length of the input.

**Co-reference resolution and fact retention** An assumption at the heart of SLED is the *Locality of information assumption*. When the input text is long, this assumption may break if distant entity resolution or factual knowledge are required. For example, a chapter in a book may mention “they were walking into the room” when knowledge of what room or who walked is located a few chapters back. In such cases, the encoder used by SLED will not be able to access this information, moving more responsibility to the decoder and reducing the effectiveness of the contextual encoding.

## 8 Conclusions

In this work we present SLED, a simple approach for modeling long texts which slides a pretrained short-range encoder over a long input document and then generates an output by attending to the encoded tokens. We show SLED can perform core operations that are important for long text understanding, such as finding relevant pieces of information and fusing them at decoding time, and demonstrate competitive performance on the SCROLLS benchmark compared to larger models and models that employ a dedicated and expensive pretraining step.

One of SLED’s most attractive features is that it can be readily used with any short-range pretrained LM. Thus, any future encoder-decoder model can be flexibly plugged into it to achieve further gains in performance on SCROLLS, some of its tasks, or any other long-range task.

We open source SLED and hope it encourages the research community to easily extend to longer inputs and push the borders of NLU models’ applicability in real-world use-cases.

## Acknowledgements

This research was partially supported by The Yandex Initiative for Machine Learning, the Shashua Fellowship, the Len Blavatnik and the Blavatnik Family foundation, and the European Research Council (ERC) under the European Union Horizons 2020 research and innovation programme (grant ERC DELPHI 802800). This work was completed in partial fulfillment for the Ph.D. degree of the first author.

## References

- Joshua Ainslie, Santiago Ontanon, Chris Alberti, Vaclav Cvicek, Zachary Fisher, Philip Pham, Anirudh Ravula, Sumit Sanghai, Qifan Wang, and Li Yang. 2020. [ETC: Encoding long and structured inputs in transformers](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 268–284, Online. Association for Computational Linguistics.
- Samuel Amouyal, Ohad Rubin, Ori Yoran, Tomer Wolfson, Jonathan Herzig, and Jonathan Berant. 2022. Qampari: : An open-domain question answering benchmark for questions

- with many answers from multiple paragraphs. *ArXiv*, abs/2205.12665.
- Iz Beltagy, Matthew E. Peters, and Arman Cohan. 2020. [Longformer: The long-document transformer](#).
- Tom B. Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel M. Ziegler, Jeffrey Wu, Clemens Winter, Christopher Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. 2020. [Language models are few-shot learners](#). In *Advances in Neural Information Processing Systems 33: Annual Conference on Neural Information Processing Systems 2020, NeurIPS 2020, December 6-12, 2020, virtual*.
- Mingda Chen, Zewei Chu, Sam Wiseman, and Kevin Gimpel. 2021. [Summscreen: A dataset for abstractive screenplay summarization](#).
- Krzysztof Marcin Choromanski, Valerii Likhosherstov, David Dohan, Xingyou Song, Andreea Gane, Tamás Szepesvári, Peter Hawkins, Jared Quincy Davis, Afroz Mohiuddin, Lukasz Kaiser, David Benjamin Belanger, Lucy J. Colwell, and Adrian Weller. 2021. [Rethinking attention with performers](#). In *9th International Conference on Learning Representations, ICLR 2021, Virtual Event, Austria, May 3-7, 2021*. OpenReview.net.
- Comet.ML. 2021. [Comet.ML home page](#).
- Peng Cui and Le Hu. 2021. [Sliding selector network with dynamic memory for extractive summarization of long documents](#). In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 5881–5891, Online. Association for Computational Linguistics.
- Pradeep Dasigi, Kyle Lo, Iz Beltagy, Arman Cohan, Noah A. Smith, and Matt Gardner. 2021. [A dataset of information-seeking questions and answers anchored in research papers](#). In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 4599–4610, Online. Association for Computational Linguistics.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. [BERT: Pre-training of deep bidirectional transformers for language understanding](#). In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 4171–4186, Minneapolis, Minnesota. Association for Computational Linguistics.
- Quentin Fournier, Gaétan Marceau Caron, and Daniel Aloise. 2021. [A practical survey on faster and lighter transformers](#).
- Albert Gu, Karan Goel, and Christopher Ré. 2021. Efficiently modeling long sequences with structured state spaces. *ArXiv*, abs/2111.00396.
- Mandy Guo, Joshua Ainslie, David C. Uthus, Santiago Ontañón, Jianmo Ni, Yun-Hsuan Sung, and Yinfei Yang. 2021. LongT5: Efficient text-to-text transformer for long sequences. *ArXiv*, abs/2112.07916.
- Ankit Gupta. 2022. Diagonal state spaces are as effective as structured state spaces. *ArXiv*, abs/2203.14343.
- Ankit Gupta and Jonathan Berant. 2020. [GMAT: Global memory augmentation for transformers](#). *ArXiv preprint*, abs/2006.03274.
- Charles R. Harris, K. Jarrod Millman, Stéfan J. van der Walt, Ralf Gommers, Pauli Virtanen, David Cournapeau, Eric Wieser, Julian Taylor, Sebastian Berg, Nathaniel J. Smith, Robert Kern, Matti Picus, Stephan Hoyer, Marten H. van Kerkwijk, Matthew Brett, Allan Haldane, Jaime Fernández del Río, Mark Wiebe, Pearu Peterson, Pierre Gérard-Marchant, Kevin Sheppard, Tyler Reddy, Warren Weckesser, Hameer Abbasi, Christoph Gohlke, and Travis E. Oliphant. 2020. [Array programming with NumPy](#). *Nature*, 585(7825):357–362.

- Luyang Huang, Shuyang Cao, Nikolaus Parulian, Heng Ji, and Lu Wang. 2021. [Efficient attentions for long document summarization](#). In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 1419–1436, Online. Association for Computational Linguistics.
- Gautier Izacard and Edouard Grave. 2021. [Leveraging passage retrieval with generative models for open domain question answering](#). In *Proceedings of the 16th Conference of the European Chapter of the Association for Computational Linguistics: Main Volume*, pages 874–880, Online. Association for Computational Linguistics.
- Yichen Jiang and Mohit Bansal. 2019. [Avoiding reasoning shortcuts: Adversarial evaluation, training, and model development for multi-hop QA](#). In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 2726–2736, Florence, Italy. Association for Computational Linguistics.
- Nikita Kitaev, Lukasz Kaiser, and Anselm Levskaya. 2020a. [Reformer: The efficient transformer](#). In *8th International Conference on Learning Representations, ICLR 2020, Addis Ababa, Ethiopia, April 26-30, 2020*. OpenReview.net.
- Nikita Kitaev, Lukasz Kaiser, and Anselm Levskaya. 2020b. [Reformer: The efficient transformer](#). In *8th International Conference on Learning Representations, ICLR 2020, Addis Ababa, Ethiopia, April 26-30, 2020*. OpenReview.net.
- Tomáš Kočiský, Jonathan Schwarz, Phil Blunsom, Chris Dyer, Karl Moritz Hermann, Gábor Melis, and Edward Grefenstette. 2018. [The NarrativeQA reading comprehension challenge](#). *Transactions of the Association for Computational Linguistics*, 6:317–328.
- Yuta Koreeda and Christopher Manning. 2021. [ContractNLI: A dataset for document-level natural language inference for contracts](#). In *Findings of the Association for Computational Linguistics: EMNLP 2021*, pages 1907–1919, Punta Cana, Dominican Republic. Association for Computational Linguistics.
- Mike Lewis, Yinhan Liu, Naman Goyal, Marjan Ghazvininejad, Abdelrahman Mohamed, Omer Levy, Veselin Stoyanov, and Luke Zettlemoyer. 2020. [BART: Denoising sequence-to-sequence pre-training for natural language generation, translation, and comprehension](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 7871–7880, Online. Association for Computational Linguistics.
- Quentin Lhoest, Albert Villanova del Moral, Yacine Jernite, Abhishek Thakur, Patrick von Platen, Suraj Patil, Julien Chaumond, Mariama Drame, Julien Plu, Lewis Tunstall, Joe Davison, Mario Šaško, Gunjan Chhablani, Bhavitvya Malik, Simon Brandeis, Teven Le Scao, Victor Sanh, Canwen Xu, Nicolas Patry, Angelina McMillan-Major, Philipp Schmid, Sylvain Gugger, Clément Delangue, Théo Matussière, Lysandre Debut, Stas Bekman, Pierre Cistac, Thibault Goehringer, Victor Mustar, François Lagunas, Alexander Rush, and Thomas Wolf. 2021. [Datasets: A community library for natural language processing](#). In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*, pages 175–184, Online and Punta Cana, Dominican Republic. Association for Computational Linguistics.
- Chin-Yew Lin. 2004. [ROUGE: A package for automatic evaluation of summaries](#). In *Text Summarization Branches Out*, pages 74–81, Barcelona, Spain. Association for Computational Linguistics.
- Xuezhe Ma, Xiang Kong, Sinong Wang, Chunting Zhou, Jonathan May, Hao Ma, and Luke Zettlemoyer. 2021. [Luna: Linear unified nested attention](#). In *Advances in Neural Information Processing Systems*.
- Wes McKinney. 2010. [Data Structures for Statistical Computing in Python](#). In *Proceedings of the 9th Python in Science Conference*, pages 56 – 61.
- Harsh Mehta, Ankit Gupta, Ashok Cutkosky, and Behnam Neyshabur. 2022. Long range language modeling via gated state spaces. *ArXiv*, abs/2206.13947.



- Richard Yuanzhe Pang, Alicia Parrish, Nitish Joshi, Nikita Nangia, Jason Phang, Angelica Chen, Vishakh Padmakumar, Johnny Ma, Jana Thompson, He He, and Samuel R. Bowman. 2021. [Quality: Question answering with long input texts, yes!](#)
- Adam Paszke, Sam Gross, Francisco Massa, Adam Lerer, James Bradbury, Gregory Chanan, Trevor Killeen, Zeming Lin, Natalia Gimelshein, Luca Antiga, Alban Desmaison, Andreas Köpf, Edward Yang, Zachary DeVito, Martin Raison, Alykhan Tejani, Sasank Chilamkurthy, Benoit Steiner, Lu Fang, Junjie Bai, and Soumith Chintala. 2019. [Pytorch: An imperative style, high-performance deep learning library](#). In *Advances in Neural Information Processing Systems 32: Annual Conference on Neural Information Processing Systems 2019, NeurIPS 2019, December 8-14, 2019, Vancouver, BC, Canada*, pages 8024–8035.
- F. Pedregosa, G. Varoquaux, A. Gramfort, V. Michel, B. Thirion, O. Grisel, M. Blondel, P. Prettenhofer, R. Weiss, V. Dubourg, J. Vanderplas, A. Passos, D. Cournapeau, M. Brucher, M. Perrot, and E. Duchesnay. 2011. Scikit-learn: Machine learning in Python. *Journal of Machine Learning Research*, 12:2825–2830.
- Hao Peng, Nikolaos Pappas, Dani Yogatama, Roy Schwartz, Noah A. Smith, and Lingpeng Kong. 2021. [Random feature attention](#). In *9th International Conference on Learning Representations, ICLR 2021, Virtual Event, Austria, May 3-7, 2021*. OpenReview.net.
- Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J. Liu. 2020a. [Exploring the limits of transfer learning with a unified text-to-text transformer](#). *Journal of Machine Learning Research*, 21(140):1–67.
- Colin Raffel, Noam M. Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J. Liu. 2020b. Exploring the limits of transfer learning with a unified text-to-text transformer. *ArXiv*, abs/1910.10683.
- Pranav Rajpurkar, Jian Zhang, Konstantin Lopyrev, and Percy Liang. 2016. [SQuAD: 100,000+ questions for machine comprehension of text](#). In *Proceedings of the 2016 Conference on Empirical Methods in Natural Language Processing*, pages 2383–2392, Austin, Texas. Association for Computational Linguistics.
- Aurko Roy, Mohammad Saffar, Ashish Vaswani, and David Grangier. 2021. [Efficient content-based sparse attention with routing transformers](#). *Transactions of the Association for Computational Linguistics*, 9:53–68.
- Uri Shaham, Elad Segal, Maor Ivgi, Avia Efrat, Ori Yoran, Adi Haviv, Ankit Gupta, Wenhan Xiong, Mor Geva, Jonathan Berant, and Omer Levy. 2022. Scrolls: Standardized comparison over long language sequences. *ArXiv*, abs/2201.03533.
- Yi Tay, Mostafa Dehghani, Samira Abnar, Hyung Won Chung, William Fedus, Jinfeng Rao, Sharan Narang, Vinh Quang Tran, Dani Yogatama, and Donald Metzler. 2022a. Scaling laws vs model architectures: How does inductive bias influence scaling? *ArXiv*, abs/2207.10551.
- Yi Tay, Mostafa Dehghani, Samira Abnar, Yikang Shen, Dara Bahri, Philip Pham, Jinfeng Rao, Liu Yang, Sebastian Ruder, and Donald Metzler. 2021. [Long range arena : A benchmark for efficient transformers](#). In *9th International Conference on Learning Representations, ICLR 2021, Virtual Event, Austria, May 3-7, 2021*. OpenReview.net.
- Yi Tay, Mostafa Dehghani, Dara Bahri, and Donald Metzler. 2020. [Efficient transformers: A survey](#).
- Yi Tay, Mostafa Dehghani, Vinh Quang Tran, Xavier García, Dara Bahri, Tal Schuster, Huaixiu Zheng, Neil Houlsby, and Donald Metzler. 2022b. Unifying language learning paradigms. *ArXiv*, abs/2205.05131.
- The pandas development team. 2020. [pandas-dev/pandas: Pandas](#).
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez, Lukasz Kaiser, and Illia Polosukhin. 2017. [Attention is all you need](#). In *Advances in Neural Information Processing Systems 30: Annual Conference on Neural Information Pro-*

- cessing Systems 2017, December 4-9, 2017, Long Beach, CA, USA*, pages 5998–6008.
- Pauli Virtanen, Ralf Gommers, Travis E. Oliphant, Matt Haberland, Tyler Reddy, David Cournapeau, Evgeni Burovski, Pearu Peterson, Warren Weckesser, Jonathan Bright, Stéfan J. van der Walt, Matthew Brett, Joshua Wilson, K. Jarrod Millman, Nikolay Mayorov, Andrew R. J. Nelson, Eric Jones, Robert Kern, Eric Larson, C J Carey, İlhan Polat, Yu Feng, Eric W. Moore, Jake VanderPlas, Denis Laxalde, Josef Perktold, Robert Cimrman, Ian Henriksen, E. A. Quintero, Charles R. Harris, Anne M. Archibald, Antônio H. Ribeiro, Fabian Pedregosa, Paul van Mulbregt, and SciPy 1.0 Contributors. 2020. [SciPy 1.0: Fundamental Algorithms for Scientific Computing in Python](#). *Nature Methods*, 17:261–272.
- Sinong Wang, Belinda Z. Li, Madian Khabsa, Han Fang, and Hao Ma. 2020. [Linformer: Self-attention with linear complexity](#).
- Zhiguo Wang, Patrick Ng, Xiaofei Ma, Ramesh Nallapati, and Bing Xiang. 2019. [Multi-passage BERT: A globally normalized BERT model for open-domain question answering](#). In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 5878–5882, Hong Kong, China. Association for Computational Linguistics.
- Thomas Wolf, Lysandre Debut, Victor Sanh, Julien Chaumond, Clement Delangue, Anthony Moi, Pierric Cistac, Tim Rault, Remi Louf, Morgan Funtowicz, Joe Davison, Sam Shleifer, Patrick von Platen, Clara Ma, Yacine Jernite, Julien Plu, Canwen Xu, Teven Le Scao, Sylvain Gugger, Mariama Drame, Quentin Lhoest, and Alexander Rush. 2020. [Transformers: State-of-the-art natural language processing](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*, pages 38–45, Online. Association for Computational Linguistics.
- Wenhan Xiong, Barlas Oguuz, Anchit Gupta, Xilun Chen, Diana Liskovich, Omer Levy, Scott Yih, and Yashar Mehdad. 2022. [Simple local attentions remain competitive for long-context tasks](#). In *Proceedings of the 2022 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 1975–1986, Seattle, United States. Association for Computational Linguistics.
- Wenhan Xiong, Barlas Ouguz, Anchit Gupta, Xilun Chen, Diana Liskovich, Omer Levy, Wen tau Yih, and Yashar Mehdad. 2021. [Simple local attentions remain competitive for long-context tasks](#). *ArXiv*, abs/2112.07210.
- Zhilin Yang, Peng Qi, Saizheng Zhang, Yoshua Bengio, William Cohen, Ruslan Salakhutdinov, and Christopher D. Manning. 2018. [HotpotQA: A dataset for diverse, explainable multi-hop question answering](#). In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 2369–2380, Brussels, Belgium. Association for Computational Linguistics.
- Semih Yavuz, Kazuma Hashimoto, Yingbo Zhou, Nitish Shirish Keskar, and Caiming Xiong. 2022. [Modeling multi-hop question answering as single sequence prediction](#). *ArXiv*, abs/2205.09226.
- Manzil Zaheer, Guru Guruganesh, Kumar Avinava Dubey, Joshua Ainslie, Chris Alberti, Santiago Ontañón, Philip Pham, Anirudh Ravula, Qifan Wang, Li Yang, and Amr Ahmed. 2020a. [Big bird: Transformers for longer sequences](#). In *Advances in Neural Information Processing Systems 33: Annual Conference on Neural Information Processing Systems 2020, NeurIPS 2020, December 6-12, 2020, virtual*.
- Manzil Zaheer, Guru Guruganesh, Kumar Avinava Dubey, Joshua Ainslie, Chris Alberti, Santiago Ontañón, Philip Pham, Anirudh Ravula, Qifan Wang, Li Yang, and Amr Ahmed. 2020b. [Big bird: Transformers for longer sequences](#). In *Advances in Neural Information Processing Systems 33: Annual Conference on Neural Information Processing Systems 2020, NeurIPS 2020, December 6-12, 2020, virtual*.
- Ming Zhong, Da Yin, Tao Yu, Ahmad Zaidi, Mutethia Mutuma, Rahul Jha, Ahmed Hassan Awadallah, Asli Celikyilmaz, Yang Liu, Xipeng Qiu, and Dragomir Radev. 2021. [QMSum: A new benchmark for query-based multi-domain](#)

meeting summarization. In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 5905–5921, Online. Association for Computational Linguistics.

## A Appendix

### A.1 SLED Implementation Details

While §3 details SLED’s method, in the sake of brevity, it leaves out a few edge cases in the implementation details. First, in the case that  $n \leq c$ , we do not perform any chunking and thus SLED effectively behaves identical to its backbone model. Second, to impose symmetry in the contextualization, we require that  $\rho \times c = 2z$  for some  $z \in \mathbb{N}$ . Finally, encoding the first and last  $\frac{\rho \times c}{2}$  input tokens requires careful attention, as they lack bidirectional context. To preserve as much commonality between chunks, all first  $\frac{(2-\rho) \times c}{2}$  are considered the *effective chunk* tokens in the first chunk. To account for the final tokens, the last chunk will always start at token  $t_{n-c+1}$  so it would contain exactly  $c$  tokens, and its *effective chunk* tokens will be defined as all tokens that were not part of any previous *effective chunk*.

### A.2 Experimental details

All experiments were done with the *transformers* (Wolf et al., 2020) library (version 4.10.0.dev0) and tracked using the *Comet.ML* infrastructure (Comet.ML, 2021). All pretraining and finetuning datasets were provided by the *Datasets library* (Lhoest et al., 2021) (version 1.17.0) and the SCROLLS official repository<sup>8</sup>. The datasets inputs and splits remained as suggested by the authors of SCROLLS. We trained all models to the maximum number of epochs suggested for each models by Shaham et al. (2022) and chose the checkpoint that performed best over the a subset of 1000 samples out of the evaluation set (i.e., post-hoc early stopping) and then evaluated it over the entire evaluation set. To perform model selection, for each model-dataset pair we finetuned 9 models with LINEAR learning rate scheduling, AdamW optimized with the default settings, and setting the learning rate to one of  $\{2e-5, 5e-5, 1e-4\}$  and the effective batch size to one of  $\{8, 16, 32\}$ . Warmup was fixed at 10%.

Other packages used for training and analyzing the results are *numpy* (Harris et al., 2020), *scipy* (Virtanen et al., 2020), *pandas* (Wes McKinney, 2010; pandas development team, 2020) and *scikit-learn* (Pedregosa et al., 2011). All models ran using *PyTorch* (Paszke et al., 2019).

---

<sup>8</sup><https://github.com/tau-nlp/scrolls>