

# **Push Proxy Gateway (PPG)**

**2005.12.01**

유원재

## Content

---

1. Term & Definition for PPG
2. PPG & SMS
3. HTTP Push vs. HTTP Pull Technology & OTA-HTTP overview
4. Protocol Stack between mobile & CP
5. WAP scenario
6. OTA-WSP Transportation flow
7. OTA-HTTP Transportation flow
8. PPG Service List
9. PPG inter-working List
10. PAP submission/result notify Format - example
11. Device CPI information Format – example
12. HTTP Push (POST) Request/Response Format - example
13. Push Message Routing Mechanism
14. Reference


# Push Proxy Gateway (PPG)

## 1. Term & Definition for PPG

CPI	Capabilities and Preference Information
OTA	Over The Air
OTA-HTTP	(Push) OTA over HTTP
OTA-WSP	(Push) OTA over WSP
IWF	Inter Working Function
PAP	Push Access Protocol
PI	Push Initiator
PO-TCP	PPG Originated TCP connection establishment method
SIA	Session Initiation Application
SIR	Session Initiation Request
TO-TCP	Terminal Originated TCP connection establishment method
WAP	Wireless Application Protocol
WSP	Wireless Session Protocol

# Push Proxy Gateway (PPG)


## 2. PPG & SMS

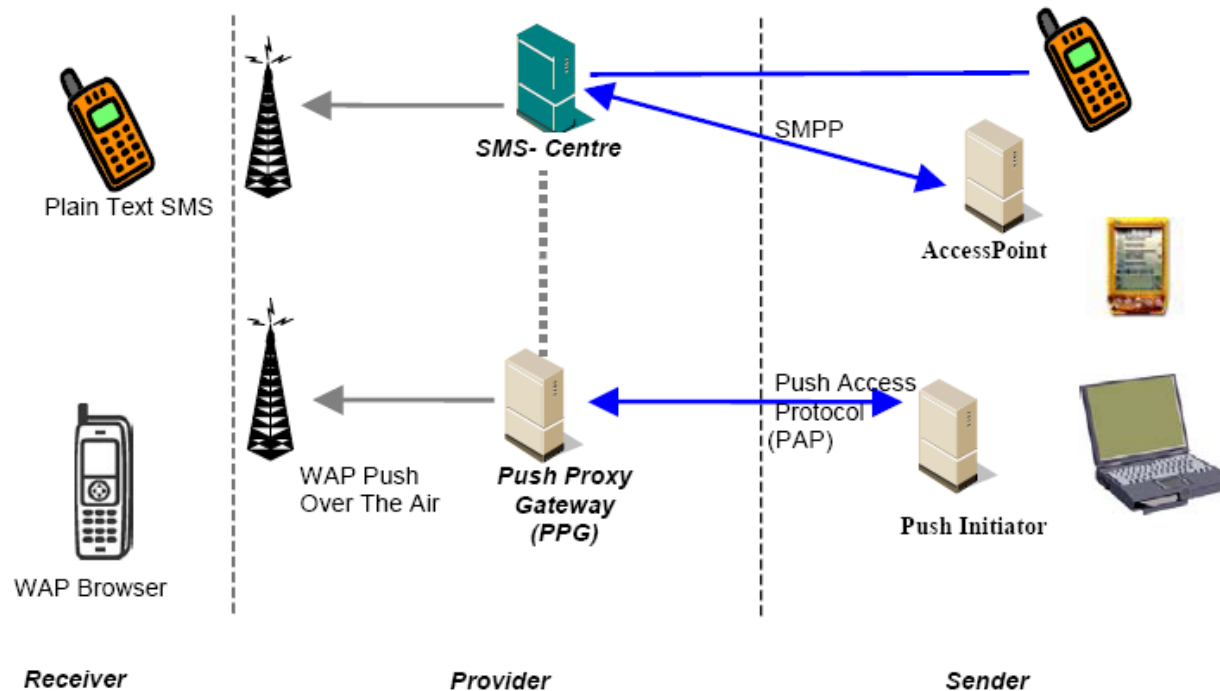

- Multi-recipient addressing: the ability to address multiple intended recipients with the same message.
- Alternate addressing: the ability to address a recipient using a phone number or a user defined identifier.
- The ability to target specific applications on the Push enabled handset
- Message delivery confirmation
- The ability to query the terminal capabilities of the intended recipient (if available) and tailor the push message accordingly.
- The ability to push MIME content type (including plain text)
- Developer control of priority of delivery
- Cache control – control the cache storage area in the push capable terminal.

# Push Proxy Gateway (PPG)

## 3. HTTP Push vs HTTP Pull Technology & OTA-HTTP overview

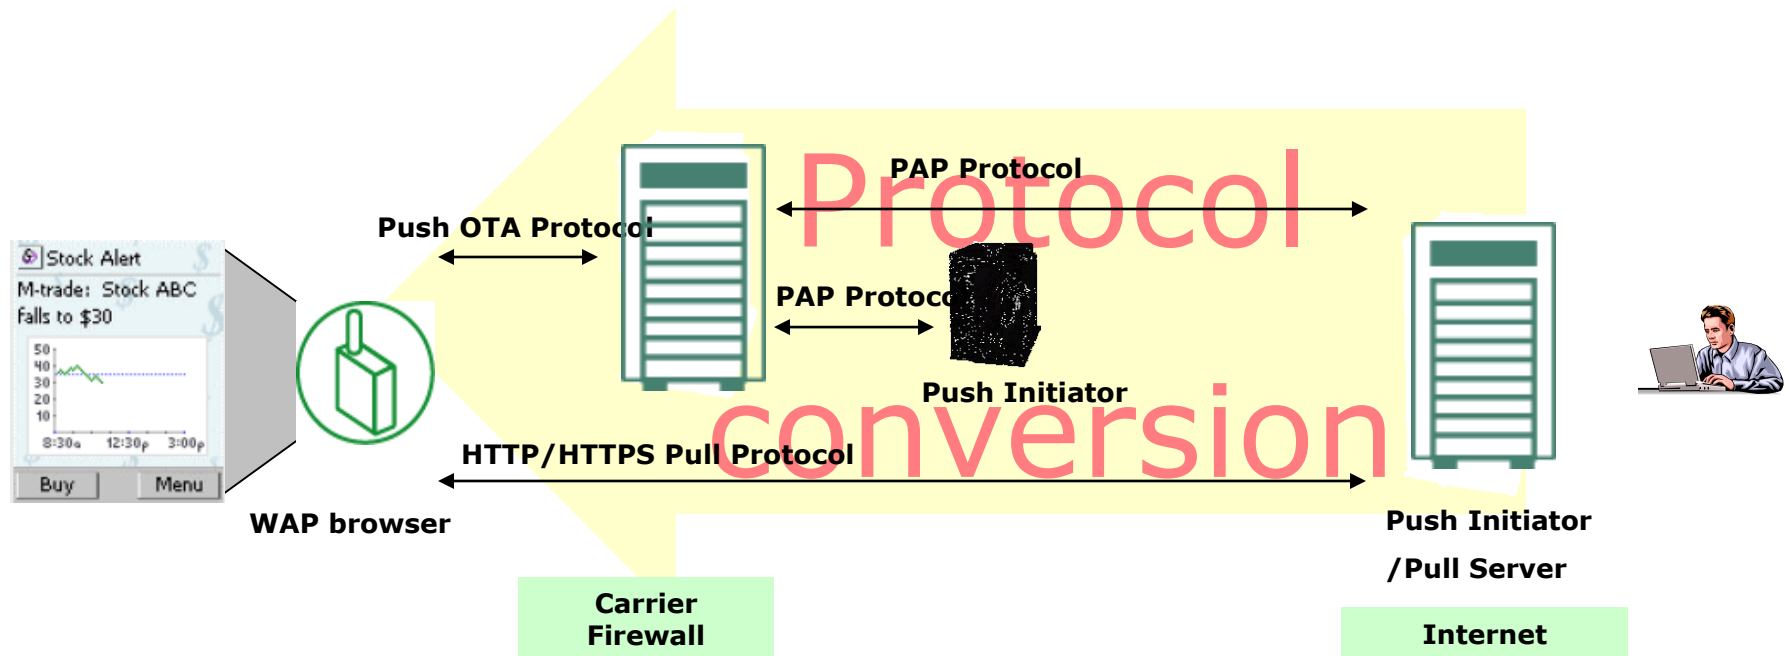

1) Push architecture - On client/Server model, transmit information to a device without a user request.

2) Pull architecture - A user enters a URL, and the server answers.


### 3) The Push Framework

A push operation accomplished by Push Initiator to transmit push content and delivery instructions to PPG, which then delivers the push content to client. The PPG uses the Push Over-the-Air Protocol for delivery.


4) PI can be separated or co-located.

# Push Proxy Gateway (PPG)


## 4. Protocol Stack between mobile & CP

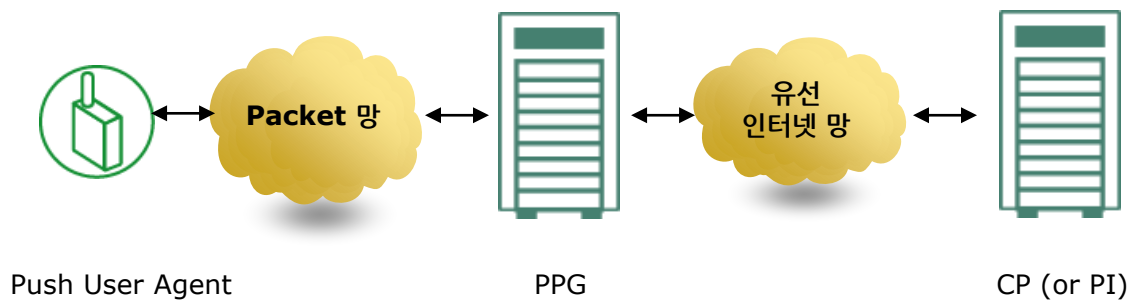

### 1) OTA-WSP

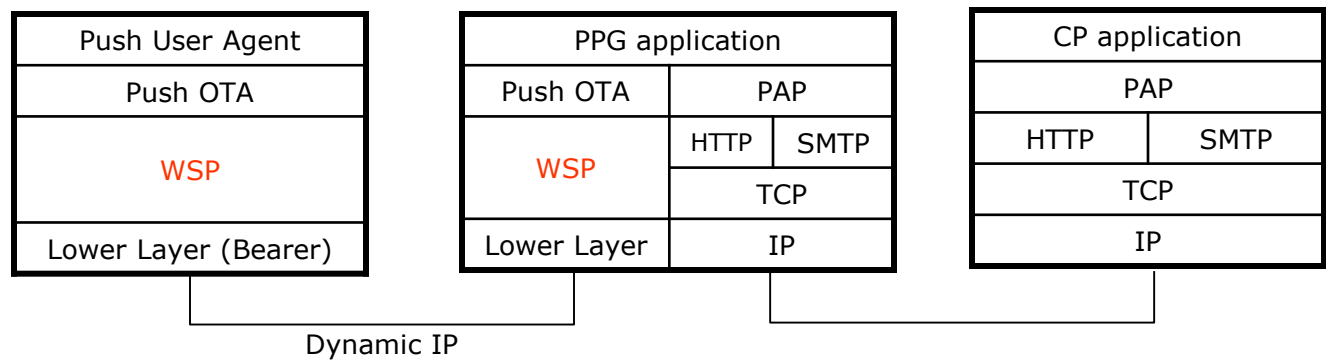


### 2) OTA-HTTP

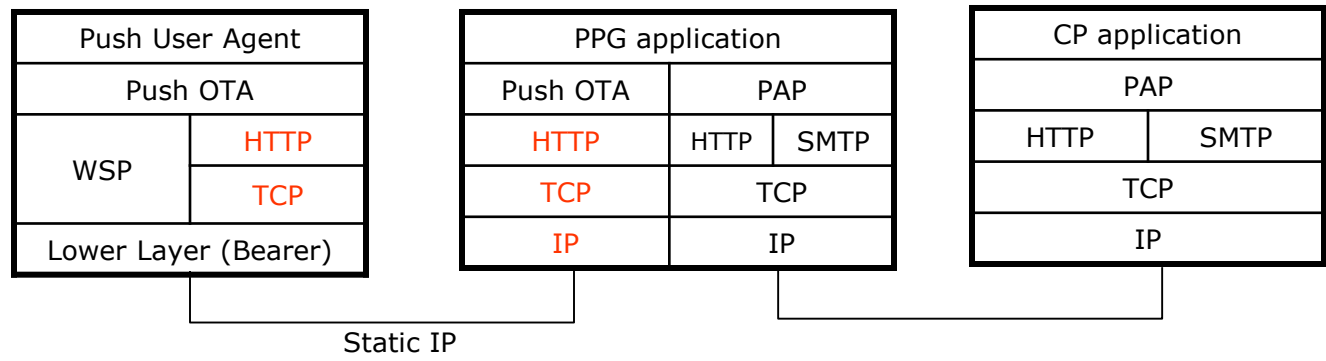

# Push Proxy Gateway (PPG)


## 5. WAP scenario

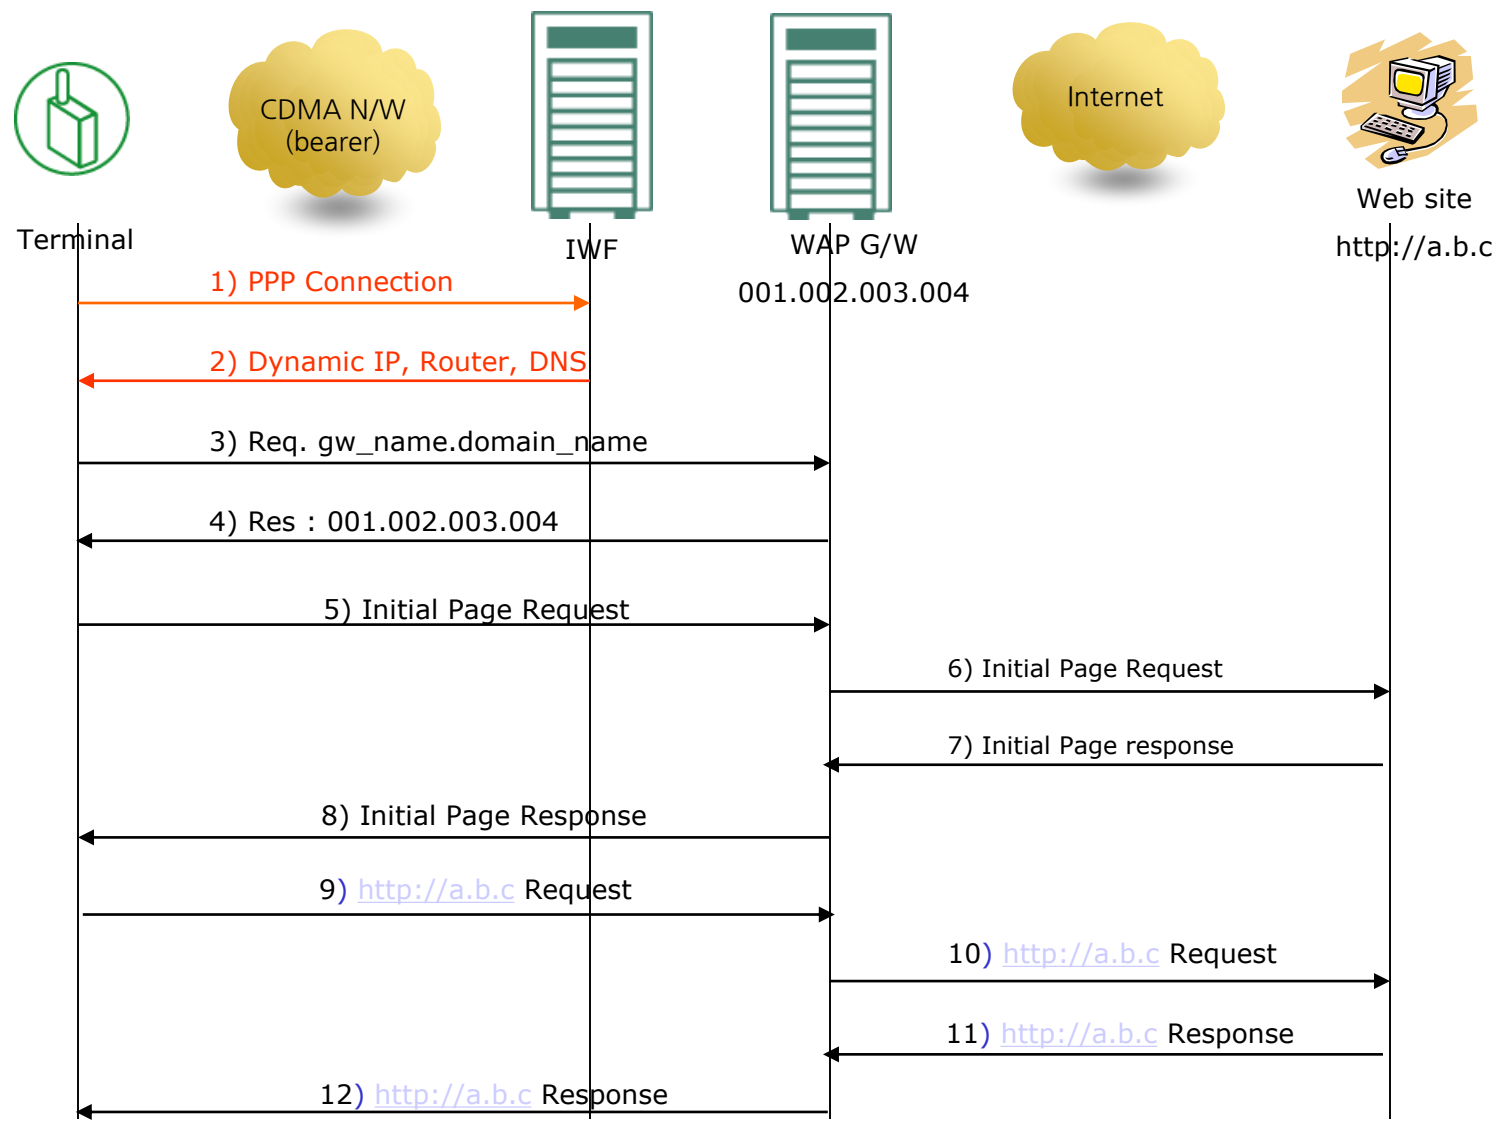


# Push Proxy Gateway (PPG)

## 6. OTA-WSP Transportation flow (General)

i) Connection

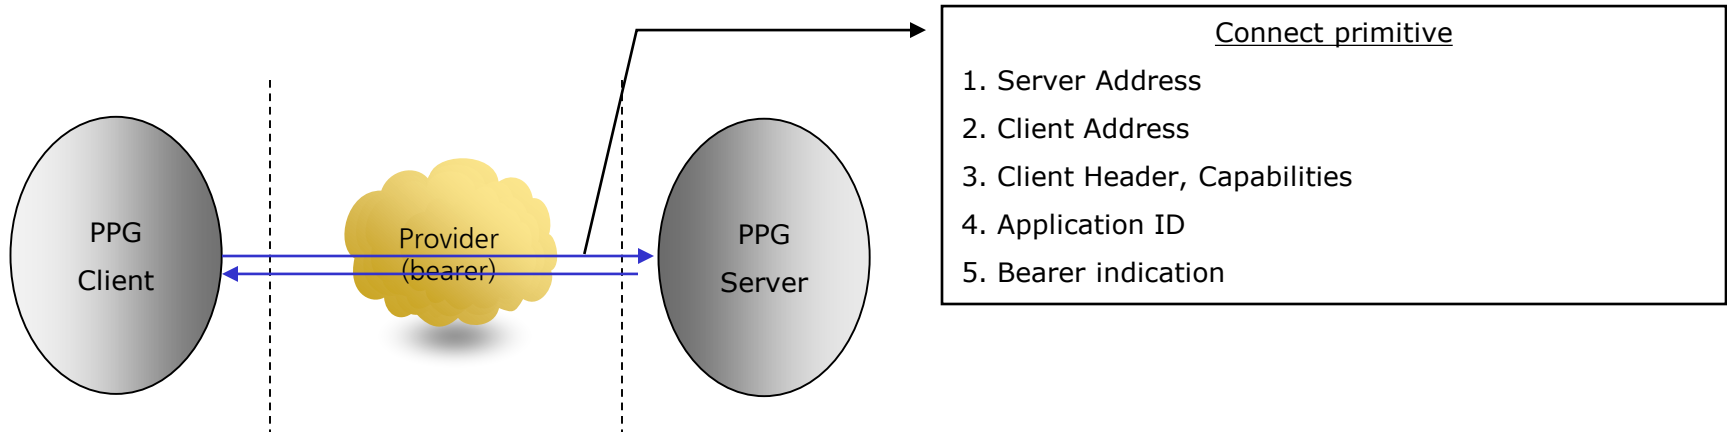

ii) Push

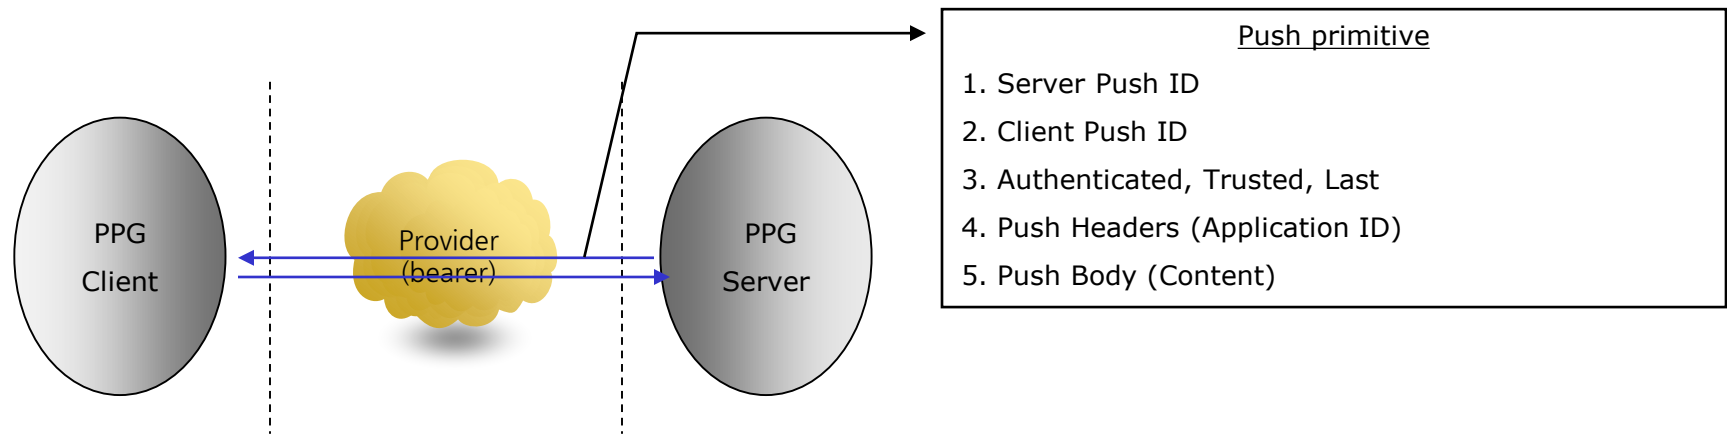

1) CONNECTION --> 2) PUSH




# Push Proxy Gateway (PPG)


## 6. OTA-WSP Transportation flow (SKT 사례, OTA-WSP 만을 적용)

i) Push Session 이 존재하는 경우 -> 바로 push session를 통해 IP, Port를 얻어 connection을 맺는다.

1. 주기적으로 client sessions 정보를 넘겨 준다.

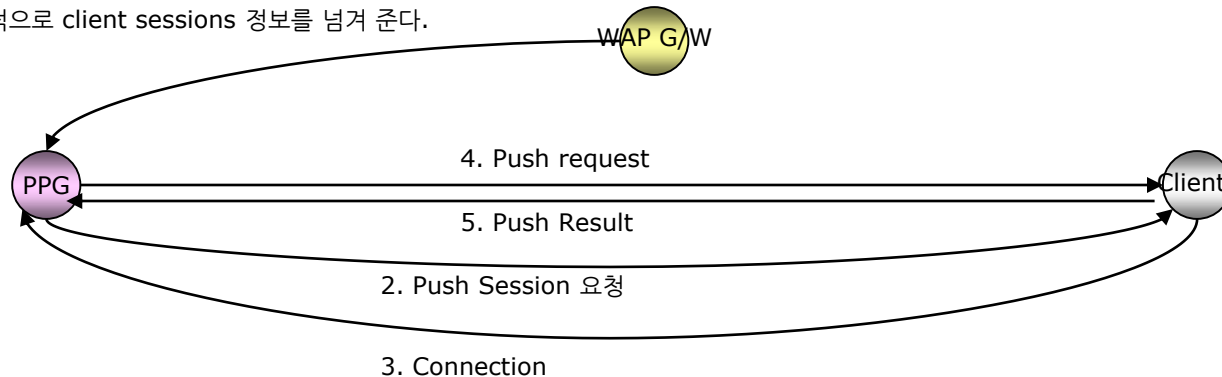


ii) Push Session 이 존재하지 않고 WAP Session이 존재하는 경우 -> WAP session 를 통해 IP, Port를 얻어 connection을 맺는다.

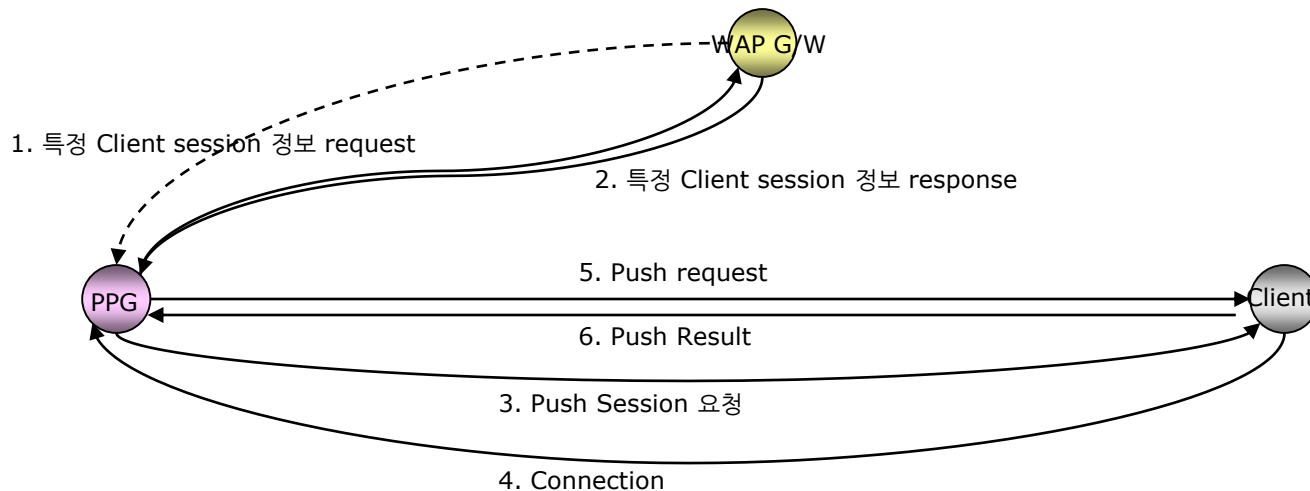

iii) SMS 를 통해서 session을 맺는 경우 -> SMS에 SIR을 short message하여 보내고 connect를 맺는다.


# Push Proxy Gateway (PPG)

## 7. OTA-HTTP Transportation flow (General)

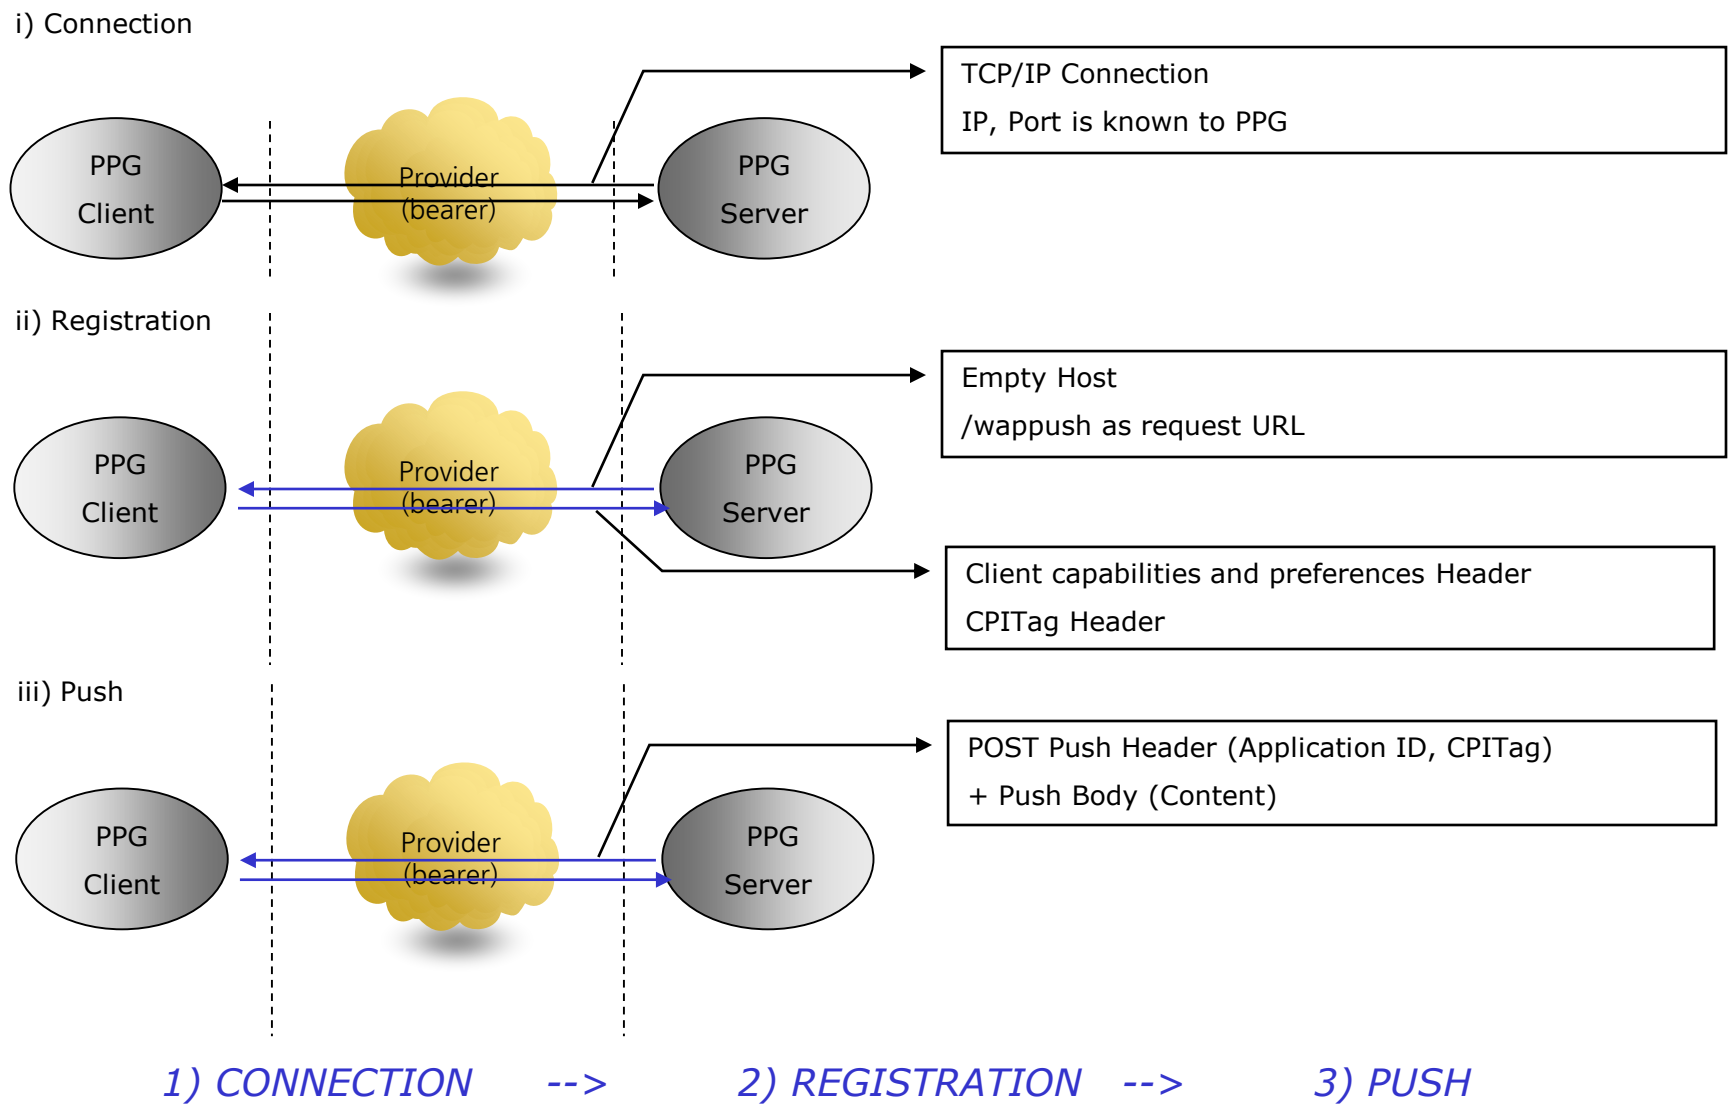

# Push Proxy Gateway (PPG)

## 7. OTA-HTTP Transportation flow (KTP 사례, OTA-HTTP 만을 적용)

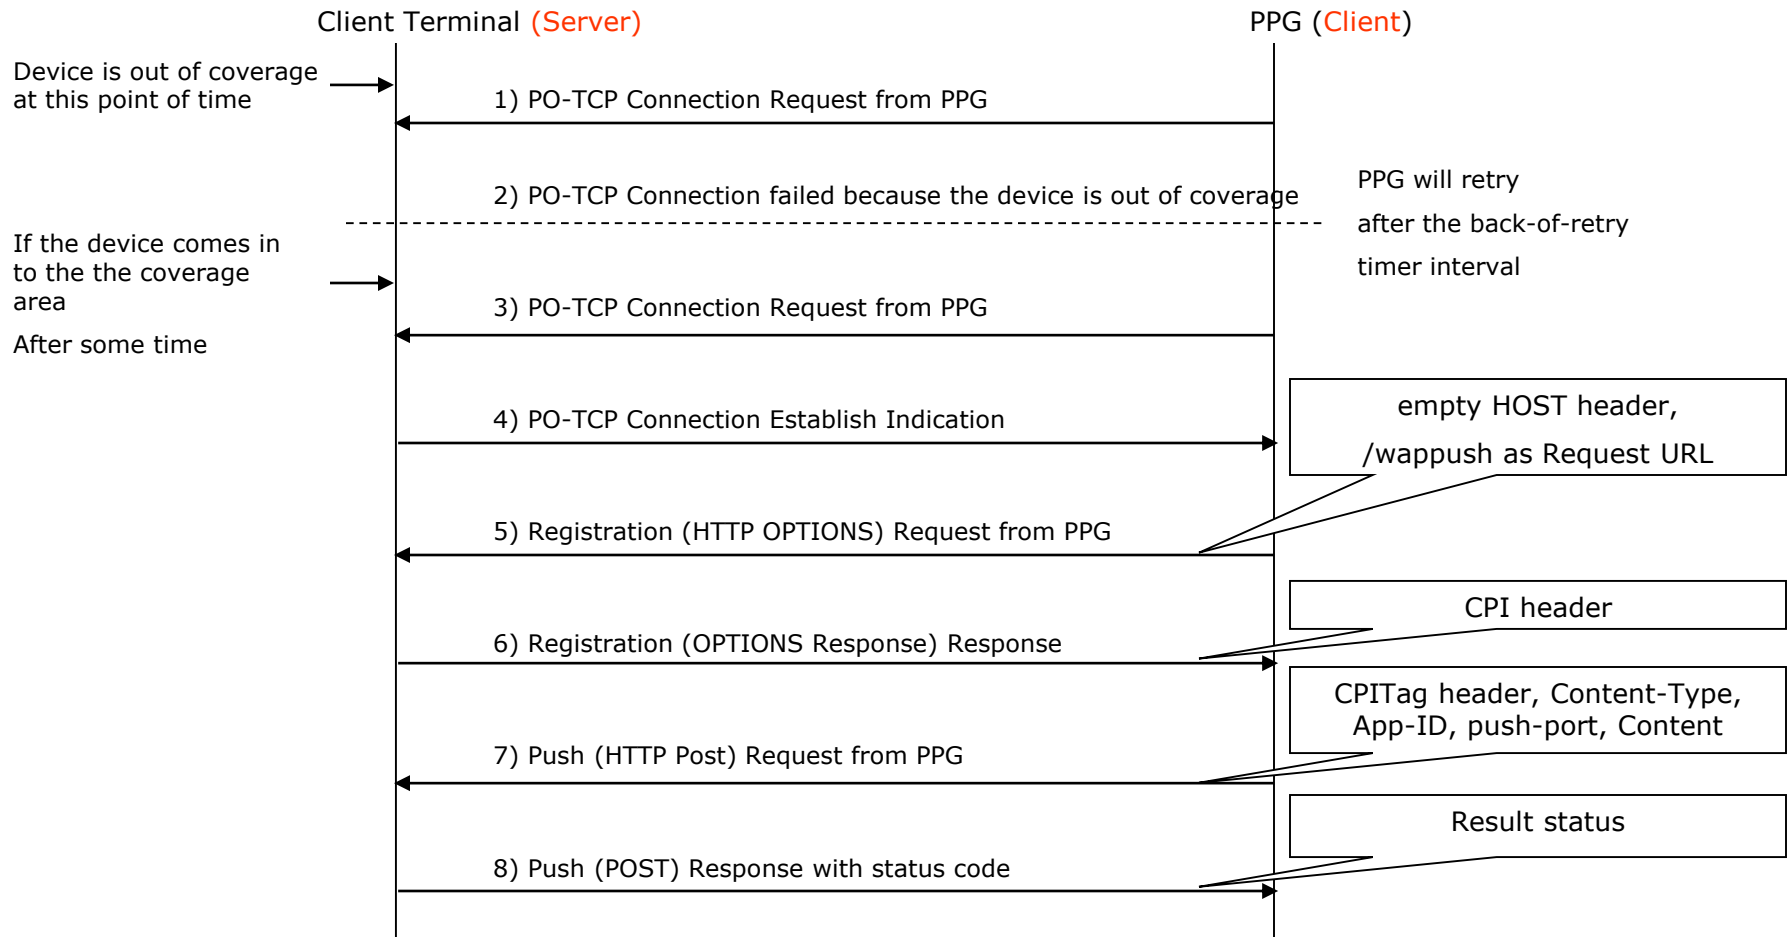

## 8. PPG Service List

- 1) PI identification and authentication; access control
- 2) Parsing of and error detection in push content and control information
- 3) Client discovery services (including client capabilities)
- 4) Address resolution of push recipient
- 5) Binary encoding and compilation of certain content types, or general compression, to improve efficiency
- 6) OTA Protocol conversion
- 7) The PPG may maintain the Black List and White List of PI (Push Initiators), and will set the Trusted flag in the Push Message

## 9. PPG inter-working List

- Terminal inter-working
- WAP G/W inter-working
- SMSS inter-working
- CSBS inter-working
- Subscriber inter-working

## 10. PAP submission/result notify Format - example

PUSH submission	
push-message	push-id replace-push-id ppg-notify-requested-to
address	address-value
PUSH result notification	
resultnotification-response	push-id code desc


```
POST /cgi-bin/wap_push.cgi HTTP/1.1
Host: www.ppg.carrier.com
Date: Tue, 11 April 2000 18:00:00 GMT
Content-Type: multipart/related; boundary=NEXT_PART; type="application/xml"
Content-Length: 353

--NEXT_PART
Content-Type: application/xml;

<?xml version="1.0"?>
<!DOCTYPE pap PUBLIC "-//WAPFORUM//DTD PAP 2.0//EN"
    "http://www.wapforum.org/DTD/pap_2.0.dtd"
    [<?wap-pap-ver supported-version="2.0.1.*"?>]>
<pap>
  <push-message push-id="210861030999"
    <address address-value="wappush="+01030322947/TYPE=PLMN"/>
  </push-message>
</pap>
```

Control entity


# Push Proxy Gateway (PPG)

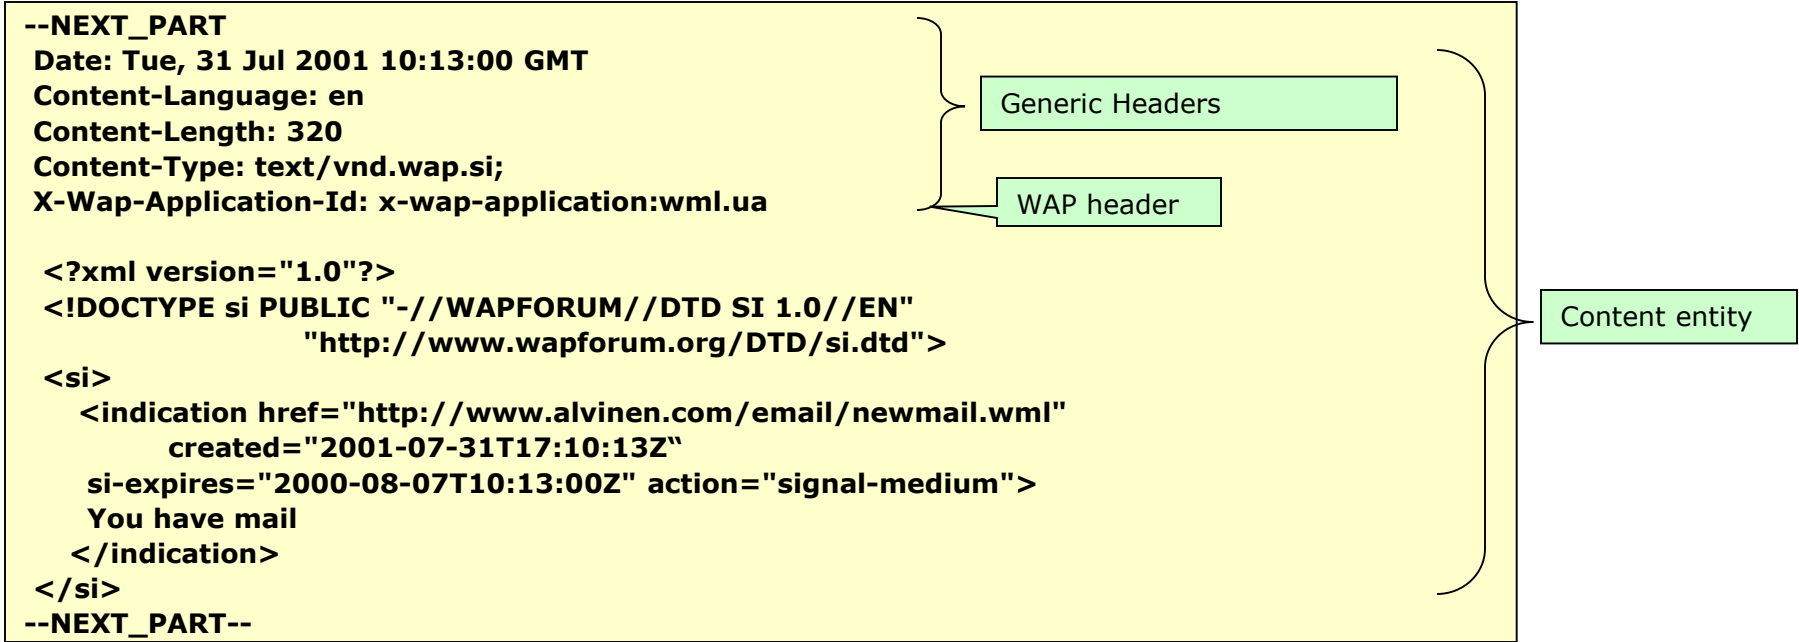

## 11. Device CPI information Format - example

CPI Field	Value
X-Wap-Push-Accept	text/plain, application/xml, application/vnd.wap.mms-message
X-Wap-Push-Accept-Charset	UTF-8
X-Wap-Push-Accept-Encoding	Identity
X-Wap-Push-Accept-Language	*
X-Wap-Push-Accept-AppID	device:oap, device:PushRegistry, device:RCM, x-wap-application:mms.ua
X-Wap-Push-User-Agent	MOT-i860
X-Wap-CPITag	vXXTqg== (4*OCTET)
X-Wap-Push-Status	501 Registration request accepted, CPITag not present

## 12. HTTP Push (POST) Request/Response Format - example

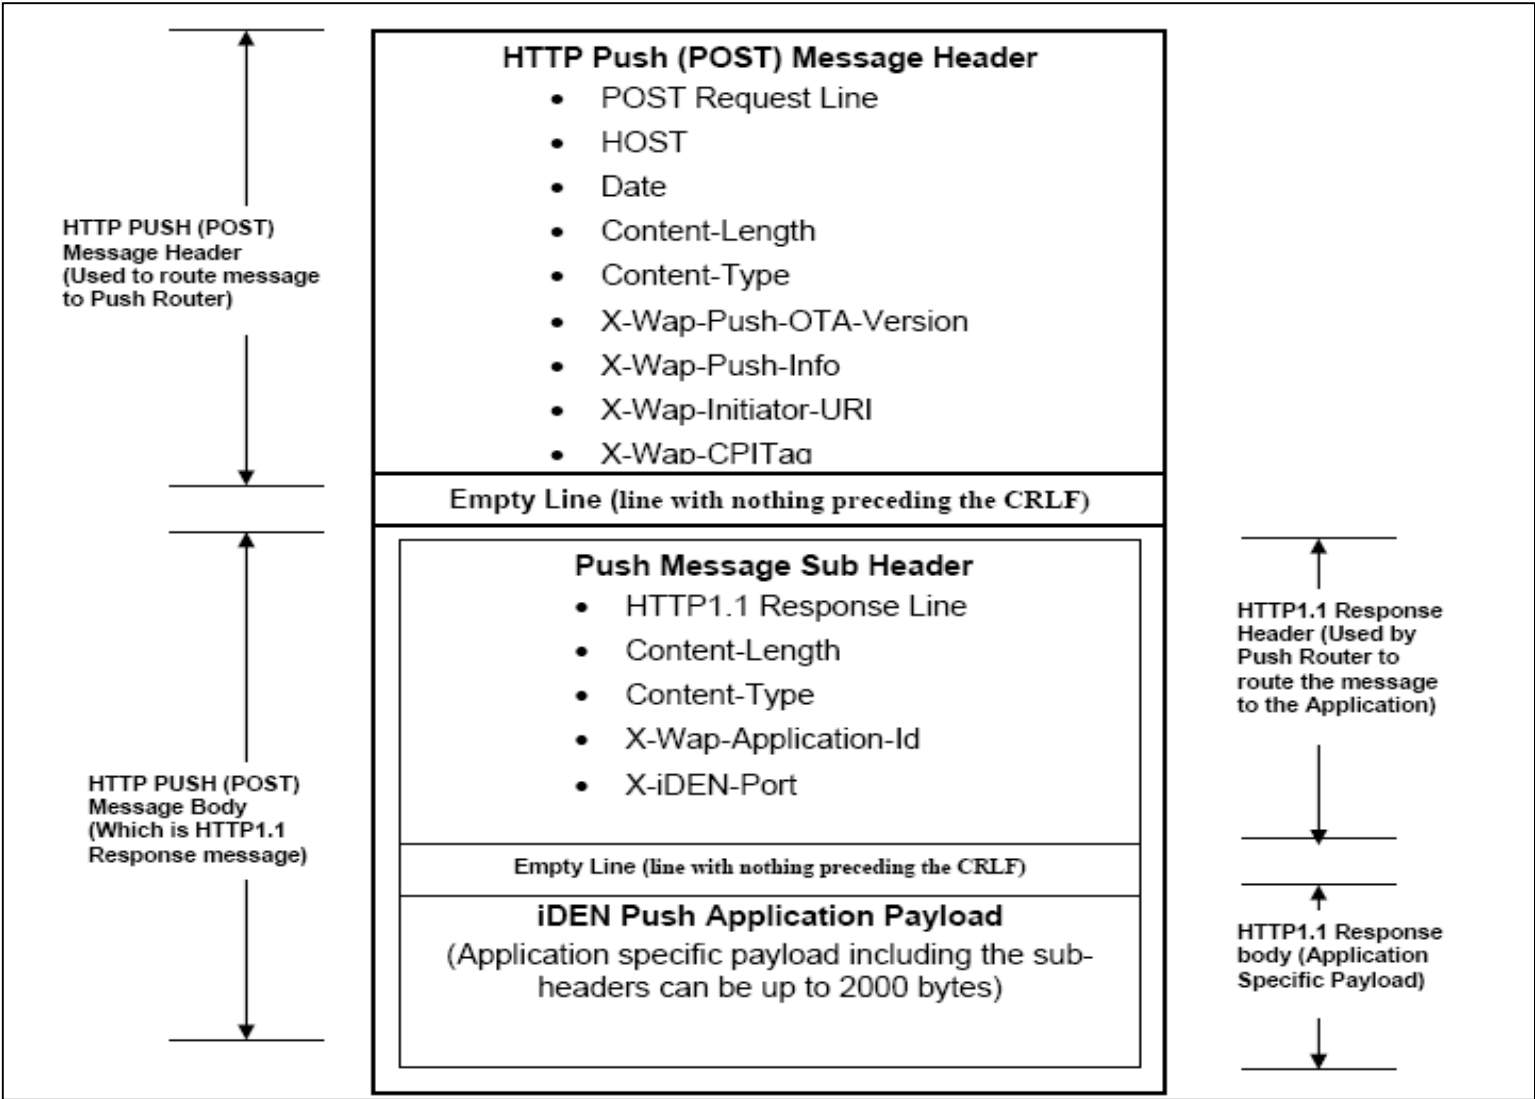

## 12. HTTP Push (POST) Request/Response Format - example

**POST /wappush HTTP/1.1**

**Host:**

**Date: Tue, 31 Jul 2001 10:13:05 GMT**

**Content-Type: application/http**

**Content-Length: 491**

**X-Wap-Push-OTA-Version: 1.0**

**HTTP/1.1 200 OK**

**Date: Tue, 31 Jul 2001 10:13:00 GMT**

**Last-modified: Tue, 31 Jul 2001 10:13:00 GMT**

**Content-Language: en**

**Content-Length: 277**

**Content-Type: vnd.wap.si**

**X-Wap-Application-Id: x-wap-application:wml.ua**

**<?xml version="1.0"?>**

**<!DOCTYPE si PUBLIC "-//WAPFORUM//DTD SI 1.0//EN" "http://www.wapforum.org/DTD/si.dtd">**

**<si>**

**<indication href="http://www.xyz.com/email/123/abc.wml" created="2001-07-31T10:13:00Z"**

**si-expires="2001-08-07T10:13:00Z">You have 4 new emails</indication>**


**</si>**

Allows the user to invoke email service




# Push Proxy Gateway (PPG)

## 13. Push Message Routing Mechanism (General)

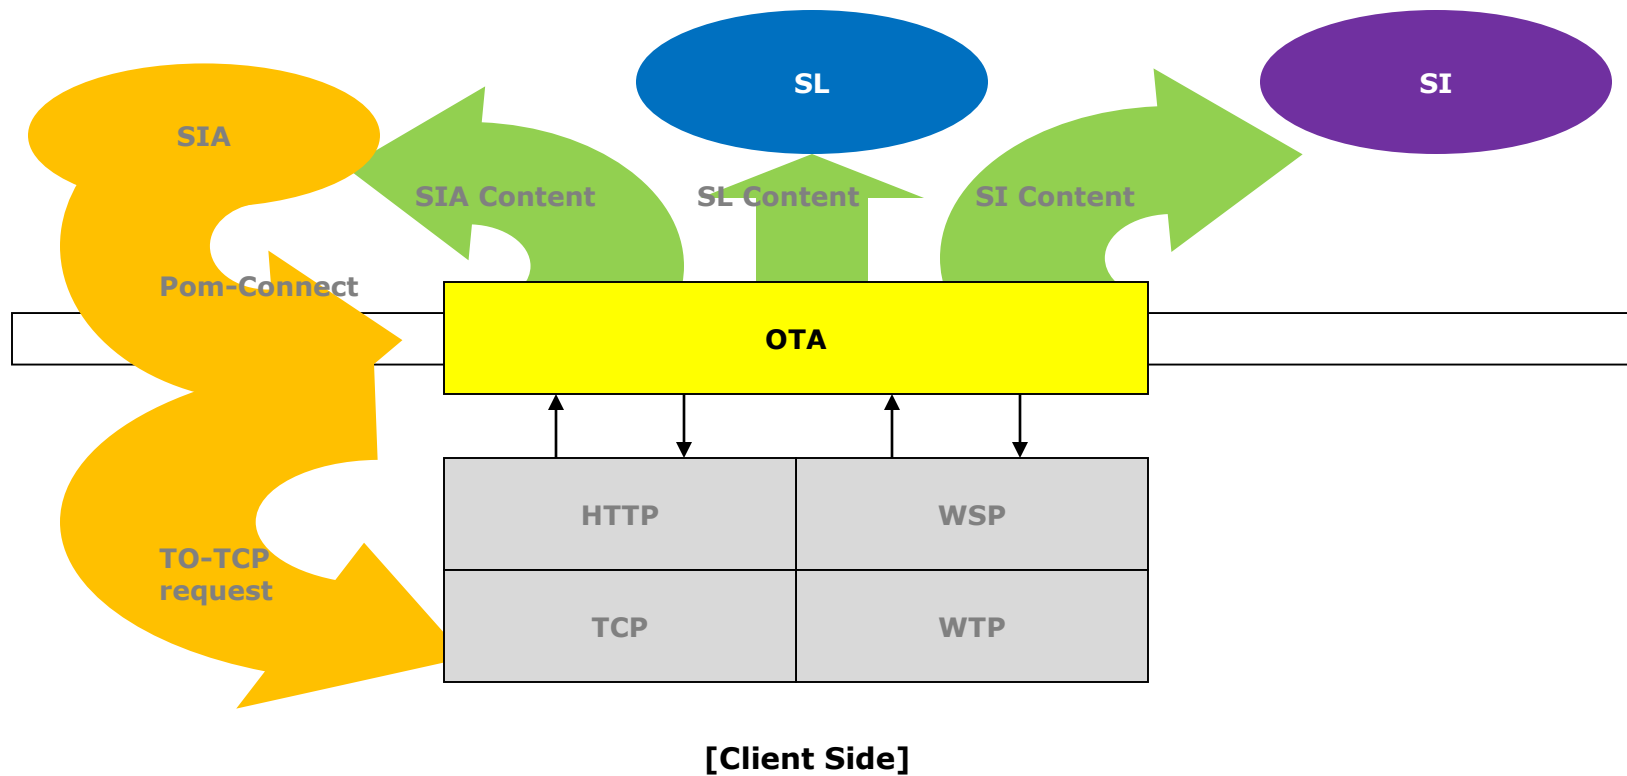

## 13. Push Message Routing Mechanism (KTP 사례)

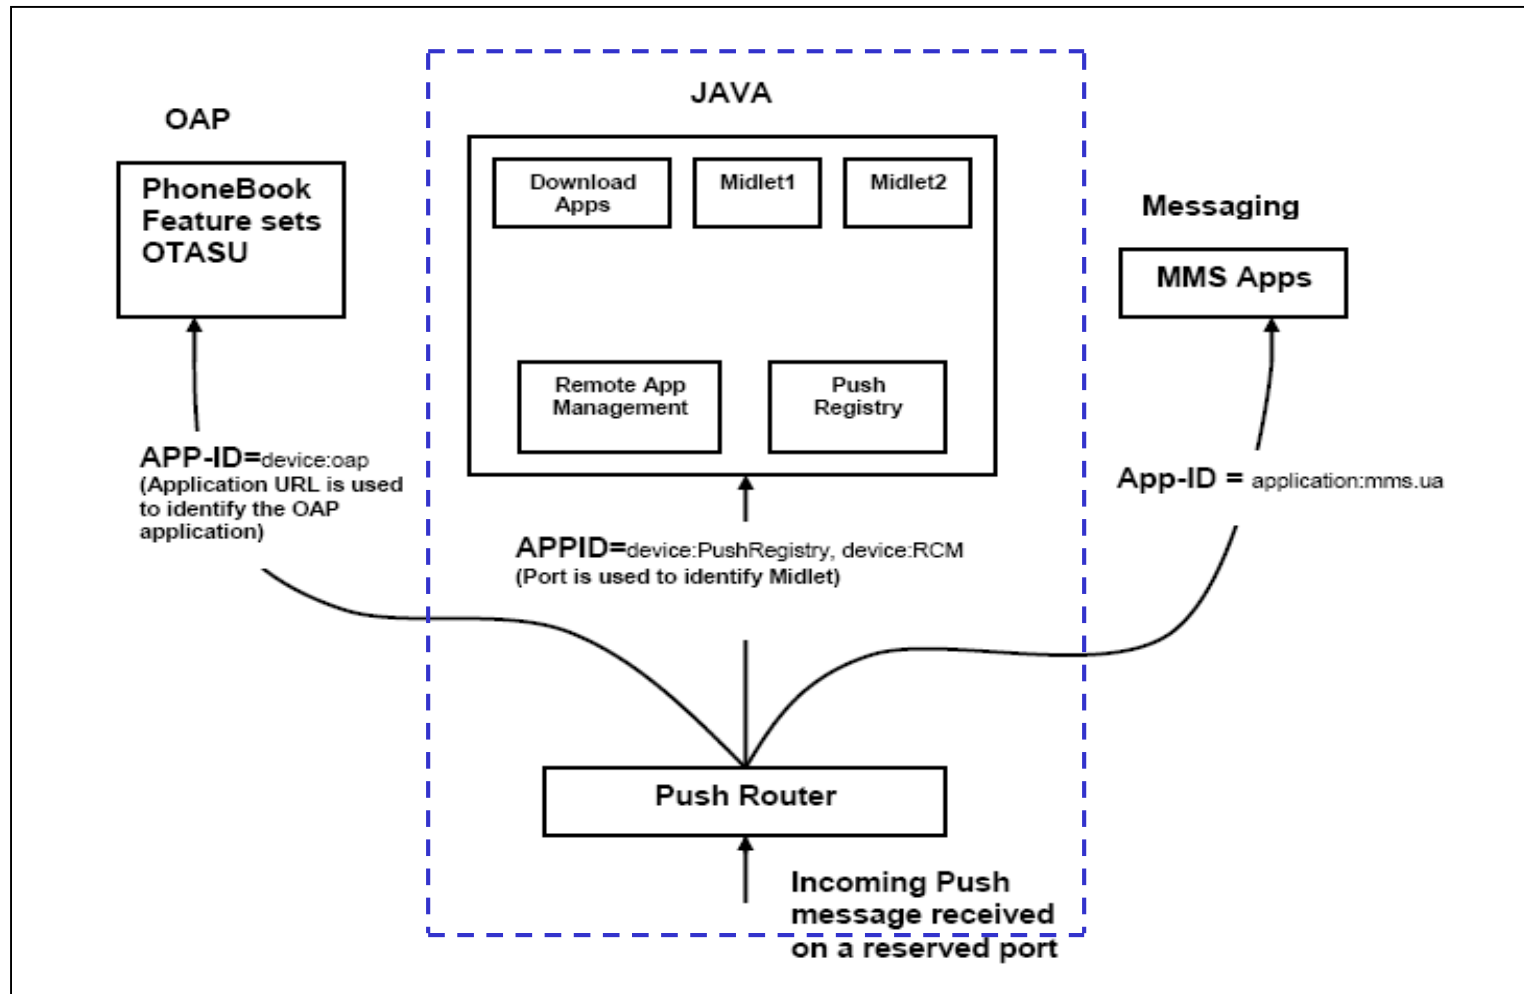

## 14. Reference

- WAP-235-PushOTA-20010425-a / WAP Forum ([www.wapforum.org](http://www.wapforum.org))
- WAP-247-PAP-20010429-a / WAP Forum ([www.wapforum.org](http://www.wapforum.org))
- Push Client Specification / Motorola (confidential)
- WAP Push Technology Overview / Openwave ([www.openwave.com](http://www.openwave.com))
- Comparison of WAP Push and Short Message Service (SMS) / Openwave ([www.openwave.com](http://www.openwave.com))
- The Value of WAP Push / openwave ([www.openwave.com](http://www.openwave.com))