

Task 4.2P

Documents added by seed.js

Connections Edit View Collection Help

Compass

localhost:27017 facts

localhost:27017 > basketballDB > facts

Documents 3 Aggregations Schema Indexes 1 Validation

Type a query: { field: 'value' } or [Generate query +](#)

[EXPLAIN](#) [Reset](#) [Find](#) [Options](#)

[ADD DATA](#) [EXPORT DATA](#) [UPDATE](#) [DELETE](#)

25 1–3 of 3

`_id: ObjectId('6931881c04a19b845d28ae96')`
`text: "The three-point line was introduced to the NBA in 1979."`
`--v: 0`

`_id: ObjectId('6931881c04a19b845d28ae97')`
`text: "Each team has five players on the court at a time."`
`--v: 0`

`_id: ObjectId('6931881c04a19b845d28ae98')`
`text: "An NBA game is 48 minutes long, split into four quarters."`
`--v: 0`

Connections Edit View Collection Help

Compass

localhost:27017 facts positions

localhost:27017 > basketballDB > positions

Documents 3 Aggregations Schema Indexes 1 Validation

Type a query: { field: 'value' } or [Generate query +](#)

[EXPLAIN](#) [Reset](#) [Find](#) [Options](#)

[ADD DATA](#) [EXPORT DATA](#) [UPDATE](#) [DELETE](#)


25 1–3 of 3

`_id: ObjectId('6931881c04a19b845d28ae92')`
`title: "Point Guard"`
`image: "images/stephcurry.png"`
`link: "Learn about point guards"`
`description: "Usually the primary ball handler and playmaker."`
`--v: 0`

`_id: ObjectId('6931881c04a19b845d28ae93')`
`title: "Shooting Guard"`
`image: "images/skobe.png"`
`link: "Learn about shooting guards"`
`description: "Often the best perimeter shooter on the team."`
`--v: 0`


`_id: ObjectId('6931881c04a19b845d28ae94')`
`title: "Center"`
`image: "images/shaq.png"`
`link: "Learn about centers"`
`description: "Tallest players who protect the paint and rebound."`
`--v: 0`

Server.js working

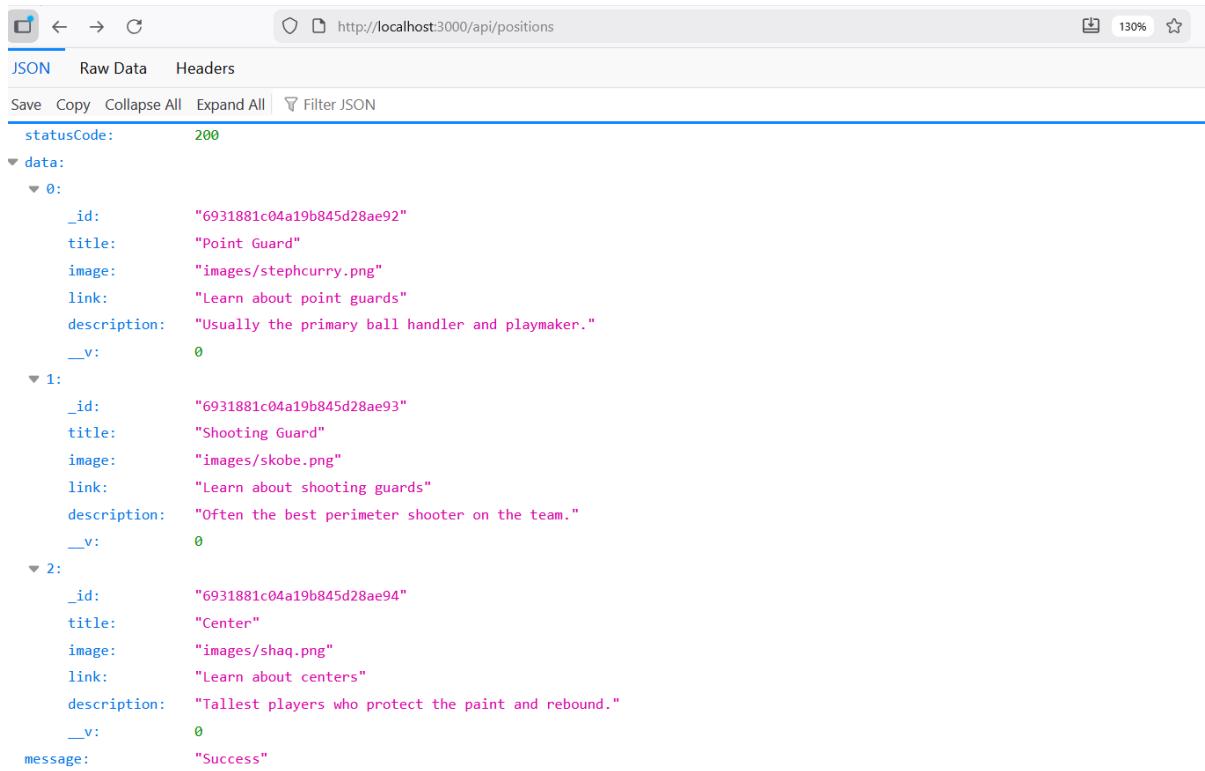

The screenshot shows a browser window with the URL `http://localhost:3000/api/positions`. The page title is "Server.js working". Below the address bar, there are tabs for "JSON", "Raw Data", and "Headers". The "JSON" tab is selected. The response body is a JSON object with the following structure:

```
statusCode: 200
data:
  0:
    _id: "6931881c04a19b845d28ae92"
    title: "Point Guard"
    image: "images/stephcurry.png"
    link: "Learn about point guards"
    description: "Usually the primary ball handler and playmaker."
    __v: 0
  1:
    _id: "6931881c04a19b845d28ae93"
    title: "Shooting Guard"
    image: "images/skobe.png"
    link: "Learn about shooting guards"
    description: "Often the best perimeter shooter on the team."
    __v: 0
  2:
    _id: "6931881c04a19b845d28ae94"
    title: "Center"
    image: "images/shaq.png"
    link: "Learn about centers"
    description: "Tallest players who protect the paint and rebound."
    __v: 0
message: "Success"
```

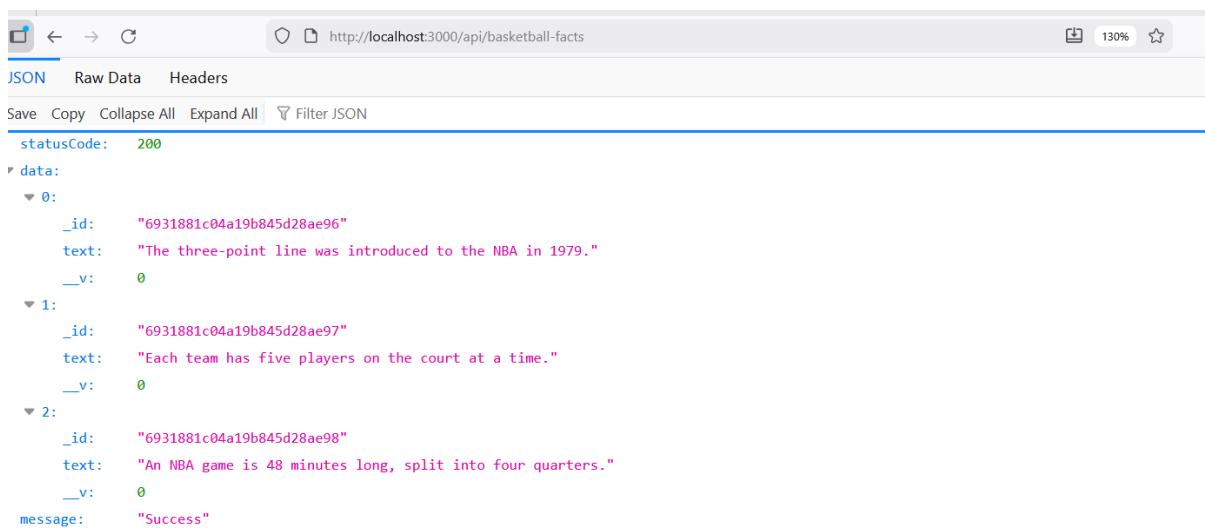

The screenshot shows a browser window with the URL `http://localhost:3000/api/basketball-facts`. The page title is "Server.js working". Below the address bar, there are tabs for "JSON", "Raw Data", and "Headers". The "JSON" tab is selected. The response body is a JSON object with the following structure:

```
statusCode: 200
data:
  0:
    _id: "6931881c04a19b845d28ae96"
    text: "The three-point line was introduced to the NBA in 1979."
    __v: 0
  1:
    _id: "6931881c04a19b845d28ae97"
    text: "Each team has five players on the court at a time."
    __v: 0
  2:
    _id: "6931881c04a19b845d28ae98"
    text: "An NBA game is 48 minutes long, split into four quarters."
    __v: 0
message: "Success"
```