

(a) Discrete Output Modeling

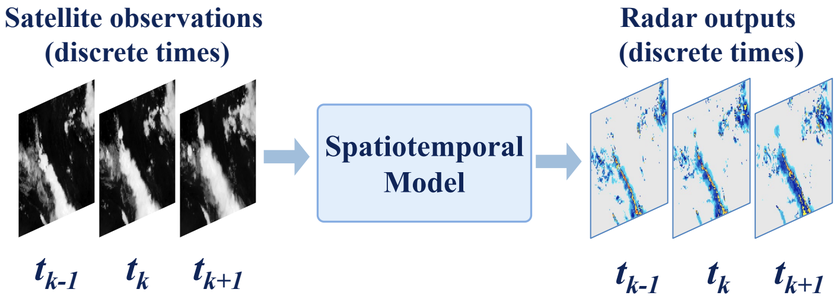

Radar fields are reconstructed at discrete timestamps.


(b) Continuous Latent-State Modeling

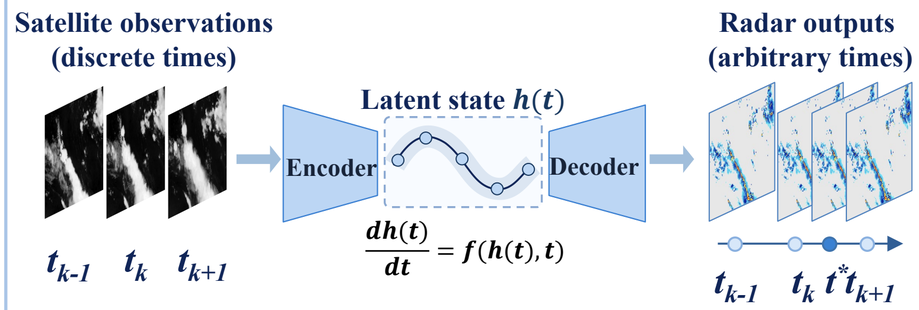


Continuous latent states are decoded into radar fields.

(c) RadarDynGS (Ours): Persistent Gaussian-State Evolution


1 Gaussian Initialization

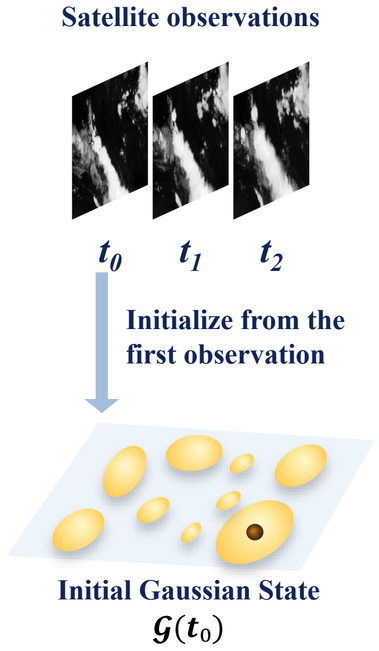

2 Satellite-Guided Gaussian-State Evolution

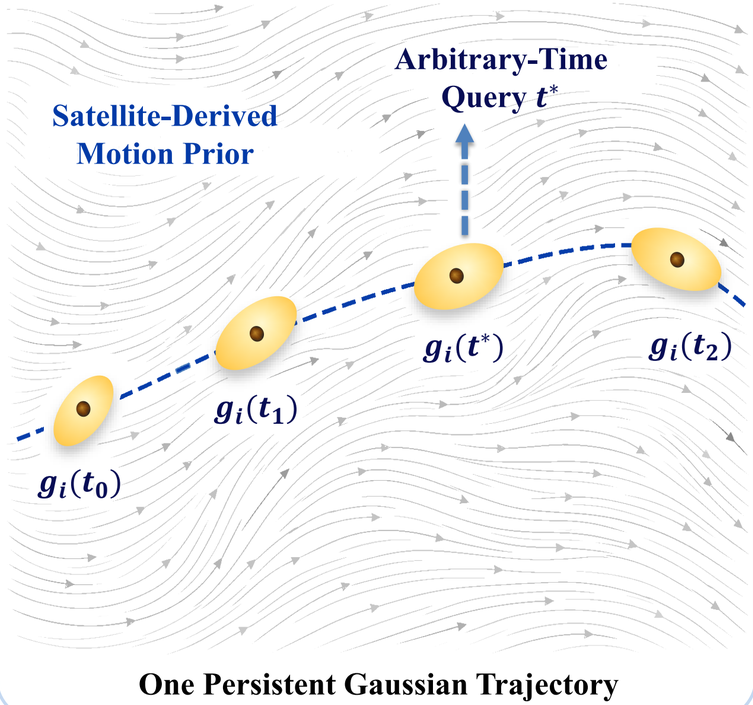

3 Arbitrary-Time Rendering

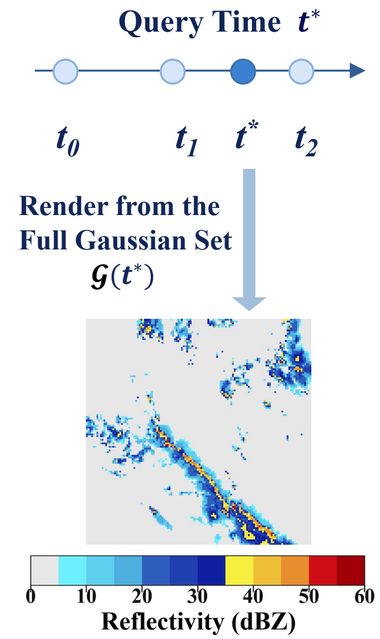

Persistent Gaussian states provide explicit temporal correspondence and arbitrary-time rendering.