

User guide

How the product runs, with live test scenarios

User documentation | 19 September 2026

Business perspective

Use LangChat to prove memory: say your name, refresh, ask again. If it remembers, Convex did its job.

The problem (why this exists at all)

People do not trust AI demos that forget them after F5.

Who the customer is

Anyone with the deployed URL on the same browser session.

How money is supposed to move

Demo for custom AI work - not a paid SKU yet.

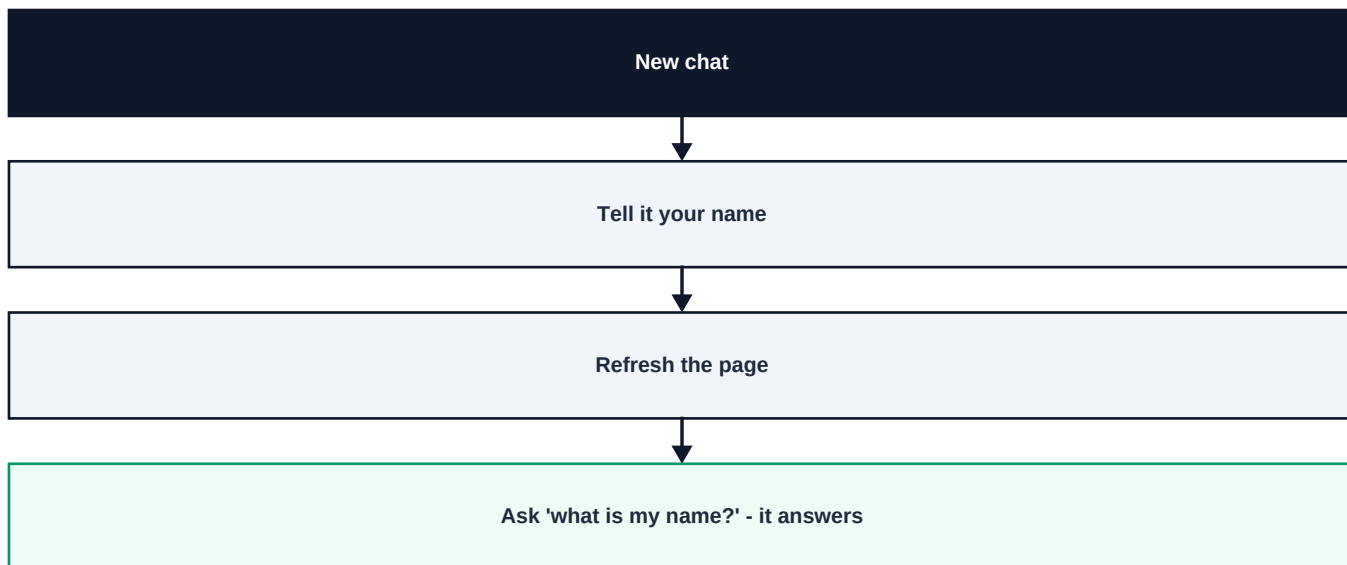


Figure B1. The one scenario that matters.

How the business runs day to day

Step	In the real world	What this software is for
Open	Load the web app.	Session id is created automatically.
Talk	Send 2-3 messages.	Bubbles appear; AI replies.
Prove	Hard refresh.	Same thread still listed and filled.
Isolate	Open a private window.	Empty threads - different session.

What 'winning' looks like (KPIs)

- Memory survives refresh.
- Private window does not see your threads.
- /health shows convexConfigured and modelConfigured true.

1. How to use this guide

Run these on the deployed LangChat URL (or local Vite + API). First Render request after sleep can take ~30-60s.

2. Modules

UI	Why
New chat	Start a fresh Convex thread.
Thread list	Switch among saved conversations for this browser session.
Composer	Sends to Python LangChain; reply is stored then streamed via Convex query.

Scenario 1. Durable memory smoke test

Setup

- LangChat web open; API healthy.

Steps

1. Click New chat.
2. Send: My name is Alice and I love pizza.
3. Wait for the AI reply.
4. Hard refresh the browser (Ctrl+F5).
5. Open the same thread. Send: What is my name and what do I like?

Expected result

- After refresh the first messages are still visible.
- The AI answer mentions Alice and pizza (or equivalent).

Scenario 2. Session isolation

Setup

- Scenario 1 done in a normal window.

Steps

1. Open a private/incognito window to the same LangChat URL.
2. Confirm the thread list does not show Alice's chat.
3. Create a new chat and send Hi from private.

Expected result

- Private session has its own threads. Normal window still has Alice.

Scenario 3. API health

Setup

- API base URL known (Render).

Steps

1. GET {API}/health
2. Confirm ok true, convexConfigured true, modelConfigured true.

Expected result

- If modelConfigured is false, set GOOGLE_API_KEY on Render and redeploy.

3. What you should not expect yet

- Google / Facebook login (Phase 2).
- Document upload / RAG.
- Shared threads across devices without copying sessionId.

End of document. Architecture and Auth PDFs live in the same Documentations folder.