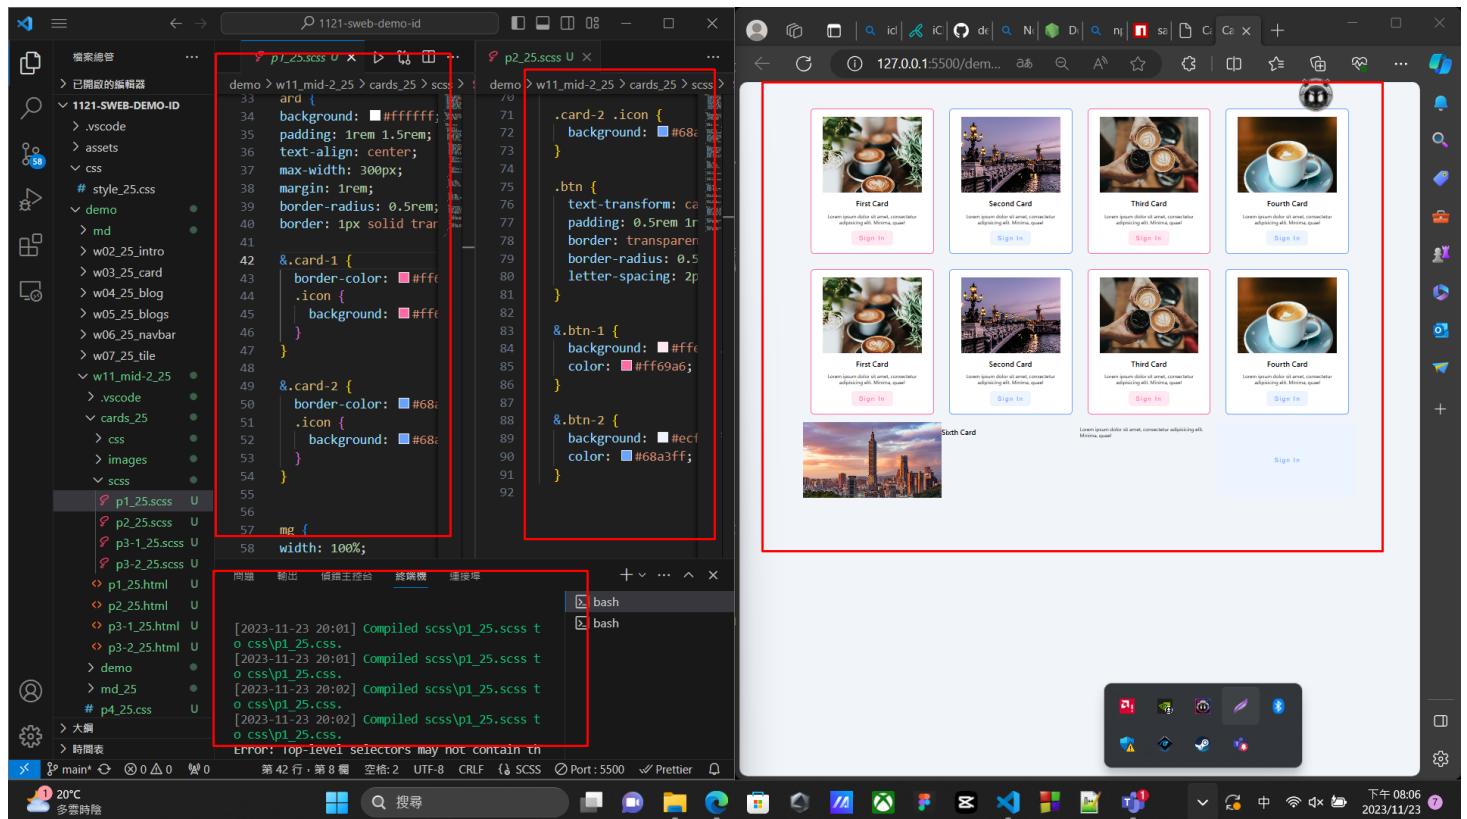
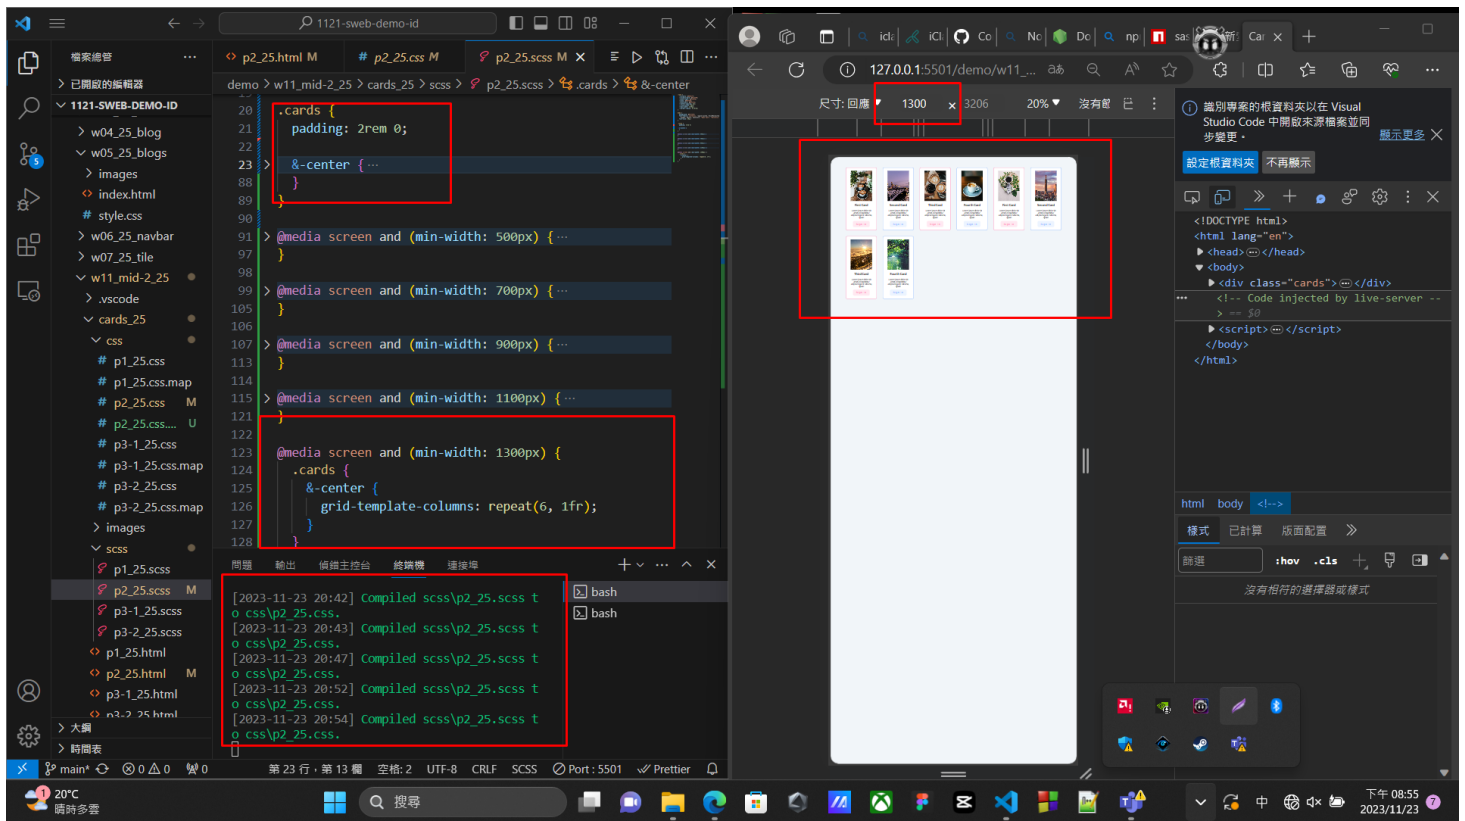


W11-P1: Use scss to finish p1_xx



06d5e45 htchung Thu Nov 23 19:09:03 2023 +0800 W11-P1: Use scss to finish p1_xx

W11-P2: Use scss to finish p2_xx (responsive)



efb433f htchung Thu Nov 23 20:00:19 2023 +0800 W11-P2: Use scss to finish p2_xx (responsive)

The screenshot shows a web development IDE with the following components:

- File Explorer (Left):** Displays a project structure for '1121-SWEB-DEMO-ID'. The 'w11_mid-2_25' folder is selected, showing files like 'w01_25_intro', 'w02_25_card', 'index.html', 'style_xxx.css', 'md_25', 'p4_25.css', 'p4_25.html', 'p4_25.js', 'p5_25.css', 'p5_25.css.map', 'p5_25.html', 'p5_25.js', 'p5_25.js.map', 'p5_25.scss', 'p5_25.scss.map', 'index.html', 'script_25.js', 'style_25.css', 'exams', 'js', and 'index.html'.
- Code Editor (Center):**
 - HTML File (p5_25.html):** Shows a grid layout for a card. A red box highlights the following HTML structure:

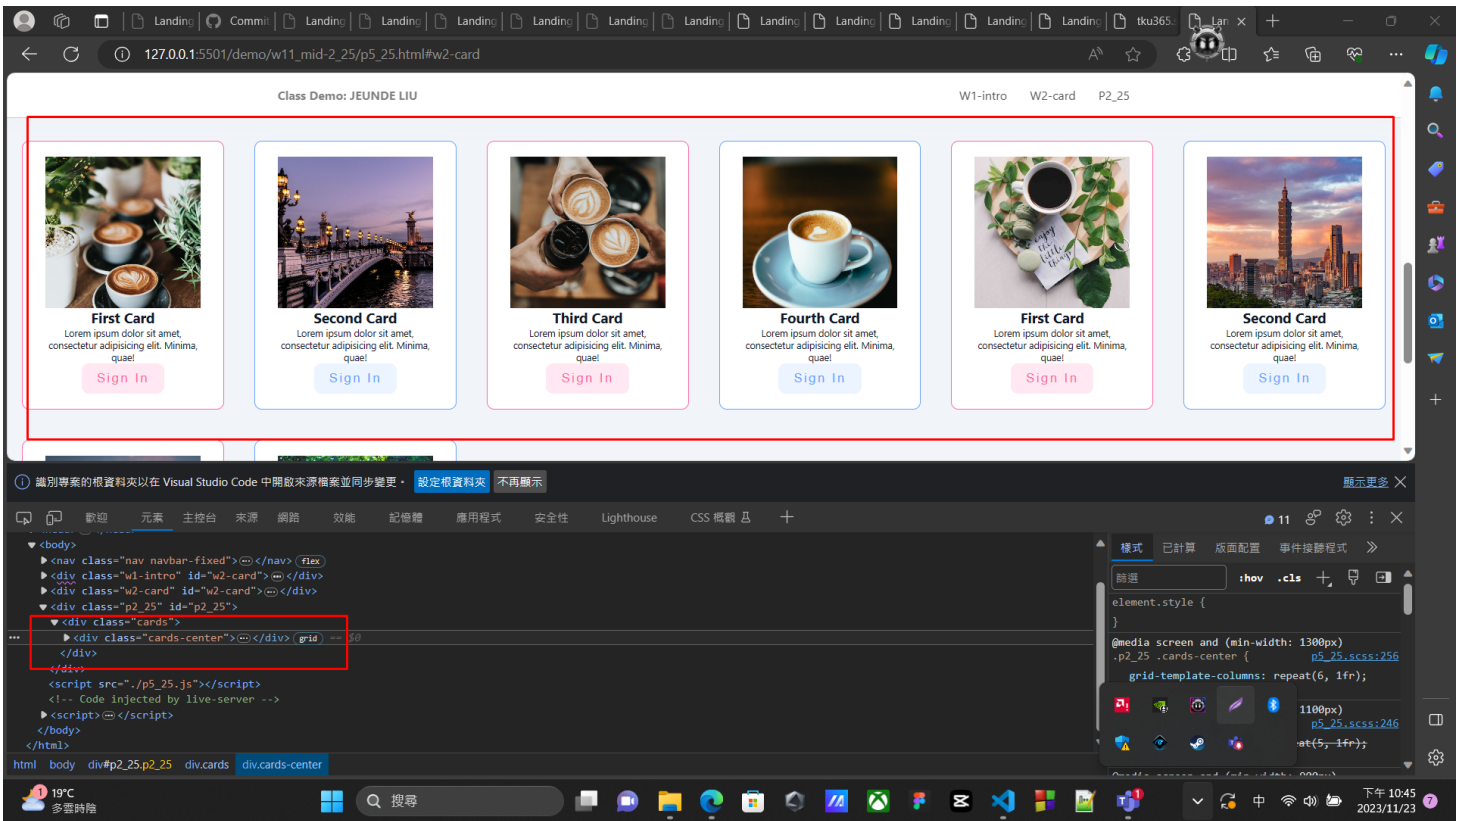

```

          <div class="card card-1">...
        </div>
        <div class="card card-2">...
        </div>
        <div class="p2_25" id="p2_25">
          <div class="cards">...
        </div>
        <script src="/p5_25.js"></script>
      </body>
    </html>
          
```
 - CSS File (p5_25.css):** Shows media queries for different screen sizes. A red box highlights the following CSS code:


```

          @media screen and (min-width: 500px) {
            .p2_25 {
              .cards {
                &-center {
                  grid-template-columns: repeat(2, 1fr);
                }
              }
            }
          }

          @media screen and (min-width: 700px) {
            .p2_25 {
              .cards {
                &-center {
                  grid-template-columns: repeat(3, 1fr);
                }
              }
            }
          }
          
```
- Terminal (Bottom):** Shows the command 'npm run build' and the output 'Compiled p5_25.scss to p5_25.css'.



W11-P4: Finish p5_25 by implement fixed navbar

