




# Streetlights APIs August 30 1.0.0

- [Introduction](#)
- [Servers](#)

## Operations

Untagged

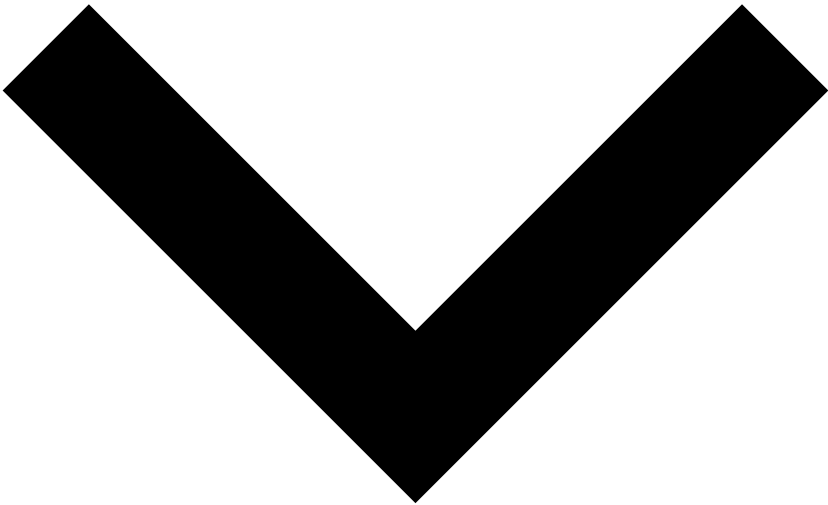

[Pub Inform about environmental lighting conditions for a particular streetlight.](#)

## Messages

[<anonymous-message-1>](#)

# Streetlights APIs August 30 1.0.0

[Apache 2.0](#)

The Smartylighting Streetlights API allows you to remotely manage the city lights.

## Servers

mqtt://test.mosquitto.org mqtt

## Operations


### Pub light/measured

Inform about environmental lighting conditions for a particular streetlight.

Accepts the following message:

<anonymous-message-1>

Payload

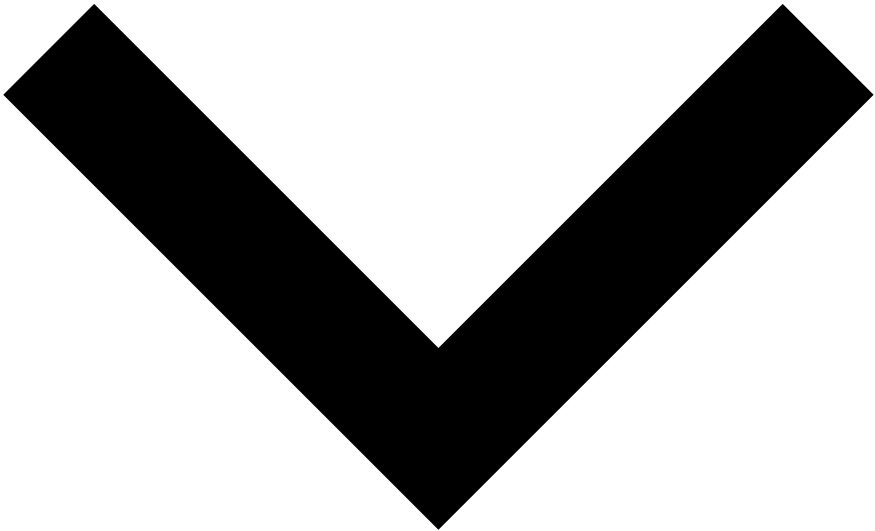

object  
id  
integer  
>= 0

Id of the streetlight.

lumens  
integer  
>= 0

Light intensity measured in lumens.

sentAt  
string

date-time


Date and time when the message was sent.

Additional properties are allowed.

Examples

<anonymous-message-1>

Payload

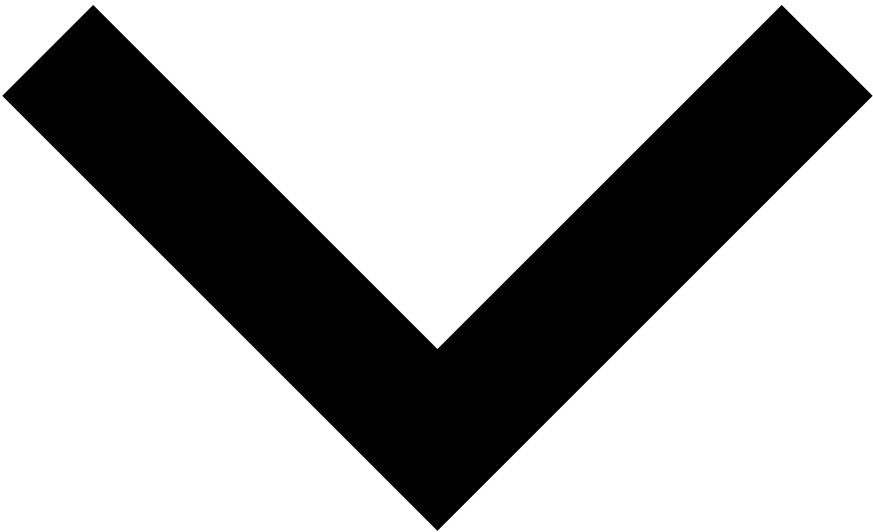


```
{
  "id": 0,
  "lumens": 0,
  "sentAt": "2019-08-24T14:15:22Z"
}
```

# Messages

#1 <anonymous-message-1>

Payload

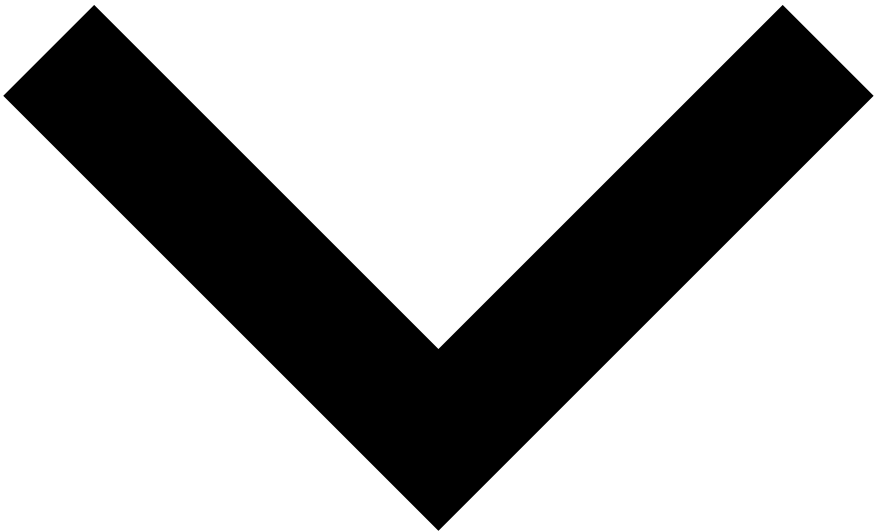

object

id

integer

>= 0

Id of the streetlight.

lumens

integer

>= 0

Light intensity measured in lumens.

sentAt

string

date-time

Date and time when the message was sent.

Additional properties are allowed.