

# Vignette

Phenological characterization and modeling of diverse lentil (*Lens culinaris* Medik.) germplasm grown in multiple environments

Derek M. Wright

2019-12-17

## Contents

Preliminary Steps	3
Supplemental tables 1 & 2	5
Figure 1 Field Trial Info	6
Additional Figure 1 LDP Origin Map	7
Supplemental Figure 1 Scaling	8
Figure 2 Data Overview	9
Additional Figures - Entry Phenology	13
Additional Figure 2 DTF DTS DTM	13
Additional Figure 3 MacroEnv Phenology	14
Additional Figure 4 ggridges	16
Supplemental Figure 2 Missing Data	17
Supplemental Figure 3 Correlation Plots	18
Additional Figures - Correlations	20
Figure 3 PCA	22
Additional Figure 5 Interactive PCA Plot	27
Additional Figure 6 PCA	27

<b>Additional Figure 7 DTF By Cluster</b>	<b>28</b>
<b>Additional Figure 8 Cluster Origins</b>	<b>29</b>
<b>Additional Figure 9 LDP Origins By Cluster</b>	<b>30</b>
<b>Additional Figures - Entry Regressions</b>	<b>31</b>
<b>PhotoThermal Plane</b>	<b>32</b>
<b>Supplemental Figure 4 Regressions</b>	<b>33</b>
<b>Modeling DTF - functions</b>	<b>36</b>
<b>Modeling DTF (T + P) - All Site-years</b>	<b>37</b>
<b>Modeling DTF (T x P) - All Site-years</b>	<b>40</b>
<b>Supplemental Table 3 Model Constants</b>	<b>43</b>
<b>Additional Figure 10 significant T x P interactions</b>	<b>43</b>
<b>Supplemental Figure 5 Model T + P vs T x P</b>	<b>44</b>
<b>Additional Figure 11 Constants</b>	<b>45</b>
<b>Additional Figure 12 Coefficient p-values</b>	<b>46</b>
<b>Additional Figure 13 p-values b c</b>	<b>47</b>
<b>Modeling DTF (T + P) - Location Out</b>	<b>48</b>
<b>Figure 4 Test Model</b>	<b>49</b>
<b>Supplemental Table 4 Test Model</b>	<b>51</b>
<b>Modeling DTF (T + P) - 3 Best</b>	<b>52</b>
<b>Modeling DTF (T + P) - 3 Worst</b>	<b>55</b>
<b>DTF Model correlation coefficients</b>	<b>58</b>
<b>Supplemental Figure 6 Compare Constants Entry</b>	<b>59</b>
<b>Supplemental Figure 7 3 best 3 worst</b>	<b>61</b>
<b>Supplemental Figure 8 Compare Constants All</b>	<b>63</b>

<b>Base Temperature &amp; Critical Photoperiod</b>	<b>64</b>
<b>Figure 5 Tb and Pc</b>	<b>64</b>
<b>Figure 6 Origin Constants</b>	<b>67</b>
<b>Supplemental Figure 9 Pc Tf PTT</b>	<b>68</b>
<b>Additional Figure 13 PTT</b>	<b>71</b>
<b>Supplemental Figure 10 Thermal Sums</b>	<b>73</b>
<b>Supplemental Figure 11 Photoperiodic Sums</b>	<b>75</b>
<b>Figure 7 Temperature Increase By MacroEnv</b>	<b>77</b>
<b>Additional Figure 14 Temperature Increase By Cluster</b>	<b>78</b>

This vignette contains the R code and analysis done for the paper: **Phenological characterization and modeling of diverse lentil (*Lens culinaris* Medik.) germplasm grown in multiple environments**

## Preliminary Steps

Load the nessessary R packages, Prepare the data for analysis.

```
# Load libraries
library(tidyverse) # data wrangling
library(scales) # rescale()
library(rworldmap) # mapBubbles()
library(ggrepel) # geom_text_repel() + geom_label_repel()
library(magick) # image editing
library(GGally) # ggpairs() + ggmatrix()
library(ggpubr) # ggarrange()
library(ggbeeswarm) # geom_quasirandom()
library(FactoMineR) # PCA() & HCPC()
library(plot3D) # 3D plots
library(stringr) # str_pad()

# General color palettes
colors <- c("darkred", "darkorange3", "darkgoldenrod2", "deeppink3",
           "steelblue", "darkorchid4", "cornsilk4", "darkgreen")
# Expts color palette
colors_Expt <- c("lightgreen", "palegreen4", "darkgreen", "darkolivegreen3",
                  "darkolivegreen4", "springgreen4", "orangered2", "orangered4",
                  "palevioletred", "mediumvioletred", "orange2", "orange4",
                  "slateblue1", "slateblue4", "aquamarine3", "aquamarine4",
                  "deepskyblue3", "deepskyblue4" )

# Locations
names_Location <- c("Rosthern, Canada", "Sutherland, Canada", "Central Ferry, USA",
                      "Bhopal, India", "Jessore, Bangladesh", "Bardiya, Nepal",
                      "Cordoba, Spain", "Marchouch, Morocco", "Metaponto, Italy" )
```

```

# Experiments
names_Expt <- c("Rosthern, Canada 2016", "Rosthern, Canada 2017",
               "Sutherland, Canada 2016", "Sutherland, Canada 2017",
               "Sutherland, Canada 2018", "Central Ferry, USA 2018",
               "Bhopal, India 2016", "Bhopal, India 2017",
               "Jessore, Bangladesh 2016", "Jessore, Bangladesh 2017",
               "Bardiya, Nepal 2016", "Bardiya, Nepal 2017",
               "Cordoba, Spain 2016", "Cordoba, Spain 2017",
               "Marchouch, Morocco 2016", "Marchouch, Morocco 2017",
               "Metaponto, Italy 2016", "Metaponto, Italy 2017" )

# Experiment short names
names_ExptShort <- c("Ro16", "Ro17", "Su16", "Su17", "Su18", "Us18",
                     "In16", "In17", "Ba16", "Ba17", "Ne16", "Ne17",
                     "Sp16", "Sp17", "Mo16", "Mo17", "It16", "It17" )

# Macro-Environments
macroEnvs <- c("Temperate", "South Asia", "Mediterranean")

# ggplot theme
theme_AGL <- theme_bw() + theme(strip.background = element_rect(fill = "White"))

# Create scaling function
traitScale <- function(x, trait) {
  xout <- rep(NA, nrow(x))
  for(i in unique(x$Expt)) {
    mn <- x %>% filter(Expt == i) %>% pull(trait) %>% min(na.rm = T)
    mx <- x %>% filter(Expt == i) %>% pull(trait) %>% max(na.rm = T)
    xout <- ifelse(x$Expt == i, rescale(x %>% pull(trait), c(1,5), c(mn,mx)), xout)
  }
  xout
}

# Prep data
# Note: DTF2 = non-flowering genotypes <- group_by(Expt) %>% max(DTF)
rr <- read.csv("data/data_Raw.csv") %>%
  mutate(Rep          = factor(Rep),
        Year         = factor(Year),
        PlantingDate = as.Date(PlantingDate),
        Location     = factor(Location, levels = names_Location),
        Expt         = factor(Expt,      levels = names_Expt),
        ExptShort    = plyr::mapvalues(Expt, names_Expt, names_ExptShort),
        ExptShort    = factor(ExptShort, levels = names_ExptShort),
        DTF2_scaled = traitScale(., "DTF2"),
        RDTF        = round(1 / DTF2, 6),
        VEG          = DTF - DTE,
        REP          = DTM - DTF)

# Average raw data
dd <- rr %>% group_by(Entry, Name, Expt, ExptShort, Location, Year) %>%
  summarise_at(vars(DTE, DTF, DTS, DTM, VEG, REP, RDTF, DTF2),
               funs(mean), na.rm = T) %>% ungroup() %>%
  mutate(DTF2_scaled = traitScale(., "DTF2"))

# Prep environmental data
ee <- read.csv("data/data_Env.csv") %>%
  mutate(Date       = as.Date(Date),
        ExptShort = plyr::mapvalues(Expt, names_Expt, names_ExptShort),
        ExptShort = factor(ExptShort, levels = names_ExptShort),
        Expt      = factor(Expt,      levels = names_Expt),

```

```

    Location = factor(Location, levels = names_Location),
    DayLength_rescaled = rescale(DayLength, to = c(0, 40)) )
# Prep field trial info
xx <- dd %>% group_by(Expt) %>%
  summarise_at(vars(DTE, DTF, DTS, DTM), funs(min, mean, max), na.rm = T) %>%
  ungroup()
ff <- read.csv("data/data_Info.csv") %>%
  mutate(Start = as.Date(Start) ) %>%
  left_join(xx, by = "Expt")
for(i in unique(ee$Expt)) {
  ee <- ee %>%
    filter(Expt != i | (Expt == i & DaysAfterPlanting <= ff$DTM_max[ff$Expt == i]))
}
xx <- ee
for(i in unique(ee$Expt)) {
  xx <- xx %>%
    filter(Expt != i | (Expt == i & DaysAfterPlanting <= ff$DTF_max[ff$Expt == i]))
}
xx <- xx %>% group_by(Location, Year) %>%
  summarise(T_mean = mean(Temp_mean, na.rm = T), T_sd = sd(Temp_mean, na.rm = T),
            P_mean = mean(DayLength, na.rm = T), P_sd = sd(DayLength, na.rm = T) ) %>%
  ungroup() %>%
  mutate(Expt = paste(Location, Year)) %>%
  select(-Location, -Year)
ff <- ff %>% left_join(xx, by = "Expt") %>%
  mutate(ExptShort = plyr::mapvalues(Expt, names_Expt, names_ExptShort),
         ExptShort = factor(ExptShort, levels = names_ExptShort),
         Expt      = factor(Expt,      levels = names_Expt),
         MacroEnv = factor(MacroEnv,  levels = macroEnvs),
         T_mean   = round(T_mean, 1),
         P_mean   = round(P_mean, 1))
# Lentil Diversity Panel metadata
ldp <- read.csv("data/data_LDP.csv")
# Country info
ct <- read.csv("data/data_Countries.csv") %>% filter(Country %in% ldp$Origin)

```

- ldp = Lentil Diversity Panel Metadata
- rr = Raw Phenotype Data
- dd = Averaged Phenotype Data
- ee = Environmental Data
- ff = Field Trial Info
- ct = Country Info

## Supplemental tables 1 & 2

```

write.csv(select(ldp, Entry, Name, Origin, Source),
          "Supplemental_Table_01.csv", row.names = F)
write.csv(select(ff, Location, Year,
              `Short Name` = ExptShort, `Planting Date` = Start, Latitude = Lat,
              Longitude = Lon, `Temperature (mean)` = T_mean, `Photoperiod (mean)` = P_mean,

```

```

`Number of Seeds Sown` = Number_of_Seeds_Sown, `Plot Type` = Plot_Type),
"Supplemental_Table_02.csv", row.names = F)


```

## Figure 1 Field Trial Info

```


# Prep data
xx <- ff %>% mutate(size = 1)
# Plot A) Map
invisible(png("Additional/Temp/Temp_F01_1.png", width = 1200, height = 450, res = 150))
par(mai = c(0,0,0,0), xaxs = "i", yaxs = "i")
mapBubbles(dF = xx, nameX = "Lon", nameY = "Lat", nameZColour = "MacroEnv",
            nameZSize = "size", symbolSize = 0.5, pch = 20, fill = F,
            colourPalette = c("darkgreen","darkorange3","darkblue"), addColourLegend = F, addLegend = F,
            xlim = c(-140,110), ylim = c(10,35),
            oceanCol = "grey90", landCol = "white", borderCol = "black")
invisible(dev.off())
# Plot B) mean T and P
mp <- ggplot(ff, aes(x = T_mean, y = P_mean)) +
  geom_point(aes(color = MacroEnv), size = 3, alpha = 0.8) +
  geom_text_repel(aes(label = ExptShort)) +
  scale_x_continuous(breaks = 11:22) +
  scale_y_continuous(breaks = 11:16) +
  scale_color_manual(name = "Macro-Environment",
                     values = c("darkgreen","darkorange3","darkblue")) +
  theme_AGL +
  theme(legend.position = "top", legend.margin = unit(c(0,0,0,0), "cm")) +
  labs(x = expression(paste("Mean temperature (", degree, "C)", sep = "")),
       y = "Mean photoperiod (hours)")
ggsave("Additional/Temp/Temp_F01_2.png", mp, width = 7, height = 3.25)
#
# Labels were added to "Additional/Temp/Temp_F1_1.png" in image editing software
# Append A) and B)
im1 <- image_read("Additional/Temp/Temp_F01_1_1.png") %>%
  image_annotate("A", size = 30)
im2 <- image_read("Additional/Temp/Temp_F01_2.png") %>%
  image_scale("1200x") %>%
  image_annotate("B", size = 30)
im <- image_append(c(im1,im2), stack = T)
image_write(im, "Figure_01_FieldTrialInfo.png")

```

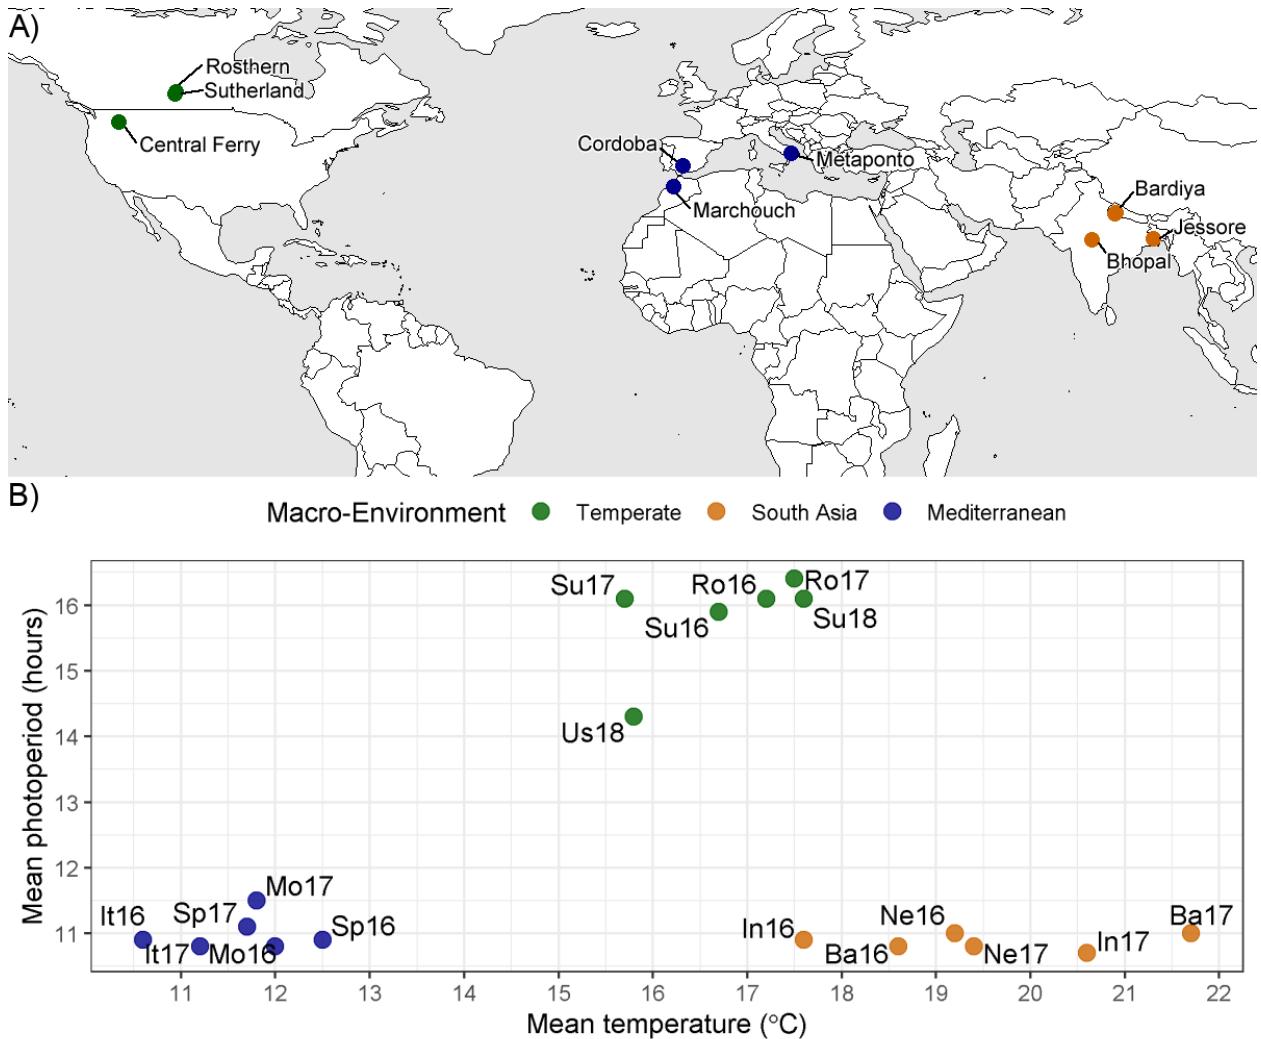


Additional Figure 1 LDP Origin Map

```
# Prep data
x1 <- ldp %>% filter(Origin != "ICARDA") %>%
  group_by(Origin) %>% summarise(Count = n()) %>%
  left_join(select(ct, Origin = Country, Lat, Lon), by = "Origin") %>%
  ungroup() %>% as.data.frame()
x1[is.na(x1)] <- 0
# Plot
invisible(png("Additional/Additional_Figure_01_LDPOriginMap.png",
              width = 1200, height = 685, res = 150))
par(mai = c(0,0,0,0), xaxs = "i",yaxs = "i")
mapBubbles(dF = x1, nameX = "Lon", nameY = "Lat",
            nameZSize = "Count", nameZColour = "darkred",
            xlim = c(-140,110), ylim = c(5,20),
            oceanCol = "grey90", landCol = "white", borderCol = "black")
invisible(dev.off())
```

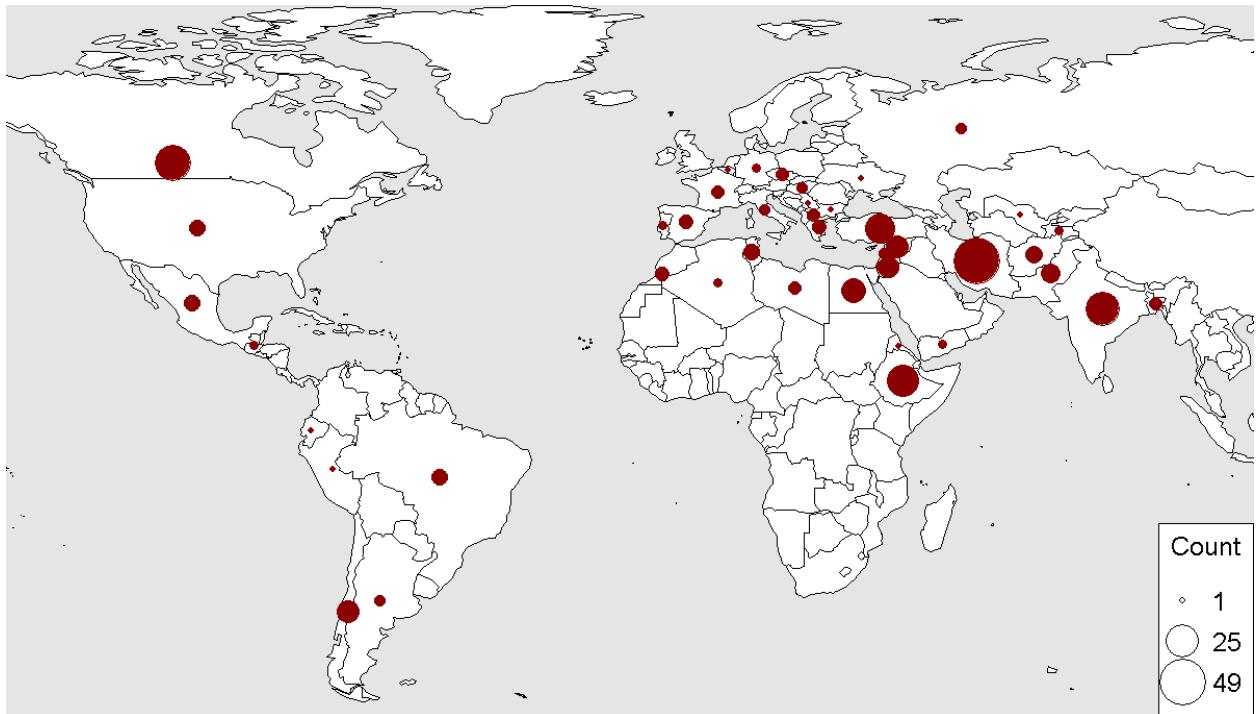

**Supplemental Figure 1 Scaling**

```
# Prep data
levs <- c("Days from sowing to flower (days)", "Scaled (1-5)")
xx <- dd %>% select(Entry, Expt, ExptShort, DTF, DTF2_scaled) %>%
  left_join(select(ff, Expt, MacroEnv), by = "Expt") %>%
  gather(Trait, Value, DTF, DTF2_scaled) %>%
  mutate(Trait = plyr::mapvalues(Trait, c("DTF", "DTF2_scaled"), levs),
         Trait = factor(Trait, levels = levs) )
# Plot
mp <- ggplot(xx, aes(x = ExptShort, y = Value)) +
  geom_violin(fill = "grey", alpha = 0.3, color = NA) +
  geom_quasirandom(aes(color = MacroEnv), size = 0.1, alpha = 0.5) +
  scale_color_manual(values = c("darkgreen","darkorange3","darkblue")) +
  facet_grid(Trait ~ MacroEnv, scales = "free") +
  theme_AGL +
  theme(legend.position = "none",
        axis.text.x = element_text(angle = 90, vjust = 0.5, hjust = 1)) +
  labs(x = NULL, y = NULL)
ggsave("Supplemental_Figure_01_Scaling.png", mp, width = 8, height = 5)
```

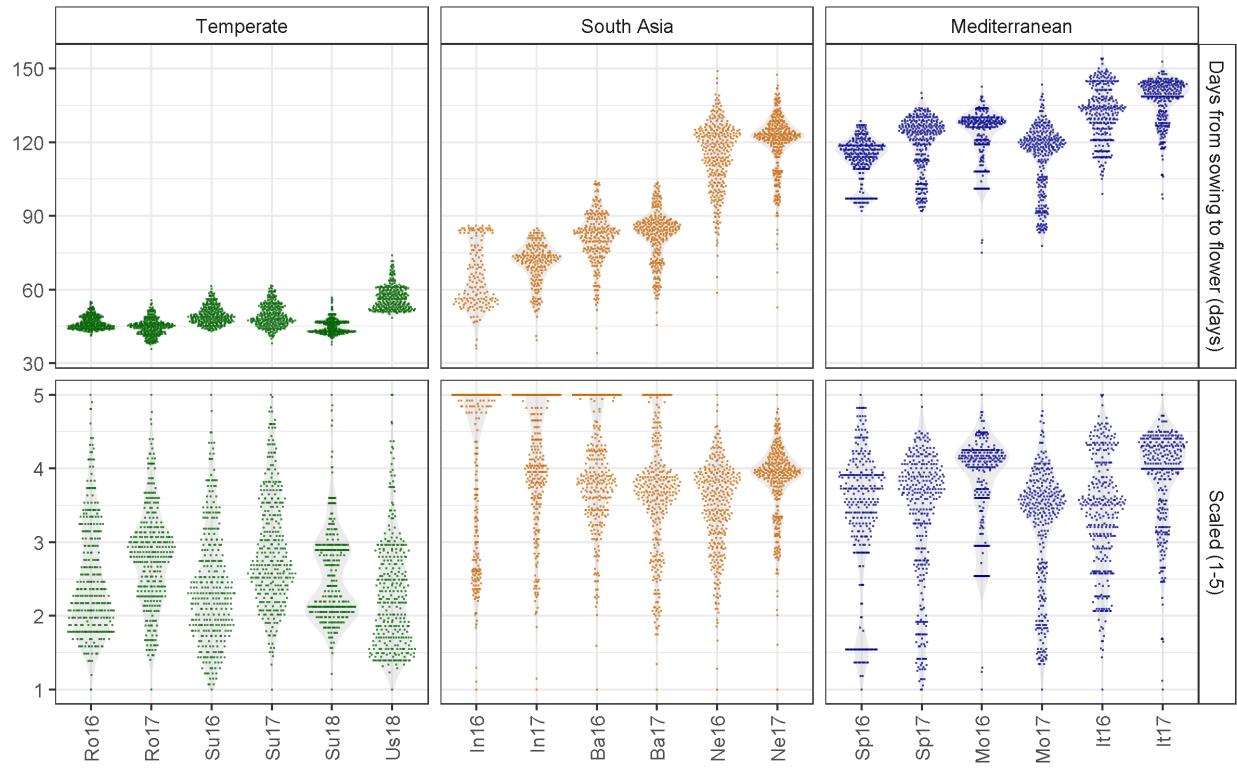

**Figure 2 Data Overview**

```
# Create plot function
ggEnvPlot <- function(x, nr = 2, nc = 3, mybreaks) {
  yy <- ff %>% filter(Expt %in% unique(x$Expt)) %>%
    select(ExptShort, Location, Year, min=DTF_min, max=DTF_max) %>%
    mutate(Trait = "DTF Window")
  ggplot(x) +
    geom_rect(data = yy, aes(xmin = min, xmax = max, fill = Trait),
              ymin = -Inf, ymax = Inf, alpha = 0.1, color = "black") +
    geom_line(aes(x = DaysAfterPlanting, y = DayLength_rescaled, color = "Day Length")) +
    geom_line(aes(x = DaysAfterPlanting, y = Temp_mean, color = "Temperature")) +
    geom_ribbon(aes(x = DaysAfterPlanting, ymin = Temp_min, ymax = Temp_max),
                fill = "darkred", alpha = 0.3) +
    facet_wrap(ExptShort ~ ., scales = "free_x", dir = "v", nrow = 2, ncol = 3) +
    scale_x_continuous(breaks = mybreaks) +
    scale_color_manual(name = NULL, values = c("darkblue", "darkred")) +
    scale_fill_manual(name = NULL, values = "darkgreen") +
    coord_cartesian(ylim=c(0, 40)) +
    theme_AGL +
    theme(plot.margin = unit(c(0,0,0,0), "cm"),
          legend.text = element_text(size = 12)) +
    labs(y = NULL, x = NULL) +
    guides(colour = guide_legend(order = 1, override.aes = list(size = 1.25)),
          fill = guide_legend(order = 2))
}
```

```

# Plot C) T and P
mp1.1 <- ggEnvPlot(ee %>% filter(MacroEnv == "Temperate"), mybreaks = c(25,50,75)) +
  labs(title = "A)", y = expression(paste(degree, "Celcius"))) +
  theme(strip.background = element_rect(fill = alpha("darkgreen", 0.3)),
        plot.margin = unit(c(0,0,0,0.155), "cm"),
        plot.title = element_text(hjust = -0.11, vjust = -20))
mp1.2 <- ggEnvPlot(ee %>% filter(MacroEnv == "South Asia"), mybreaks = c(25,75,125)) +
  theme(strip.background = element_rect(fill = alpha("darkgoldenrod2", 0.3)),
        axis.text.y = element_blank(),
        axis.ticks.y = element_blank())
mp1.3 <- ggEnvPlot(ee %>% filter(MacroEnv == "Mediterranean"), mybreaks = c(50,100,150)) +
  scale_y_continuous(sec.axis = sec_axis(~ (16.62 - 9.11) * . / (40 - 0) + 9.11,
                                         name = "Hours", breaks = c(10, 12, 14, 16))) +
  theme(strip.background = element_rect(fill = alpha("darkblue", 0.3)),
        plot.margin = unit(c(0,0.17,0,0), "cm"),
        axis.text.y.left = element_blank(),
        axis.ticks.y.left = element_blank())
mp1 <- ggarrange(mp1.1, mp1.2, mp1.3, nrow = 1, ncol = 3, align = "h",
                  legend = "bottom", common.legend = T)

# Prep data
xx <- dd %>% select(Entry, Year, Expt, ExptShort, Location, DTF, DTS, DTM) %>%
  left_join(select(ff, Expt, MacroEnv), by = "Expt") %>%
  gather(Trait, Value, DTF, DTS, DTM) %>%
  mutate(Trait = factor(Trait, levels = c("DTF", "DTS", "DTM")))

# Create plot function
ggDistroDTF <- function(x) {
  ggplot(x, aes(x = Trait, y = Value)) +
    geom_violin(color = NA, fill = "grey", alpha = 0.3) +
    geom_quasirandom(size = 0.3, aes(color = Trait)) +
    facet_wrap(ExptShort ~ ., scales = "free_x", dir = "v", ncol = 3, nrow = 2) +
    scale_color_manual(values = c("darkgreen", "darkred", "darkgoldenrod2")) +
    scale_y_continuous(limits = c(30,190), breaks = c(50,75,100,125,150,175)) +
    theme_AGL + labs(y = NULL, x = NULL) +
    theme(plot.margin = unit(c(0,0,0.1,0), "cm"))
}

# Plot A) DTF, DTS and DTM
mp2.1 <- ggDistroDTF(xx %>% filter(MacroEnv == "Temperate")) +
  labs(title = "B)", y = "Days After Planting") +
  theme(strip.background = element_rect(fill = alpha("darkgreen", 0.3)),
        #plot.margin = unit(c(0,0,0,0.15), "cm"),
        plot.title = element_text(hjust = -0.11, vjust = -30))
mp2.2 <- ggDistroDTF(xx %>% filter(MacroEnv == "South Asia")) +
  theme(strip.background = element_rect(fill = alpha("darkgoldenrod2", 0.3)),
        #plot.margin = unit(c(0,0,0,0), "cm"),
        axis.text.y = element_blank(),
        axis.ticks.y = element_blank())
mp2.3 <- ggDistroDTF(xx %>% filter(MacroEnv == "Mediterranean")) +
  scale_y_continuous(sec.axis = sec_axis(~ ., name = "Days After Planting")) +
  theme(strip.background = element_rect(fill = alpha("darkblue", 0.3)),
        #plot.margin = unit(c(0,0,0,0), "cm"),
        axis.text.y.left = element_blank(),
        axis.ticks.y.left = element_blank())
mp2 <- ggmatrix(list(mp2.1, mp2.2, mp2.3), nrow = 1, ncol = 3,

```

```


        ylab = "Days After Planting", xAxisLabels = macroEnvs) +
theme_AGL +
  theme(plot.margin = unit(c(0,1,0,0), "cm"),
        plot.title = element_text(hjust = -0.04))
mp2 <- ggarrange(mp2.1, mp2.2, mp2.3, nrow = 1, ncol = 3, align = "h", legend = "none")
# Prep data
xx <- dd %>% select(Entry, Name, Expt, ExptShort, Location, Year, VEG, REP) %>%
  left_join(select(ff, Expt, MacroEnv), by = "Expt") %>%
  gather(Trait, Value, VEG, REP) %>%
  mutate(Trait = factor(Trait, levels = c("VEG", "REP")))
# Create plot function
ggDistroREP <- function(x) {
  ggplot(x, aes(x = Trait, y = Value)) +
    geom_violin(color = NA, fill = "grey", alpha = 0.3) +
    geom_quasirandom(size = 0.3, aes(color = Trait)) +
    facet_wrap(ExptShort ~ ., scales = "free_x", dir = "v", ncol = 3, nrow = 2) +
    scale_color_manual(values = c("steelblue", "purple")) +
    scale_y_continuous(limits = c(25,135), breaks = c(25,50,75,100,125)) +
    theme_AGL + labs(x = NULL, y = NULL) +
    theme(plot.margin = unit(c(0,0,0.1,0), "cm"))
}
# Plot B) REP and VEG
mp3.1 <- ggDistroREP(xx %>% filter(MacroEnv == "Temperate")) +
  labs(title = "C", y = "Days") +
  theme(strip.background = element_rect(fill = alpha("darkgreen", 0.3)),
        #plot.margin = unit(c(0,0,0,0.15), "cm"),
        plot.title = element_text(hjust = -0.11, vjust = -20))
mp3.2 <- ggDistroREP(xx %>% filter(MacroEnv == "South Asia")) +
  theme(strip.background = element_rect(fill = alpha("darkgoldenrod2", 0.3)),
        #plot.margin = unit(c(0,0,0,0), "cm"),
        axis.text.y = element_blank(),
        axis.ticks.y = element_blank())
mp3.3 <- ggDistroREP(xx %>% filter(MacroEnv == "Mediterranean")) +
  scale_y_continuous(sec.axis = sec_axis(~ ., name = "Days")) +
  theme(strip.background = element_rect(fill = alpha("darkblue", 0.3)),
        #plot.margin = unit(c(0,0,0,0), "cm"),
        axis.text.y.left = element_blank(),
        axis.ticks.y.left = element_blank())
mp3 <- ggmatrix(list(mp2.1, mp2.2, mp2.3),
                 nrow = 1, ncol = 3, ylab = "Days") +
  theme_AGL +
  theme(#plot.margin = unit(c(0,1,0,0), "cm"),
        plot.title = element_text(hjust = -0.04))
mp3 <- ggarrange(mp3.1, mp3.2, mp3.3, nrow = 1, ncol = 3, align = "h", legend = "none")
#
mp <- ggarrange(mp1, mp2, mp3, nrow = 3, ncol = 1, align = "v",
                legend = "none", common.legend = T,
                heights = c(1.1,1,1))
ggsave("Figure_02_DataOverview.png", mp, width = 12, height = 12)
# Save
ggsave("Additional/Temp(Temp_F02_1.png", mp1, width = 12, height = 4)
ggsave("Additional/Temp(Temp_F02_2.png", mp2, width = 12, height = 4)
ggsave("Additional/Temp(Temp_F02_3.png", mp3, width = 12, height = 4)

```

```

# Append A), B) and C)
#mp1 <- image_read("Additional/Temp/Temp_F02_1.png") %>%
#  image_annotate("A", size = 60)
#mp2 <- image_read("Additional/Temp/Temp_F02_2.png") %>%
#  image_annotate("B", size = 60)
#mp3 <- image_read("Additional/Temp/Temp_F02_3.png") %>%
#  image_annotate("C", size = 60)
#mp <- image_append(c(mp1, mp2, mp3), stack = T)
#image_write(mp, "Figure_02_DataOverview.png")

```

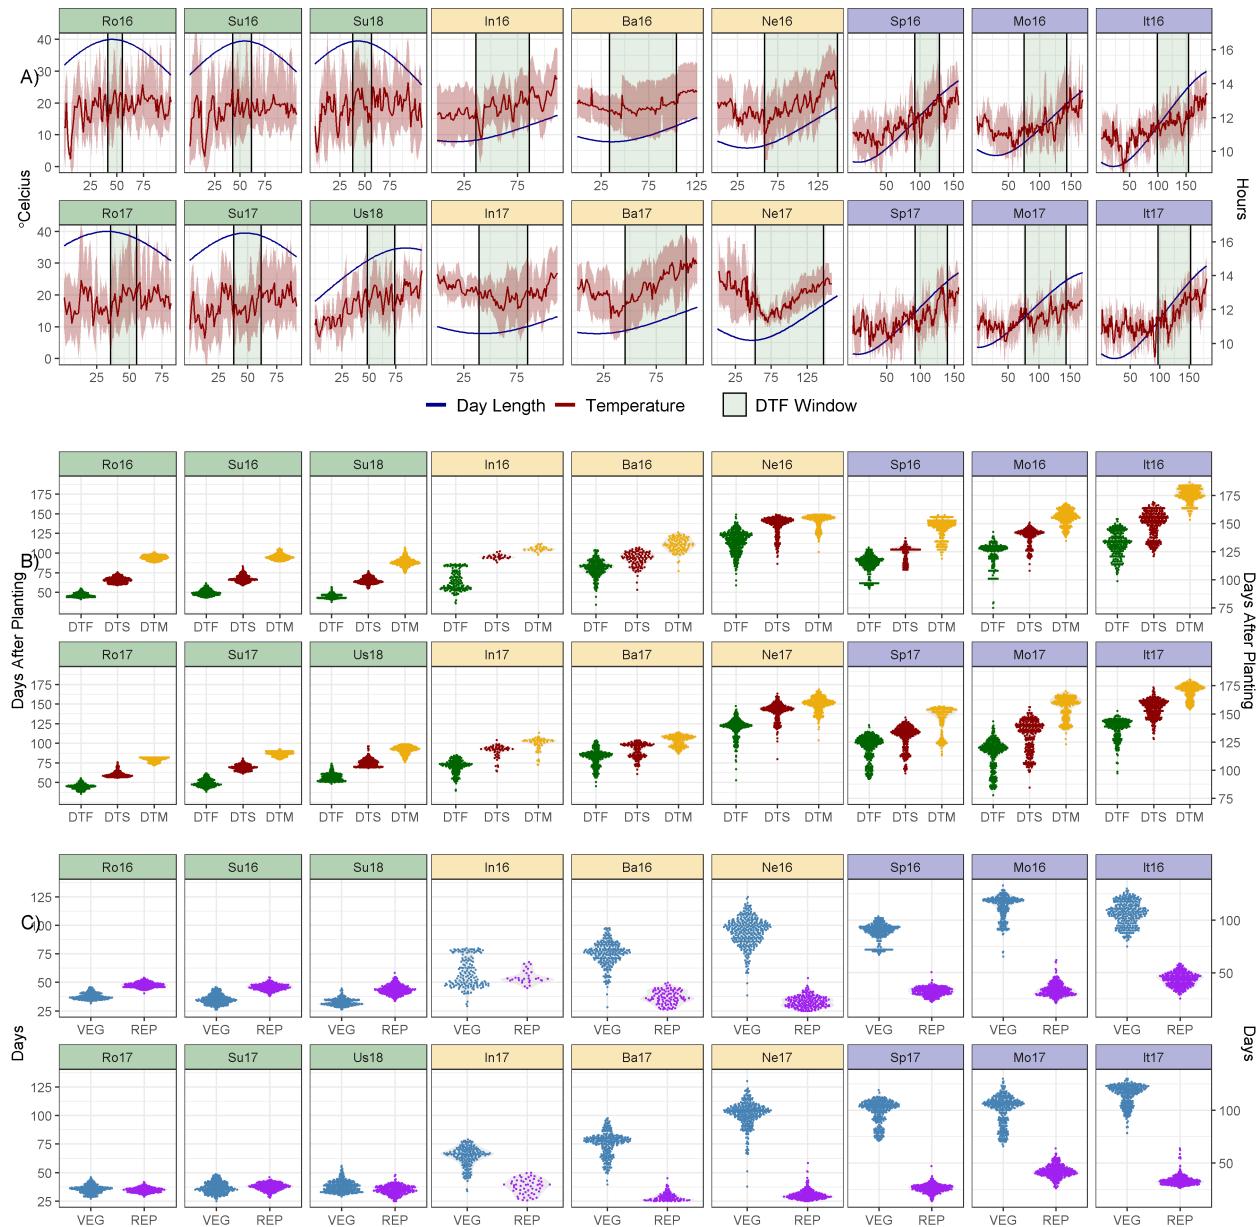

## Additional Figures - Entry Phenology

```

# Create plotting function
gg_phenol <- function(x, xE, colnum) {
  mycols <- c("darkgreen", "darkorange3", "darkblue")
  ggplot(xE, aes(x = Trait, y = Value, group = Entry, color = MacroEnv)) +
    geom_line(data = x, color = "grey", alpha = 0.5) +
    geom_line() + geom_point() +
    facet_grid(MacroEnv ~ ExptShort) +
    scale_color_manual(values = mycols[colnum]) +
    theme_AGL +
    theme(legend.position = "none") +
    ylim(c(min(x$Value, na.rm = T), max(x$Value, na.rm = T))) +
    labs(x = NULL, y = "Days")
}

# Prep data
xx <- dd %>% select(Entry, Name, ExptShort, DTF, DTS, DTM) %>%
  left_join(select(ff, ExptShort, MacroEnv), by = "ExptShort") %>%
  gather(Trait, Value, DTF, DTS, DTM) %>%
  mutate(Trait = factor(Trait, levels = c("DTF", "DTS", "DTM")))
x1 <- xx %>% filter(MacroEnv == "Temperate")
x2 <- xx %>% filter(MacroEnv == "South Asia")
x3 <- xx %>% filter(MacroEnv == "Mediterranean")
# Create PDF
pdf("Additional/pdf_Phenology.pdf", width = 8, height = 6)
for(i in 1:324) {
  xE1 <- xx %>% filter(Entry == i, !is.na(Value), MacroEnv == "Temperate")
  xE2 <- xx %>% filter(Entry == i, !is.na(Value), MacroEnv == "South Asia")
  xE3 <- xx %>% filter(Entry == i, !is.na(Value), MacroEnv == "Mediterranean")
  mp1 <- gg_phenol(x1, xE1, 1)
  mp2 <- gg_phenol(x2, xE2, 2)
  mp3 <- gg_phenol(x3, xE3, 3)
  figlab <- paste("Entry", str_pad(i, 3, "left", "0"), "|", unique(xE1>Name))
  mp <- ggarrange(mp1, mp2, mp3, nrow = 3, ncol = 1) %>%
    annotate_figure(top = figlab)
  print(mp)
  ggsave(paste0("Additional/Entry_Phenology/Phenology_Entry", str_pad(i, 3, "left", "0"), ".png"),
         mp, width = 8, height = 6)
}
dev.off() #dev.set(dev.next())

```

## Additional Figure 2 DTF DTS DTM

```


# Prep data
xx <- dd %>% select(Entry, Expt, ExptShort, DTF, DTS, DTM) %>%
  left_join(select(ff, Expt, MacroEnv), by = "Expt") %>%
  gather(Trait, Value, DTF, DTS, DTM) %>%
  mutate(Trait = factor(Trait, levels = c("DTF", "DTS", "DTM")) )
# Plot
mp <- ggplot(xx, aes(x = Expt, y = Value)) +

```

```

geom_violin(fill = "grey", alpha = 0.25, color = NA) +
geom_quasirandom(size = 0.1, alpha = 0.5, aes(color = MacroEnv)) +
facet_grid(Trait ~ MacroEnv, scales = "free") +
scale_color_manual(values = c("darkgreen", "darkorange3", "darkblue")) +
theme_AGL +
theme(legend.position = "none",
      axis.text.x = element_text(angle = 90, vjust = 0.5, hjust = 1)) +
labs(x = NULL, y = "Days After Planting")
ggsave("Additional/Additional_Figure_02_DTFDTSDTM.png", mp, width = 8, height = 6)

```

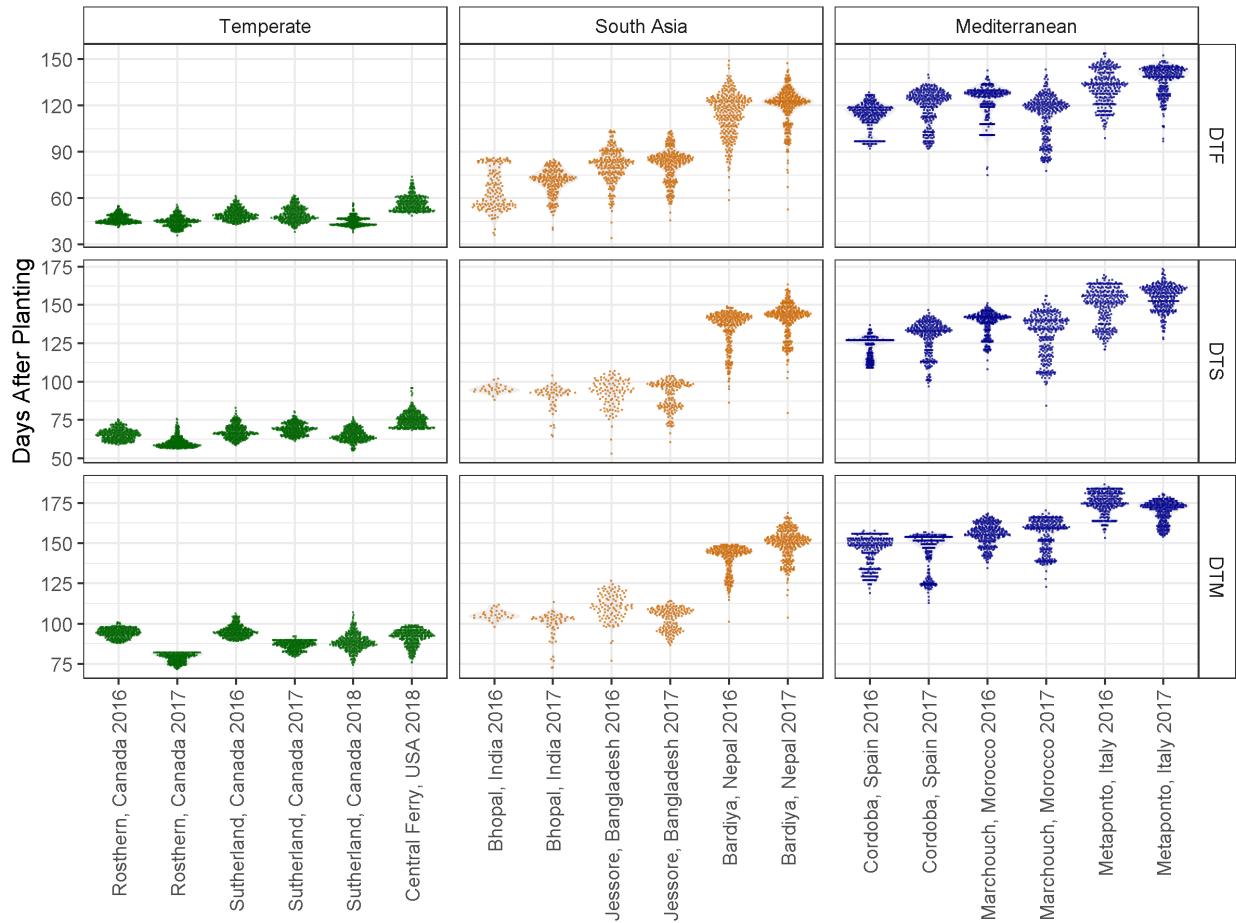

### Additional Figure 3 MacroEnv Phenology

```


# Prep data
xx <- ee %>% filter(ExptShort %in% c("Su17", "Ba17", "It17"))
yy <- ff %>% filter(Expt %in% unique(xx$Expt)) %>%
  mutate(DTF_min = Start + DTF_min, DTF_max = Start + DTF_max,
         DTM_min = Start + DTM_min, DTM_max = Start + DTM_max)
y1 <- select(yy, Expt, Location, Year, MacroEnv, min = DTF_min, max = DTF_max) %>%
  mutate(Trait = "DTF")
y2 <- select(yy, Expt, Location, Year, MacroEnv, min = DTM_min, max = DTM_max) %>%

```

```


    mutate(Trait = "DTM")
yy <- bind_rows(y1, y2)
# Plot
mp <- ggplot(xx) +
  geom_rect(data = yy, aes(xmin = min, xmax = max, fill = Trait),
            ymin = 0, ymax = 40, alpha = 0.4) +
  geom_line(aes(x = Date, y = DayLength_rescaled, color = "Blue")) +
  geom_line(aes(x = Date, y = Temp_mean, color = "darkred")) +
  geom_ribbon(aes(x = Date, ymin = Temp_min, ymax = Temp_max),
              fill = alpha("darkred", 0.25), color = alpha("darkred", 0.25)) +
  facet_grid(Location +MacroEnv ~ ., scales = "free_x", space = "free_x") +
  scale_color_manual(name = NULL, values = c("Blue", "darkred"),
                     labels = c("Day length", "Temperature")) +
  scale_fill_manual(name = NULL, values = c("darkgreen", "darkgoldenrod2")) +
  coord_cartesian(ylim = c(0,40)) +
  theme_AGL +
  theme(legend.position = "bottom",
        legend.text = element_text(size = 12),
        axis.text.x = element_text(angle = 90, hjust = 1, vjust = 0.5)) +
  scale_x_date(breaks = "1 month", labels = date_format("%B")) +
  scale_y_continuous(sec.axis = sec_axis(~ (16.62 - 9.11) * . / (40 - 0) + 9.11,
                                         breaks = c(10, 12, 14, 16), name = "Hours")) +
  labs(title = "2017 - 2018", y = expression(paste(degree, "Celcius")), x = NULL)) +
  guides(colour = guide_legend(order = 1, override.aes = list(size = 1.25)),
         fill = guide_legend(order = 2))
ggsave("Additional/Additional_Figure_03_MacroEnvPhenology.png", mp, width = 8, height = 6)

```

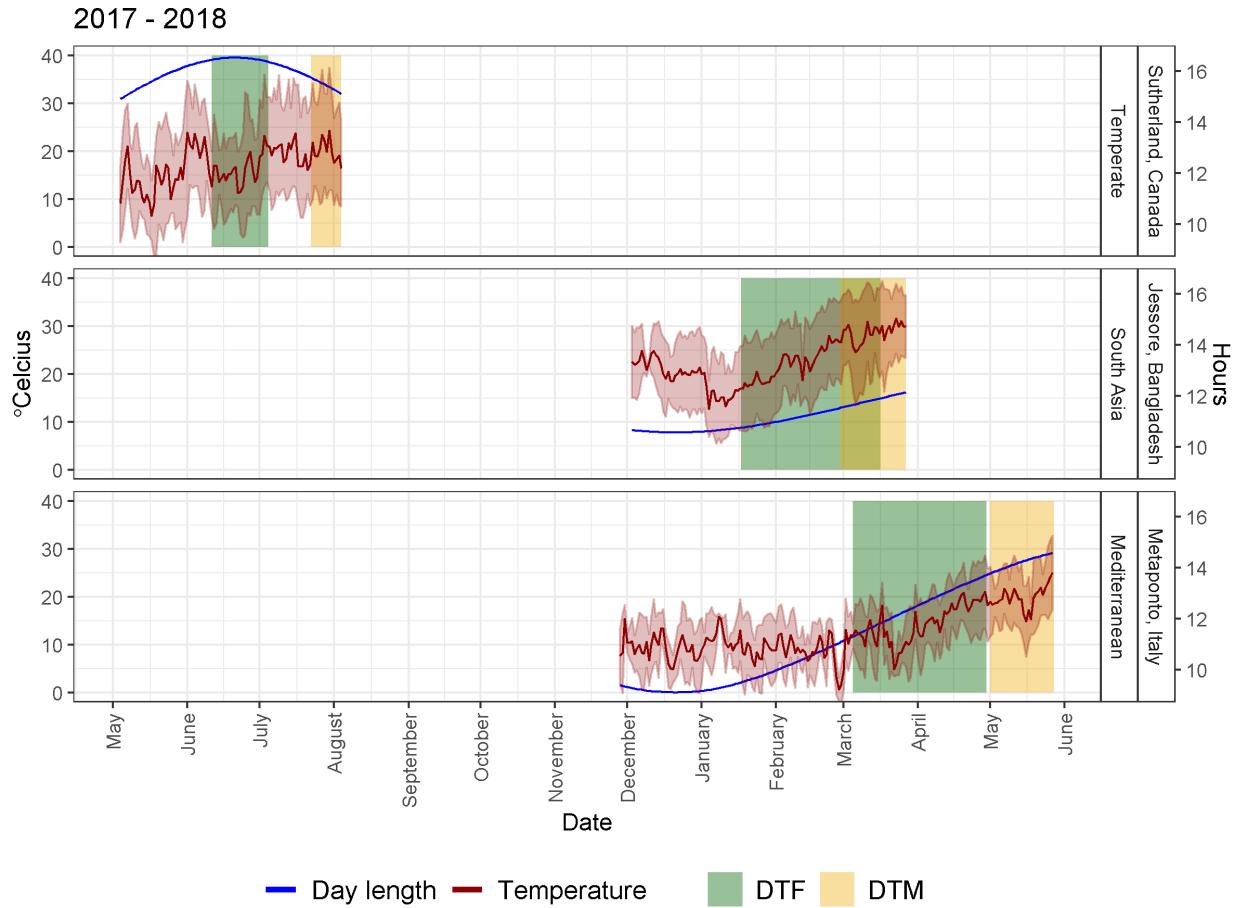

## Additional Figure 4 ggridges

```
# Prep data
xx <- dd %>% select(Expt, DTF, DTS, DTM) %>%
  gather(Trait, Value, DTF, DTS, DTM) %>%
  mutate(Trait = factor(Trait, levels = c("DTF", "DTS", "DTM")))
# Plot
mp <- ggplot(xx, aes(x = Value, y = Expt, fill = Trait)) +
  ggridges::geom_density_ridges() +
  scale_fill_manual(values = c("darkgreen", "darkred", "darkgoldenrod2")) +
  theme(legend.position = "top", legend.margin = unit(c(0,0,0,0), "cm")) +
  labs(y = NULL, x = "Days After Sowing")
ggsave("Additional/Additional_Figure_04_ggridges.png", mp, width = 6, height = 4)
```

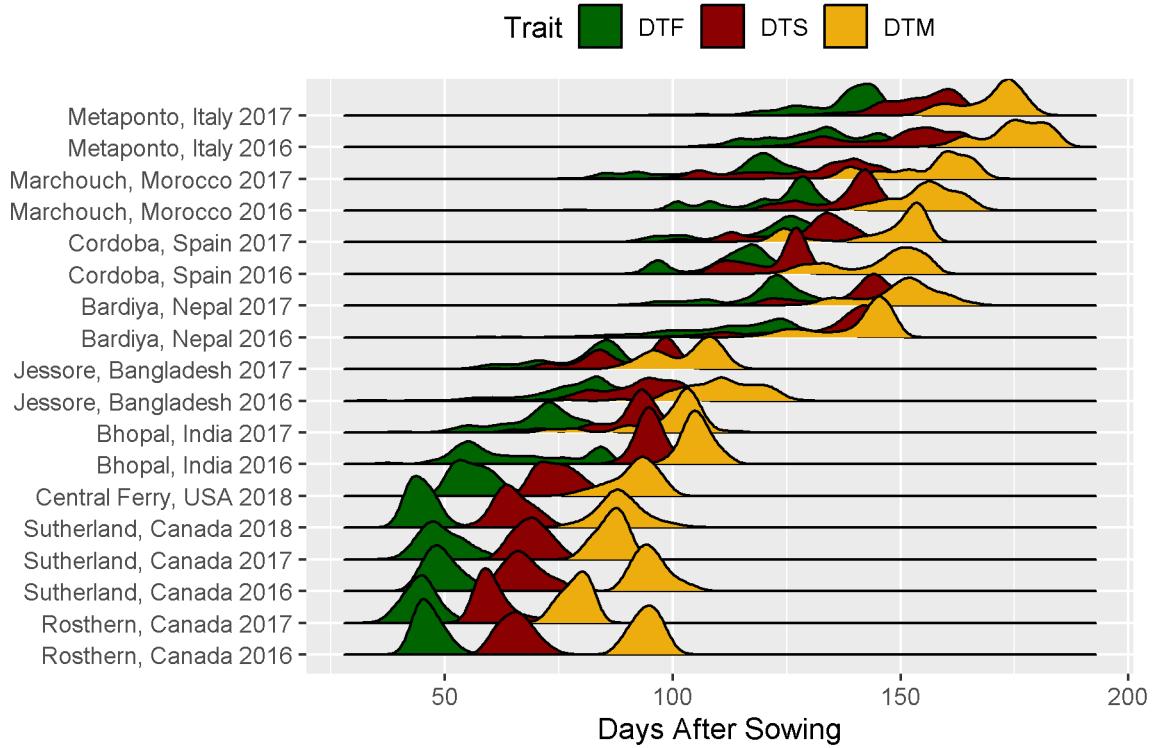


## Supplemental Figure 2 Missing Data

```
# Prep data
xx <- dd %>%
  filter(Location %in% c("Bhopal, India", "Jessore, Bangladesh", "Bardiya, Nepal")) %>%
  mutate(DTF = ifelse(is.na(DTF), 0, 1),
        DTS = ifelse(is.na(DTS), 0, 1),
        DTM = ifelse(is.na(DTM), 0, 1)) %>%
  group_by(Expt, Location, Year) %>%
  summarise_at(vars(DTF, DTS, DTM), funs(sum), na.rm = T) %>%
  ungroup() %>%
  gather(Trait, Flowered, DTF, DTS, DTM) %>%
  mutate(Total = ifelse(Expt == "Bardiya, Nepal 2016", 323, 324),
        # One accession was not planted in Bardiya, Nepal 2016
        DidNotFlower = Total - Flowered,
        Percent = round(100 * Flowered / Total),
        Label = paste0(Percent, "%"),
        Trait = factor(Trait, levels = c("DTF", "DTS", "DTM")))
# Plot
mp <- ggplot(xx, aes(x = Trait, y = Percent, fill = Trait)) +
  geom_bar(stat = "identity", color = "black", alpha = 0.7) +
  geom_text(aes(label = Label), nudge_y = -3, size = 3.5) +
  facet_grid(. ~ Location + Year) +
  scale_fill_manual(values = c("darkgreen", "darkred", "darkgoldenrod2")) +
  scale_y_continuous(limits = c(0,100), expand = c(0,0)) +
  theme_AGL +
```

```

theme(legend.position = "none",
      panel.grid.major.x = element_blank() ) +
labs(x = NULL, y = "Percent of accessions reaching key phenological time points")
ggsave("Supplemental_Figure_02_PercentFlowered.png", width = 10, height = 5)

```

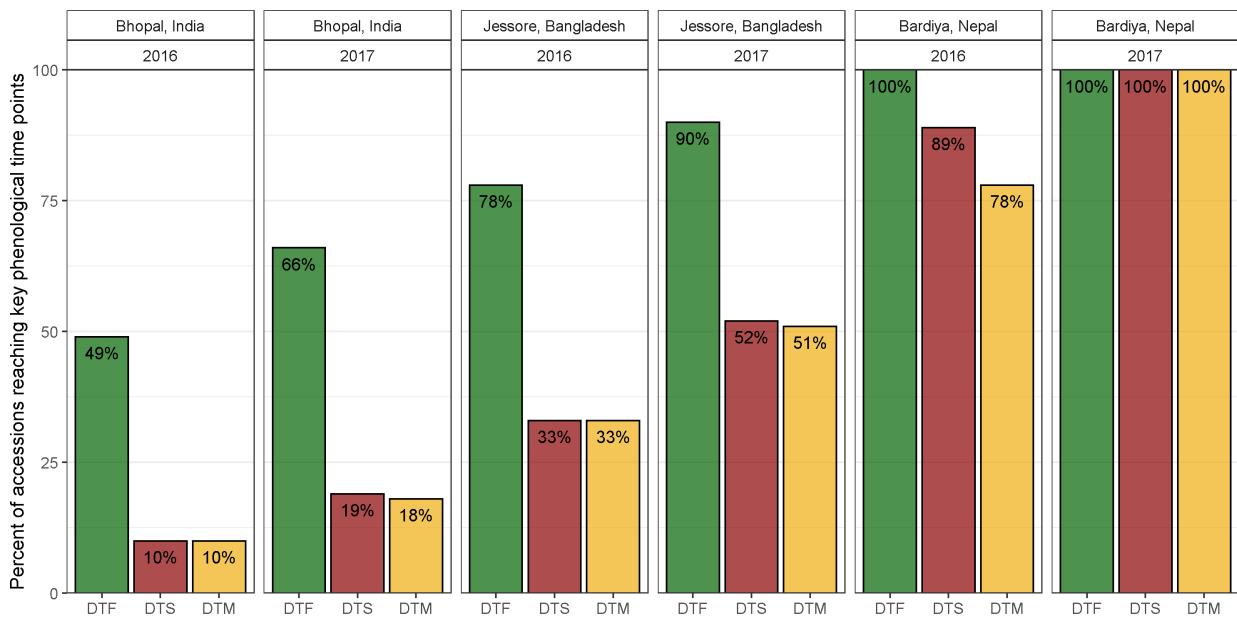

### Supplemental Figure 3 Correlation Plots

```


# Prep data
xx <- dd %>% left_join(select(ff, Expt, MacroEnv), by = "Expt") %>%
  select(Entry, Expt, MacroEnv, DTF, DTS, DTM)
# Create plotting function
ggCorPlot <- function(x, legend.title, colNums) {
  # Plot A
  r2 <- round(cor(x$DTF, x$DTS, use = "complete", method = "pearson")^2, 2)
  tp1 <- ggplot(x) + theme_AGL +
    geom_point(aes(x = DTF, y = DTS, color = Expt, shape = Expt), alpha = 0.8) +
    geom_label(x = -Inf, y = Inf, hjust = 0, vjust = 1, parse = T,
               label = paste("italic(R)^2 == ", r2)) +
    scale_color_manual(name = legend.title, values = colors_Expt[colNums]) +
    scale_shape_manual(name = legend.title, values = c(15, 16, 17, 15, 16, 17))
  # Plot B
  r2 <- round(cor(x$DTF, x$DTM, use = "complete.obs", method = "pearson")^2, 2)
  tp2 <- ggplot(x) + theme_AGL +
    geom_point(aes(x = DTF, y = DTM, color = Expt, shape = Expt), alpha = 0.8) +
    geom_label(x = -Inf, y = Inf, hjust = 0, vjust = 1, parse = T,
               label = paste("italic(R)^2 == ", r2)) +
    scale_color_manual(name = legend.title, values = colors_Expt[colNums]) +
    scale_shape_manual(name = legend.title, values = c(15, 16, 17, 15, 16, 17))
  # Plot C
  r2 <- round(cor(x$DTS, x$DTM, use = "complete", method = "pearson")^2, 2)

```

```

tp3 <- ggplot(x) + theme_AGL +
  geom_point(aes(x = DTS, y = DTM, color = Expt, shape = Expt), alpha = 0.8) +
  geom_label(x = -Inf, y = Inf, hjust = 0, vjust = 1, parse = T,
             label = paste("italic(R)^2 == ", r2) ) +
  scale_color_manual(name = legend.title, values = colors_Expt[colNums]) +
  scale_shape_manual(name = legend.title, values = c(15,16,17,15,16,17))
# Append A), B) and C)
mp <- ggarrange(tp1, tp2, tp3, nrow = 1, ncol = 3,
                 common.legend = T, legend = "right")
mp
}
# Plot
mp1 <- ggCorPlot(xx %>% filter(MacroEnv == "Temperate"),      "Temperate",      1:6 )
mp2 <- ggCorPlot(xx %>% filter(MacroEnv == "South Asia"),       "South Asia",       7:12)
mp3 <- ggCorPlot(xx %>% filter(MacroEnv == "Mediterranean"),   "Mediterranean", 13:18)
mp <- ggarrange(mp1, mp2, mp3, nrow = 3, ncol = 1, common.legend = T, legend = "right")
ggsave("Supplemental_Figure_03_Correlations.png", mp, width = 10, height = 8)

```

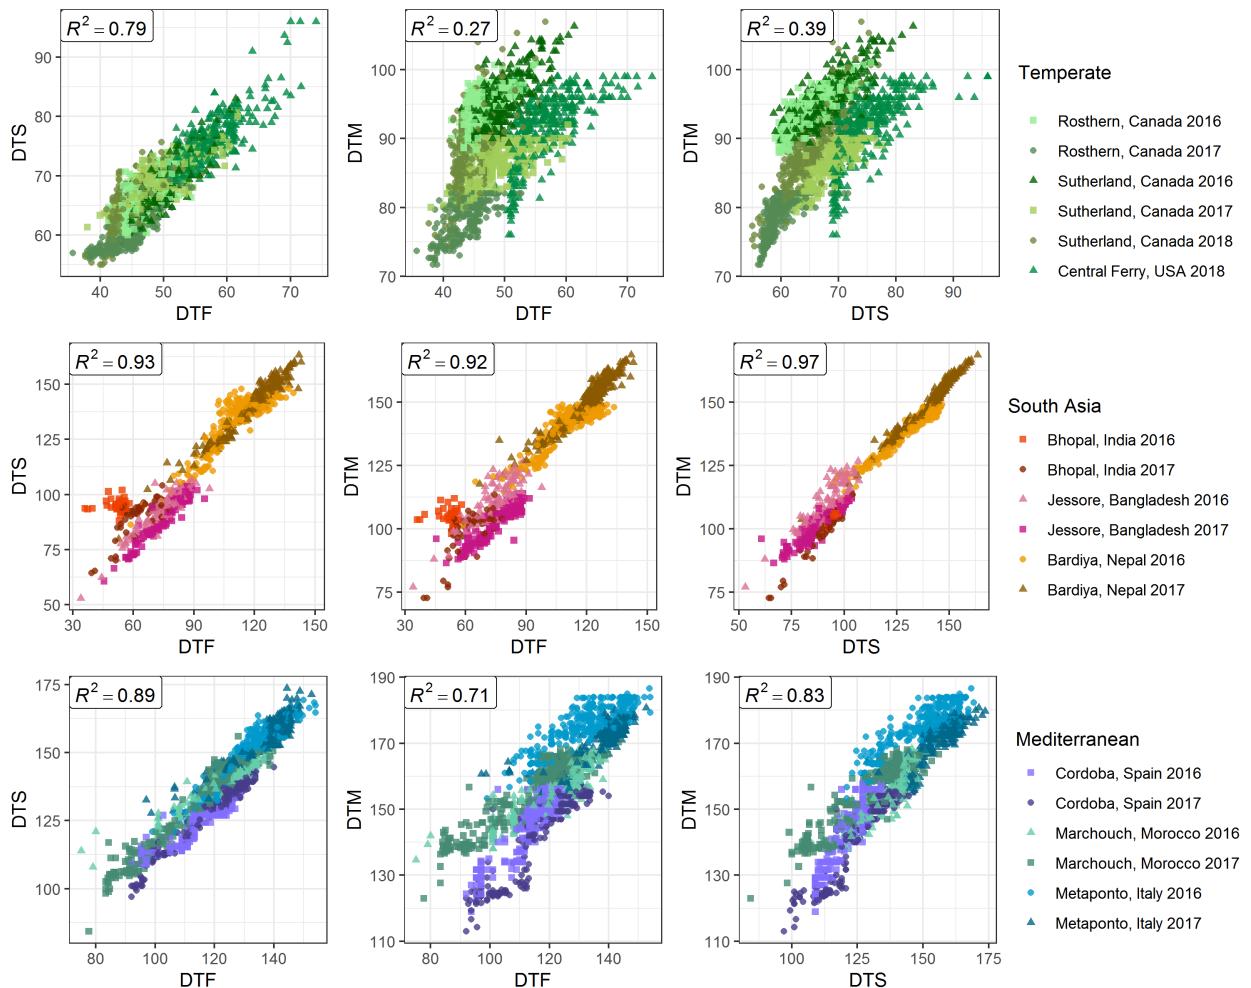

## Additional Figures - Correlations

```
# Prep data
xx <- dd %>% left_join(select(ff, Expt, MacroEnv), by = "Expt") %>%
  mutate(DTE = ifelse(Location == "Cordoba, Spain", NA, DTE))
x1 <- xx %>% filter(MacroEnv == "Temperate")
x2 <- xx %>% filter(MacroEnv == "South Asia")
x3 <- xx %>% filter(MacroEnv == "Mediterranean")
# Create plotting functions
my_lower <- function(data, mapping, cols = colors_Expt, ...) {
  ggplot(data = data, mapping = mapping) +
    geom_point(alpha = 0.5, size = 0.3, aes(color = Expt)) +
    theme_bw() +
    scale_color_manual(values = cols)
}
my_middle <- function(data, mapping, cols = colors_Expt, ...) {
  ggplot(data = data, mapping = mapping) +
    geom_density(alpha = 0.5) + theme_bw() +
    scale_color_manual(name = NULL, values = cols) +
    scale_fill_manual(name = NULL, values = cols) +
    guides(color = F, fill = guide_legend(nrow = 3, byrow = T))
}
# See: https://github.com/ggobi/ggally/issues/139
my_upper <- function(data, mapping, color = I("black"), sizeRange = c(1,5), ...) {
  # Prep data
  x <- eval_data_col(data, mapping$x)
  y <- eval_data_col(data, mapping$y)
  #
  r2 <- cor(x, y, method = "pearson", use = "complete.obs")^2
  rt <- format(r2, digits = 2)[1]
  cex <- max(sizeRange)
  tt <- as.character(rt)
  # plot the cor value
  p <- ggally_text(label = tt, mapping = aes(), color = color,
                    xP = 0.5, yP = 0.5, size = 6, ... ) + theme_bw()
  # Create color palette
  corColors <- RColorBrewer::brewer.pal(n = 10, name = "RdBu")[2:9]
  if (r2 <= -0.9) { corCol <- alpha(corColors[1], 0.5)
  } else if (r2 >= -0.9 & r2 <= -0.6) { corCol <- alpha(corColors[2], 0.5)
  } else if (r2 >= -0.6 & r2 <= -0.3) { corCol <- alpha(corColors[3], 0.5)
  } else if (r2 >= -0.3 & r2 <= 0) { corCol <- alpha(corColors[4], 0.5)
  } else if (r2 >= 0 & r2 <= 0.3) { corCol <- alpha(corColors[5], 0.5)
  } else if (r2 >= 0.3 & r2 <= 0.6) { corCol <- alpha(corColors[6], 0.5)
  } else if (r2 >= 0.6 & r2 <= 0.9) { corCol <- alpha(corColors[7], 0.5)
  } else { corCol <- alpha(corColors[8], 0.5) }
  # Plot
  p <- p +
    theme(panel.background = element_rect(fill = corCol),
          panel.grid.major = element_blank(),
          panel.grid.minor = element_blank(),
          axis.text = element_text(size = 5))
}
p
```

```

# Plot Correlations for each Expt
for(i in 1:length(names_Expt)) {
  mp <- ggpairs(xx %>% filter(Expt == names_Expt[i]),
                columns = c("DTE", "DTF", "DTS", "DTM", "REP"),
                upper = list(continuous = my_upper),
                diag = list(continuous = my_middle),
                lower = list(continuous = wrap(my_lower, cols = "black")),
                title = i) +
    theme(strip.background = element_rect(fill = "White"))
  ggsave(paste0("Additional/Corr/Corr_", str_pad(i,2,"left","0"), "_", names_Expt[i], ".png"),
         mp, width = 6, height = 6)
}

# Plot A) Temperate
mp1 <- ggpairs(x1, columns = c("DTE", "DTF", "DTS", "DTM", "REP"),
                aes(color = Expt, fill = Expt),
                upper=list(continuous = my_upper),
                diag =list(continuous = wrap(my_middle, cols = colors_Expt[1:6])),
                lower=list(continuous = wrap(my_lower, cols = colors_Expt[1:6])),
                title = "A) Temperate",
                legend = c(2,2)) +
    theme(strip.background = element_rect(fill = "White"),
          legend.position = "bottom")
ggsave("Additional/Corr/Corr_Temperate.png", mp1, width = 6, height = 6)

# Plot B) South Asia
mp2 <- ggpairs(x2, columns = c("DTE", "DTF", "DTS", "DTM", "REP"),
                aes(color = Expt, fill = Expt),
                upper = list(continuous = my_upper),
                diag = list(continuous = wrap(my_middle, cols = colors_Expt[7:12])),
                lower = list(continuous = wrap(my_lower, cols = colors_Expt[7:12])),
                title = "B) South Asia",
                legend = c(2,2)) +
    theme(strip.background = element_rect(fill = "White"),
          legend.position = "bottom")
ggsave("Additional/Corr/Corr_SouthAsia.png", mp2, width = 6, height = 6)

# Plot C) Mediterranean
mp3 <- ggpairs(x3, columns = c("DTE", "DTF", "DTS", "DTM", "REP"),
                aes(color = Expt, fill = Expt),
                upper = list(continuous = my_upper),
                diag = list(continuous = wrap(my_middle, cols = colors_Expt[13:18])),
                lower = list(continuous = wrap(my_lower, cols = colors_Expt[13:18])),
                title = "C) Mediterranean",
                legend = c(2,2)) +
    theme(strip.background = element_rect(fill = "White"),
          legend.position = "bottom")
ggsave("Additional/Corr/Corr_Mediterranean.png", mp3, width = 6, height = 6)

# Plot All
mp4 <- ggpairs(xx, columns = c("DTE", "DTF", "DTS", "DTM", "REP"),
                aes(color = ExptShort, fill = ExptShort),
                upper = list(continuous = my_upper),
                diag = list(continuous = my_middle),
                lower = list(continuous = my_lower),
                title = "D) ALL",
                legend = c(2,2))

```

```

theme(strip.background = element_rect(fill = "White"),
      legend.position = "bottom")
ggsave("Additional/Corr/Corr_All.png", mp4, width = 6, height = 6)

```

D) ALL

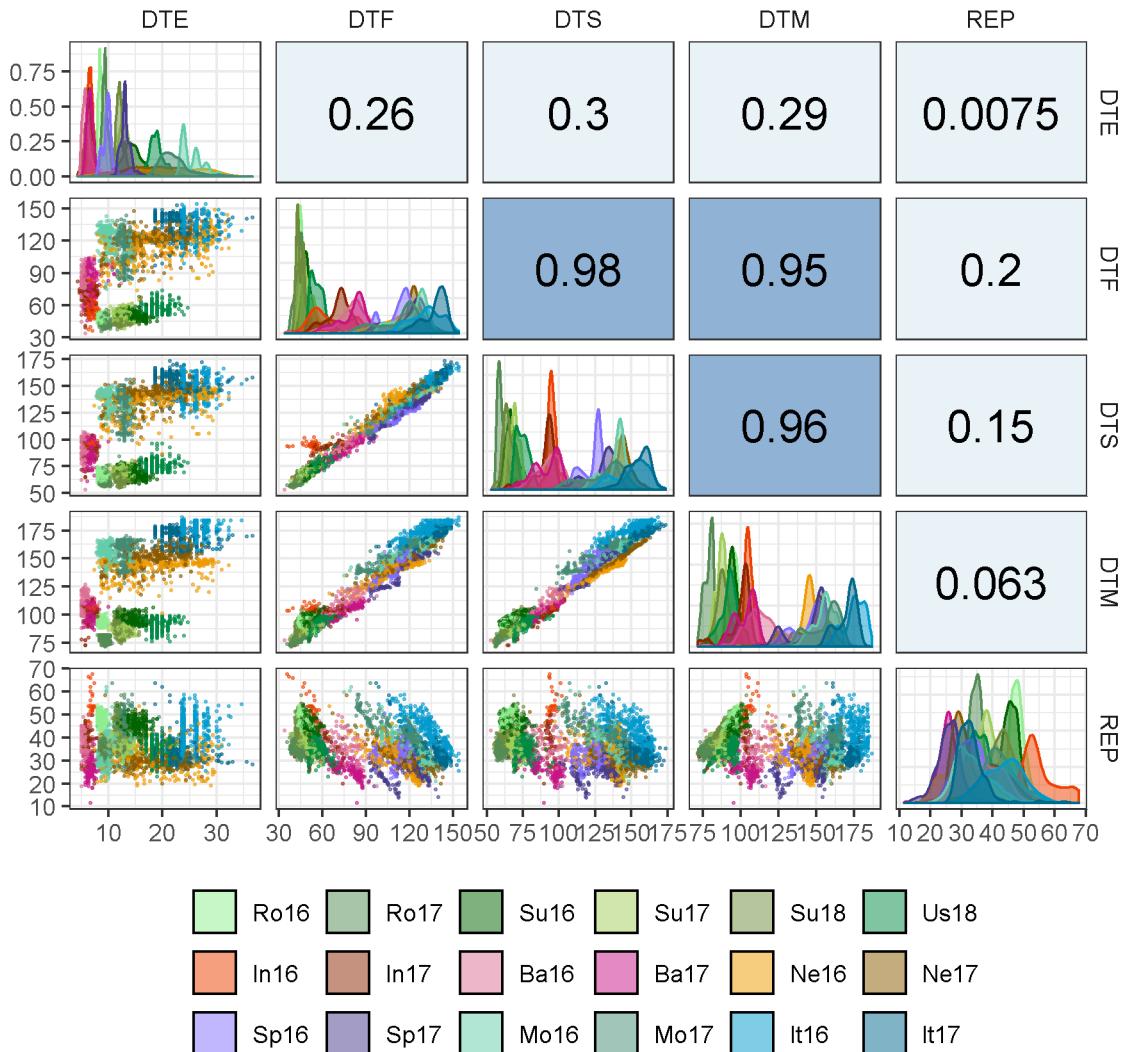


Figure 3 PCA

```

# Prep data
xx <- dd %>% select(Entry, Expt, DTF2_scaled) %>%
  spread(Expt, DTF2_scaled)
xx <- xx %>% column_to_rownames("Entry") %>% as.matrix()
# PCA
mypca <- PCA(xx, ncp = 10, graph = F)
# Heirarcical clustering

```

```

mypcaH <- HCPC(mypca, nb.clust = 8, graph = F)
perc <- round(mypca[[1]][,2], 1)
x1 <- mypcaH[[4]]$X %>%
  rownames_to_column("Entry") %>%
  mutate(Entry = as.numeric(Entry)) %>%
  rename(PC1=Dim.1, PC2=Dim.2, PC3=Dim.3, PC4=Dim.4, PC5=Dim.5,
         PC6=Dim.6, PC7=Dim.7, PC8=Dim.8, PC9=Dim.9, PC10=Dim.10,
         Cluster=clust) %>%
  left_join(select(ldp, Entry, Name, Origin), by = "Entry") %>%
  left_join(select(ct, Origin=Country, Region), by = "Origin") %>%
  select(Entry, Name, Origin, Region, everything())
write.csv(x1, "data/data_PCA_Results.csv", row.names = F)
# Prep data
x2 <- dd %>% left_join(select(x1, Entry, Cluster), by = "Entry") %>%
  group_by(Expt, ExptShort, Cluster) %>%
  summarise(mean = mean(DTF2_scaled, na.rm = T), sd = sd(DTF2_scaled, na.rm = T)) %>%
  ungroup() %>%
  mutate(ClusterNum = plyr::mapvalues(Cluster, as.character(1:8), summary(x1$Cluster)))
x3 <- x1 %>% count(Cluster) %>%
  mutate(Cluster = factor(Cluster, levels = rev(levels(Cluster))), y = n/2)
for(i in 2:nrow(x3)) { x3$y[i] <- sum(x3$n[1:(i-1)]) + (x3$n[i]/2) }
# Plot A) PCA 1v2
find_hull <- function(df) df[chull(df[, "PC1"], df[, "PC2"])]
polys <- plyr::ddply(x1, "Cluster", find_hull) %>% mutate(Cluster = factor(Cluster))
mp1.1 <- ggplot(x1) +
  geom_polygon(data = polys, alpha = 0.15, aes(x = PC1, y = PC2, fill = Cluster)) +
  geom_point(aes(x = PC1, y = PC2, colour = Cluster)) +
  scale_fill_manual(values = colors) +
  scale_color_manual(values = colors) +
  theme_classic() +
  theme(legend.position = "none") +
  labs(x = paste0("PC1 (", perc[1], "%)"),
       y = paste0("PC2 (", perc[2], "%)"))
# Plot A) PCA 1v3
find_hull <- function(df) df[chull(df[, "PC1"], df[, "PC3"])]
polys <- plyr::ddply(x1, "Cluster", find_hull) %>% mutate(Cluster = factor(Cluster))
mp1.2 <- ggplot(x1) +
  geom_polygon(data = polys, alpha = 0.15, aes(x = PC1, y = PC3, fill = Cluster)) +
  geom_point(aes(x = PC1, y = PC3, colour = Cluster)) +
  scale_fill_manual(values = colors) +
  scale_color_manual(values = colors) +
  theme_classic() +
  theme(legend.position = "none") +
  labs(x = paste0("PC1 (", perc[1], "%)"),
       y = paste0("PC3 (", perc[3], "%)"))
# Plot A) PCA 2v3
find_hull <- function(df) df[chull(df[, "PC2"], df[, "PC3"])]
polys <- plyr::ddply(x1, "Cluster", find_hull) %>% mutate(Cluster = factor(Cluster))
mp1.3 <- ggplot(x1) +
  geom_polygon(data = polys, alpha = 0.15, aes(x = PC2, y = PC3, fill = Cluster)) +
  geom_point(aes(x = PC2, y = PC3, colour = Cluster)) +
  scale_fill_manual(values = colors) +
  scale_color_manual(values = colors) +

```

```

theme_classic() +
  theme(legend.position = "none") +
  labs(x = paste0("PC2 (", perc[2], "%)"),
       y = paste0("PC3 (", perc[3], "%)"))
# Append
mp1 <- ggarrange(mp1.1, mp1.2, mp1.3, nrow = 1, ncol = 3, hjust = 0)
# Plot B) DTF
mp2 <- ggplot(x2, aes(x = ExptShort, y = mean, group = Cluster)) +
  geom_point(aes(color = Cluster)) +
  geom_vline(xintercept = 6.5, lty = 2) +
  geom_vline(xintercept = 12.5, lty = 2) +
  geom_ribbon(aes(ymin = mean - sd, ymax = mean + sd, fill = Cluster),
              alpha = 0.1, color = NA) +
  geom_line(aes(color = Cluster), size = 1) +
  scale_color_manual(values = colors) +
  scale_fill_manual(values = colors) +
  coord_cartesian(ylim = c(0.95, 5.05), expand = F) +
  theme_minimal() +
  theme(axis.text.x = element_text(angle = 90, hjust = 1, vjust = 0.5),
        legend.position = "none", strip.placement = "outside",
        axis.line = element_line(), axis.ticks = element_line()) +
  labs(y = "DTF (scaled 1-5)", x = NULL)
#
ggsave("Additional/Temp/Temp_F03_1.png", mp1, width = 8, height = 1 * 6 / 2.5)
ggsave("Additional/Temp/Temp_F03_2.png", mp2, width = 8, height = 1.5 * 6 / 2.5)
# Plot C)
xx <- ldp %>% left_join(select(x1, Entry, Cluster), by = "Entry") %>%
  mutate(test1 = factor(paste(Origin, Cluster)))
xx <- xx %>% filter(Origin != "ICARDA") %>%
  group_by(Origin, Cluster) %>% summarise(Count = n()) %>%
  spread(Cluster, Count) %>%
  left_join(select(ct, Origin=Country, Lat, Lon), by = "Origin") %>%
  ungroup() %>% as.data.frame()
xx[is.na(xx)] <- 0
invisible(png("Additional/Temp/Temp_F03_3.png", width = 2400, height = 1100, res = 150))
par(mai = c(0,0,0,0), xaxs = "i", yaxs = "i")
mapPies(dF = xx, nameX = "Lon", nameY = "Lat", zColours = colors,
         nameZs = c("1", "2", "3", "4", "5", "6", "7", "8"), symbolSize = 1, lwd = 2,
         xlim = c(-140, 110), ylim = c(0, 20), addCatLegend = F,
         oceanCol = "grey90", landCol = "white", borderCol = "black")


symbolMaxSize= 5  maxSumValues= 49  symbolScale= 0.7142857
List of 2
$ x: num [1:100] -125 -125 -125 -125 -125 ...
$ y: num [1:100] 57.3 57.6 57.9 58.2 58.5 ...

legend(-139.5, 15.5, title = "Cluster", legend = 1:8, col = colors,
       pch = 16, cex = 2, pt.cex = 4, box.lwd = 2)
invisible(dev.off())
# Append A), B) and C)
im1 <- image_read("Additional/Temp/Temp_F03_1.png") %>%
  image_annotate("A", size = 60, location = "+0+0")
im2 <- image_read("Additional/Temp/Temp_F03_2.png") %>%

```

```
image_annotate("B)", size = 60, location = "+0+0")
im3 <- image_read("Additional(Temp/Temp_F03_3.png") %>%
  image_annotate("C)", size = 60, location = "+0+0")
im <- image_append(c(im1, im2, im3), stack = T)
image_write(im, "Figure_03_PCA.png")
#
summary(x1$Cluster)
```

```
1 2 3 4 5 6 7 8
22 51 18 56 41 51 62 23
```

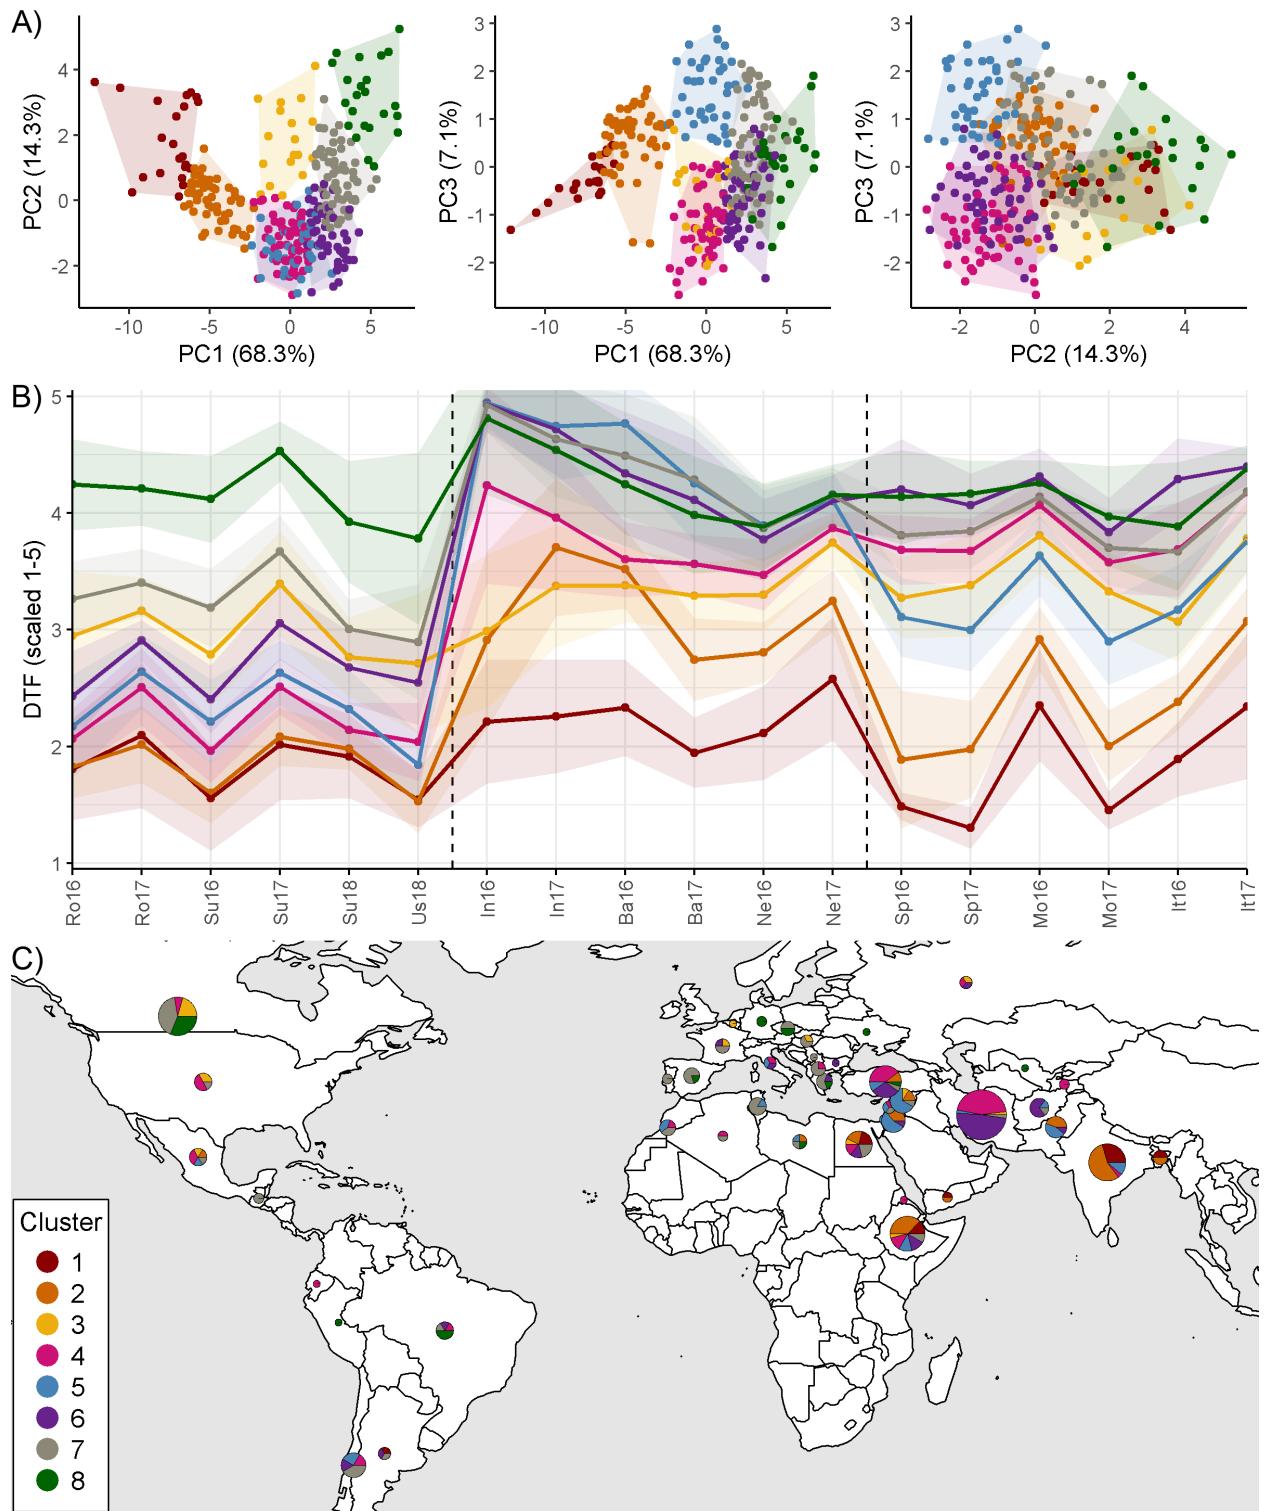


## Additional Figure 5 Interactive PCA Plot

```
pca <- read.csv("data/data_PCA_Results.csv") %>%
  mutate(Cluster = factor(Cluster),
         myColors = plyr::mapvalues(Cluster, 1:8, colors))
rgl::plot3d(pca[5:7], col = pca$myColors, size = 15)
rgl::writeWebGL(filename = "Additional/Additional_Figure_PCA_3D.html",
                 width = 650, height = 650)
```


## Additional Figure 6 PCA

```
# Prep data
xx <- read.csv("data/data_PCA_Results.csv") %>%
  mutate(Region = ifelse(Origin == "ICARDA", "ICARDA", as.character(Region)))
# Plot
mp <- ggplot(xx, aes(x = PC1, y = PC2, color = Region, shape = Region)) +
  geom_point(alpha = 0.7, size = 2) +
  scale_color_manual(values = colors[c(1,5,3,8,7)]) +
  scale_shape_manual(values = c(16,17,18,15,13)) +
  theme_AGL
ggsave("Additional/Additional_Figure_06_PCA.png", mp, width = 6, height = 4)
```

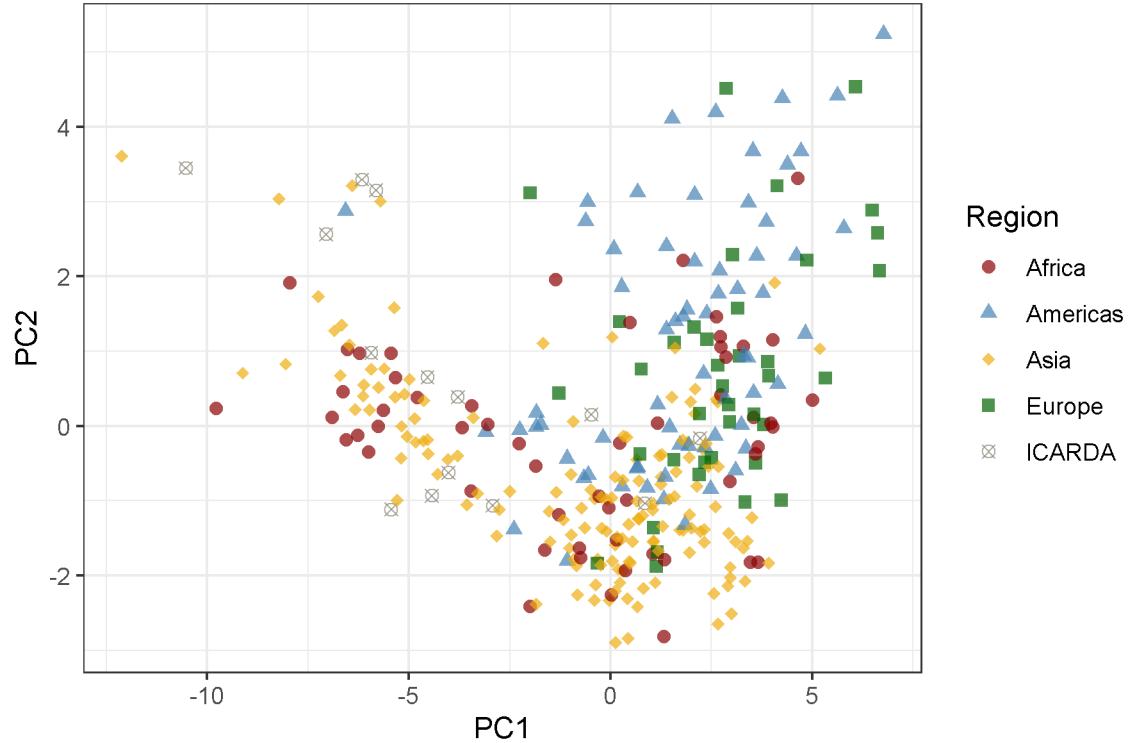

## Additional Figure 7 DTF By Cluster

```
# Prep data
x1 <- read.csv("data/data_PCA_Results.csv") %>% mutate(Cluster = factor(Cluster))
yy <- c("India", "Bangladesh", "Ethiopia", "Pakistan", "Jordan",
       "Iran", "Turkey", "Syria", "Chile", "Spain", "Czech Republic", "Canada" )
xx <- dd %>% left_join(ldp, by = "Entry") %>%
  filter(ExptShort %in% c("Ro17", "Ba17", "Ne17", "It17"), Origin != "Unknown") %>%
  left_join(select(x1, Entry, Cluster), by = "Entry") %>%
  mutate(Origin = factor(Origin, levels = unique(Origin)[rev(order(unique(Origin)))])) %>%
  filter(Origin %in% yy) %>%
  mutate(Origin = factor(Origin, levels = yy))
# Plot
mp <- ggplot(xx, aes(y = DTF2, x = Origin)) +
  geom_quasirandom(aes(color = Cluster)) +
  facet_grid(Location+Year ~ ., scales = "free_y") +
  scale_color_manual(values = colors) +
  theme_AGL +
  theme(legend.position = "top",
        axis.text.x = element_text(angle = 90, hjust = 1, vjust = 0.5)) +
  guides(colour = guide_legend(nrow = 1, override.aes = list(size = 3))) +
  labs(y = "Days from sowing to flower")
ggsave("Additional/Additional_Figure_07_DTFByCluster.png", mp, width = 5, height = 7)
```

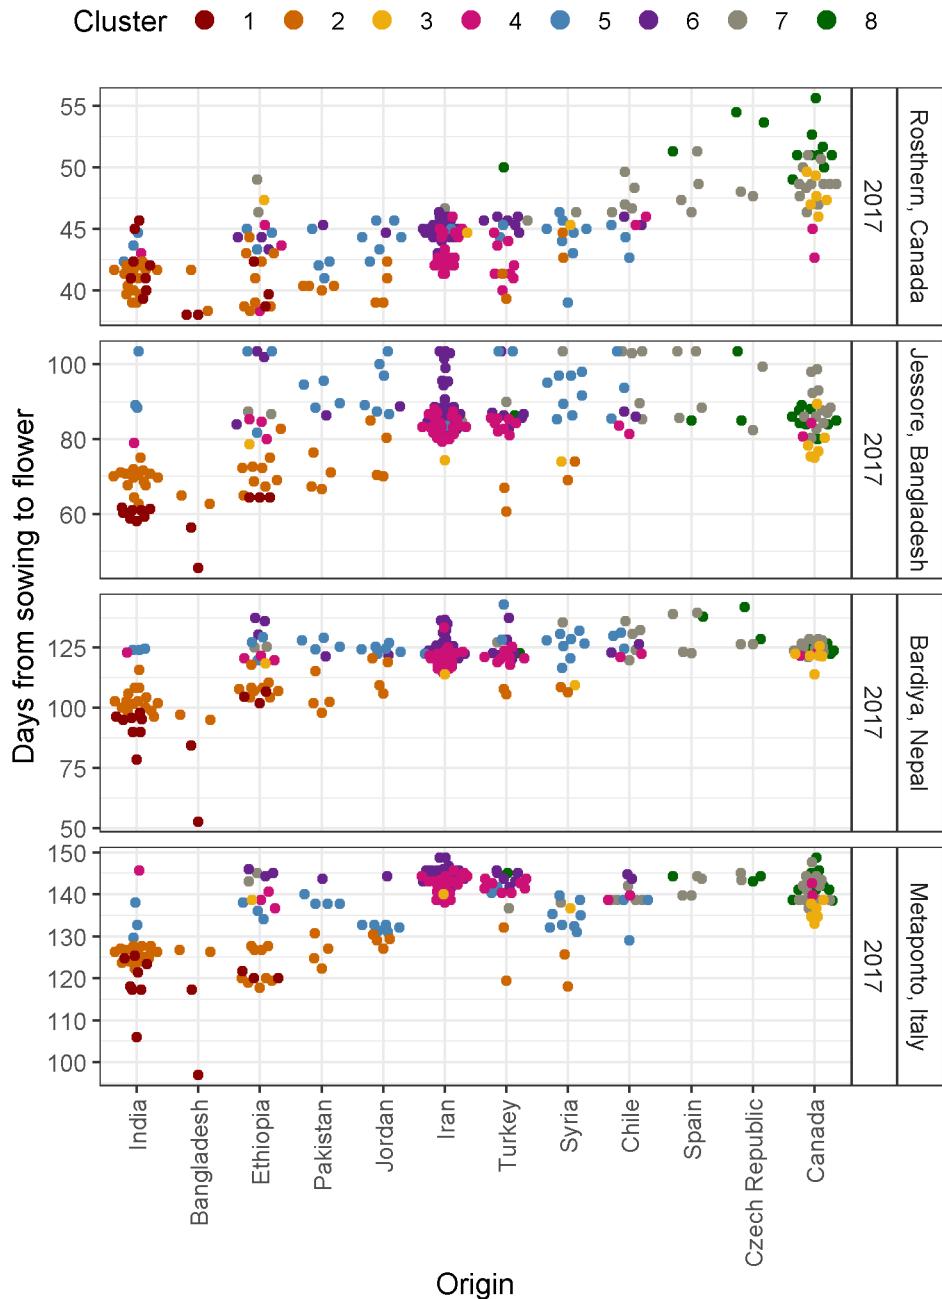


Additional Figure 8 Cluster Origins

```
# Prep data
pca <- read.csv("data/data_PCA_Results.csv") %>% mutate(Cluster = factor(Cluster))
xx <- ldp %>% left_join(select(pca, Entry, Cluster), by = "Entry") %>%
  mutate(test1 = factor(paste(Origin, Cluster)))
x1 <- xx %>% filter(Origin != "ICARDA") %>%
  group_by(Origin, Cluster) %>% summarise(Count = n()) %>%
```

```

spread(Cluster, Count) %>%
left_join(select(ct, Origin=Country, Lat, Lon), by = "Origin") %>%
ungroup() %>% as.data.frame()
x1[is.na(x1)] <- 0
# Plot
mp <- ggplot(xx, aes(x = Origin, fill = Cluster)) +
  geom_bar(stat = "count") +
  facet_grid(. ~ Cluster, scales = "free", space = "free") +
  scale_fill_manual(values = colors) +
  theme_AGL +
  theme(axis.text.x = element_text(angle = 90, hjust = 1, vjust = 0.5),
        legend.position = "none") +
  labs(x = NULL)
ggsave("Additional/Additional_Figure_08_ClusterOrigins.png", width = 16, height = 4)

```

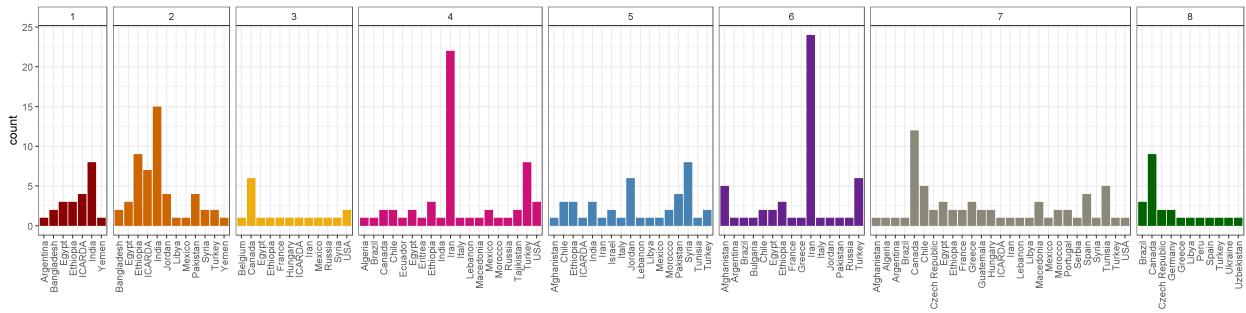


## Additional Figure 9 LDP Origins By Cluster

```

# Prep data
x1 <- read.csv("data/data_PCA_Results.csv") %>% mutate(Cluster = factor(Cluster))
xx <- ldp %>% select(Entry, Name, Lat, Lon) %>% left_join(x1, by = "Entry") %>%
  left_join(select(ct, Origin=Country, cLat=Lat, cLon=Lon), by = "Origin") %>%
  mutate(Lat = ifelse(is.na(Lat), cLat, Lat),
        Lon = ifelse(is.na(Lon), cLon, Lon),
        Lat = ifelse(duplicated(Lat), jitter(Lat, 1, 1), Lat),
        Lon = ifelse(duplicated(Lon), jitter(Lon, 1, 1), Lon), Size = 1)
# Plot
invisible(png("Additional/Additional_Figure_09_LDPOriginsByCluster.png", width = 2400, height = 1100, res = 300))
par(mai = c(0,0,0,0), xaxs = "i", yaxs = "i")
mapBubbles(dF = xx, nameX = "Lon", nameY = "Lat", nameZColour = "Cluster",
            nameZSize = "Size", symbolSize = 0.5, pch = 20, colourPalette = colors[1:8],
            xlim = c(-140,110), ylim = c(0,20), addLegend = F, addColourLegend = F, colourLegendTitle = "Cluster",
            oceanCol = "grey90", landCol = "white", borderCol = "black")
legend(-139.5, 15.5, title = "Cluster", legend = 1:8, col = colors,
       pch = 16, cex = 2, pt.cex = 4, box.lwd = 2)
invisible(dev.off())

```

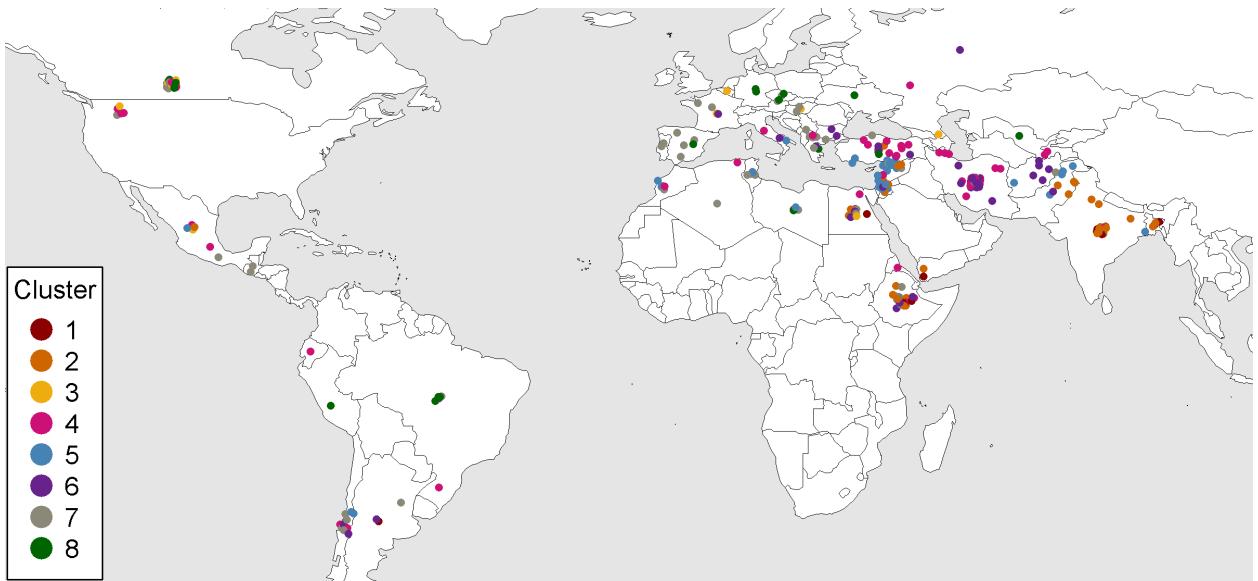

## Additional Figures - Entry Regressions

```

myfills <- alpha(c("darkgreen", "darkorange3", "darkblue"), 0.5)
mymin <- min(rr$RDTF, na.rm = T); mymax <- max(rr$RDTF, na.rm = T)
mp <- list()
for(i in 1:324) {
  xx <- rr %>% filter(Entry == i) %>%
    left_join(select(ff, Expt, MacroEnv, T_mean, P_mean), by = "Expt") %>%
    mutate(myfill = MacroEnv)
  x1 <- xx %>% filter(MacroEnv != "South Asia")
  x2 <- xx %>% filter(MacroEnv != "Temperate")
  x3 <- xx %>% filter(MacroEnv != "Mediterranean")
  figlab <- paste("Entry", str_pad(i, 3, "left", "0"), "|", unique(xx>Name))
  # Plot A) 1/f = a + bT
  mp1 <- ggplot(xx, aes(x = T_mean, y = RDTF)) +
    geom_point(aes(shape = MacroEnv, color = MacroEnv)) +
    geom_smooth(data = x1, method = "lm", se = F, color = "black", lty = 3) +
    geom_smooth(data = x2, method = "lm", se = F, color = "black") +
    scale_y_continuous(sec.axis = dup_axis(~ 1/., name = NULL, breaks = c(35,50,100,150)),
                       trans = "reverse", breaks = c(0.01,0.02,0.03), limits = c(mymax, mymin)) +
    scale_x_continuous(breaks = c(11,13,15,17,19,21)) +
    scale_shape_manual(name = "Macro-environment", values = c(16,15,17)) +
    scale_color_manual(name = "Macro-environment", values = myfills) +
    theme_AGL +
    labs(title = figlab, y = "1 / DTF",
         x = expression(paste("Temperature (", degree, "C)", sep = "")))
  # Plot B) 1/f = a + cP
  mp2 <- ggplot(xx, aes(x = P_mean, y = RDTF)) +
    geom_point(aes(shape = MacroEnv, color = MacroEnv)) +
    geom_smooth(data = x1, method = "lm", se = F, color = "black", lty = 3) +
    geom_smooth(data = x3, method = "lm", se = F, color = "black") +
    scale_y_continuous(sec.axis = dup_axis(~ 1/., name="DTF", breaks = c(35,50,100,150)),

```

```

        trans = "reverse", breaks = c(0.01,0.02,0.03), limits = c(mymax, mymin)) +
scale_x_continuous(breaks = c(11,12,13,14,15,16)) +
scale_shape_manual(name = "Macro-environment", values = c(16,15,17)) +
scale_color_manual(name = "Macro-environment", values = myfills) +
theme_AGL +
labs(title = "", y = NULL,x = "Photoperiod (hours)")
#
mp[[i]] <- ggarrange(mp1, mp2, ncol = 2, common.legend = T, legend = "bottom")
ggsave(paste0("Additional/Entry_TP/Entry_", str_pad(i, 3, pad = "0"), ".png"),
       mp[[i]], width = 8, height = 4)
}
pdf("Additional/pdf_TP.pdf", width = 8, height = 4)
for(i in 1:324) { print(mp[[i]]) }
dev.off() #dev.set(dev.next())

```

## PhotoThermal Plane

```

# Prep data
xx <- rr %>% filter(!is.na(RDTF)) %>%
  left_join(select(ff, Expt, T_mean, P_mean, MacroEnv), by = "Expt")
# Create plotting function
gg_PTplane <- function(x, i) {
  x1 <- x %>% filter(Entry == i) %>%
    arrange(MacroEnv) %>%
    mutate(myPal = as.character(plyr::mapvalues(MacroEnv,
          c("Temperate", "South Asia", "Mediterranean"),
          c("darkgreen", "darkorange3", "darkblue") ) ) )
  x <- x1$T_mean
  y <- x1$P_mean
  z <- x1$RDTF
  fit <- lm(z ~ x + y)
  # Create PhotoThermal plane
  fitp <- predict(fit)
  grid.lines <- 12
  x.p <- seq(min(x), max(x), length.out = grid.lines)
  y.p <- seq(min(y), max(y), length.out = grid.lines)
  xy <- expand.grid(x = x.p, y = y.p)
  z.p <- matrix(predict(fit, newdata = xy), nrow = grid.lines, ncol = grid.lines)
  pchs <- plyr::mapvalues(x1$Expt, names_Expt, c(rep(16,6),rep(15,6),rep(17,6))) %>%
    as.character() %>% as.numeric()
  # Plot with regression plane
  par(mar=c(1.5, 2.5, 1.5, 0.5))
  scatter3D(x, y, z, pch = pchs, cex = 2, zlim = c(0.005,0.03), main = unique(x1$Name),
    col = alpha(x1$myPal,0.5), colvar = as.numeric(x1$MacroEnv), colkey = F,
    theta = 40, phi = 25, ticktype = "detailed", cex.lab = 1, cex.axis = 0.5,
    xlab = "Temperature", ylab = "Photoperiod", zlab = "1 / DTF", col.grid = "gray90", bty = "u",
    surf = list(x = x.p, y = y.p, z = z.p, col = "black", facets = NA, fit = fitp) )
}
# Plot each Entry
for (i in 1:324) {
  png(paste0("Additional/Entry_3D/3D_Entry_", str_pad(i, 3, pad = "0"), ".png"),

```

```

    width = 1000, height = 1000, res = 200)
gg_PTplane(xx, i)
dev.off()
}
# Create PDF
pdf("Additional/pdf_3D.pdf")
par(mar=c(1.5, 2.5, 1.5, 0.5))
for (i in 1:324) {
  gg_PTplane(xx, i)
}
dev.off() #dev.set(dev.next())
#
# Plot ILL 5888 & ILL 4400 & Laird
xx <- xx %>% mutate(Name = gsub(" AGL", "", Name))
for (i in c(235, 94, 128)) {
  png(paste0("Additional/Tmp/3D_Entry_", str_pad(i, 3, pad = "0"), ".png"),
      width = 1000, height = 1000, res = 200)
  gg_PTplane(xx, i)
  dev.off()
}
# Create animation
xx <- read.csv("data/model_T+P_Coefs.csv") %>% arrange(b, c)
lf <- list.files("Additional/Entry_3D")[xx$Entry]
mp <- image_read(paste0("Additional/Entry_3D/", lf))
animation <- image_animate(mp, fps = 10)
image_write(animation, "Additional/Animation_3D.gif")

```

## Supplemental Figure 4 Regressions

```

# Prep data
myfills <- alpha(c("darkgreen", "darkorange3", "darkblue"), 0.5)
yy <- c("ILL 5888 AGL", "PI 420925 LSP AGL", "Laird AGL") # "ILL 4400 AGL",
xx <- rr %>% filter(Name %in% yy, !is.na(DTF)) %>%
  left_join(select(ff, Expt, MacroEnv, T_mean, P_mean), by = "Expt") %>%
  mutate(Name = gsub(" AGL", "", Name),
        Name = factor(Name, levels = gsub(" AGL", "", yy)),
        myfill = MacroEnv)
x1 <- xx %>% filter(MacroEnv != "South Asia")
x2 <- xx %>% filter(MacroEnv != "Temperate")
x3 <- xx %>% filter(MacroEnv != "Mediterranean")
# Plot A) 1/f = a + bT
mp1 <- ggplot(xx, aes(x = T_mean, y = RDTF)) +
  geom_point(aes(shape = MacroEnv, color = MacroEnv)) +
  geom_smooth(data = x1, method = "lm", se = F, color = "black", lty = 3) +
  geom_smooth(data = x2, method = "lm", se = F, color = "black") +
  scale_y_continuous(trans = "reverse", breaks = c(0.01, 0.02, 0.03),
                     sec.axis = dup_axis(~ 1/., name = "DTF", breaks = c(35, 50, 100, 150))) +
  scale_x_continuous(breaks = c(11, 13, 15, 17, 19, 21)) +
  scale_shape_manual(name = "Macro-environment", values = c(16, 15, 17)) +
  scale_color_manual(name = "Macro-environment", values = myfills) +
  theme_AGL + facet_grid(. ~ Name) +


```

```

theme(axis.title.y = element_text(size = 9),
      plot.margin = unit(c(0,0,0,0), "cm")) +
guides(colour = guide_legend(override.aes = list(size = 3))) +
labs(y = "1 / DTF", x = expression(paste("Temperature (", degree, "C)", sep = "")))
# Plot B) 1/f = a + cP
mp2 <- ggplot(xx, aes(x = P_mean, y = RDTF)) +
  geom_point(aes(shape = MacroEnv, color = MacroEnv)) +
  geom_smooth(data = x1, method = "lm", se = F, color = "black", lty = 3) +
  geom_smooth(data = x3, method = "lm", se = F, color = "black") +
  scale_y_continuous(trans = "reverse", breaks = c(0.01,0.02,0.03),
                     sec.axis = dup_axis(~ 1/, name="DTF", breaks = c(35,50,100,150))) +
  scale_x_continuous(breaks = c(11,12,13,14,15,16)) +
  scale_shape_manual(name = "Macro-environment", values = c(16,15,17)) +
  scale_color_manual(name = "Macro-environment", values = myfills) +
  theme_AGL + facet_grid(. ~ Name) +
  theme(axis.title.y = element_text(size = 9),
        plot.margin = unit(c(0,0,0,0), "cm")) +
  guides(colour = guide_legend(override.aes = list(size = 3))) +
  labs(y = "1 / DTF", x = "Photoperiod (hours)")
# Append A) and B)
mp <- ggarrange(mp1, mp2, ncol = 1, common.legend = T, legend = "bottom")
ggsave("Additional/Temp/Temp_SF04_1.png", mp, width = 6, height = 3.75)
# Append C)s
im1 <- image_read("Additional/Temp/3D_Entry_094.png")
im2 <- image_read("Additional/Temp/3D_Entry_235.png") #3D_Entry_076.png
im3 <- image_read("Additional/Temp/3D_Entry_128.png")
im <- image_append(c(im1, im2, im3)) %>% image_scale("1800x")
image_write(im, "Additional/Temp/Temp_SF04_2.png")
# Prep data
xx <- dd %>% filter(Name %in% yy) %>%
  mutate(Name = gsub(" AGL", "", Name),
        Name = factor(Name, levels = gsub(" AGL", "", yy)))
# Plot D)
mp3 <- ggplot(dd, aes(x = ExptShort, y = DTF2_scaled, group = Name)) +
  geom_line(color = "black", alpha = 0.1) +
  geom_vline(xintercept = 6.5, lty = 2) +
  geom_vline(xintercept = 12.5, lty = 2) +
  geom_line(data = xx, aes(color = Name), size = 2) +
  scale_color_manual(name = "Genotype", values = colors[c(1,5,8)]) +
  theme_AGL + labs(y = "DTF (scaled 1-5)", x = NULL) +
  theme(legend.position = "bottom", legend.margin = unit(c(0,0,0,0), "cm"),
        plot.margin = unit(c(0,0,0,0), "cm"),
        axis.title.y = element_text(size = 9),
        axis.text.x = element_text(angle = 90, vjust = 0.5))
ggsave("Additional/Temp/Temp_SF04_3.png", mp3, width = 6, height = 2.5)
# Append A), B), C) and D)
im1 <- image_read("Additional/Temp/Temp_SF04_1.png") %>%
  image_annotate("A", size = 40, location = "+0+0") %>%
  image_annotate("B", size = 40, location = "+0+500")
im2 <- image_read("Additional/Temp/Temp_SF04_2.png") %>%
  image_annotate("C", size = 40)
im3 <- image_read("Additional/Temp/Temp_SF04_3.png") %>%
  image_annotate("D", size = 40)

```

```
im <- image_append(c(im1, im2, im3), stack = T)
image_write(im, "Supplemental_Figure_04_Regressions.png")
```

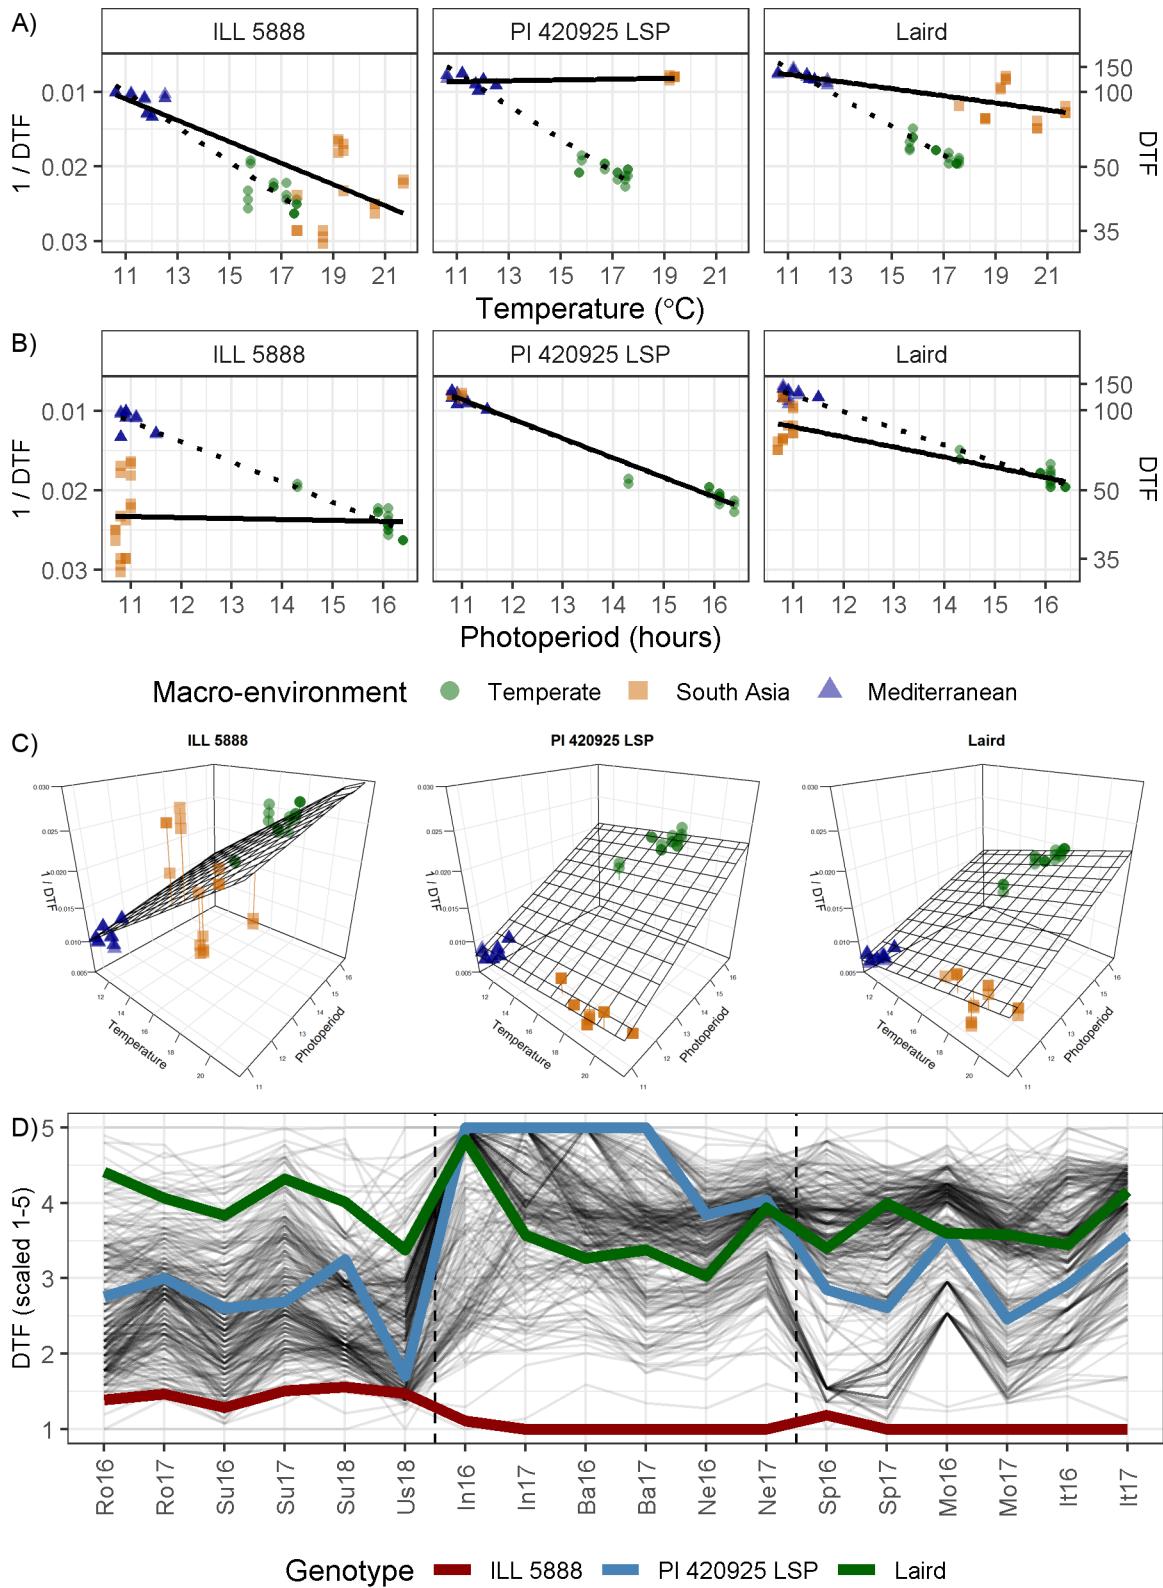

## Modeling DTF - functions

```
# Create functions
# Plot Observed vs Predicted
gg_model_1 <- function(x, title = NULL, type = 1,
  mymin = min(c(x$DTF,x$Predicted_DTF)) - 2,
  mymax = max(c(x$DTF,x$Predicted_DTF)) + 2 ) {
  x <- x %>% mutate(Flowered = ifelse(is.na(DTF), "Did not Flower", "Flowered"))
  # Prep data
  if(type == 1) {
    myx <- "DTF"; myy <- "Predicted_DTF"
    x <- x %>% filter(!is.na(DTF))
  }
  if(type == 2) {
    myx <- "RDTF"; myy <- "Predicted_RDTF"
    x <- x %>% filter(!is.na(RDTF))
  }
  myPal <- colors_Expt[names_Expt %in% unique(x$Expt)]
  r2 <- round(modelR2(x = x[,myx], y = x[,myy]), 3)
  # Plot
  mp <- ggplot(x) +
    geom_point(aes(x = get(myx), y = get(myy), color = Expt)) +
    geom_abline() +
    geom_label(x = mymin, y = mymax, hjust = 0, vjust = 1, parse = T,
      label = paste("italic(R)^2 == ", r2)) +
    scale_x_continuous(limits = c(mymin, mymax), expand = c(0, 0)) +
    scale_y_continuous(limits = c(mymin, mymax), expand = c(0, 0)) +
    scale_color_manual(name = NULL, values = myPal) +
    theme_AGL + guides(colour = guide_legend(override.aes = list(size = 2))) +
    labs(y = "Predicted", x = "Observed")
  if(!is.null(title)) { mp <- mp + labs(title = title) }
  mp
}
# Facets by Expt
gg_model_2 <- function(x, myX = "DTF", myY = "Predicted_DTF", title = NULL,
  x1 = 30, x2 = 30, y1 = 145, y2 = 120, legend.pos = "bottom") {
  # Prep data
  pca <- read.csv("data/data_PCA_Results.csv") %>% select(Entry, Cluster) %>%
    mutate(Cluster = factor(Cluster))
  x <- x %>%
    filter(!is.na(get(myX))) %>%
    left_join(pca, by = "Entry")
  xf <- x %>% group_by(Expt) %>%
    summarise(Mean = mean(DTF)) %>% ungroup() %>%
    mutate(r2 = NA, RMSE = NA)
  for(i in 1:nrow(xf)) {
    xi <- x %>% filter(Expt == xf$Expt[i])
    xf[i,"r2"] <- round(modelR2(x = xi[,myX], y = xi[,myY]), 2)
    xf[i,"RMSE"] <- round(modelRMSE(x = xi[,myX], y = xi[,myY]), 1)
  }
  # Plot
  mp <- ggplot(x, aes(x = get(myX), y = get(myY))) +
    geom_point(aes(color = Cluster), size = 0.75, alpha = 0.7) + geom_abline() +
```

```

geom_text(x = x1, y = y1, color = "black", hjust = 0, vjust = 0, size = 3,
          aes(label = paste("RMSE = ", RMSE, sep = "")), data = xf) +
  geom_text(x = x2, y = y2, color = "black", hjust = 0, vjust = 0, size = 3,
            aes(label = paste("italic(R)^2 == ", r2)), parse = T, data = xf) +
  facet_wrap(Expt ~ ., ncol = 6, labeller = label_wrap_gen(width = 17)) +
  scale_x_continuous(limits = c(min(x[,myX]), max(x[,myX]))) +
  scale_y_continuous(limits = c(min(x[,myX]), max(x[,myX]))) +
  scale_color_manual(values = colors) +
  theme_AGL +
  theme(legend.position = legend.pos, legend.margin = unit(c(0,0,0,0), "cm")) +
  guides(colour = guide_legend(nrow = 1, override.aes = list(size = 3))) +
  labs(y = "Predicted", x = "Observed")
if(!is.null(title)) { mp <- mp + labs(title = title) }
mp
}
# R^2 function
modelR2 <- function(x, y) {
  1 - (sum((x - y)^2, na.rm = T) / sum((x - mean(x, na.rm = T))^2, na.rm = T))
}
# RMSE function
modelRMSE <- function(x, y) {
  sqrt(sum((x-y)^2, na.rm = T) / length(x))
}

```

$$R^2 = 1 - \frac{SS_{residuals}}{SS_{total}} = 1 - \frac{\sum(x-y)^2}{\sum(x-\bar{x})}$$

$$RMSE = \sqrt{\frac{\sum(y-x)^2}{n}}$$

## Modeling DTF (T + P) - All Site-years

```

#####
# 1/f = a + bT + cP (All) #
#####
# Prep data
xx <- rr %>% filter(!is.na(RDTF)) %>%
  left_join(select(ff, Expt, T_mean, P_mean), by = "Expt") %>%
  select(Plot, Entry, Name, Rep, Expt, ExptShort, T_mean, P_mean, RDTF, DTF)
mr <- NULL; md <- NULL
mc <- select(ldp, Entry, Name) %>%
  mutate(a = NA, b = NA, c = NA, RR = NA, Environments = NA,
        aP = NA, bP = NA, cP = NA)
# Model
for(i in 1:324) {
  # Prep data
  xri <- xx %>% filter(Entry == i)
  xdi <- xri %>% group_by(Entry, Name, Expt, ExptShort) %>%
    summarise_at(vars(DTF, RDTF, T_mean, P_mean), funs(mean), na.rm = T) %>%
    ungroup()
  # Train Model
  mi <- lm(RDTF ~ T_mean + P_mean, data = xri)

```


```

# Predict DTF
xri <- xri %>% mutate(Predicted_RDTF = predict(mi),
                         Predicted_DTF = 1 / predict(mi))
xdi <- xdi %>% mutate(Predicted_RDTF = predict(mi, newdata = xdi),
                         Predicted_DTF = 1 / predict(mi, newdata = xdi))
# Save to table
mr <- bind_rows(mr, xri)
md <- bind_rows(md, xdi)
# Save coefficients
mc[i,c("a","b","c")] <- mi$coefficients
# Calculate rr and # of environments used
mc[i,"RR"] <- 1 - sum((xri$DTF - xri$Predicted_DTF)^2, na.rm = T) /
  sum((xri$Predicted_DTF - mean(xri$DTF, na.rm = T))^2, na.rm = T)
mc[i,"Environments"] <- length(unique(xri$Expt[!is.na(xri$DTF)]))
mc[i,"aP"] <- summary(mi)[[4]][1,4]
mc[i,"bP"] <- summary(mi)[[4]][2,4]
mc[i,"cP"] <- summary(mi)[[4]][3,4]
}
mr <- mr %>% mutate(Expt = factor(Expt, levels = names_Expt))
md <- md %>% mutate(Expt = factor(Expt, levels = names_Expt))
# Save Results
write.csv(mr, "data/model_T+P.csv", row.names = F)
write.csv(md, "data/model_T+P_d.csv", row.names = F)
write.csv(mc, "data/model_T+P_Coefs.csv", row.names = F)
#
# Plot Each Entry
mp <- list()
for(i in 1:324) {
  mp1 <- gg_model_1(mr %>% filter(Entry == i), paste("Entry", i, "| DTF"))
  mp2 <- gg_model_1(mr %>% filter(Entry == i), paste("Entry", i, "| RDTF"), type = 2,
                    mymin = min(c(mr$Predicted_RDTF, mr$RDTF)) - 0.001,
                    mymax = max(c(mr$Predicted_RDTF, mr$RDTF)) + 0.001)
  mp[[i]] <- ggarrange(mp1, mp2, ncol = 2, common.legend = T, legend = "right")
  fname <- paste0("Additional/Entry_Model/Model_Entry_", str_pad(i, 3, pad = "0"), ".png")
  ggsave(fname, mp[[i]], width = 10, height = 4.25)
}
pdf("Additional/pdf_Model.pdf", width = 10, height = 4.25)
for (i in 1:324) { print(mp[[i]]) }
dev.off() #dev.set(dev.next())

# Prep data
xx <- read.csv("data/model_T+P_d.csv") %>% mutate(Expt = factor(Expt, levels = names_Expt))
# Plot Observed vs Predicted
mp <- gg_model_1(xx, title = "Model = T + P")
ggsave("Additional/Model/Model_1_1.png", mp, width = 7, height = 5)


```

Model = T + P

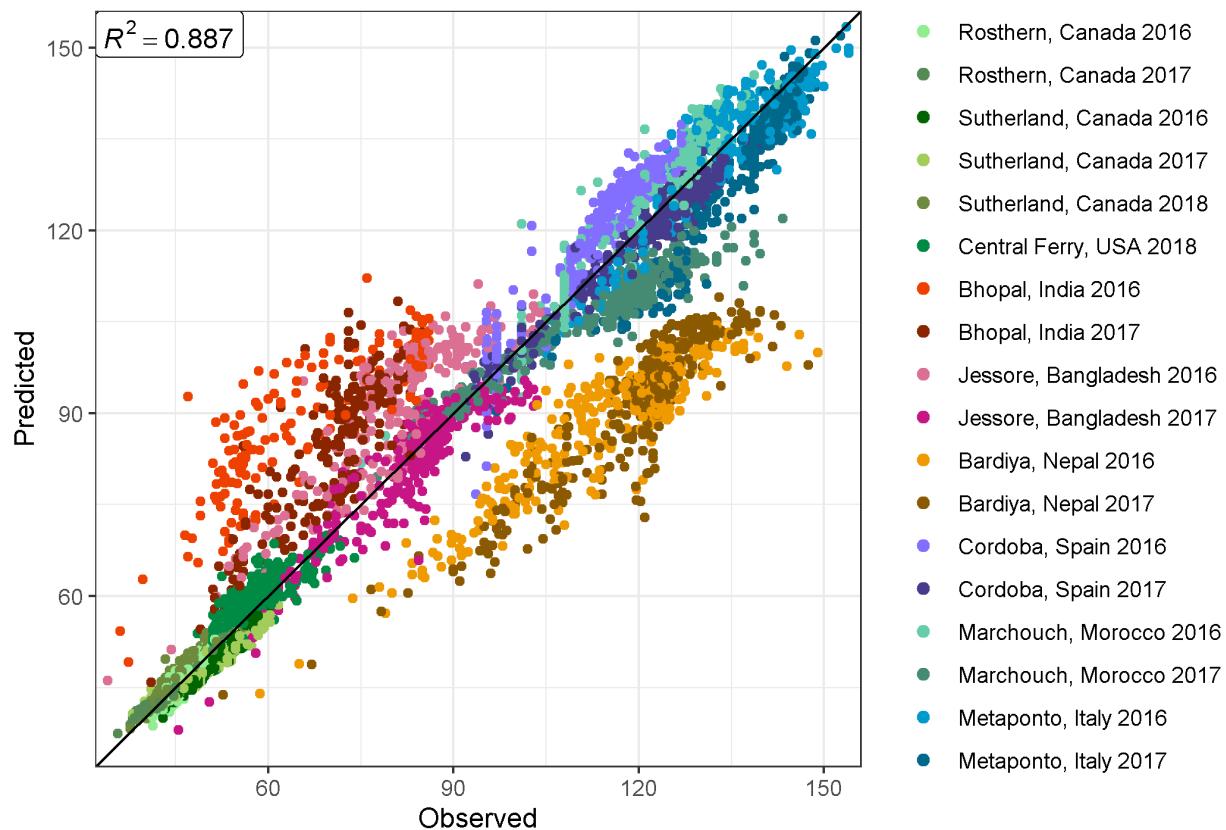


```
# Plot Observed vs Predicted
mp <- gg_model_2(xx, title = "Model = T + P")
ggsave("Additional/Model/Model_2_1.png", mp, width = 8, height = 5.5)
```

Model = T + P

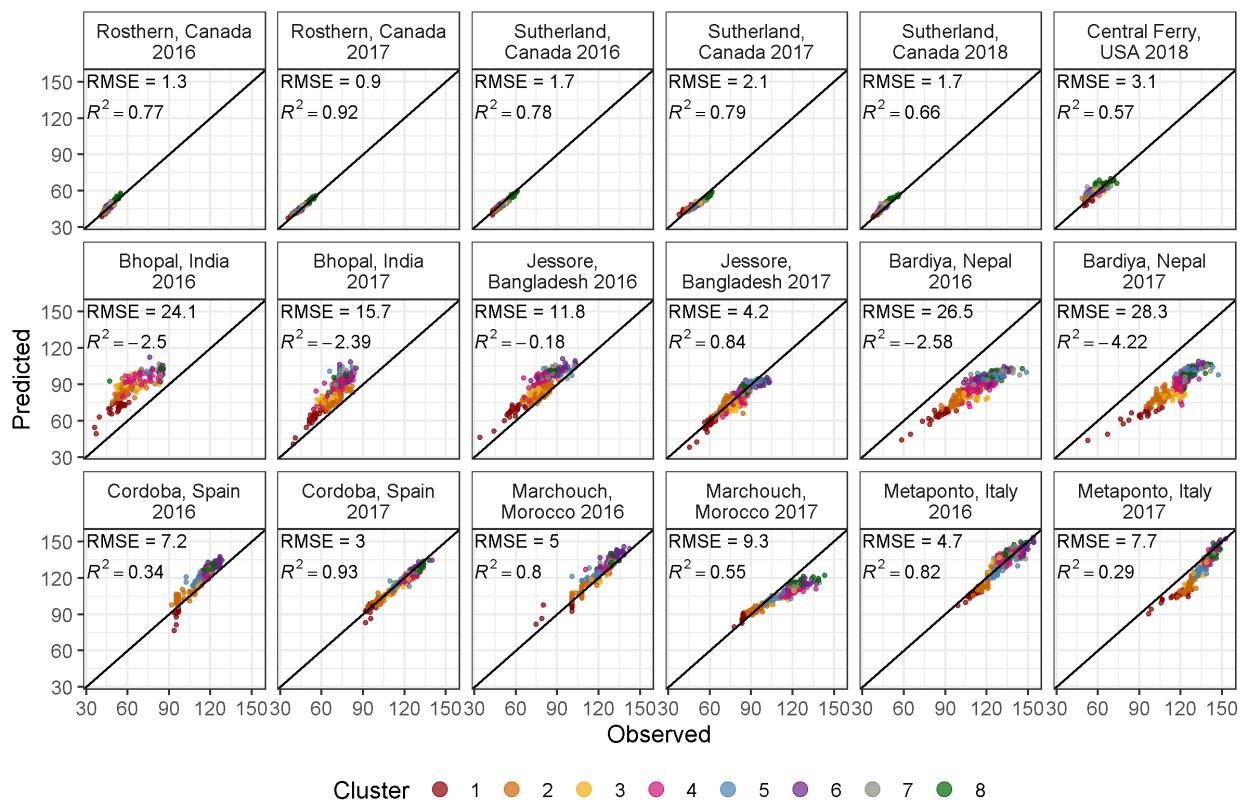

# Plot Observed vs Predicted for Temperate Locations

```
mp <- gg_model_2(xx %>% filter(ExptShort %in% c("Ro16", "Ro17", "Su16", "Su17", "Su18", "Us18")))
ggsave("Additional/Model/Model_3_1.png", mp, width = 8, height = 3)
```

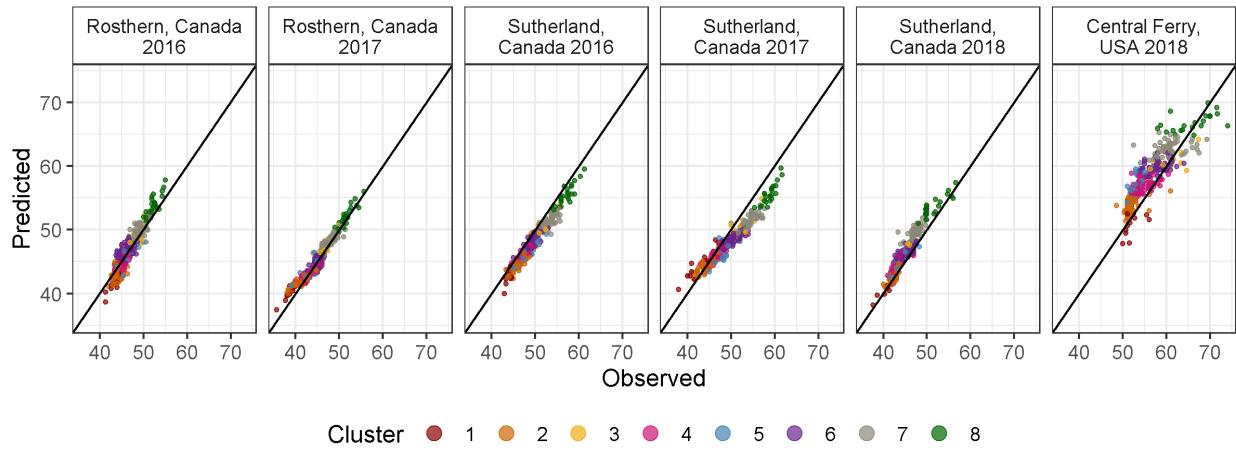

Modeling DTF (T x P) - All Site-years

```


#####
# 1/f = a + bT + cP (All) #
#####

# Prep data
xx <- rr %>% filter(!is.na(RDTF)) %>%
  left_join(select(ff, Expt, T_mean, P_mean), by = "Expt") %>%
  select(Plot, Entry, Name, Rep, Expt, ExptShort, T_mean, P_mean, RDTF, DTF)
mr <- NULL; md <- NULL
mc <- select(ldp, Entry, Name) %>%
  mutate(a = NA, b = NA, c = NA, d = NA, RR = NA, Environments = NA,
        aP = NA, bP = NA, cP= NA, dP = NA)
# Model
for(i in 1:324) {
  # Prep data
  xri <- xx %>% filter(Entry == i)
  xdi <- xri %>% group_by(Entry, Name, Expt, ExptShort) %>%
    summarise_at(vars(DTF, RDTF, T_mean, P_mean), funs(mean), na.rm = T) %>%
    ungroup()
  # Train Model
  mi <- lm(RDTF ~ T_mean * P_mean, data = xri)
  # Predict DTF
  xri <- xri %>% mutate(Predicted_RDTF = predict(mi),
                           Predicted_DTF = 1 / predict(mi))
  xdi <- xdi %>% mutate(Predicted_RDTF = predict(mi, newdata = xdi),
                           Predicted_DTF = 1 / predict(mi, newdata = xdi))
  # Save to table
  mr <- bind_rows(mr, xri)
  md <- bind_rows(md, xdi)
  # Save coefficients
  mc[i,c("a","b","c","d")] <- mi$coefficients
  # Calculate rr and # of environments used
  mc[i,"RR"] <- 1 - sum((xri$DTF - xri$Predicted_DTF)^2, na.rm = T) /
    sum((xri$Predicted_DTF - mean(xri$DTF, na.rm = T))^2, na.rm = T)
  mc[i,"Environments"] <- length(unique(xri$Expt[!is.na(xri$DTF)]))
  mc[i,"aP"] <- summary(mi)[[4]][1,4]
  mc[i,"bP"] <- summary(mi)[[4]][2,4]
  mc[i,"cP"] <- summary(mi)[[4]][3,4]
  mc[i,"dP"] <- summary(mi)[[4]][4,4]
}
mr <- mr %>% mutate(Expt = factor(Expt, levels = names_Expt))
md <- md %>% mutate(Expt = factor(Expt, levels = names_Expt))
# Save Results
write.csv(mr, "data/model_TxP.csv", row.names = F)
write.csv(md, "data/model_TxP_d.csv", row.names = F)
write.csv(mc, "data/model_TxP_Coefs.csv", row.names = F)

# Prep data
xx <- read.csv("data/model_TxP_d.csv") %>% mutate(Expt = factor(Expt, levels = names_Expt))
# Plot Observed vs Predicted
mp <- gg_model_1(xx, title = "Model = T x P")
ggsave("Additional/Model/Model_1_2.png", mp, width = 7, height = 5)


```

Model = T + P

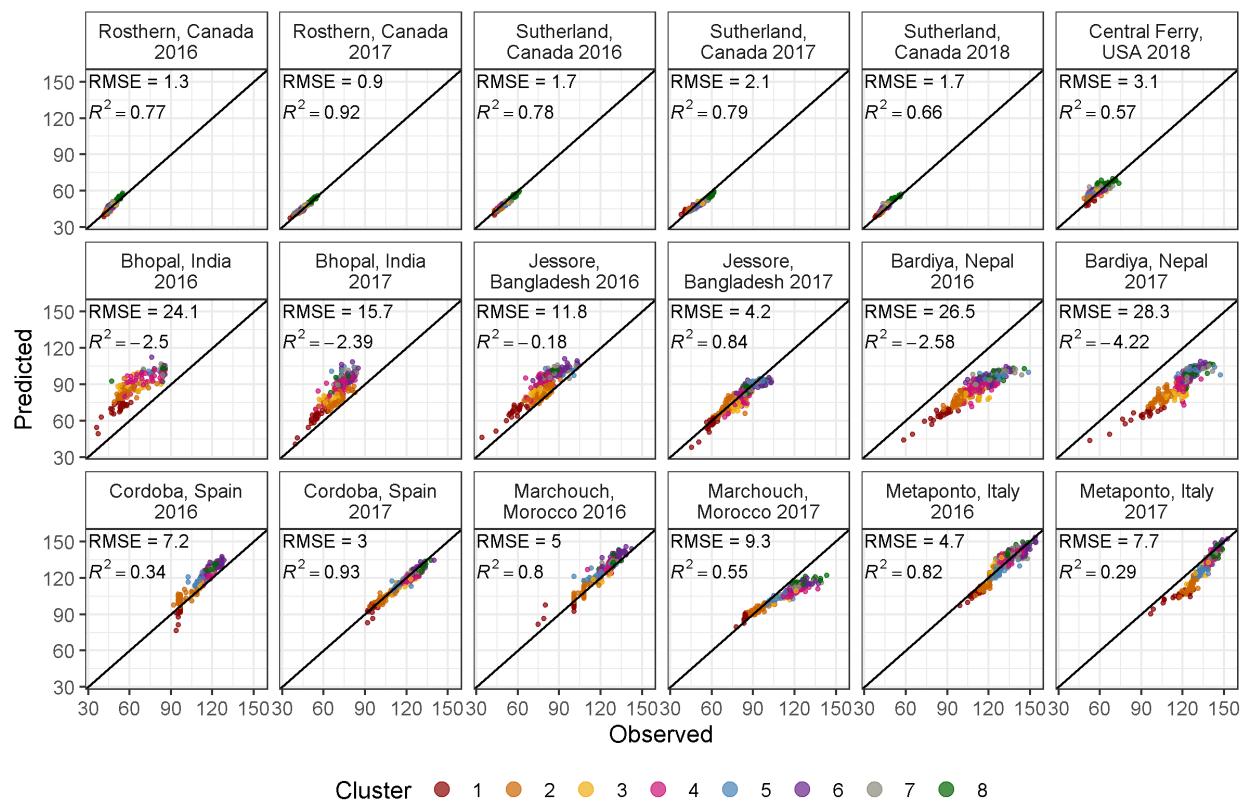

```
# Plot Observed vs Predicted
mp <- gg_model_2(xx, title = "Model = T x P")
ggsave("Additional/Model/Model_2_2.png", mp, width = 8, height = 5.5)
```

Model = T x P

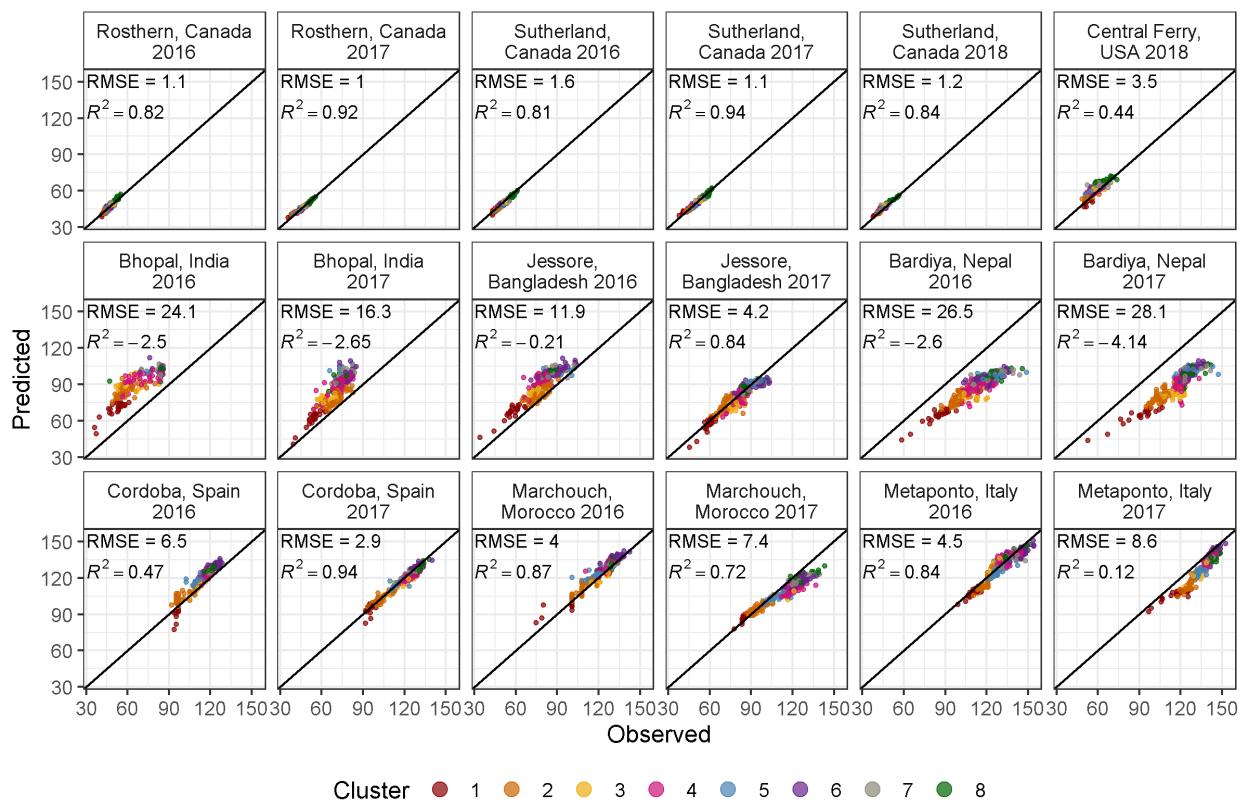

Supplemental Table 3 Model Constants

```
# Prep data
x1 <- read.csv("data/model_T+P_Coefs.csv")
x2 <- read.csv("data/model_TxP_Coefs.csv")
xx <- bind_rows(x1, x2) %>% arrange(Entry) %>%
  select(Entry, Name, a, b, c, d, RR, Environments,
         a_p.value=aP, b_p.value=bP, c_p.value=cP, d_p.value=dP)
# Save
write.csv(xx, "Supplemental_Table_03.csv", na = "", row.names = F)
```

Additional Figure 10 significant T x P interactions

```
# Prep data
x1 <- read.csv("data/model_T+P_Coefs.csv") %>% mutate(Model = "T + P")
x2 <- read.csv("data/model_TxP_Coefs.csv") %>% mutate(Model = "T x P")
xx <- bind_rows(x1, x2) %>% arrange(Entry) %>%
  left_join(select(ldp, Entry, Origin), by = "Entry") %>%
  select(Entry, Name, Model, a, b, c, d, RR, Environments, aP, bP, cP, dP)
ents <- x2 %>% filter(dP < 0.05) %>% pull(Entry)
```

```

xx <- xx %>% filter(Entry %in% ents)
write.csv(xx, "Additional/Additional_Table_01.csv", na = "", row.names = F)
xx <- xx %>% arrange(RR) %>% mutate(Entry = factor(Entry, levels = unique(Entry)))
length(ents)


```

[1] 31

```

# Plot
mp <- ggplot(xx, aes(x = Entry, y = RR, fill = Model)) +
  geom_bar(stat = "identity", position = "dodge") +
  scale_y_continuous(breaks = seq(0,1,0.1), minor_breaks = seq(0,1,0.01)) +
  theme(legend.position = "top")
ggsave("Additional/Additional_Figure_10_TxPRR.png" ,mp, width = 7, height = 5)

```

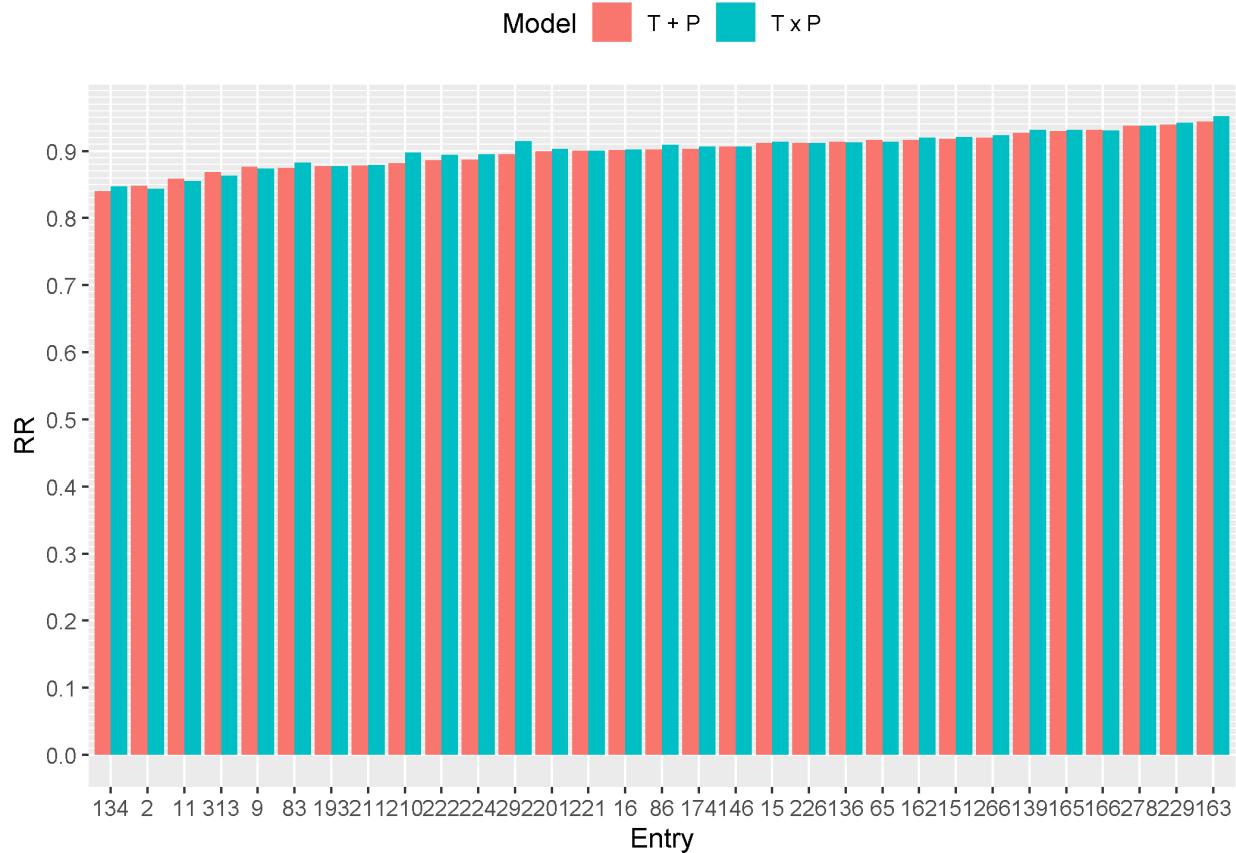

Supplemental Figure 5 Model T + P vs T x P

```


# Prep data
xx <- read.csv("data/model_T+P_d.csv") %>% mutate(Expt = factor(Expt, levels = names_Expt))
# Plot Observed vs Predicted
mp1 <- gg_model_1(xx, title = expression(paste("A" , italic(" 1 / f = a + bT + cP"))))
# Prep data

```

```

xx <- read.csv("data/model_TxP_d.csv") %>% mutate(Expt = factor(Expt, levels = names_Expt))
# Plot Observed vs Predicted
mp2 <- gg_model_1(xx, title = expression(paste("B ", italic(" 1 / f = a + bT + cP + dTP"))))
# Append
mp <- ggarrange(mp1, mp2, ncol = 2, common.legend = T, legend = "right")
ggsave("Supplemental_Figure_05_Models.png", mp, width = 12, height = 5)

```

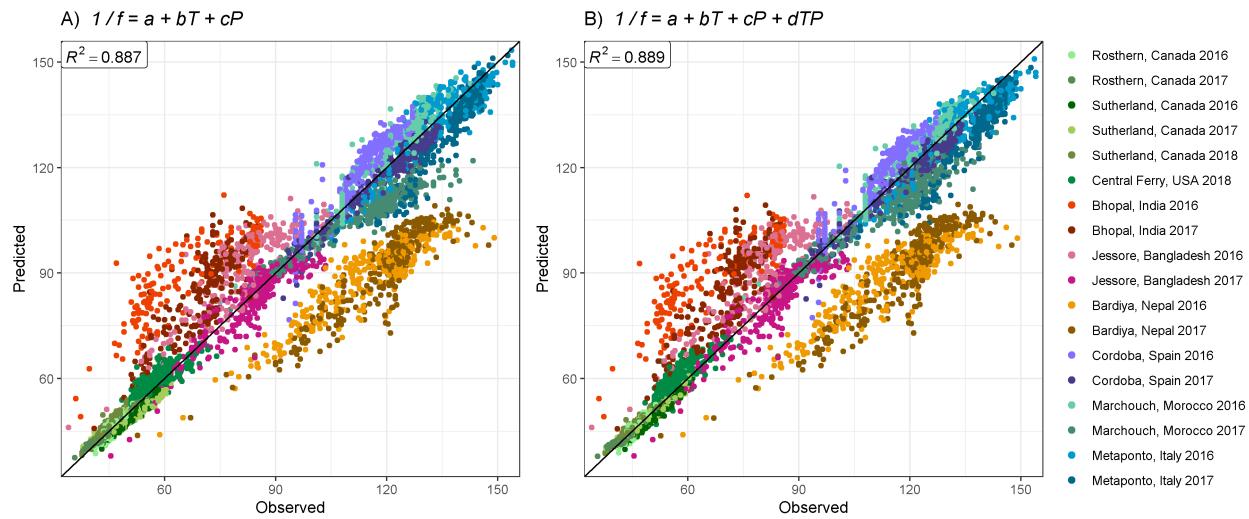


## Additional Figure 11 Constants

```


# Prep data
pca <- read.csv("data/data_PCA_Results.csv") %>% mutate(Cluster = factor(Cluster))
x1 <- read.csv("data/model_T+P_Coefs.csv") %>% mutate(Model = "T+P")
x2 <- read.csv("data/model_TxP_Coefs.csv") %>% mutate(Model = "TxP")
xx <- bind_rows(x1, x2) %>%
  gather(Coef, Value, a,b,c,d) %>%
  left_join(pca, by = "Entry") %>% mutate(Cluster = factor(Cluster))
# Plot
mp1 <- ggplot(xx %>% filter(Model == "T+P"), aes(x = Cluster, y = Value, color = Cluster)) +
  geom_quasirandom() + theme_AGL +
  facet_grid(Coef ~ Model, scales = "free_y") +
  scale_color_manual(values = colors) + labs(y = NULL)
mp2 <- ggplot(xx %>% filter(Model == "TxP"), aes(x = Cluster, y = Value, color = Cluster)) +
  geom_quasirandom() + theme_AGL +
  facet_grid(Coef ~ Model, scales = "free_y") +
  scale_color_manual(values = colors) + labs(y = NULL)
mp <- ggarrange(mp1, mp2, ncol = 2, legend = "none")
ggsave("Additional/Additional_Figure_11_Coefs.png", mp, width = 8, height = 5)

```

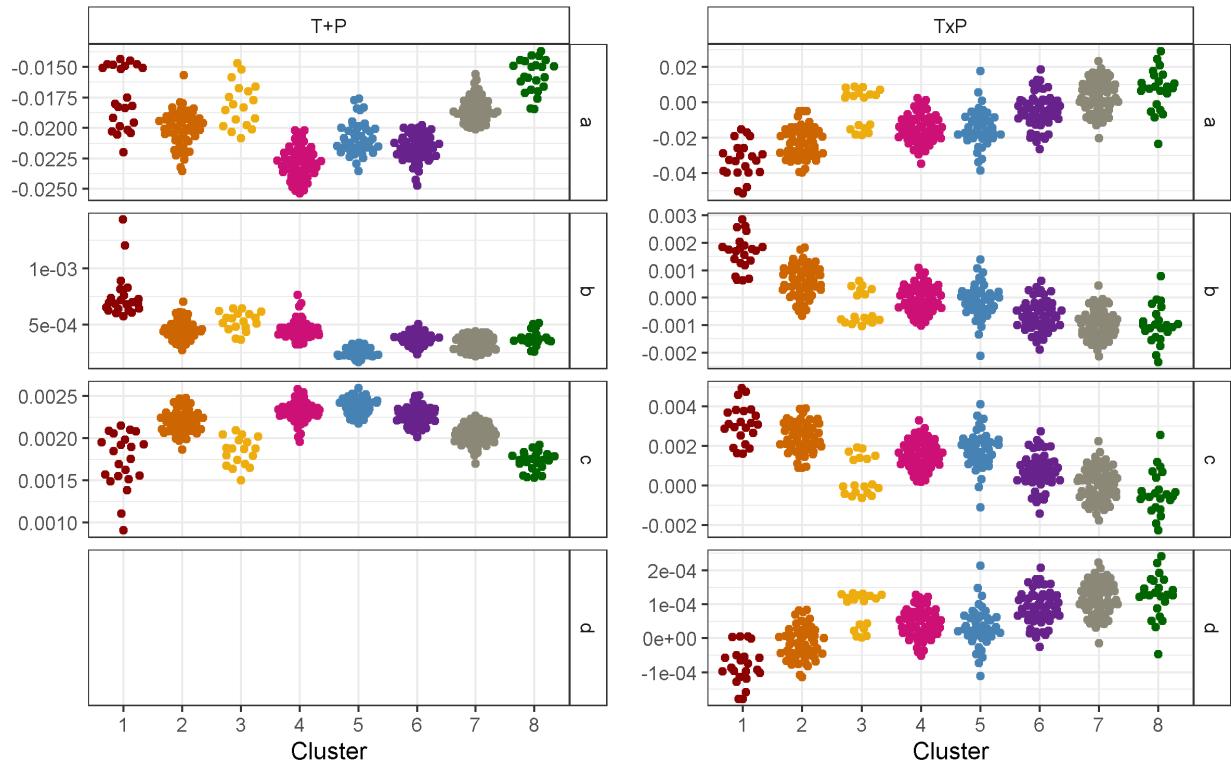

**Additional Figure 12 Coefficient p-values**

```
# Prep data
pca <- read.csv("data/data_PCA_Results.csv") %>% mutate(Cluster = factor(Cluster))
x1 <- read.csv("data/model_T+P_Coefs.csv") %>% mutate(Model = "T+P")
x2 <- read.csv("data/model_TxP_Coefs.csv") %>% mutate(Model = "TxP")
xx <- bind_rows(x1, x2) %>% gather(Coef, Value, aP,bP,cP,dP) %>
  left_join(pca, by = "Entry") %>% mutate(Cluster = factor(Cluster))
# Plot
mp1 <- ggplot(xx%>%filter(Model=="T+P"), aes(x = Cluster, y = Value, color = Cluster)) +
  geom_quasirandom() + theme_AGL +
  facet_grid(Coef~Model, scales = "free_y") +
  scale_color_manual(values = colors)
mp2 <- ggplot(xx%>%filter(Model=="TxP"), aes(x = Cluster, y = Value, color = Cluster)) +
  geom_quasirandom() + theme_AGL +
  facet_grid(Coef~Model, scales = "free_y") +
  scale_color_manual(values = colors)
mp <- ggarrange(mp1,mp2,ncol=2, legend = "none")
ggsave("Additional/Additional_Figure_12_CoefsP.png", mp, width = 8, height = 5)
```

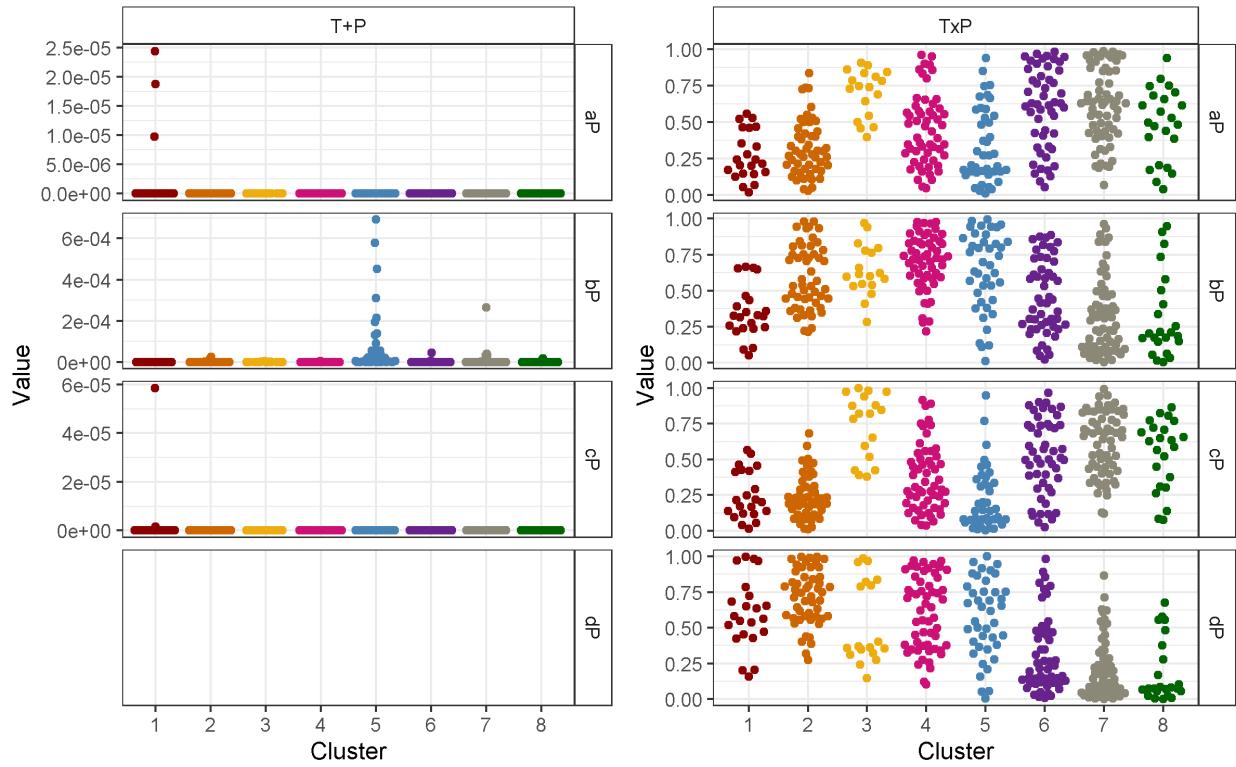

Additional Figure 13 p-values b c


```
# Prep data
pca <- read.csv("data/data_PCA_Results.csv") %>% mutate(Cluster = factor(Cluster))
xx <- read.csv("data/model_T+P_Coefs.csv") %>%
  mutate(Sig = factor(ifelse(bP > 0.0001, "Sig", "Less Sig"))) %>%
  select(Entry, Sig, p.value=bP, b) %>%
  gather(Trait, Value, p.value, b) %>%
  left_join(pca, by = "Entry")
x1 <- xx %>% filter(Sig == "Sig", Trait == "p.value")
# Plot A)
mp1 <- ggplot(xx, aes(x = 1, y = Value)) +
  geom_quasirandom(aes(color = Cluster)) +
  geom_point(data = x1, size = 2.5, pch = 25, color = "black", fill = "darkblue") +
  geom_text_repel(data = x1, aes(label = Entry)) +
  facet_wrap(~Trait, scales = "free_y") +
  theme_AGL +
  scale_color_manual(values = colors) +
  guides(colour = guide_legend(nrow = 1, override.aes = list(size = 3))) +
  labs(title = "A)", x = NULL, y = NULL)

# Prep data
xx <- read.csv("data/model_T+P_Coefs.csv") %>%
  mutate(Sig = factor(ifelse(cP > 0.000001, "Sig", "Less Sig"))) %>%
  select(Entry, Sig, p.value=cP, c) %>%
  gather(Trait, Value, p.value, c) %>%
  left_join(pca, by = "Entry")
```

```

x1 <- xx %>% filter(Sig == "Sig")
# Plot B)
mp2 <- ggplot(xx, aes(x = 1, y = Value)) +
  geom_quasirandom(aes(color = Cluster)) +
  geom_point(data = x1, size = 2.5, pch = 25, color = "black", fill = "darkred") +
  geom_text_repel(data = x1 %>% filter(Trait == "p.value"), aes(label = Entry)) +
  facet_wrap(~Trait, scales = "free_y") +
  theme_AGL +
  scale_color_manual(values = colors) +
  guides(colour = guide_legend(nrow = 1, override.aes = list(size = 3))) +
  labs(title = "B)", x = NULL, y = NULL)
# Append A) and B)
mp <- ggarrange(mp1, mp2, ncol = 2, common.legend = T, legend = "bottom")
ggsave("Additional/Additional_Figure_13_bP.png", mp, width = 8, height = 4)

```

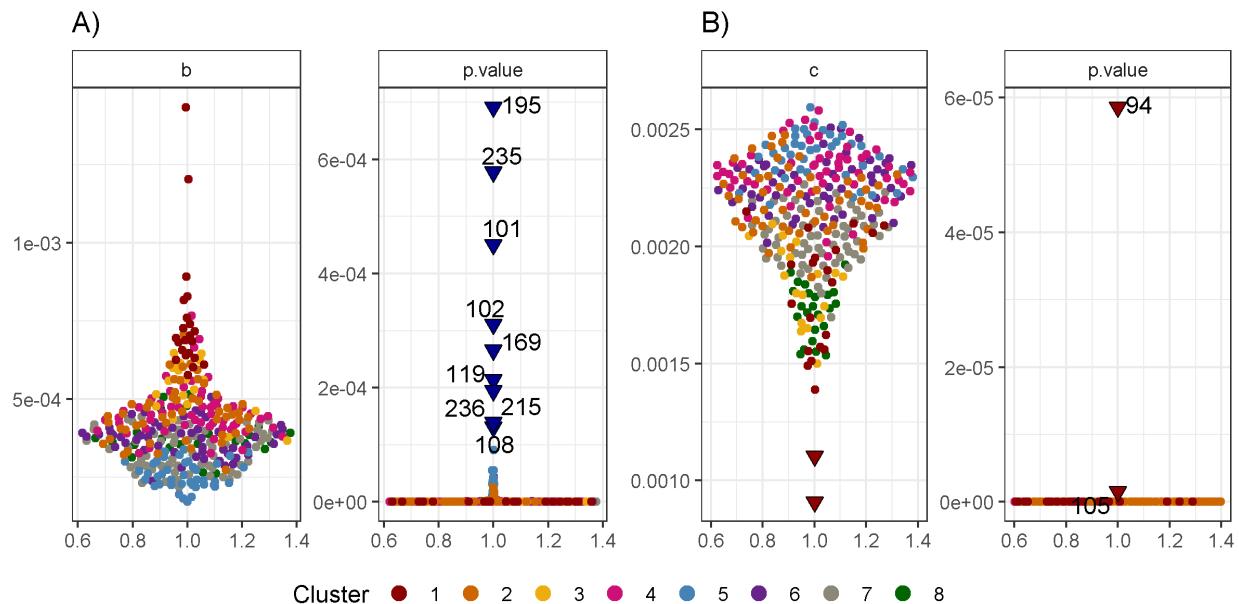

## Modeling DTF (T + P) - Location Out

Train the model without the location used for prediction

```

#####
# 1/f = a + bT + cP (Location Out) #
#####

# Prep data
xx <- rr %>% filter(!is.na(RDTF)) %>%
  left_join(select(ff, Expt, T_mean, P_mean), by = "Expt")
mr <- NULL; md <- NULL
# Model - For each Location, the model is re-trained without that locations data
for(i in 1:324) {
  for(k in unique(xx$Location)) {
    # Prep data
    xi1 <- xx %>% filter(Entry == i, Location != k)
  }
}

```

```

xi2 <- xx %>% filter(Entry == i, Location == k)
xd2 <- xi2 %>% group_by(Entry, Name, Expt, ExptShort) %>%
  summarise_at(vars(DTF, RDTF, T_mean, P_mean), funs(mean), na.rm = T) %>%
  ungroup()
# Train model
mi <- lm(RDTF ~ T_mean * P_mean, data = xi1)
# Predict DTF
xi2 <- xi2 %>% mutate(Predicted_DTF = 1 / predict(mi, newdata = xi2))
xd2 <- xd2 %>% mutate(Predicted_DTF = 1 / predict(mi, newdata = xd2))
# Save to table
mr <- bind_rows(mr, xi2)
md <- bind_rows(md, xd2)
}
}
# Save Results
write.csv(mr, "data/model_Test.csv", row.names = F)
write.csv(md, "data/model_Test_d.csv", row.names = F)

```


## Figure 4 Test Model

```

# Prep data
xx <- read.csv("data/model_Test_d.csv") %>% mutate(Expt = factor(Expt, levels = names_Expt))
# Plot Observed vs Predicted
mp <- gg_model_1(xx, title = "Model = T + P | Location Out")
ggsave("Additional/Model/Model_1_3.png", mp, width = 7, height = 5)

```

Model = T + P | Location Out

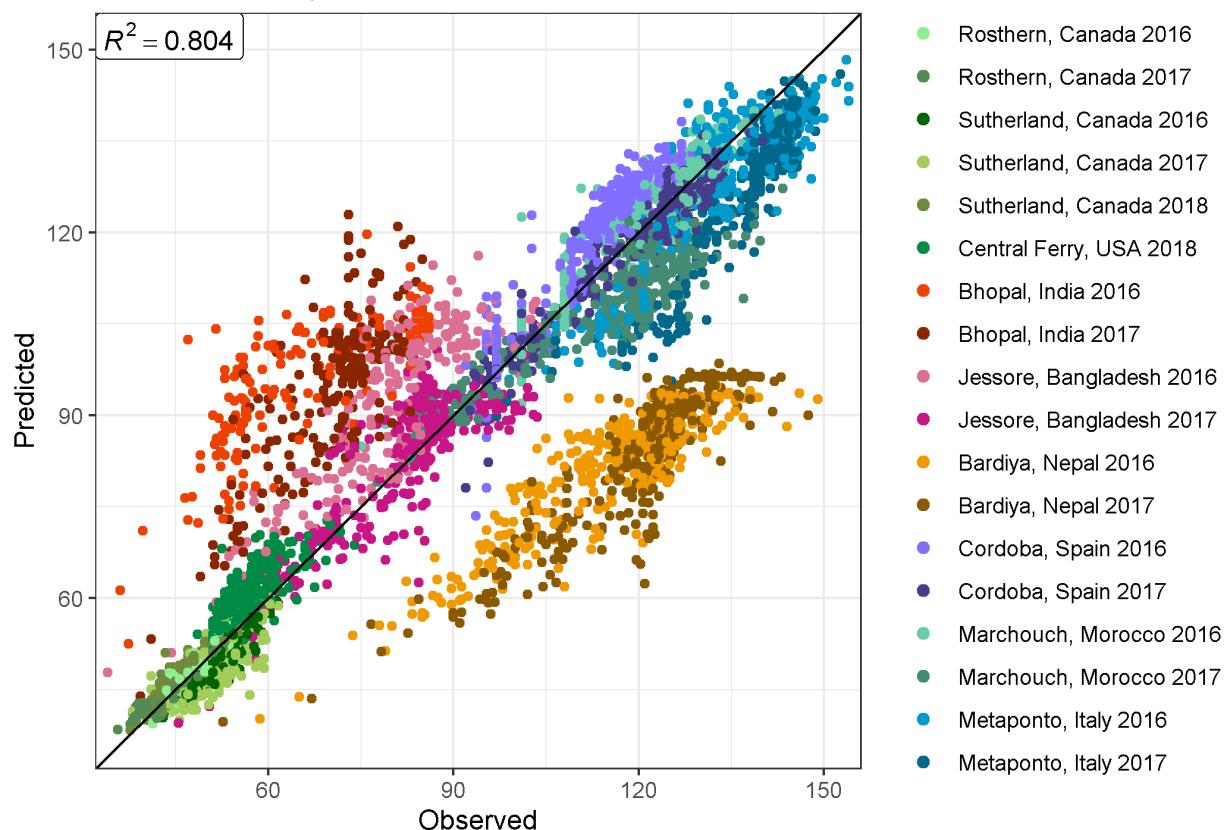

```
modelR2(xx$DTF, xx$Predicted_DTF)
```


```
[1] 0.8035367
```

```
modelRMSE(xx$DTF, xx$Predicted_DTF)
```

```
[1] 15.04869
```

```
# Plot A)
mp <- gg_model_2(xx, title = expression(paste("Overall: ",
      italic("R")^2, " = 0.804 | RMSE = 15.0")))
ggsave("Figure_04_ModelPrediction.png", mp, width = 8, height = 5.5)
mp <- gg_model_2(xx, title = "Model = T + P | Location Out")
ggsave("Additional/Model/Model_2_3.png", mp, width = 8, height = 5.5)
```

Overall:  $R^2 = 0.804$  | RMSE = 15.0

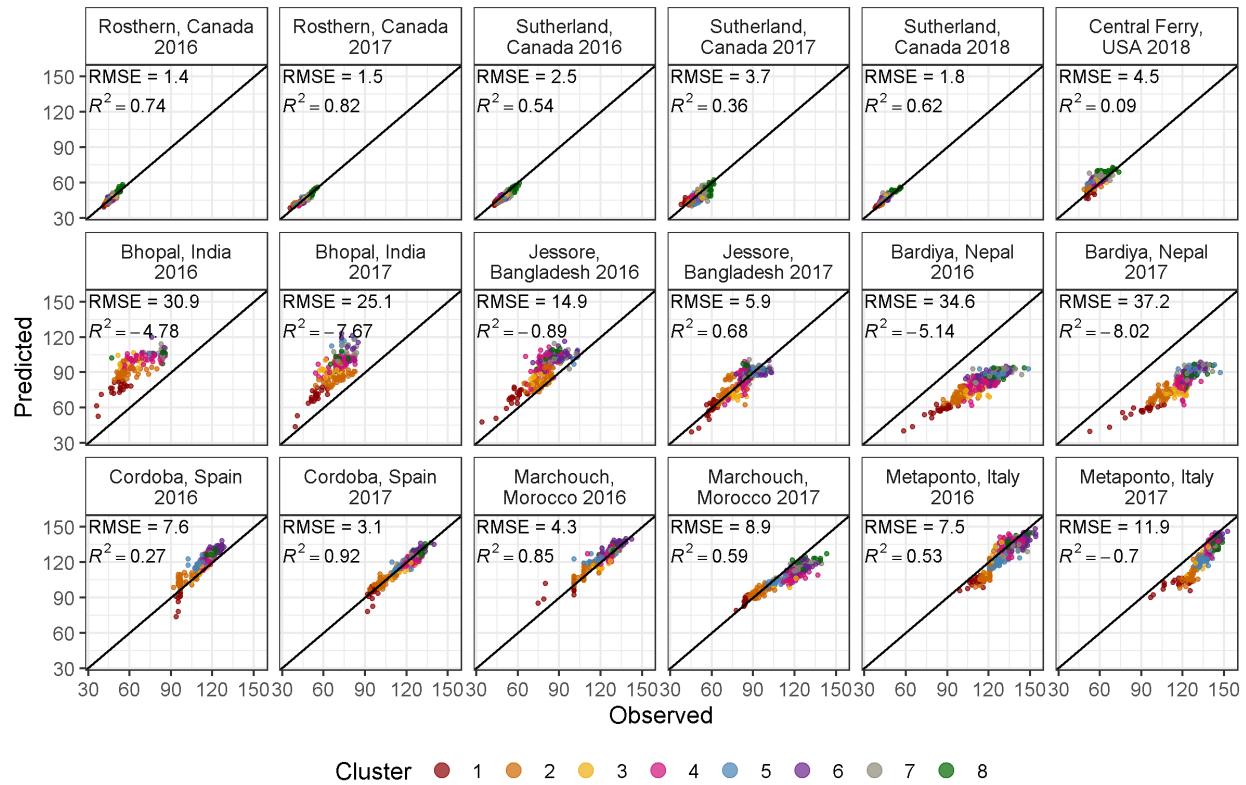

#### Supplemental Table 4 Test Model

```
#####
# 1/f = a + bT + cP (3 Locations) #
#####

# Prep data
xx <- rr %>% #filter(!is.na(DTF)) %>%
  left_join(select(ff, Expt, T_mean, P_mean), by = "Expt")
mt <- data.frame(Temperate_Location      = rep(names_ExptShort[1:6],  each = 36),
                  SouthAsian_Location    = rep(names_ExptShort[7:12], times = 36)) %>%
  arrange(SouthAsian_Location) %>%
  mutate(Mediterranean_Location = rep(names_ExptShort[13:18], 36),
         RR = NA, Genotypes = NA)
sum(duplicated(paste(mt$Temperate_Location, mt$SouthAsian_Location, mt$Mediterranean_Location)))
# Run each combination
for(t in names_ExptShort[1:6]) { # Temperate site-years
  for(s in names_ExptShort[7:12]) { # South asian site-years
    for(m in names_ExptShort[13:18]) { # Mediterranean site-years
      mr <- NULL; md <- NULL
      for(i in 1:324) {
        # Prep data
        xi1 <- xx %>% filter(Entry == i, ExptShort %in% c(t, s, m))
        xi2 <- xx %>% filter(Entry == i)
```

```

xd2 <- xi2 %>% group_by(Entry, Name, Expt, ExptShort) %>%
  summarise_at(vars(DTF, RDTF, T_mean, P_mean), funs(mean), na.rm = T) %>%
  ungroup()
# Train model
mi <- lm(RDTF ~ T_mean + P_mean, data = xi1)
# Predict DTF
xi2 <- xi2 %>% mutate(Predicted_DTF = 1 / predict(mi, newdata = xi2))
xd2 <- xd2 %>% mutate(Predicted_DTF = 1 / predict(mi, newdata = xd2))
# Save to table
mr <- bind_rows(mr, xi2)
md <- bind_rows(md, xd2)
}
remEntries <- unique(md$Entry[is.na(md$DTF) & md$ExptShort %in% c(t, s, m)])
md2 <- md %>% filter(!Entry %in% remEntries, !md$ExptShort %in% c(t, s, m))
myrow <- mt$Temperate_Location==t & mt$SouthAsian_Location==s & mt$Mediterranean_Location==m
mt[myrow, "RR"] <- round(modelR2(md2$DTF, md2$Predicted_DTF), 6)
mt[myrow, "Genotypes"] <- length(unique(md2$Entry))
}
}
}
# Save
write.csv(mt %>% arrange(RR), "Supplemental_Table_04.csv", row.names = F)

```

## Modeling DTF (T + P) - 3 Best

```

#####
# 1/f = a + bT + cP (3 Locations) #
#####
# Prep data
xx <- rr %>% filter(!is.na(RDTF)) %>%
  left_join(select(ff, Expt, T_mean, P_mean), by = "Expt")
mr <- NULL; md <- NULL
mc <- select(ldp, Entry, Name) %>%
  mutate(a = NA, b = NA, c = NA, RR = NA, Environments = NA )
k <- c("Sutherland, Canada 2016", "Jessore, Bangladesh 2017", "Cordoba, Spain 2017")
# Model - only the ^above^ three site-years are used to train the model
for(i in 1:324) {
  # Prep data
  xi1 <- xx %>% filter(Entry == i, Expt %in% k)
  xi2 <- xx %>% filter(Entry == i)
  xd2 <- xi2 %>% group_by(Entry, Name, Expt, ExptShort) %>%
    summarise_at(vars(DTF, RDTF, T_mean, P_mean), funs(mean), na.rm = T) %>%
    ungroup()
  # Train model
  mi <- lm(RDTF ~ T_mean * P_mean, data = xi1)
  # Predict DTF
  xi2 <- xi2 %>% mutate(Predicted_DTF = 1 / predict(mi, newdata = xi2))
  xd2 <- xd2 %>% mutate(Predicted_DTF = 1 / predict(mi, newdata = xd2))
  # Save to table
  mr <- bind_rows(mr, xi2)
  md <- bind_rows(md, xd2)
}
```

```

# Save coefficients
mc[i,c(3:5)] <- mi$coefficients
# Calculate rr and # of environments used
mc[i,6] <- 1 - sum((xi2$DTF - xi2$Predicted_DTF)^2) /
  sum((xi2$Predicted_DTF - mean(xi2$DTF))^2)
mc[i,7] <- length(unique(xi2$Expt))
}
ents <- xx %>% filter(ExptShort %in% c("Su16", "Ba17", "Sp17"), is.na(DTF)) %>%
  pull(Entry) %>% unique()
mr <- mr %>% filter(!Entry %in% ents)
md <- md %>% filter(!Entry %in% ents)
mc <- mc %>% filter(!Entry %in% ents)
# Save Results
write.csv(mr, "data/model_3best.csv", row.names = F)
write.csv(md, "data/model_3best_d.csv", row.names = F)
write.csv(mc, "data/model_3best_Coefs.csv", row.names = F)


# Prep data
xx <- read.csv("data/model_3best_d.csv") %>% mutate(Expt = factor(Expt, levels = names_Expt))
length(unique(xx$Entry))

[1] 291

# Plot Observed vs Predicted
mp <- gg_model_1(xx, title = "3 Best Locations | Su16,Ba17,Sp17 | 291/324")
ggsave("Additional/Model/Model_1_4.png", mp, width = 7, height = 5)


```

### 3 Best Locations | Su16,Ba17,Sp17 | 291/324

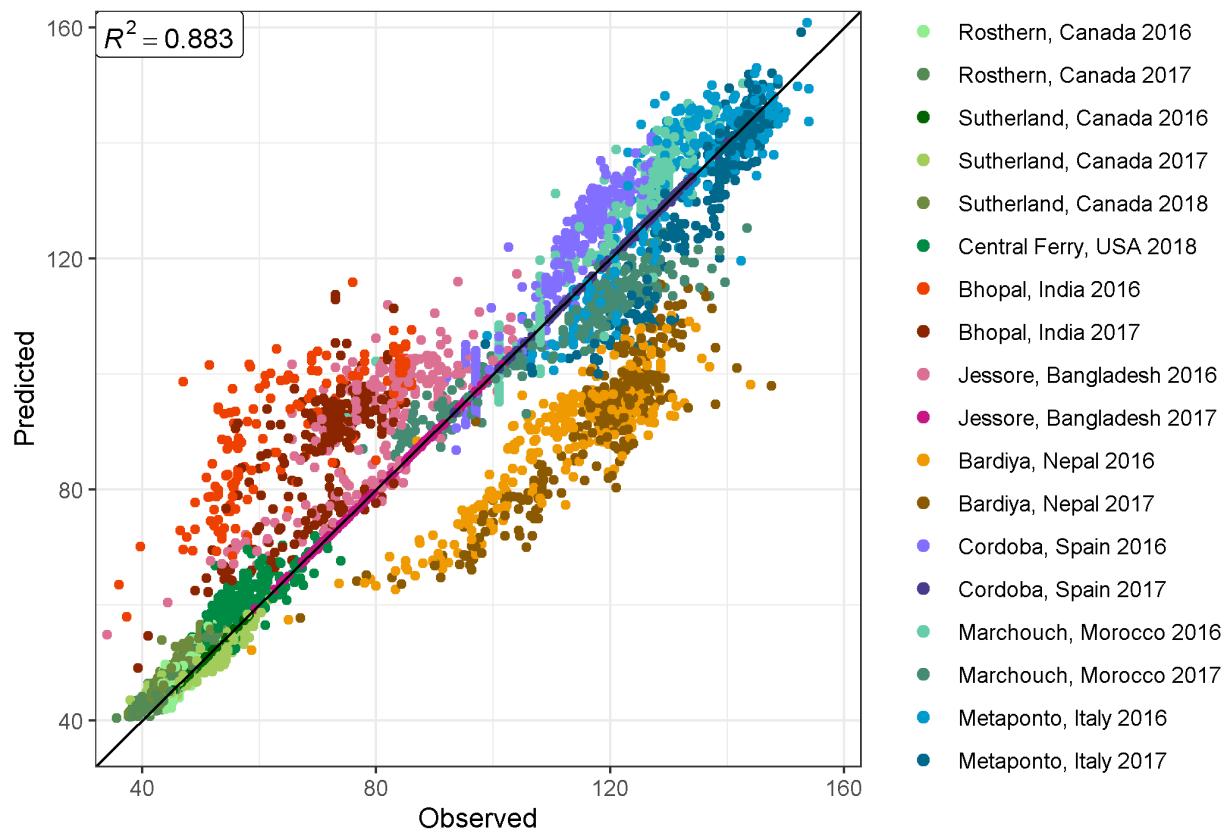

```
# Plot B)
mp <- gg_model_2(xx, title = "3 Best Locations | Su16,Ba17,Sp17 | 291/324")
ggsave("Additional/Model/Model_2_4.png", mp, width = 8, height = 5.5)
```

### 3 Best Locations | Su16,Ba17,Sp17 | 291/324

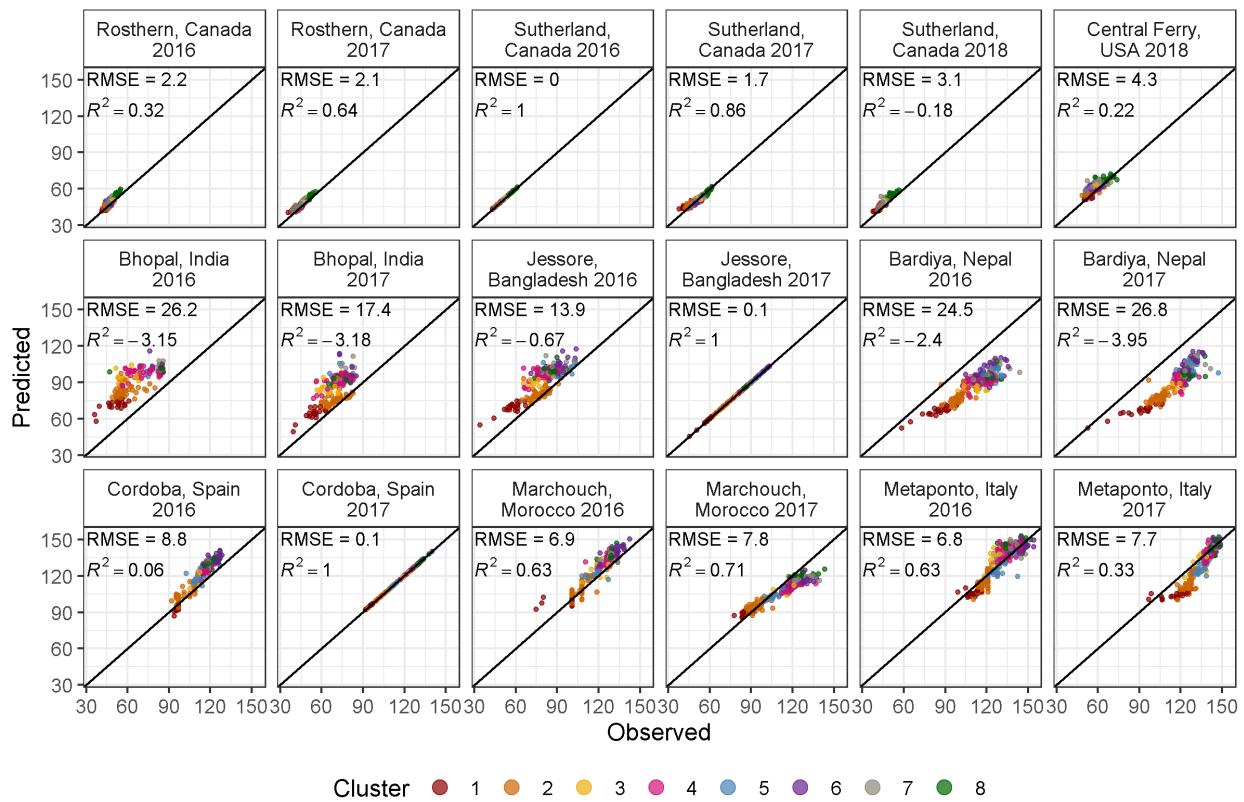

### Modeling DTF (T + P) - 3 Worst

```
#####
# 1/f = a + bT + cP (3 Locations) #
#####
# Prep data
xx <- rr %>% filter(!is.na(RDTF)) %>%
  left_join(select(ff, Expt, T_mean, P_mean), by = "Expt")
mr <- NULL; md <- NULL
mc <- select(ldp, Entry, Name) %>%
  mutate(a = NA, b = NA, c = NA, RR = NA, Environments = NA )
k <- c("Sutherland, Canada 2018", "Bhopal, India 2016", "Cordoba, Spain 2016")
# Model - only the ^above^ three site-years are used to train the model
for(i in 1:324) {
  # Prep data
  xi1 <- xx %>% filter(Entry == i, Expt %in% k)
  xi2 <- xx %>% filter(Entry == i)
  xd2 <- xi2 %>% group_by(Entry, Name, Expt, ExptShort) %>%
    summarise_at(vars(DTF, RDTF, T_mean, P_mean), funs(mean), na.rm = T) %>%
    ungroup()
  # Train model
  mi <- lm(RDTF ~ T_mean * P_mean, data = xi1)
  # Predict DTF
```

```

xi2 <- xi2 %>% mutate(Predicted_DTF = 1 / predict(mi, newdata = xi2))
xd2 <- xd2 %>% mutate(Predicted_DTF = 1 / predict(mi, newdata = xd2))
# Save to table
mr <- bind_rows(mr, xi2)
md <- bind_rows(md, xd2)
# Save coefficients
mc[i,c(3:5)] <- mi$coefficients
# Calculate rr and # of environments used
mc[i,6] <- 1 - sum((xi2$DTF - xi2$Predicted_DTF)^2) /
  sum((xi2$Predicted_DTF - mean(xi2$DTF))^2)
mc[i,7] <- length(unique(xi2$Expt))
}
ents <- xx %>% filter(ExptShort %in% c("Su18", "In16", "Sp16"), is.na(DTF)) %>%
  pull(Entry) %>% unique()
mr <- mr %>% filter(!Entry %in% ents)
md <- md %>% filter(!Entry %in% ents)
mc <- mc %>% filter(!Entry %in% ents)
# Save Results
write.csv(mr, "data/model_3Worst.csv", row.names = F)
write.csv(md, "data/model_3Worst_d.csv", row.names = F)
write.csv(mc, "data/model_3Worst_Coefs.csv", row.names = F)


# Prep data
xx <- read.csv("data/model_3Worst_d.csv") %>% mutate(Expt = factor(Expt, levels = names_Expt))
length(unique(xx$Entry))

[1] 159

# Plot Observed vs Predicted
mp <- gg_model_1(xx, title = "3 Worst Locations | Su18,In16,Sp16 | 159/324")
ggsave("Additional/Model/Model_1_5.png", mp, width = 7, height = 5)


```

### 3 Worst Locations | Su18,In16,Sp16 | 159/324

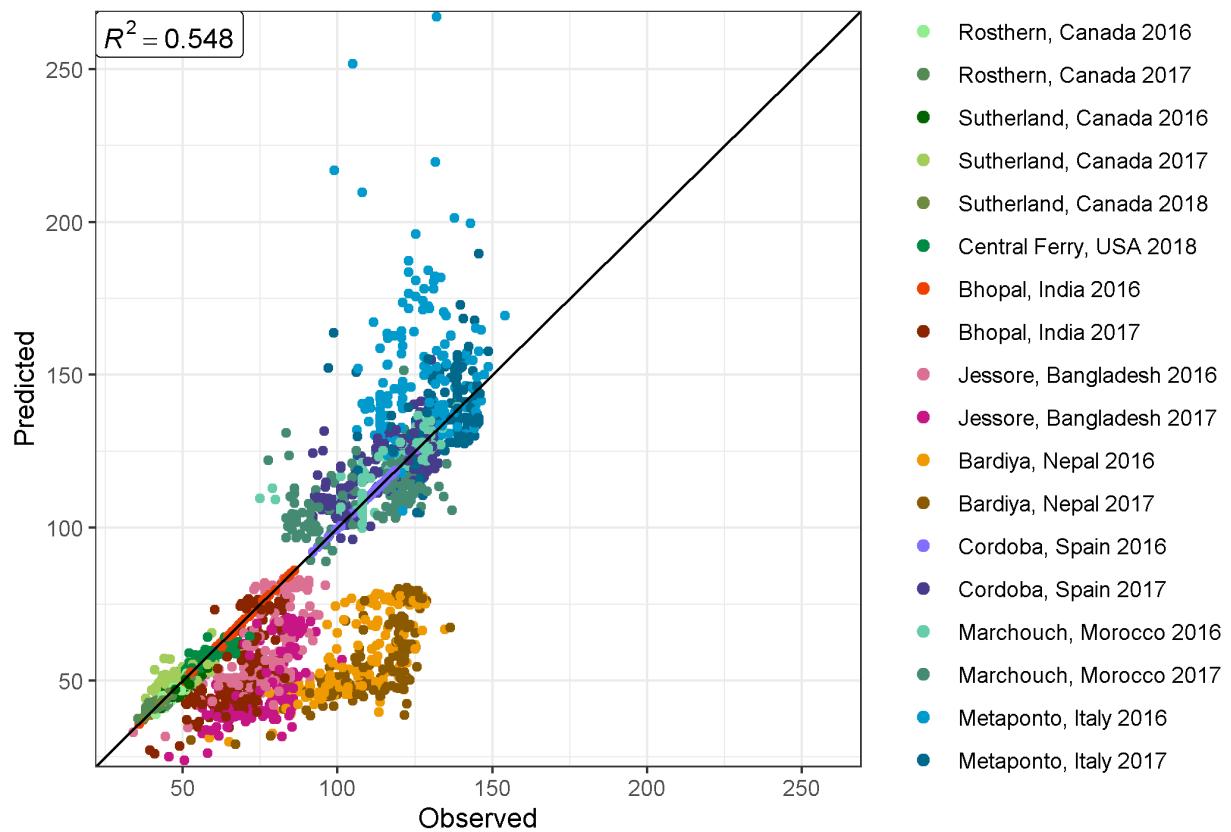

```
# Plot B)
mp <- gg_model_2(xx, title = "3 Worst Locations | Su18,In16,Sp16 | 159/324")
ggsave("Additional/Model/Model_2_5.png", mp, width = 8, height = 5.5)
```


### 3 Worst Locations | Su18,In16,Sp16 | 159/324

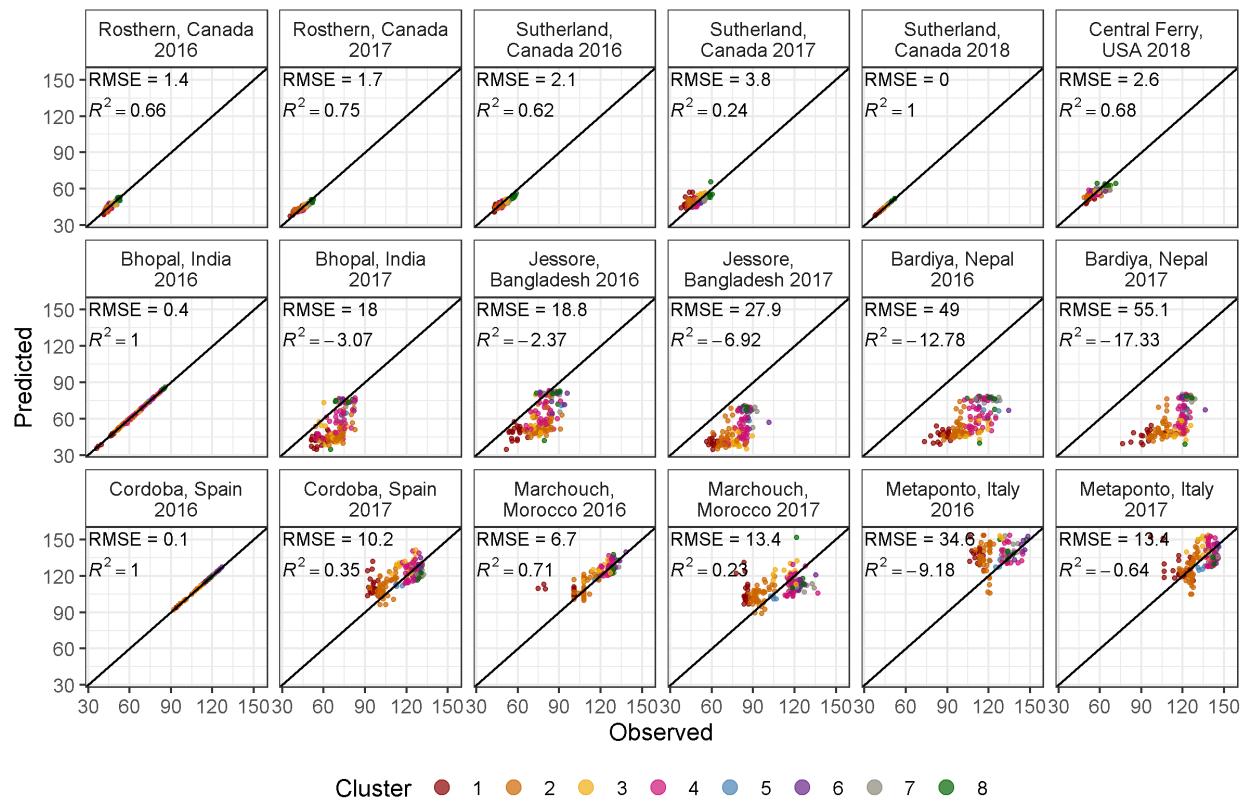

### DTF Model correlation coefficients

```
# Prep data
x1 <- read.csv("data/model_T+P_Coefs.csv") %>% mutate(Model = "T+P")
x2 <- read.csv("data/model_TxP_Coefs.csv") %>% mutate(Model = "TxP")
x3 <- read.csv("data/model_Test_Coefs.csv") %>% mutate(Model = "Test")
x4 <- read.csv("data/model_3Best_Coefs.csv") %>% mutate(Model = "3 Best")
x5 <- read.csv("data/model_3Worst_Coefs.csv") %>% mutate(Model = "3 Worst")
xx <- bind_rows(x1, x2, x3, x4, x5) %>%
  mutate(Model = factor(Model, levels = unique(Model))),
  Environments = factor(Environments))

# Plot RR
mp <- ggplot(xx, aes(x = "", y = RR)) +
  geom_violin() + geom_quasirandom(aes(color = Environments)) +
  facet_grid(. ~ Model) +
  theme_AGL + labs(x = NULL)
ggsave("Additional/Model/Model_pvalues.png", mp, width = 7, height = 4)
```

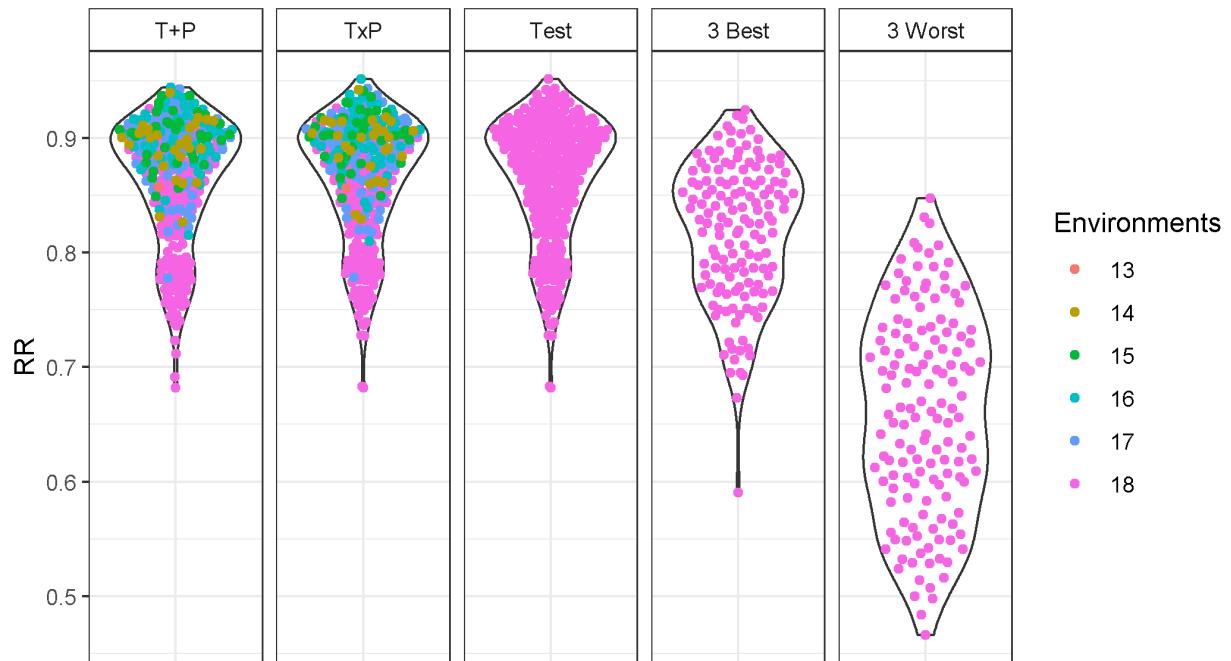

## Supplemental Figure 6 Compare Constants Entry


- Entry 76 = ILL 4400 (Syrian Local Large)
- Entry 77 = ILL 4605 (Precoz)
- Entry 118 = ILL 9
- Entry 128 = Laird

```
# Prep data
x1 <- read.csv("data/model_T+P_Coefs.csv") %>%
  filter(Entry %in% c(76, 77, 118, 128)) %>%
  mutate(Expt = "All 18 Site-years")
x2.1 <- read.csv("data/model_3Best_Coefs.csv") %>%
  filter(Entry %in% c(76, 77, 118, 128)) %>%
  mutate(Expt = "Su16-Ba17-Sp17")
x2.2 <- read.csv("data/model_3Worst_Coefs.csv") %>%
  filter(Entry %in% c(76, 77, 118, 128)) %>%
  mutate(Expt = "Su18-In16-Sp16")
# Summerfield et al., 1985
x3 <- x1 %>% mutate(Expt = "Summerfield 1985 -V")
x3[x3$Entry == 76, c("a","b","c")] <- c(-0.002918, 0, 0.0010093)
x3[x3$Entry == 77, c("a","b","c")] <- c(-0.0052226, 0.00093643, 0.00075104)
x3[x3$Entry == 118, c("a","b","c")] <- c(-0.0057408, 0.00020113, 0.0012292)
x3[x3$Entry == 128, c("a","b","c")] <- c( 0.0014689, 0.00030622, 0.00044640)
x4 <- x1 %>% mutate(Expt = "Summerfield 1985 +V")
x4[x4$Entry == 76, c("a","b","c")] <- c(-0.020910, 0.00045813, 0.0020210)
x4[x4$Entry == 77, c("a","b","c")] <- c( 0.0101590, -0.00008401, -0.00044067)
x4[x4$Entry == 118, c("a","b","c")] <- c(-0.0196948, 0.00078441, 0.0019110)
x4[x4$Entry == 128, c("a","b","c")] <- c( 0.0015094, 0.00030622, 0.00085502)
# Roberts et al., 1988
```

```

x5 <- x1 %>% filter(Entry %in% c(77, 128)) %>% mutate(Expt = "Roberts 1988")
x5[x5$Entry == 77, c("a","b","c")] <- c(-0.0112, 0.001427, 0.000871)
x5[x5$Entry == 128, c("a","b","c")] <- c(-0.008172, 0.000309, 0.001187)
#
xx <- bind_rows(x1, x2.1, x2.2, x3, x4, x5) %>%
  gather(Constant, Value, a, b, c) %>%
  mutate(Entry = factor(Entry),
         Name = plyr::mapvalues(Entry, c(76,77,118,128),
                                c("Precoz","ILL 4400","ILL 9","Laird")),
         Expt = factor(Expt, levels = c("All 18 Site-years",
                                         "Su16-Ba17-Sp17", "Su18-In16-Sp16",
                                         "Summerfield 1985 -V", "Summerfield 1985 +V", "Roberts 1988")))
# Plot
mp <- ggplot(xx, aes(x = Expt, y = Value * 10000, shape = Expt)) +
  geom_quasirandom(size = 2, width = 0.2) +
  facet_grid(Constant ~ Name, scales = "free_y") +
  scale_shape_manual(name = NULL, values = c(8,3,4,1,16,11)) +
  guides(shape=guide_legend(nrow = 3, byrow = F)) +
  theme_AGL +
  theme(legend.position = "bottom", legend.margin = unit(c(0,0,0,0), "cm"),
        strip.text.y = element_text(face = "italic"),
        panel.grid.major.x = element_blank(),
        panel.grid.minor = element_blank(),
        axis.text.x = element_blank()) +
  labs(x = NULL, y = "x 10000")
ggsave("Supplemental_Figure_06_CompareConstants.png", mp, width = 4, height = 5)


```

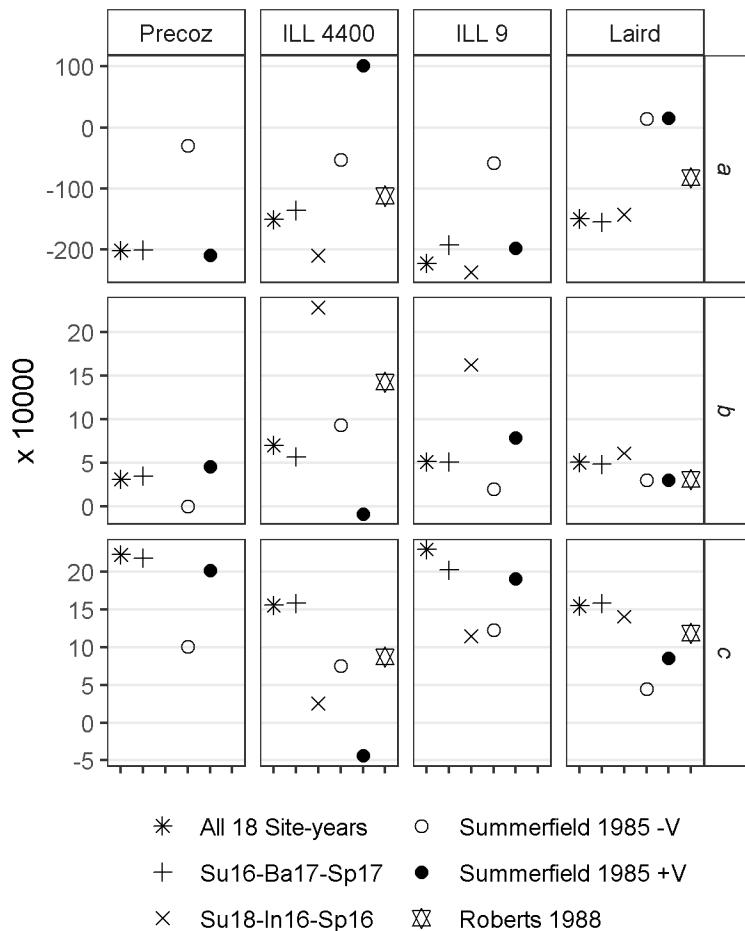


Supplemental Figure 7 3 best 3 worst

```
# Plot A)
xx <- read.csv("data/model_3best_d.csv") %>% mutate(Expt = factor(Expt, levels = names_Expt))
mp1 <- gg_model_2(xx, title = "A) 3 Best Locations | Su16-Ba17-Sp17 | 291/324")
# Plot B)
xx <- read.csv("data/model_3Worst_d.csv") %>% mutate(Expt = factor(Expt, levels = names_Expt))
mp2 <- gg_model_2(xx, title = "B) 3 Worst Locations | Su18-In16-Sp16 | 159/324")
# Append A) and B)
mp <- ggarrange(mp1, mp2, ncol = 1, common.legend = T, legend = "bottom")
ggsave("Supplemental_Figure_07_TestModel.png", mp, width = 8, height = 11)
```

A) 3 Best Locations | Su16-Ba17-Sp17 | 291/324

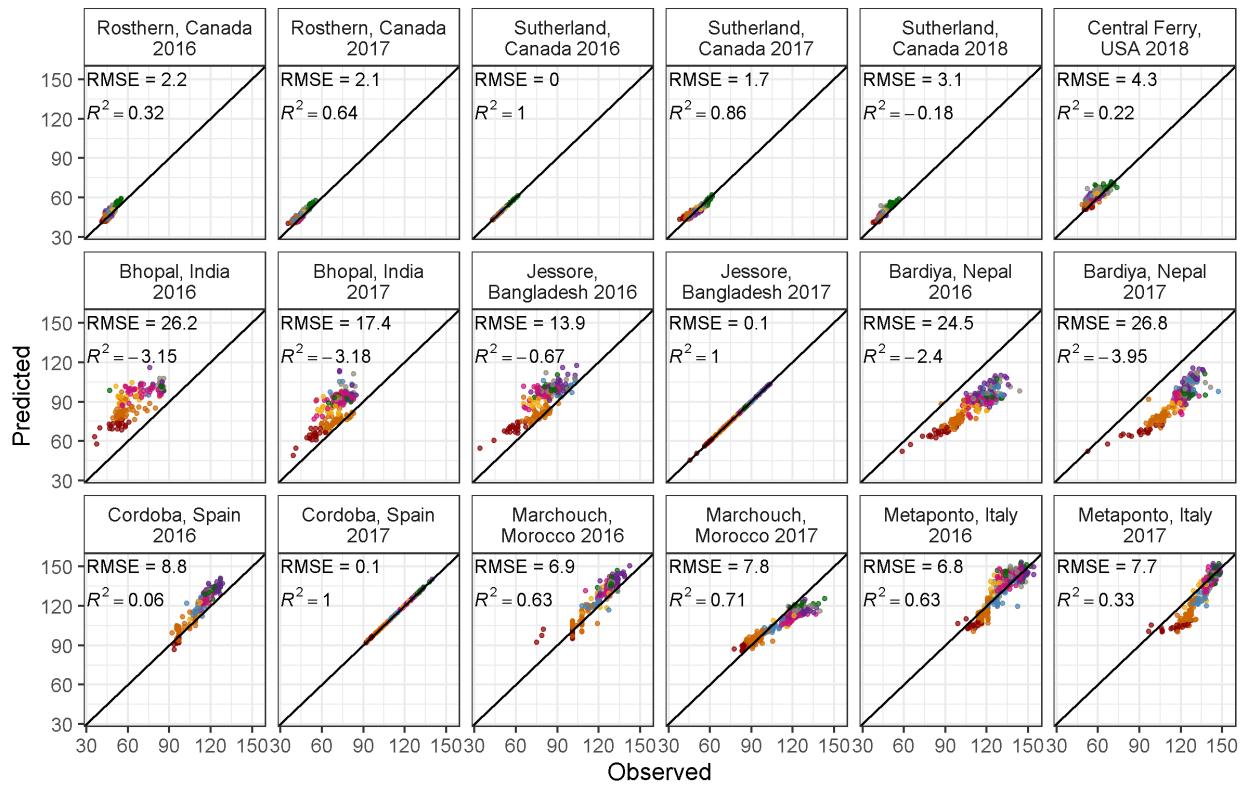

B) 3 Worst Locations | Su18-In16-Sp16 | 159/324

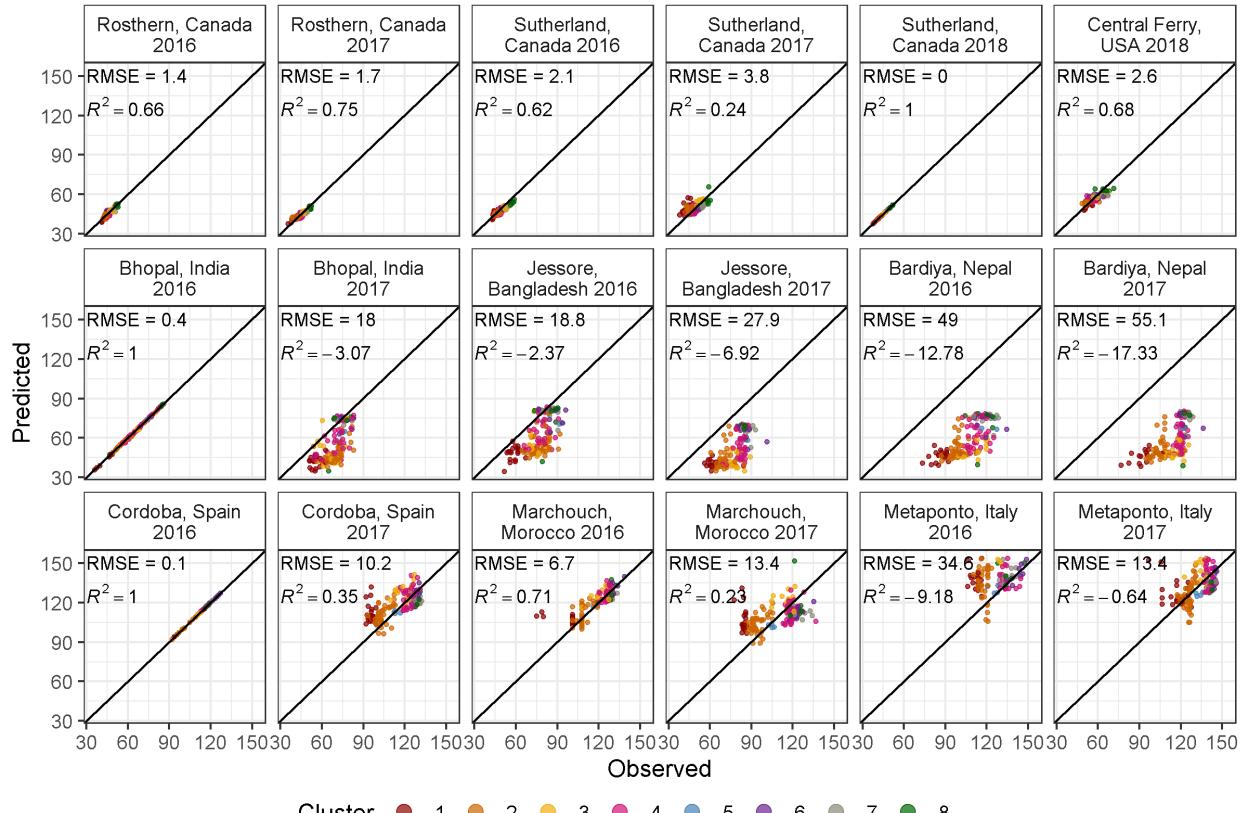

Cluster    ● 1   ● 2   ● 3   ● 4   ● 5   ● 6   ● 7   ● 8


## Supplemental Figure 8 Compare Constants All

```

# Prep data
levs <- c("All 18 Site-years", "Su16-Ba17-Sp17", "Su18-In16-Sp16")
pca <- read.csv("data/data_PCA_Results.csv") %>% select(Entry, Cluster) %>%
  mutate(Cluster = factor(Cluster))
x1 <- read.csv("data/model_T+P_Coefs.csv") %>%
  mutate(Expt = levs[1]) %>% select(-RR)
x2 <- read.csv("data/model_3Best_Coefs.csv") %>%
  mutate(Expt = levs[2])
x3 <- read.csv("data/model_3Worst_Coefs.csv") %>%
  mutate(Expt = levs[3])
xx <- bind_rows(x1, x2, x3) %>%
  left_join(pca, by = "Entry") %>%
  gather(Trait, Value, a, b, c) %>%
  mutate(Expt = factor(Expt, levels = levs))

# Plot
mp <- ggplot(xx, aes(x = Expt, y = Value * 10000)) +
  geom_violin(alpha = 0.3, color = NA, fill = "grey") +
  geom_quasirandom(aes(color = Cluster), size = 0.3) +
  facet_wrap(Trait ~ ., scales = "free") +
  scale_color_manual(values = colors, breaks = 8:1) +
  theme_AGL +
  theme(strip.text = element_text(face = "italic"),
        axis.text.x = element_text(angle = 90, vjust = 0.5, hjust = 1)) +
  guides(colour = guide_legend(override.aes = list(size = 2))) +
  labs(x = NULL, y = "x 10000")
ggsave("Supplemental_Figure_08_ConstantsCompare.png", mp, width = 6, height = 3)

```

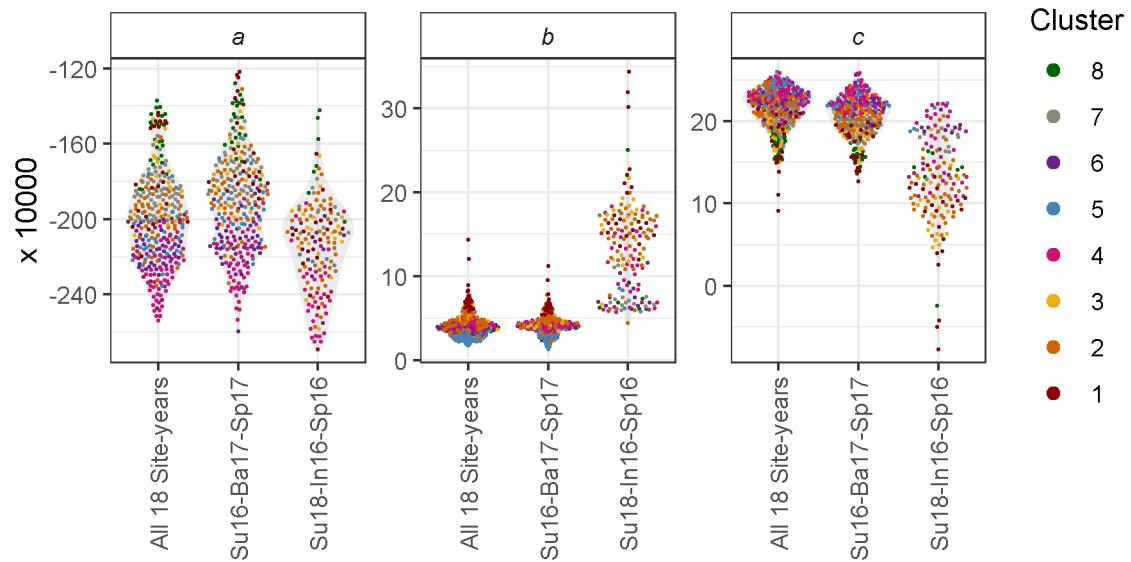

## Base Temperature & Critical Photoperiod

```

# Calculate Tf and Pf
xx <- read.csv("data/model_T+P_Coefs.csv") %>% select(-Name) %>%
  mutate(predicted_Tf = 1/b, predicted_Pf = 1/c )
xx <- rr %>% left_join(xx, by = "Entry") %>%
  left_join(select(ff, Expt, T_mean, P_mean), by = "Expt") %>%
  mutate(Tb = -(a + c * P_mean) / b,
         Pc = -(a + b * T_mean) / c,
         Tf_0 = NA, Tf_5 = NA, Tf = NA, Pf = NA, PTT = NA)
for(i in 1:nrow(xx)) {
  e1 <- ee %>% filter(Expt == xx$Expt[i])
  for(k in 1:nrow(e1)) {
    e1$Tfsum[k] <- sum(e1$Temp_mean[1:k] - xx$Tb[i])
    e1$Pfsum[k] <- sum(e1$DayLength[1:k] - xx$Pc[i])
  }
  ei <- e1 %>%
    filter(Date <= xx$PlantingDate[i] + xx$DTF2[i], !is.na(Temp_mean))
  if(nrow(ei) > 0) {
    xx$Tf_0[i] <- round(sum(ei$Temp_mean), 1)
    xx$Tf_5[i] <- round(sum(ei$Temp_mean - 5), 1)
    xx$Tf[i] <- round(sum(ei$Temp_mean - xx$Tb[i]), 1)
    xx$Pf_0[i] <- round(sum(ei$DayLength), 1)
    xx$Pf_7[i] <- round(sum(ei$DayLength - 7), 1)
    xx$Pf[i] <- round(sum(ei$DayLength - xx$Pc[i]), 1)
    xx$PTT_0[i] <- round(sum(ei$Temp_mean * ei$DayLength), 1)
    xx$PTT[i] <- round(sum((ei$Temp_mean - xx$Tb[i]) * (ei$DayLength - xx$Pc[i])), 1)
    eTf <- e1 %>% filter(Tfsum > xx$predicted_Tf[i])
    ePf <- e1 %>% filter(Pfsum > xx$predicted_Pf[i])
    xx$predicted_DTF_Tf[i] <- eTf$DaysAfterPlanting[1]
    xx$predicted_DTF_Pf[i] <- ePf$DaysAfterPlanting[1]
  }
}
xx <- xx %>% left_join(select(ff, Expt, MacroEnv), by = "Expt") %>%
  group_by(Entry, Name, Expt, ExptShort, MacroEnv) %>%
  summarise_at(vars(DTF, Tb, Pc, Tf_0, Tf_5, Tf, Pf_0, Pf_7, Pf, PTT, PTT_0,
                     predicted_DTF_Tf, predicted_DTF_Pf,
                     predicted_Pf, predicted_Tf), funs(mean), na.rm = T) %>%
  ungroup()
# Save
write.csv(xx,"data/data_Tf_Pf.csv", row.names = F)

```

Figure 5 Tb and Pc

```

# Prep data for A) a, b and c
pca <- read.csv("data/data_PCA_Results.csv") %>% select(Entry, Cluster) %>%
  mutate(Cluster = factor(Cluster))
xx <- read.csv("data/model_T+P_Coefs.csv") %>%
  left_join(pca, by = "Entry") %>%
  select(Entry, Name, Cluster, a, b, c) %>%

```

```


gather(Constant, Value, 4:ncol(.)) %>%
  mutate(Meaning = plyr::mapvalues(Constant, c("a","b","c"),
    c("", "temperature sensitivity", "photoperiod sensitivity")))
#genotypes <- c("ILL 5888", "ILL 4400", "Laird")
#x4 <- xx %>% filter(Entry %in% c(76,94,128)) %>%
#  mutate(Name = gsub(" AGL", "", Name),
#        Name = factor(Name, levels = genotypes))
x1 <- xx %>% filter(Entry %in% c(94,105), Constant != "a") %>%
  mutate(Name = gsub(" AGL", "", Name))
# Plot A) a, b and c
mp1 <- ggplot(xx, aes(x = Cluster, y = Value * 10000) ) +
  geom_violin(aes(fill = Cluster), color = NA, alpha = 0.7) +
  geom_quasirandom(size = 0.3) +
  geom_text_repel(data = x1, aes(label = Name), size = 3, nudge_x = 0.5) +
  facet_wrap(Constant+Meaning ~ ., nrow = 1, scales = "free") +
  theme_AGL +
  theme(strip.text = element_text(face = "italic"),
        legend.position = "none") +
  scale_fill_manual(name = NULL, values = colors) +
  guides(fill = F) +
  labs(y = "x 10000")
#ggsave("Additional/Temp/Temp_F06_1.png", mp1, width = 6, height = 2.5)
# Prep data
xx <- read.csv("data/data_Tf_Pf.csv") %>%
  left_join(pca, by = "Entry") %>%
  mutate(Expt = factor(Expt, levels = names_Expt)) %>%
  select(Entry, Name, Expt, ExptShort, Cluster, Tb, Pc, predicted_Tf, predicted_Pf)
x1 <- xx %>%
  filter(ExptShort %in% c("Su17", "Ba17", "It17")) %>%
  group_by(Entry, Name, Expt, ExptShort, Cluster) %>%
  summarise_at(vars(Tb, Pc), funs(mean), na.rm = T)
# Plot A) Tb
mp2.1 <- ggplot(x1, aes(x = 1, y = Tb)) +
  geom_violin(fill = "grey", alpha = 0.3, color = NA) +
  geom_quasirandom(aes(color = Cluster), size = 0.3) +
  facet_grid(. ~ Expt, labeller = label_wrap_gen(width = 17)) +
  scale_y_continuous(breaks = seq(-80,0,20), minor_breaks = seq(-110,0,10)) +
  scale_color_manual(values = colors) +
  theme_AGL +
  theme(axis.text.x      = element_blank(),
        axis.ticks.x     = element_blank(),
        panel.grid.minor.x = element_blank(),
        #plot.title = element_text(hjust = -0.17, vjust = -10)
        ) +
  guides(colour = guide_legend(nrow = 1, override.aes = list(size=2))) +
  labs(x = NULL,
       y = expression(paste(italic("T") [italic("b")], " = -(", italic("a"), " + ",
                             italic("cP"), ") / ", italic("b")))))
# Plot B) Pc
x2 <- x1 %>% filter(Entry %in% c(94,105)) %>%
  ungroup() %>% mutate(Name = gsub(" AGL", "", Name))
mp2.2 <- ggplot(x1, aes(x = 1, y = Pc)) +
  geom_violin(fill = "grey", alpha = 0.3, color = NA) +

```

```

geom_quasirandom(aes(color = Cluster), size = 0.3) +
facet_grid(. ~ Expt, labeller = label_wrap_gen(width = 17)) +
geom_text(data = x2, aes(label = Name), size = 3, nudge_y = 1.2) +
scale_y_continuous(breaks = c(-20,-15,-10,-5,0,5)) +
scale_color_manual(values = colors) +
theme_AGL +
theme(axis.text.x      = element_blank(),
      axis.ticks.x     = element_blank(),
      panel.grid.minor.x = element_blank(),
      legend.margin = unit(c(0,0,0,0), "cm")) +
guides(colour = guide_legend(nrow = 1, override.aes = list(size=2))) +
labs(y = expression(paste(italic("P") [italic("c")], " = -(", italic("a"), " + ",
                           italic("bT"), ") / ", italic("c"))), x = NULL)
mp2 <- ggarrange(mp2.1, mp2.2, nrow = 1, ncol = 2, common.legend = T, legend = "bottom",
                  labels = c("B", "C"), font.label = list(face = "plain"))
#ggsave("Additional/Temp/Temp_F06_2.png", mp2, width = 7, height = 5)
# Append ALL
mp <- ggarrange(mp1, mp2, nrow = 2, ncol = 1, align = "hv",
                 labels = c("A", ""), font.label = list(face = "plain")) #heights = c(1,1.75),
#mp1 <- ggarrange(mp1, mp2, nrow = 2, ncol = 1, heights = c(1,1.75), align = "v")
#mp2 <- ggarrange(mp3, mp4, nrow = 1, ncol = 2, common.legend = T, legend = "bottom")
#mp <- ggarrange(mp1, mp2, nrow = 2, ncol = 1, heights = c(2,1.25))
ggsave("Figure_05_TbPc.png", mp, width = 8, height = 6)

```

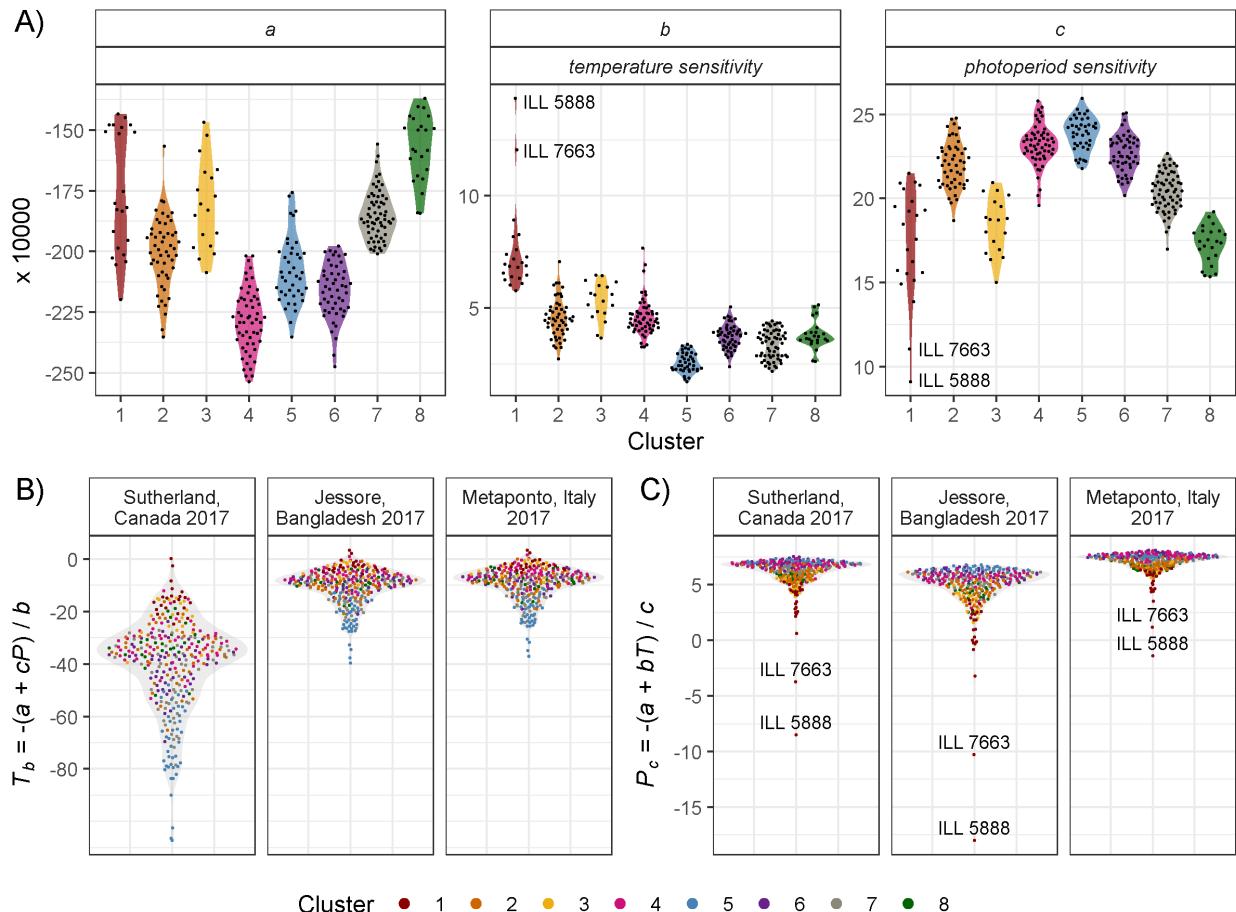


## Figure 6 Origin Constants

```

# Prep data
mycts <- c("Canada", "USA", "Iran", "Yemen",
          "India", "Pakistan", "Bangladesh", "Afghanistan",
          "Syria", "Jordan", "Turkey", "Lebanon", "Israel")
xx <- read.csv("data/model_T+P_Coefs.csv") %>%
  left_join(select(ldp, Entry, Origin), by = "Entry") %>%
  left_join(select(ct, Origin=Country, SubRegion), by = "Origin") %>%
  mutate(SubRegion = ifelse(Origin == "ICARDA", "ICARDA", as.character(SubRegion)),
         Origin = ifelse(Origin %in% mycts, Origin, as.character(SubRegion)))
x1 <- xx %>%
  left_join(dd %>% filter(ExptShort == "Su17") %>% select(Entry, DTF), by = "Entry") %>%
  group_by(Origin) %>%
  summarise_at(vars(DTF, a, b, c), funs(mean, sd)) %>%
  filter(Origin != "Unknown")
x2 <- x1 %>% mutate(CO = 1) %>%
  filter(Origin %in% c("Syria", "Jordan", "Turkey", "Lebanon", "Israel"))
# Plot A) a vs DTF
find_hull <- function(df) df[chull(df[, "DTF_mean"], df[, "a_mean"]), ]
polys <- plyr::ddply(x2, "CO", find_hull)
mp1 <- ggplot(x1, aes(x = DTF_mean, y = a_mean * 10000)) +
  geom_polygon(data = polys, fill = NA, color = "black") +
  geom_point() + geom_text_repel(aes(label = Origin)) +
  scale_x_continuous(breaks = seq(42, 56, 2)) +
  theme_AGL +
  theme(plot.title = element_text(hjust = -0.085)) +
  labs(title = "A"),
  y = expression(paste("Genotype constant (", italic(a), " x 10000)")),
  x = "Days from sowing to flower (Sutherland, Canada 2017)")
# Plot B) b vs c
find_hull <- function(df) df[chull(df[, "c_mean"], df[, "b_mean"]), ]
polys <- plyr::ddply(x2, "CO", find_hull)
mp2 <- ggplot(x1, aes(x = c_mean * 10000, y = b_mean * 10000)) +
  geom_polygon(data = polys, fill = NA, color = "black") +
  geom_point() + geom_text_repel(aes(label = Origin)) +
  scale_x_continuous(breaks = seq(18, 24, 1)) +
  scale_y_continuous(breaks = 3:8) +
  theme_AGL +
  theme(plot.title = element_text(hjust = -0.06)) +
  labs(title = "B"),
  y = expression(paste("Temperature response (", italic(b), " x 10000))),
  x = expression(paste("Photoperiod response (", italic(c), " x 10000)"))
# Append A) and B)
mp <- ggarrange(mp1, mp2, ncol = 1, nrow = 2)
ggsave("Figure_06-OriginCoefficients.png", mp, width = 7, height = 7)
ggsave("Additional/Temp/Temp_F06_1.png", mp1, width = 8, height = 4)
ggsave("Additional/Temp/Temp_F06_2.png", mp2, width = 8, height = 4)

```

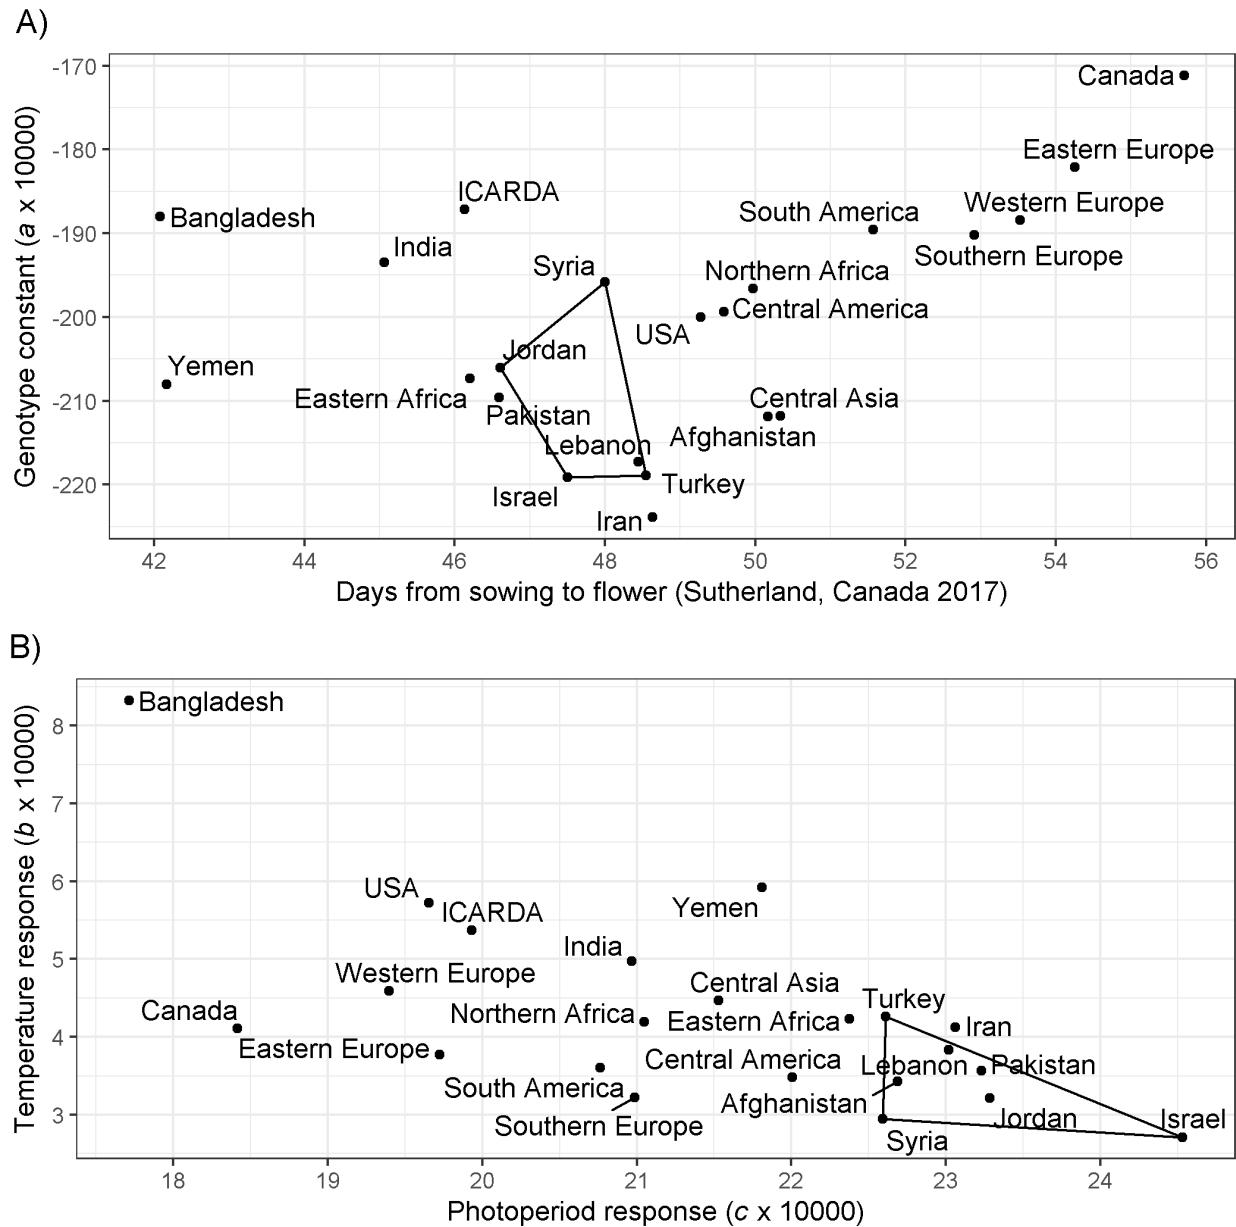

Supplemental Figure 9 Pc Tf PTT

```
# Prep data for A) Tf
pca <- read.csv("data/data_PCA_Results.csv") %>% select(Entry, Cluster) %>%
  mutate(Cluster = factor(Cluster))
xx <- read.csv("data/data_Tf_Pf.csv") %>%
  left_join(pca, by = "Entry") %>%
  mutate(MacroEnv = factor(MacroEnv, levels = macroEnvs))
x1 <- xx %>%
  select(Entry, Name, Expt, ExptShort, MacroEnv, Cluster, Tf_0, Tf_5, Tf) %>%
  gather(Trait, Value, Tf_0, Tf_5, Tf) %>%
```


```

    mutate(Trait = factor(Trait, levels = c("Tf_0", "Tf_5", "Tf")))
new.lab <- as_labeller(c(
  Tf_0 = "italic(T)[italic(b)]==0", Tf_5 = "italic(T)[italic(b)]==5",
  Tf = "italic(T)[italic(b)]==-(italic(a)+italic(Pc))/italic(b)",
  Mediterranean = "Mediterranean", Temperate = "Temperate",
  `South Asia` = "South~Asia"), label_parsed)
# Plot A) Tf
mp1 <- ggplot(x1, aes(x = ExptShort, y = Value)) +
  geom_violin(fill = "grey", alpha = 0.3, color = NA) +
  geom_quasirandom(aes(color = Cluster), size = 0.1, alpha = 0.7) +
  facet_grid(Trait ~ MacroEnv, scales = "free", labeller = new.lab) +
  scale_color_manual(values = colors) +
  theme_AGL +
  theme(legend.position = "bottom", legend.margin = unit(c(0,0,0,0), "cm"),
        axis.text.x = element_text(angle = 90, hjust = 1, vjust = 0.5)) +
  guides(colour = guide_legend(nrow = 1, override.aes = list(size = 3))) +
  labs(title = "A) Thermal sum required for flowering",
       y = expression(italic("T") [italic("f")]), x = NULL)
# Prep data for B) Pf
x1 <- xx %>%
  select(Entry, Expt, ExptShort, MacroEnv, Cluster, Pf_0, Pf_7, Pf) %>%
  gather(Trait, Value, Pf_0, Pf_7, Pf) %>%
  mutate(Trait = factor(Trait, levels = c("Pf_0", "Pf_7", "Pf")))
new.lab <- as_labeller(c(
  Pf_0 = "italic(P)[italic(c)]==0", Pf_7 = "italic(P)[italic(c)]==5",
  Pf = "italic(P)[italic(c)]==-(italic(a)+italic(Tb))/italic(c)",
  Mediterranean = "Mediterranean", Temperate = "Temperate",
  `South Asia` = "South~Asia"), label_parsed)
# Plot B) Pf
mp2 <- ggplot(x1, aes(x = ExptShort, y = Value)) +
  geom_violin(fill = "grey", alpha = 0.3, color = NA) +
  geom_quasirandom(aes(color = Cluster), size = 0.1, alpha = 0.7) +
  facet_grid(Trait ~ MacroEnv, scales = "free", labeller = new.lab) +
  scale_color_manual(values = colors) +
  theme_AGL +
  theme(legend.position = "bottom",
        axis.text.x = element_text(angle = 90, hjust = 1, vjust = 0.5)) +
  guides(colour = guide_legend(nrow = 1, override.aes = list(size = 3))) +
  labs(title = "B) Photoperiodic sum required for flowering",
       y = expression(italic("P") [italic("f")]), x = NULL)


# Append A) B) C)
mp <- ggarrange(mp1, mp2, ncol = 1, common.legend = T, legend = "bottom")
# Save
ggsave("Additional/Temp/Temp_SF09_1.png", mp1, width = 10, height = 13 * 3 / 8.2)
ggsave("Additional/Temp/Temp_SF09_2.png", mp2, width = 10, height = 13 * 3 / 8.2)
ggsave("Supplemental_Figure_09_TfPc.png", mp, width = 8, height = 10)

```

A) Thermal sum required for flowering

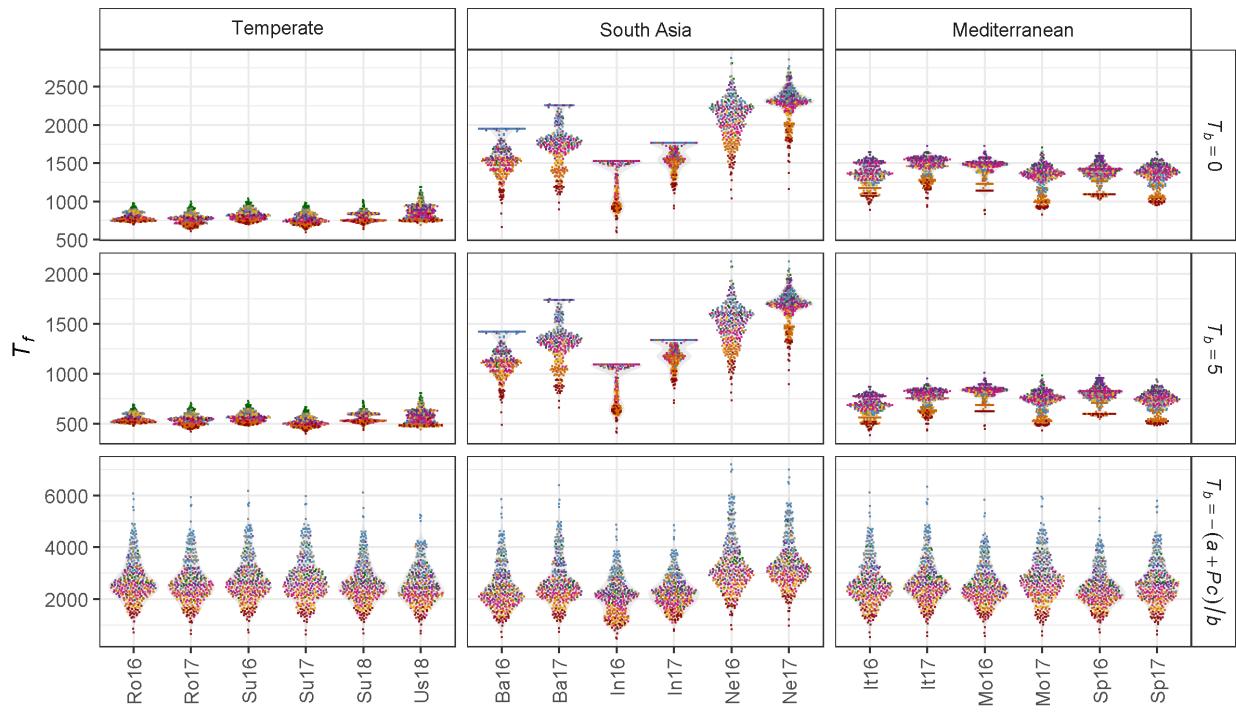

B) Photoperiodic sum required for flowering

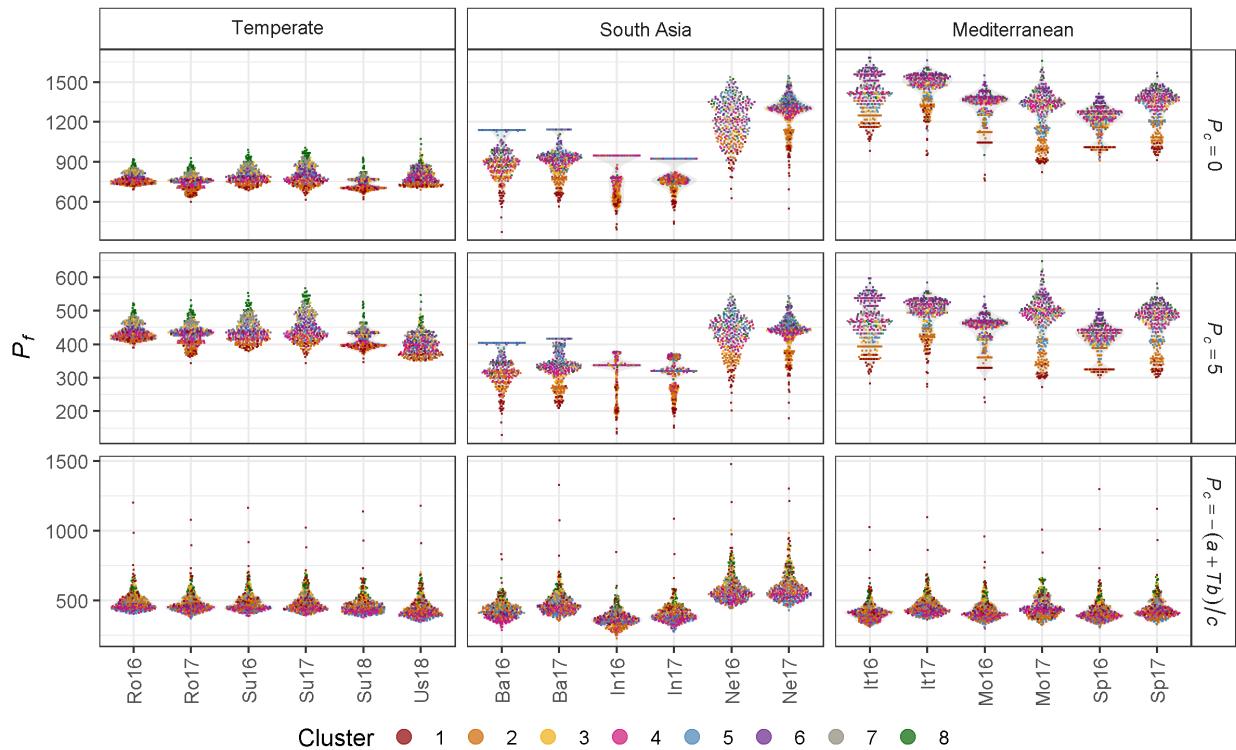


Cluster 1 2 3 4 5 6 7 8


## Additional Figure 13 PTT

```
# Prep data
pca <- read.csv("data/data_PCA_Results.csv") %>% select(Entry, Cluster) %>%
  mutate(Cluster = factor(Cluster))
xx <- read.csv("data/data_Tf_Pf.csv") %>%
  left_join(pca, by = "Entry") %>%
  mutate(MacroEnv = factor(MacroEnv, levels = macroEnvs)) %>%
  select(Entry, Expt, ExptShort, MacroEnv, Cluster, PTT_0, PTT) %>%
  gather(Trait, Value, PTT_0, PTT) %>%
  mutate(Trait = factor(Trait, levels = c("PTT_0", "PTT")))
new.lab <- as_labeller(c(PTT_0 = "Sigma(italic(T))(italic(P))",
  PTT = "Sigma(italic(T)-italic(T)[italic(b)])(italic(P)-italic(P)[italic(c)])",
  Mediterranean = "Mediterranean", Temperate = "Temperate",
  `South Asia` = "South~Asia"), label_parsed)
# Plot PTT
mp3 <- ggplot(xx, aes(x = ExptShort, y = Value)) +
  geom_violin(fill = "grey", alpha = 0.3, color = NA) +
  geom_quasirandom(aes(color = Cluster), size = 0.1, alpha = 0.7) +
  facet_grid(Trait ~ MacroEnv, scales = "free", labeller = new.lab) +
  scale_color_manual(values = colors) +
  theme_AGL +
  theme(legend.position = "bottom",
    axis.text.x = element_text(angle = 90, hjust = 1, vjust = 0.5)) +
  guides(colour = guide_legend(nrow = 1, override.aes = list(size = 3))) +
  labs(title = "B)", y = expression(italic("PTT")), x = NULL)
ggsave("Additional/Additional_Figure_13_PTT.png", mp, width = 8, height = 10)
```

A) Thermal sum required for flowering

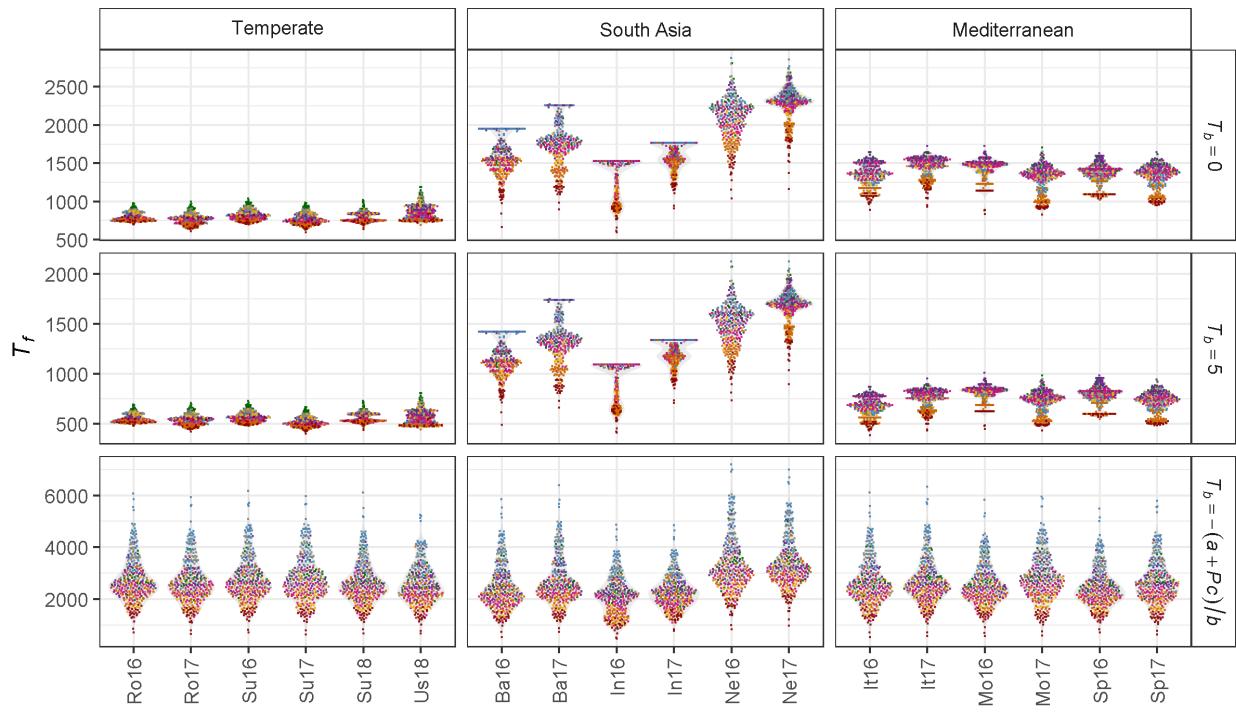

B) Photoperiodic sum required for flowering

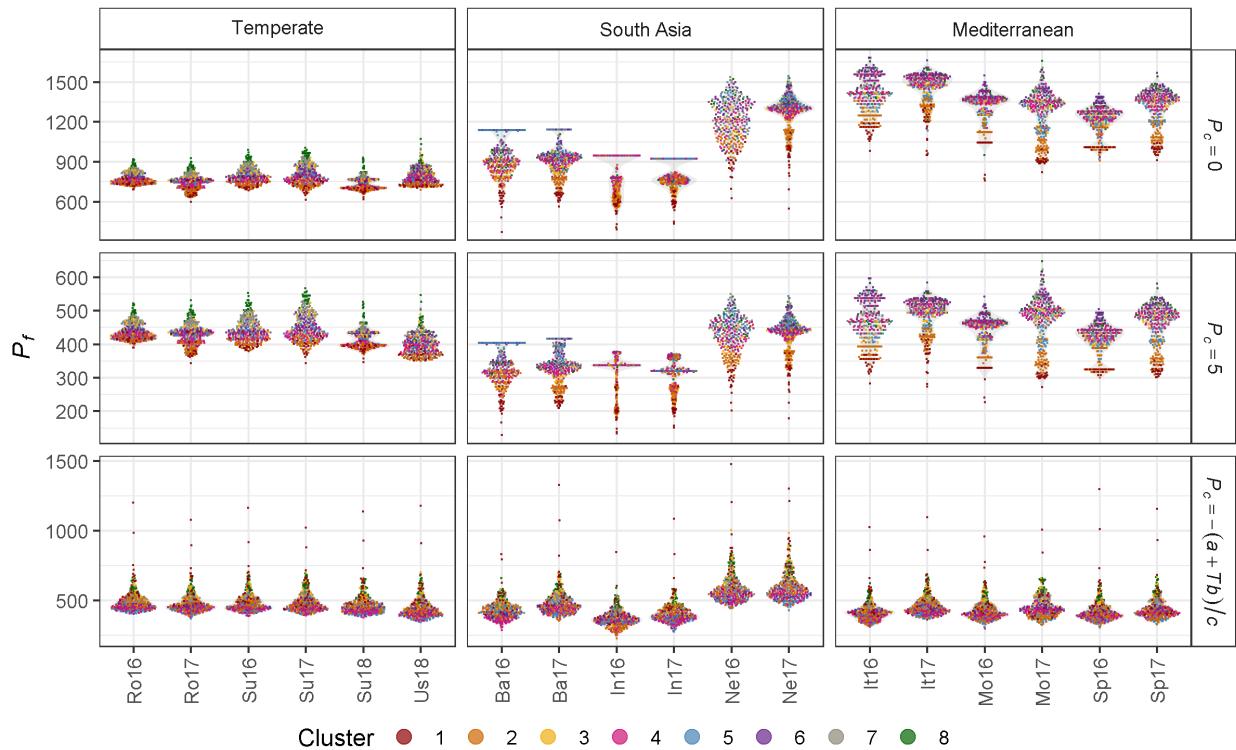


Cluster 1 2 3 4 5 6 7 8


## Supplemental Figure 10 Thermal Sums

```
# Prep data
xx <- read.csv("data/data_Tf_Pf.csv") %>% #select(-MacroEnv) %>%
  mutate(Expt = factor(Expt, levels = names_Expt))
# Plot A)
mp1 <- gg_model_2(xx, "Tf", "predicted_Tf", "A) Thermal sum required for flowering",
                    200, 200, 6600, 5500)
# Plot B)
mp2 <- gg_model_2(xx, "DTF", "predicted_DTF_Tf", "B) Days from sowing to flower",
                    30, 30, 145, 125)
# Append A) and B)
mp <- ggarrange(mp1, mp2, nrow = 2, ncol = 1, common.legend = T, legend = "bottom")
ggsave("Supplemental_Figure_10_Tf.png", mp, width = 8, height = 10)
```

### A) Thermal sum required for flowering

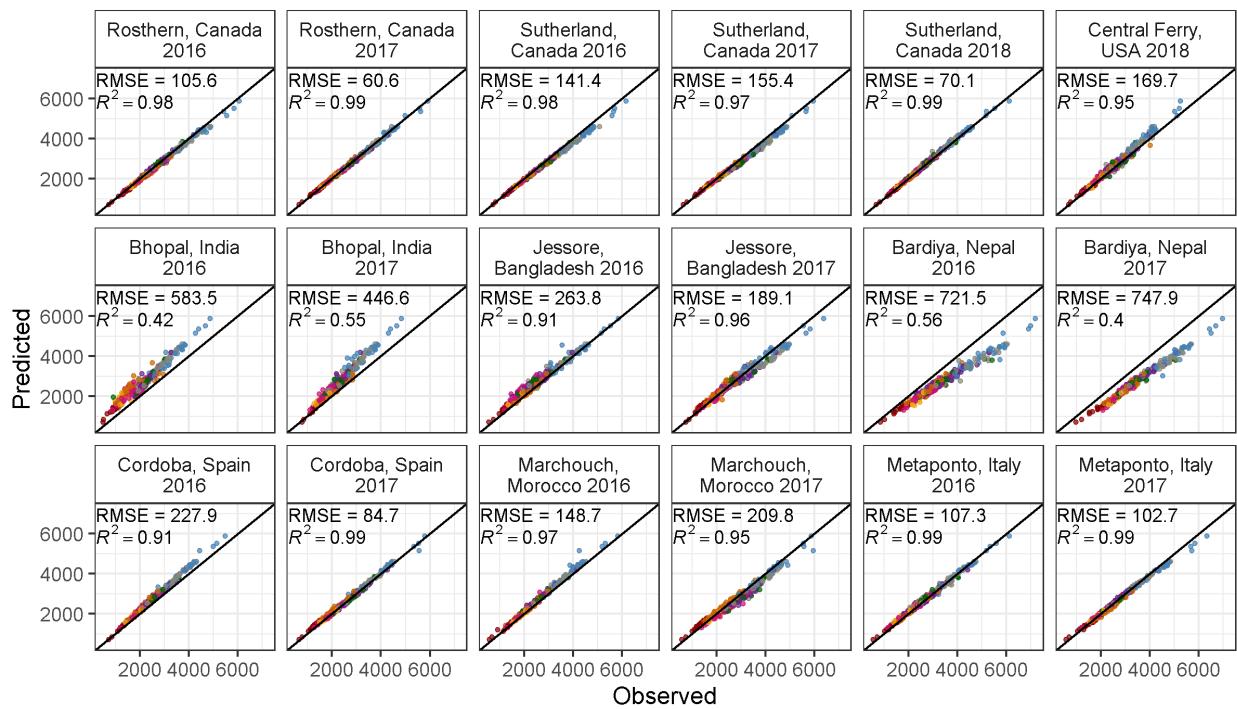

### B) Days from sowing to flower

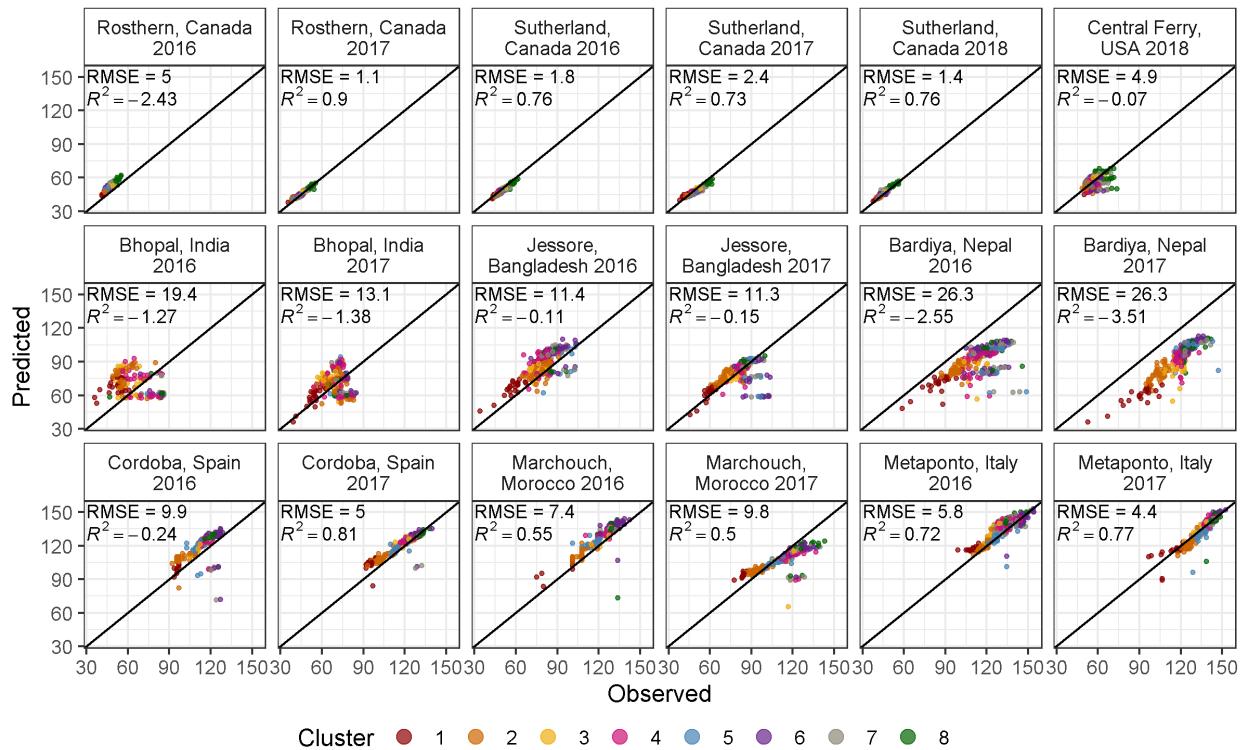


Cluster    1    2    3    4    5    6    7    8


## Supplemental Figure 11 Photoperiodic Sums

```
# Prep data
xx <- read.csv("data/data_Tf_Pf.csv") %>% #select(-MacroEnv) %>%
  mutate(Expt = factor(Expt, levels = names_Expt))
# Plot A)
mp1 <- gg_model_2(xx, "Pf", "predicted_Pf", "A) Photoperiodic sum required for flowering",
                    190, 190, 1350, 1150)
# Plot B)
mp2 <- gg_model_2(xx, "DTF", "predicted_DTF_Pf", "B) Days from sowing to flower",
                    30, 30, 145, 125)
# Append A) and B)
mp <- ggarrange(mp1, mp2, nrow = 2, ncol = 1, common.legend = T, legend = "bottom")
ggsave("Supplemental_Figure_11_Pf.png", mp, width = 8, height = 10)
```

### A) Photoperiodic sum required for flowering

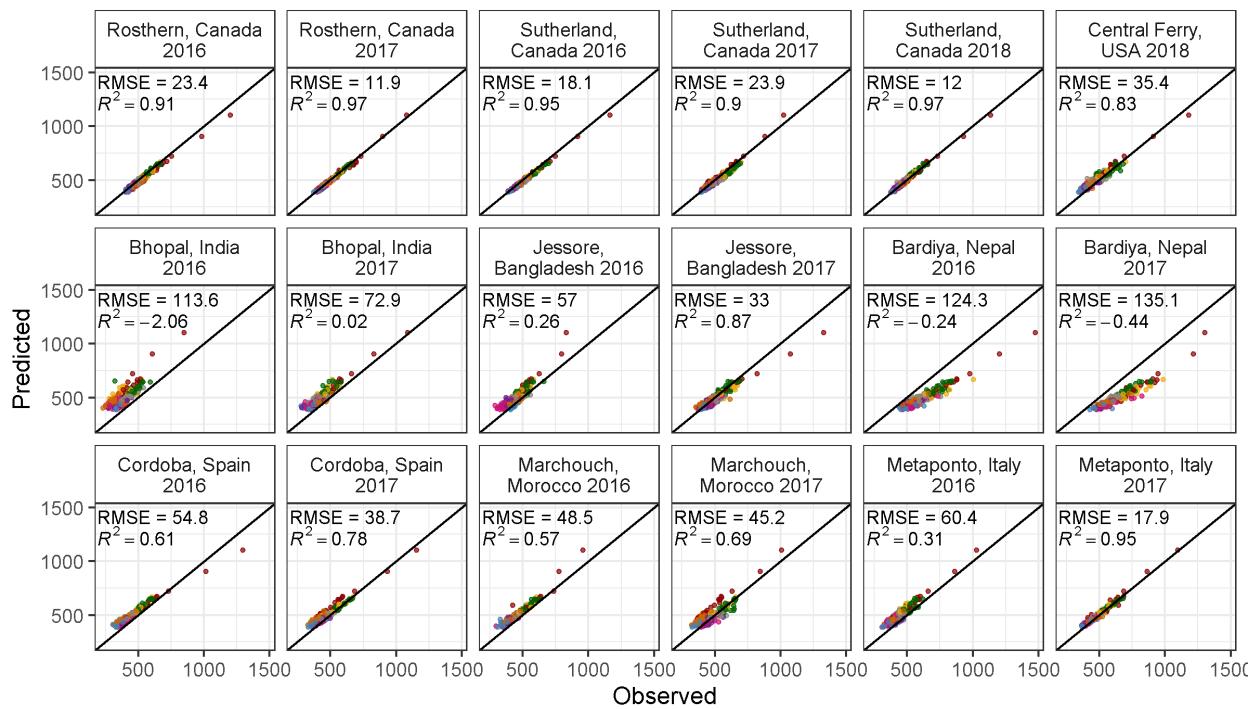

### B) Days from sowing to flower

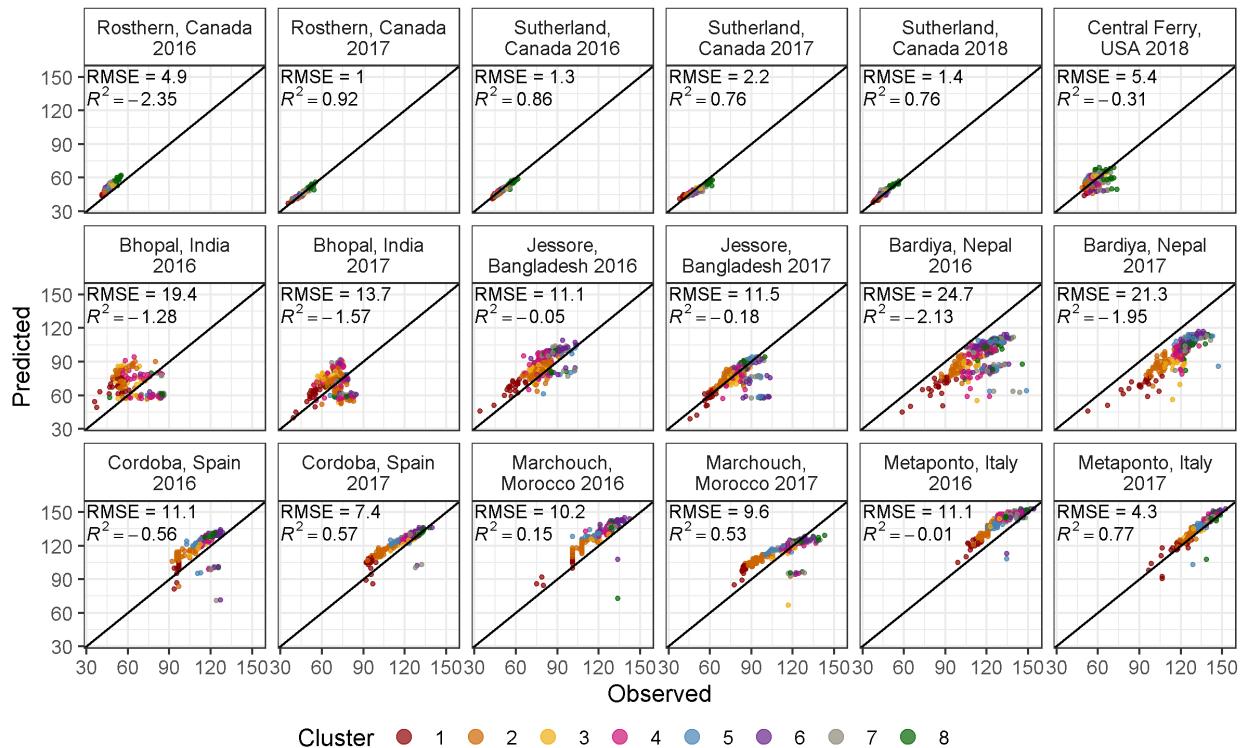

Cluster    1    2    3    4    5    6    7    8

Figure 7 Temperature Increase By MacroEnv

```

# Prep data
yy <- c("Ro17", "Su17", "Us18", "In17", "Ba17", "Ne17", "Sp17", "Mo17", "It17")
coefs <- read.csv("data/model_T+P_Coefs.csv")
pca <- read.csv("data/data_PCA_Results.csv") %>% select(Entry, Cluster) %>%
  mutate(Cluster = factor(Cluster))
xx <- dd %>%
  select(Entry, Expt, ExptShort, DTF) %>%
  left_join(coefs, by = "Entry") %>%
  left_join(pca, by = "Entry") %>%
  left_join(select(ff, Expt, MacroEnv, T_mean, P_mean), by = "Expt")
# Temp +1
x1 <- xx %>%
  mutate(T_mean2 = T_mean + 1.5,
        DTF_1 = 1 / (a + b * T_mean2 + c * P_mean),
        DTF_0 = 1 / (a + b * T_mean + c * P_mean),
        Diff = DTF_0 - DTF_1) %>%
  filter(ExptShort %in% yy)
x2 <- xx %>%
  mutate(P_mean2 = P_mean + 0.1,
        DTF_1 = 1 / (a + b * T_mean + c * P_mean2),
        DTF_0 = 1 / (a + b * T_mean2 + c * P_mean),
        Diff = DTF_0 - DTF_1) %>%
  filter(ExptShort %in% yy)
x1 <- x1 %>% mutate(Increase = "T")
x2 <- x2 %>% mutate(Increase = "P")
knitr::kable(x1 %>% group_by(MacroEnv) %>%
  summarise(Min = round(min(Diff),2), Max = round(max(Diff),2)) )

```

MacroEnv	Min	Max
Temperate	0.49	4.48
South Asia	2.28	6.03
Mediterranean	2.54	18.05

```

knitr::kable(x2 %>% group_by(MacroEnv) %>%
  summarise(Min = round(min(Diff),2), Max = round(max(Diff),2)) )

```

MacroEnv	Min	Max
Temperate	0.14	0.87
South Asia	0.13	2.80
Mediterranean	0.57	5.42

```


xx <- bind_rows(x1, x2)
write.csv(xx, "data/data_Temp_Increase.csv", row.names = F)
new.lab <- as_labeller(c(T = "italic(T)~+~1.5~degree*C", P = "italic(P)~+~0.1~italic(h)",
  Mediterranean = "Mediterranean", Temperate = "Temperate",
  `South Asia` = "South~Asia"), label_parsed)

```

```

my_breaks <- function(x) { if (max(x) < 6) c(0,2.5,5) else seq(0,30,5) }
#my_minor_breaks <- function(x) { if (max(x) < 6) 1:5 else 1:30 }
# Plot
mp <- ggplot(xx, aes(x = ExptShort, y = Diff)) +
  geom_violin(fill = "grey", alpha = 0.3, color = NA) +
  geom_quasirandom(aes(color = Cluster), size = 0.3) +
  facet_grid(Increase ~ MacroEnv, scales = "free", labeller = new.lab) +
  scale_y_continuous(minor_breaks = 0:30, breaks = my_breaks) +
  scale_color_manual(values = colors) +
  theme_AGL +
  theme(legend.position = "bottom", legend.margin = unit(c(0,0,0,0), "cm"),
        axis.text.x = element_text(angle = 90, hjust = 1, vjust = 0.5),
        panel.grid.major.y = element_line(colour = "grey70", size = 0.5)) +
  guides(colour = guide_legend(nrow = 1, override.aes = list(size=2))) +
  labs(y = "Decrease in days to flower", x = NULL)
ggsave("Figure_07_TempIncrease.png", mp, width = 7, height = 5)

```

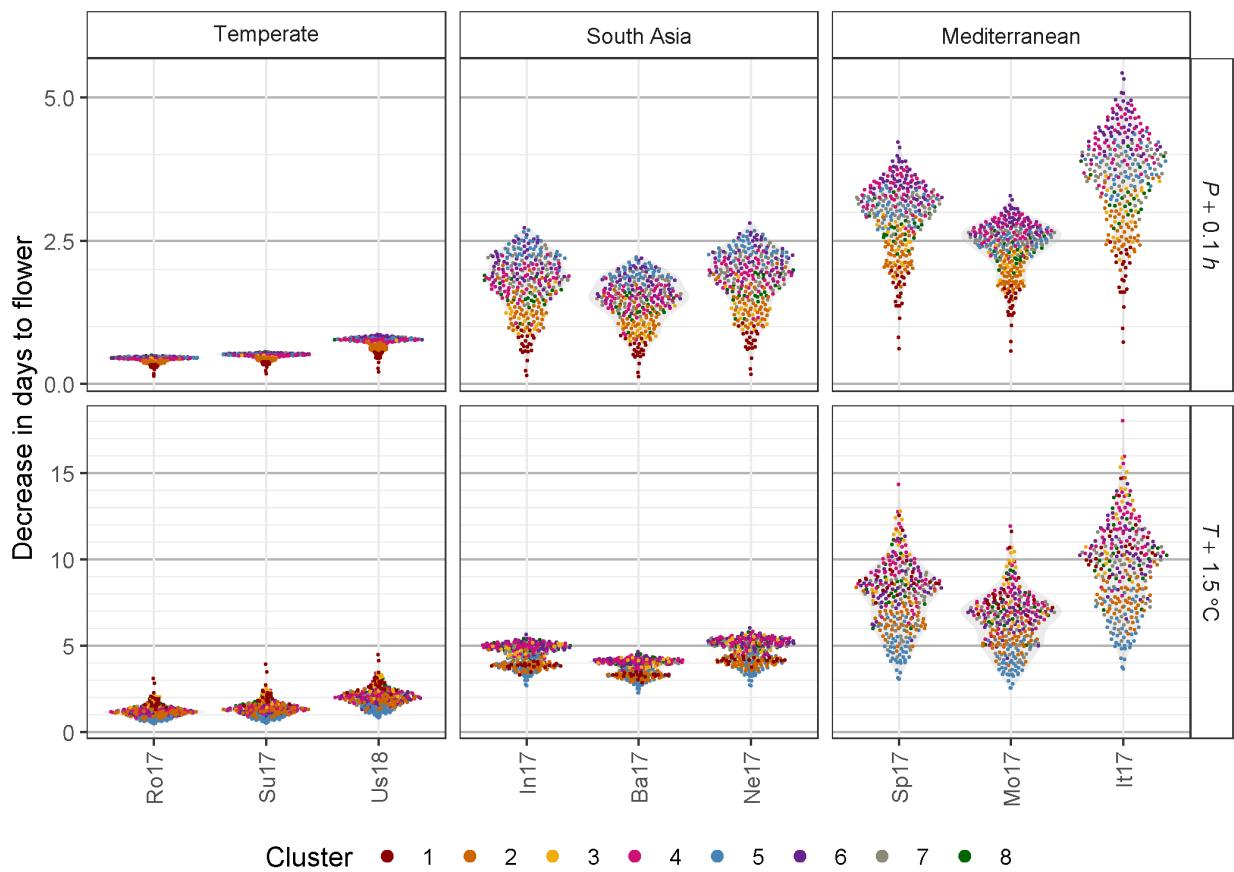

**Additional Figure 14 Temperature Increase By Cluster**

```

x1 <- read.csv("data/data_Temp_Increase.csv")
x2 <- select(read.csv("data/data_PCA_Results.csv"), Entry, Cluster)

```

```

xx <- left_join(x1, x2, by = "Entry") %>%
  left_join(pca, by = "Entry") %>%
  mutate(Cluster = factor(Cluster)) %>%
  filter(ExptShort %in% c("Su17", "It17", "Ba17"))
mp <- ggplot(xx, aes(x = Cluster, y = Diff, fill = Cluster)) +
  geom_violin(color = NA, alpha = 0.6) +
  geom_quasirandom(color = "Black", alpha = 0.6) +
  facet_grid(Expt ~ ., scales = "free") +
  theme_AGL +
  theme(legend.position = "none") +
  scale_fill_manual(name = NULL, values = colors) +
  labs(y = "Decrease in days to flower")
ggsave("Additional/Additional_Figure_14_TempIncreaseByCluster.png", mp, width = 7, height = 6)

```

