

R Vignette

Understanding photothermal interactions can help expand production range and increase genetic diversity of lentil (*Lens culinaris* Medik.)

Derek Michael Wright derek.wright@usask.ca

2020-06-03

Contents

| | |
|---|-----------|
| Data Preparation | 2 |
| Materials & Methods | 5 |
| Supplemental table 1 | 5 |
| Supplemental table 2 | 5 |
| Figure 1 Field Trial Info | 6 |
| Additional Figure 1 LDP Origin Map | 7 |
| Supplemental Figure 1 Scaling | 8 |
| Phenology | 9 |
| Figure 2 Data Overview | 9 |
| Additional Figures - Entry Phenology | 12 |
| Additional Figure 2 DTF DTS DTM | 13 |
| Additional Figure 3 MacroEnv Phenology | 14 |
| Additional Figure 4 ggridges | 15 |
| Supplemental Figure 2 Missing Data | 16 |
| Supplemental Figure 3 Correlation Plots | 17 |
| Additional Figures - Correlations | 19 |
| PCA | 22 |
| Figure 3 PCA | 22 |
| Additional Figure 5 Interactive PCA Plot | 25 |
| Additional Figure 6 PCA | 25 |
| Additional Figure 7 DTF By Cluster | 26 |
| Additional Figure 8 Cluster Origins | 27 |
| Additional Figure 9 LDP Origins By Cluster | 28 |
| Modeling DTF | 29 |
| Additional Figures - Entry Regressions | 29 |
| PhotoThermal Plane | 30 |
| Supplemental Figure 4 Regressions | 33 |
| Modeling DTF - functions | 35 |
| Modeling DTF (T + P) - All Site-years | 37 |
| Modeling DTF (T x P) - All Site-years | 40 |
| Supplemental Table 3 Model Constants | 43 |
| Additional Figure 10 significant T x P interactions | 44 |
| Supplemental Figure 5 Model T + P vs T x P | 45 |
| Additional Figure 11 Constants | 46 |

| | |
|---|----|
| Additional Figure 12 Coefficient p-values | 47 |
| Additional Figure 13 p-values b c | 48 |
| Modeling DTF (T + P) - Location Out | 49 |
| Figure 4 Test Model | 50 |
| Supplemental Table 4 Test Model | 52 |
| Modeling DTF (T + P) - 3 Best | 54 |
| Modeling DTF (T + P) - 3 Worst | 57 |
| DTF Model correlation coefficients | 60 |
| Supplemental Figure 6 Compare Constants Entry | 61 |
| Supplemental Figure 7 3 best 3 worst | 63 |
| Supplemental Figure 8 Compare Constants All | 64 |
| Base Temperature & Critical Photoperiod | 65 |
| Figure 5 Tb and Pc | 66 |
| Figure 6 Origin Constants | 68 |
| Supplemental Figure 9 Pc Tf PTT | 71 |
| Additional Figure 14 PTT | 73 |
| Supplemental Figure 10 Thermal Sums | 75 |
| Supplemental Figure 11 Photoperiodic Sums | 77 |
| Figure 7 Temperature Increase By MacroEnv | 78 |



APPLICATION OF GENOMICS TO INNOVATION IN THE LENTIL ECONOMY

This vignette contains the R code and analysis done for the paper: **Understanding photothermal interactions can help expand production range and increase genetic diversity of lentil (*Lens culinaris* Medik.)**

Data Preparation

Load the nessesary R packages, Prepare the data for analysis.

```
#install.packages(c("tidyverse", "scales", "rworldmap", "ggrepel", "magick", "GGally",
#                  "ggbeeswarm", "FactoMineR", "plot3D", "stringr"))
# Load libraries
library(tidyverse) # data wrangling
library(scales)    # rescale()
library(rworldmap) # mapBubbles()
```

```

library(ggrepel)      # geom_text_repel() + geom_label_repel()
library(magick)        # image editing
library(GGally)        # ggpairs() + ggmatrix()
library(ggpubr)        # ggarrange()
library(ggbeeswarm)    # geom_quasirandom()
library(FactoMineR)    # PCA() & HCPC()
library(plot3D)         # 3D plots
library(stringr)       # str_pad()
# General color palettes
colors <- c("darkred", "darkorange3", "darkgoldenrod2", "deeppink3",
           "steelblue", "darkorchid4", "cornsilk4", "darkgreen")
# Expts color palette
colors_Expt <- c("lightgreen", "palegreen4", "darkgreen", "darkolivegreen3",
                  "darkolivegreen4", "springgreen4", "orangered2", "orangered4",
                  "palevioletred", "mediumvioletred", "orange2", "orange4",
                  "slateblue1", "slateblue4", "aquamarine3", "aquamarine4",
                  "deepskyblue3", "deepskyblue4" )
# Locations
names_Location <- c("Rosthern, Canada", "Sutherland, Canada", "Central Ferry, USA",
                      "Bhopal, India", "Jessore, Bangladesh", "Bardiya, Nepal",
                      "Cordoba, Spain", "Marchouch, Morocco", "Metaponto, Italy" )
# Experiments
names_Expt <- c("Rosthern, Canada 2016", "Rosthern, Canada 2017",
                 "Sutherland, Canada 2016", "Sutherland, Canada 2017",
                 "Sutherland, Canada 2018", "Central Ferry, USA 2018",
                 "Bhopal, India 2016", "Bhopal, India 2017",
                 "Jessore, Bangladesh 2016", "Jessore, Bangladesh 2017",
                 "Bardiya, Nepal 2016", "Bardiya, Nepal 2017",
                 "Cordoba, Spain 2016", "Cordoba, Spain 2017",
                 "Marchouch, Morocco 2016", "Marchouch, Morocco 2017",
                 "Metaponto, Italy 2016", "Metaponto, Italy 2017" )
# Experiment short names
names_ExptShort <- c("Ro16", "Ro17", "Su16", "Su17", "Su18", "Us18",
                      "In16", "In17", "Ba16", "Ba17", "Ne16", "Ne17",
                      "Sp16", "Sp17", "Mo16", "Mo17", "It16", "It17" )
# Macro-Environments
macroEnvs <- c("Temperate", "South Asia", "Mediterranean")
# ggplot theme
theme_AGL <- theme_bw() +
  theme(strip.background = element_rect(colour = "black", fill = NA, size = 0.5),
        panel.background = element_rect(colour = "black", fill = NA, size = 0.5),
        panel.border     = element_rect(colour = "black", size = 0.5),
        panel.grid       = element_line(color = alpha("black", 0.1), size = 0.5),
        panel.grid.minor.x = element_blank(),
        panel.grid.minor.y = element_blank())
# Create scaling function
traitScale <- function(x, trait) {
  xout <- rep(NA, nrow(x))
  for(i in unique(x$Expt)) {
    mn <- x %>% filter(Expt == i) %>% pull(trait) %>% min(na.rm = T)
    mx <- x %>% filter(Expt == i) %>% pull(trait) %>% max(na.rm = T)
    xout <- ifelse(x$Expt == i, rescale(x %>% pull(trait), c(1,5), c(mn,mx)), xout)
  }
}

```

```

xout
}

# Prep data
# Notes:
# - DTF2 = non-flowering genotypes <- group_by(Expt) %>% max(DTF)
#
rr <- read.csv("data/data_raw.csv") %>%
  mutate(Rep      = factor(Rep),
        Year     = factor(Year),
        PlantingDate = as.Date(PlantingDate),
        Location   = factor(Location, levels = names_Location),
        Expt       = factor(Expt,      levels = names_Expt),
        ExptShort  = plyr::mapvalues(Expt, names_Expt, names_ExptShort),
        ExptShort  = factor(ExptShort, levels = names_ExptShort),
        DTF2_scaled = traitScale(., "DTF2"),
        RDTF      = round(1 / DTF2, 6),
        VEG       = DTF - DTE,
        REP       = DTM - DTF)

# Average raw data
dd <- rr %>% group_by(Entry, Name, Expt, ExptShort, Location, Year) %>%
  summarise_at(vars(DTE, DTF, DTS, DTM, VEG, REP, RDTF, DTF2),
               funs(mean), na.rm = T) %>% ungroup() %>%
  mutate(DTF2_scaled = traitScale(., "DTF2"))

# Prep environmental data
ee <- read.csv("data/data_env.csv") %>%
  mutate(Date      = as.Date(Date),
        ExptShort = plyr::mapvalues(Expt, names_Expt, names_ExptShort),
        ExptShort = factor(ExptShort, levels = names_ExptShort),
        Expt      = factor(Expt,      levels = names_Expt),
        Location  = factor(Location, levels = names_Location),
        DayLength_rescaled = rescale(DayLength, to = c(0, 40)) )

# Prep field trial info
xx <- dd %>% group_by(Expt) %>%
  summarise_at(vars(DTE, DTF, DTS, DTM), funs(min, mean, max), na.rm = T) %>%
  ungroup()
ff <- read.csv("data/data_info.csv") %>%
  mutate(Start = as.Date(Start) ) %>%
  left_join(xx, by = "Expt")
for(i in unique(ee$Expt)) {
  ee <- ee %>%
    filter(Expt != i | (Expt == i & DaysAfterPlanting <= ff$DTM_max[ff$Expt == i]))
}
xx <- ee
for(i in unique(ee$Expt)) {
  xx <- xx %>%
    filter(Expt != i | (Expt == i & DaysAfterPlanting <= ff$DTF_max[ff$Expt == i]))
}
xx <- xx %>% group_by(Location, Year) %>%
  summarise(T_mean = mean(Temp_mean, na.rm = T), T_sd = sd(Temp_mean, na.rm = T),
            P_mean = mean(DayLength, na.rm = T), P_sd = sd(DayLength, na.rm = T) ) %>%
  ungroup() %>%
  mutate(Expt = paste(Location, Year)) %>%
  select(-Location, -Year)

```

```

ff <- ff %>% left_join(xx, by = "Expt") %>%
  mutate(ExptShort = plyr::mapvalues(Expt, names_Expt, names_ExptShort),
        ExptShort = factor(ExptShort, levels = names_ExptShort),
        Expt      = factor(Expt,      levels = names_Expt),
        MacroEnv  = factor(MacroEnv,  levels = macroEnvs),
        T_mean    = round(T_mean, 1),
        P_mean    = round(P_mean, 1))
# Lentil Diversity Panel metadata
ldp <- read.csv("data/data_ldp.csv")
# Country info
ct <- read.csv("data/data_countries.csv") %>% filter(Country %in% ldp$Origin)

```

- ldp = Lentil Diversity Panel Metadata
- rr = Raw Phenotype Data
- dd = Averaged Phenotype Data
- ee = Environmental Data
- ff = Field Trial Info
- ct = Country Info

Materials & Methods

Supplemental table 1

```

s1 <- select(ldp, Entry, Name, Origin, Source, Synonyms)
write.csv(s1, "Supplemental_Table_01.csv", row.names = F)

```

| | Entry | Name | Origin | Source | Synonyms |
|-----|-------|-------------------|--------|--------|-----------------|
| 1 | 1 | CDC Asterix AGL | Canada | USASK | |
| 2 | 2 | CDC Rosie AGL | Canada | USASK | |
| 3 | 3 | 3156-11 AGL | Canada | USASK | |
| 4 | 4 | CDC Greenstar AGL | Canada | USASK | |
| 5 | 5 | CDC Cherie AGL | Canada | USASK | |
| 320 | 320 | W6 27754 LSP AGL | USDA | USDA | |
| 321 | 321 | W6 27760 LSP AGL | USDA | USDA | |
| 322 | 322 | W6 27763 LSP AGL | USDA | USDA | |
| 323 | 323 | W6 27766 LSP AGL | USDA | USDA | |
| 324 | 324 | W6 27767 LSP AGL | USDA | USDA | Not Barimasur-4 |

Supplemental table 2

```

s2 <- select(ff, Location, Year, `Short Name` = ExptShort, Latitude = Lat, Longitude = Lon,
             `Planting Date` = Start, `Temperature (mean)` = T_mean, `Photoperiod (mean)` = P_mean,
             `Number of Seeds Sown` = Number_of_Seeds_Sown, `Plot Type` = Plot_Type)
write.csv(s2, "Supplemental_Table_02.csv", row.names = F)

```

```

'data.frame':   18 obs. of  10 variables:
 $ Location           : chr  "Sutherland, Canada" "Rosthern, Canada" "Marchouch, Morocco" "Cordoba, Sp
 $ Year                : int  2016 2016 2016 2016 2016 2016 2016 2017 2017 ...
 $ Short Name          : Factor w/ 18 levels "Ro16","Ro17",...: 3 1 15 13 17 7 11 9 4 2 ...
 $ Latitude             : num  52.2 52.7 33.6 37.9 40.4 ...
 $ Longitude            : num  -106.51 -106.29 -6.72 -4.8 16.78 ...



```

```

$ Planting Date      : Date, format: "2016-04-27" "2016-05-06" ...
$ Temperature (mean) : num 16.7 17.2 12 12.5 10.6 17.6 19.2 18.6 15.7 17.5 ...
$ Photoperiod (mean) : num 15.9 16.2 10.8 10.9 10.8 10.9 11 10.8 16.1 16.4 ...
$ Number of Seeds Sown: int 60 60 25 25 25 25 25 25 70 70 ...
$ Plot Type          : chr "three, 1 meter rows" "three, 1 meter rows" "one, 1 meter row" "one, 1 me

```

Figure 1 Field Trial Info

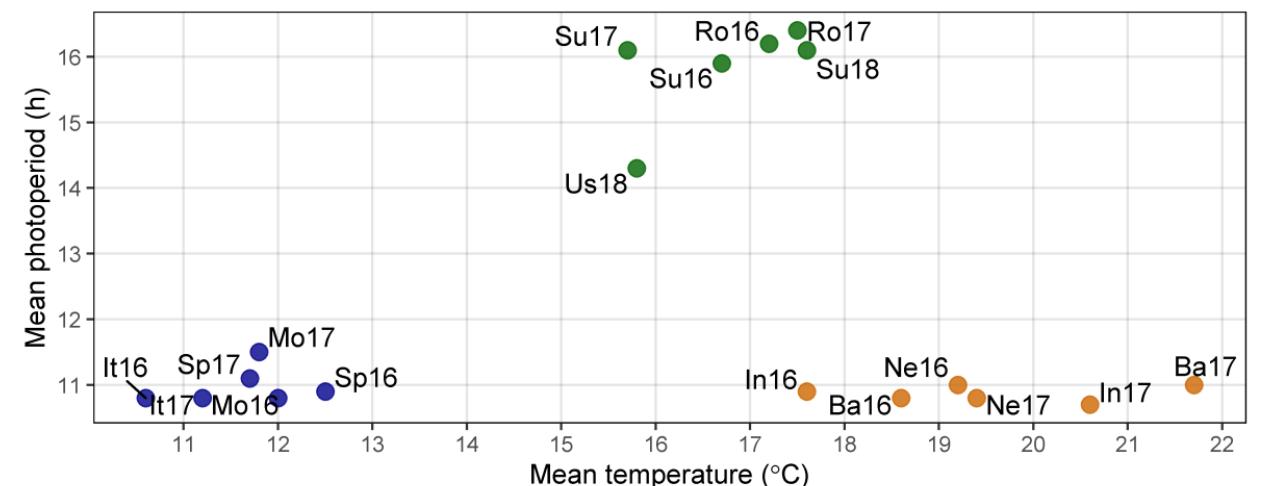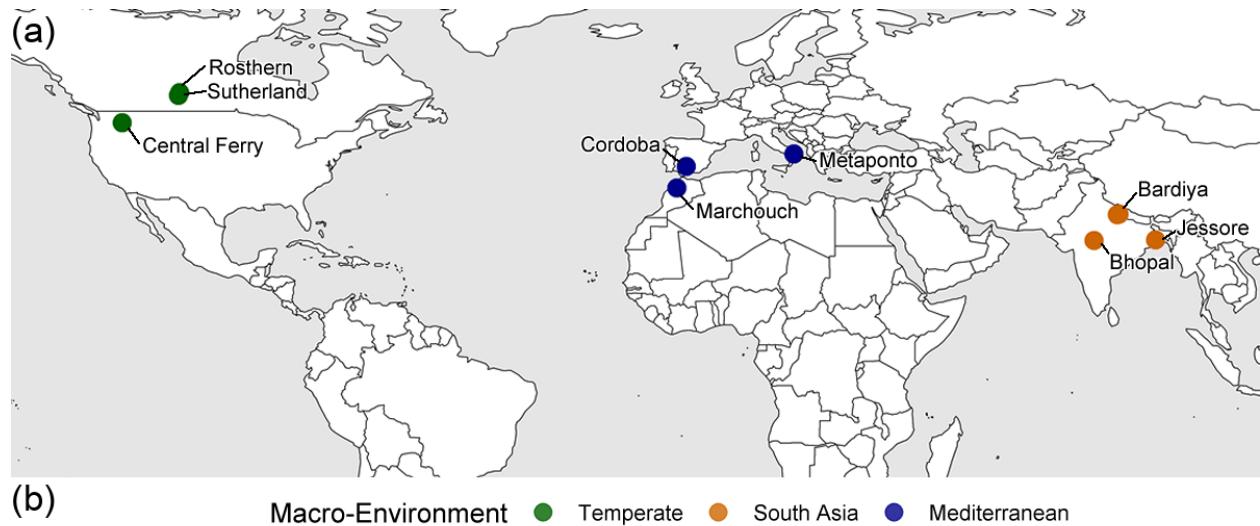

```

# Prep data
xx <- ff %>% mutate(Size = 1)
# Plot (a) Map
invisible(png("Additional/Temp/Temp_F01_1.png", width = 4200, height = 1575, res = 600))
par(mai = c(0,0,0,0), xaxs = "i", yaxs = "i")
mapBubbles(dF = xx, nameX = "Lon", nameY = "Lat", nameZColour = "MacroEnv",
           nameZSize = "Size", symbolSize = 0.5, pch = 20, fill = F, addLegend = F,
           colourPalette = c("darkgreen", "darkorange3", "darkblue"), addColourLegend = F,
           xlim = c(-140,110), ylim = c(10,35),
           oceanCol = "grey90", landCol = "white", borderCol = "black")
invisible(dev.off())
# Plot (b) mean T and P


```

```

mp <- ggplot(ff, aes(x = T_mean, y = P_mean)) +
  geom_point(aes(color = MacroEnv), size = 3, alpha = 0.8) +
  geom_text_repel(aes(label = ExptShort)) +
  scale_x_continuous(breaks = 11:22) +
  scale_y_continuous(breaks = 11:16) +
  scale_color_manual(name = "Macro-Environment",
                     values = c("darkgreen", "darkorange3", "darkblue")) +
  theme_AGL +
  theme(legend.position = "top", legend.margin = unit(c(0,0,0,0), "cm")) +
  labs(x = expression(paste("Mean temperature (", degree, "C)", sep = "")),
       y = "Mean photoperiod (h)")
ggsave("Additional/Temp/Temp_F01_2.png", mp, width = 7, height = 3.25, dpi = 600)
# Labels were added to "Additional/Temp/Temp_F1_1.png" in image editing software
# Append (a) and (b)
im1 <- image_read("Additional/Temp/Temp_F01_1_1.png") %>%
  image_annotate("(a)", size = 35)
im2 <- image_read("Additional/Temp/Temp_F01_2.png") %>% image_scale("1200x") %>%
  image_annotate("(b)", size = 35)
im <- image_append(c(im1, im2), stack = T)
image_write(im, "Figure_01.png")

```

Additional Figure 1 LDP Origin Map

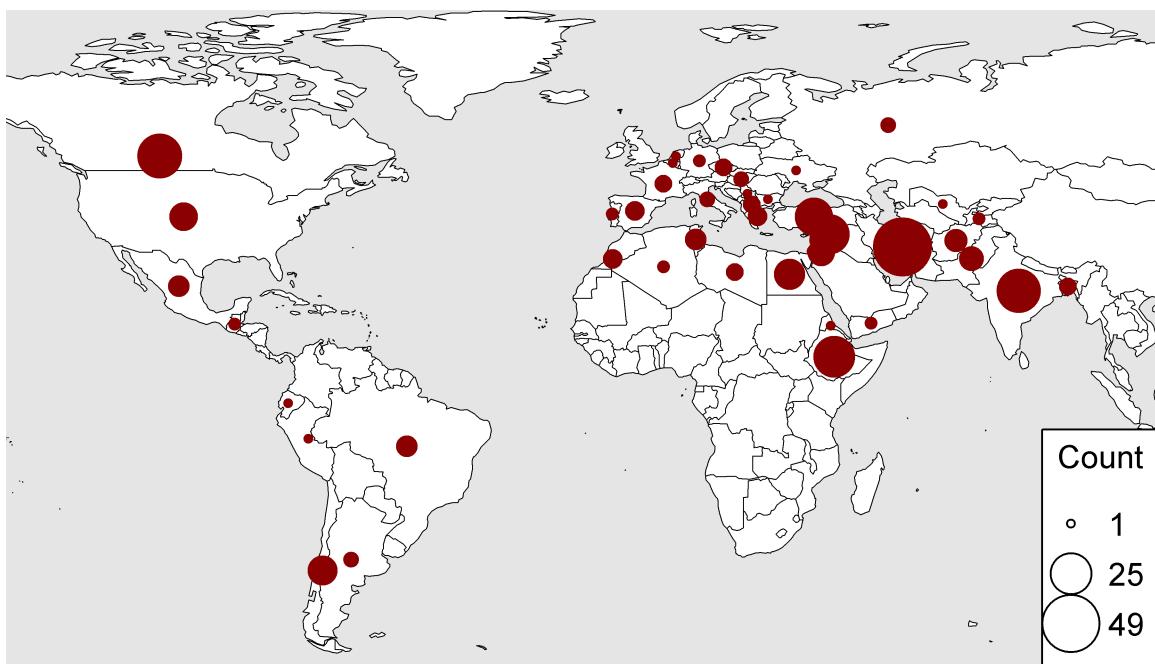

```

# Prep data
x1 <- ldp %>% filter(Origin != "Unknown") %>%
  mutate(Origin = recode(Origin, "ICARDA"="Syria", "USDA"="USA")) %>%
  group_by(Origin) %>% summarise(Count = n()) %>%
  left_join(select(ct, Origin = Country, Lat, Lon), by = "Origin") %>%
  ungroup() %>% as.data.frame()
x1[is.na(x1)] <- 0
# Plot
invisible(png("Additional/Additional_Figure_01.png",


```

```

width = 3600, height = 2055, res = 600)) #res = 150
par(mai = c(0,0,0,0), xaxs = "i",yaxs = "i")
mapBubbles(dF = x1, nameX = "Lon", nameY = "Lat",
           nameZSize = "Count", nameZColour = "darkred",
           xlim = c(-140,110), ylim = c(5,20),
           oceanCol = "grey90", landCol = "white", borderCol = "black")
invisible(dev.off())

```

Supplemental Figure 1 Scaling

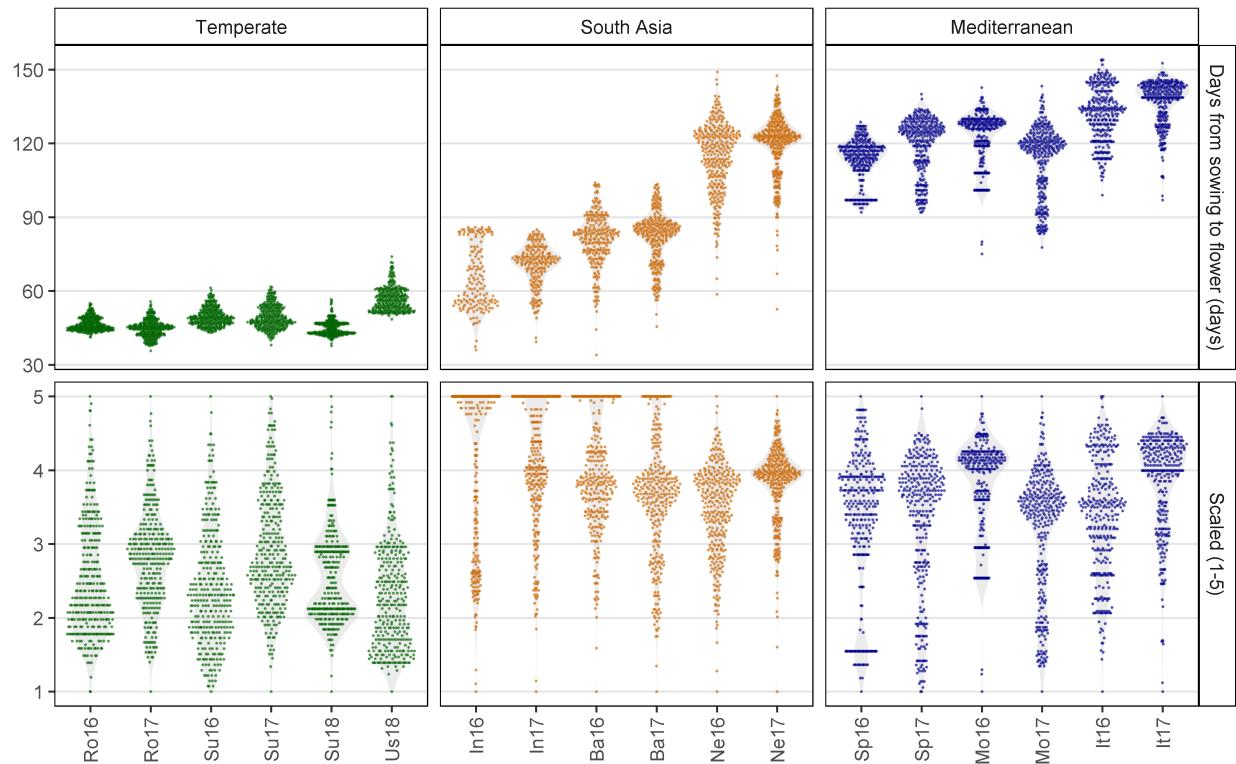

```


# Prep data
levs <- c("Days from sowing to flower (days)", "Scaled (1-5)")
xx <- dd %>% select(Entry, Expt, ExptShort, DTF, DTF2_scaled) %>%
  left_join(select(ff, Expt, MacroEnv), by = "Expt") %>%
  gather(Trait, Value, DTF, DTF2_scaled) %>%
  mutate(Trait = plyr::mapvalues(Trait, c("DTF", "DTF2_scaled"), levs),
         Trait = factor(Trait, levels = levs))
# Plot
mp <- ggplot(xx, aes(x = ExptShort, y = Value)) +
  geom_violin(fill = "grey", alpha = 0.3, color = NA) +
  geom_quasirandom(aes(color = MacroEnv), size = 0.1, alpha = 0.5) +
  scale_color_manual(values = c("darkgreen","darkorange3","darkblue")) +
  facet_grid(Trait ~ MacroEnv, scales = "free") +
  theme_AGL +
  theme(legend.position = "none",
        panel.grid.major.x = element_blank(),
        axis.text.x = element_text(angle = 90, vjust = 0.5, hjust = 1)) +
  labs(x = NULL, y = NULL)

```

```
ggsave("Supplemental_Figure_01.png", mp, width = 8, height = 5, dpi = 600)
```

Phenology

Figure 2 Data Overview

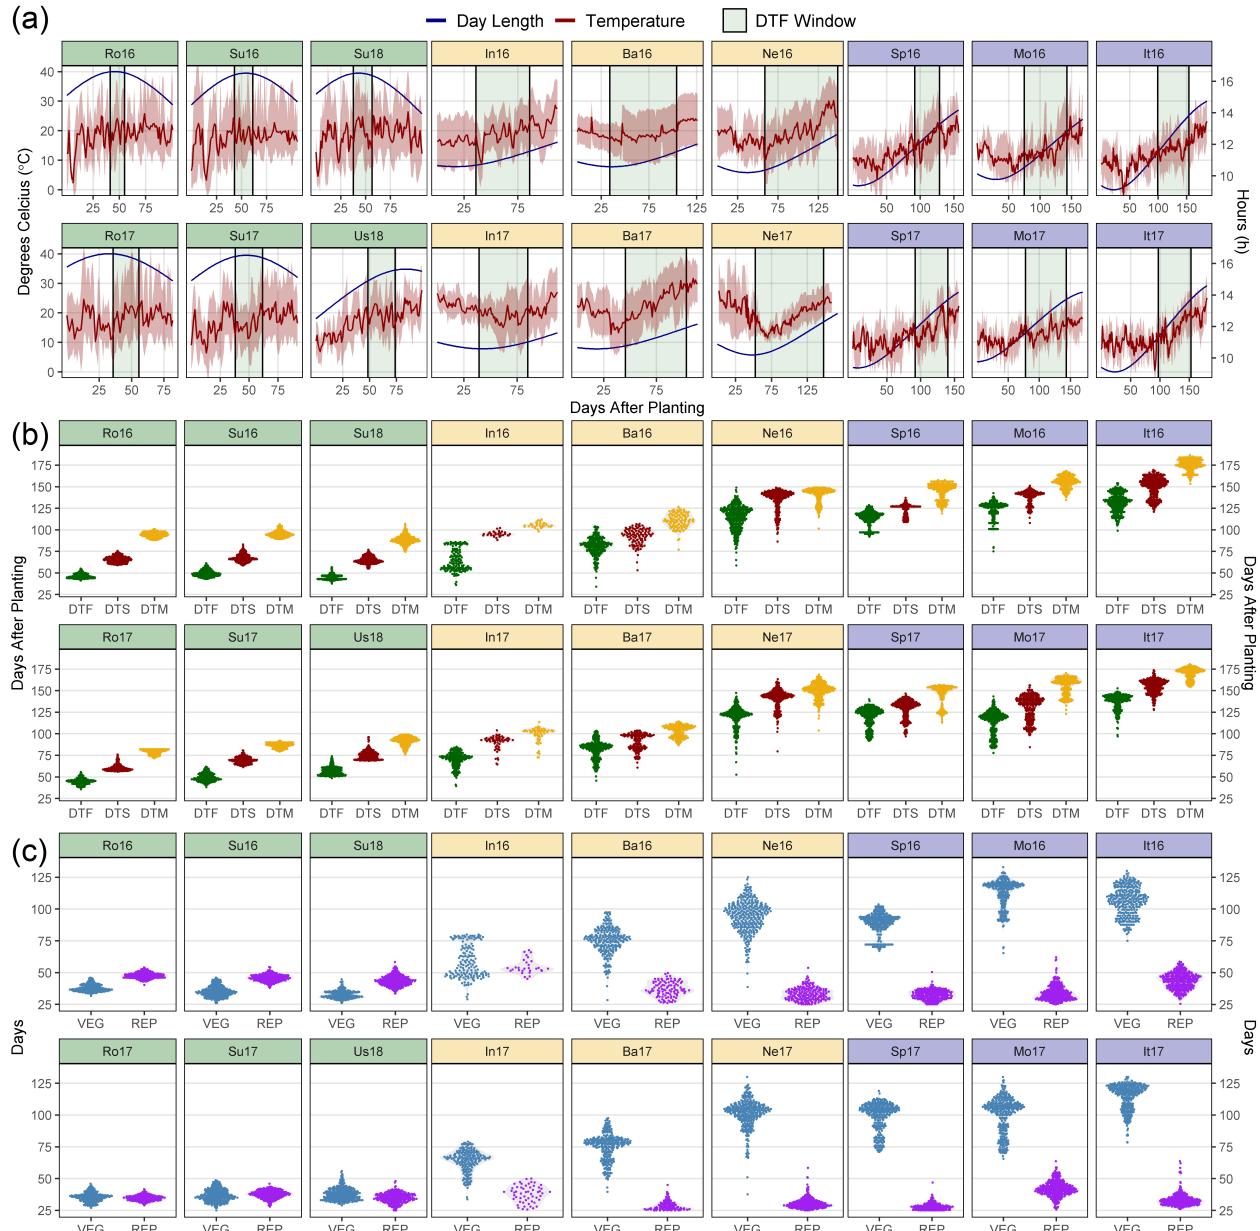

```
# Create plot function
ggEnvPlot <- function(x, nr = 2, nc = 3, mybreaks) {
  yy <- ff %>% filter(Expt %in% unique(x$Expt)) %>%
    select(ExptShort, Location, Year, min=DTF_min, max=DTF_max) %>%
    mutate(Trait = "DTF Window")
  ggplot(x) +
    geom_rect(data = yy, aes(xmin = min, xmax = max, fill = Trait),
```

```

        ymin = -Inf, ymax = Inf, alpha = 0.1, color = "black") +
  geom_line(aes(x = DaysAfterPlanting, y = DayLength_rescaled, color = "Day Length")) +
  geom_line(aes(x = DaysAfterPlanting, y = Temp_mean, color = "Temperature")) +
  geom_ribbon(aes(x = DaysAfterPlanting, ymin = Temp_min, ymax = Temp_max),
              fill = "darkred", alpha = 0.3) +
  facet_wrap(ExptShort ~ ., scales = "free_x", dir = "v", nrow = 2, ncol = 3) +
  scale_x_continuous(breaks = mybreaks) +
  scale_color_manual(name = NULL, values = c("darkblue", "darkred")) +
  scale_fill_manual(name = NULL, values = "darkgreen") +
  coord_cartesian(ylim=c(0, 40)) +
  theme_AGL +
  theme(plot.margin = unit(c(0,0,0,0), "cm"),
        legend.text = element_text(size = 12)) +
  labs(y = NULL, x = NULL) +
  guides(colour = guide_legend(order = 1, override.aes = list(size = 1.25)),
         fill = guide_legend(order = 2))
}

# Plot (a) T and P
mp1.1 <- ggEnvPlot(ee %>% filter(MacroEnv == "Temperate"), mybreaks = c(25,50,75)) +
  labs(y = expression(paste("Degrees Celcius (", degree, "C)"))) +
  theme(strip.background = element_rect(fill = alpha("darkgreen", 0.3)),
        plot.margin = unit(c(0,0,0,0.155), "cm"))
mp1.2 <- ggEnvPlot(ee %>% filter(MacroEnv == "South Asia"), mybreaks = c(25,75,125)) +
  labs(x = "Days After Planting") +
  theme(strip.background = element_rect(fill = alpha("darkgoldenrod2", 0.3)),
        axis.text.y = element_blank(),
        axis.ticks.y = element_blank())
mp1.3 <- ggEnvPlot(ee %>% filter(MacroEnv == "Mediterranean"), mybreaks = c(50,100,150)) +
  scale_y_continuous(sec.axis = sec_axis(~ (16.62 - 9.11) * . / (40 - 0) + 9.11,
                                         name = "Hours (h)", breaks = c(10, 12, 14, 16))) +
  theme(strip.background = element_rect(fill = alpha("darkblue", 0.3)),
        plot.margin = unit(c(0,0.17,0,0), "cm"),
        axis.text.y.left = element_blank(),
        axis.ticks.y.left = element_blank())
mp1 <- ggarrange(mp1.1, mp1.2, mp1.3, nrow = 1, ncol = 3, align = "h",
                  legend = "top", common.legend = T)

# Prep data
xx <- dd %>% select(Entry, Year, Expt, ExptShort, Location, DTF, DTS, DTM) %>%
  left_join(select(ff, Expt, MacroEnv), by = "Expt") %>%
  gather(Trait, Value, DTF, DTS, DTM) %>%
  mutate(Trait = factor(Trait, levels = c("DTF", "DTS", "DTM")))

# Create plot function
ggDistroDTF <- function(x) {
  ggplot(x, aes(x = Trait, y = Value)) +
    geom_violin(color = NA, fill = "grey", alpha = 0.3) +
    geom_quasirandom(size = 0.3, aes(color = Trait)) +
    facet_wrap(ExptShort ~ ., scales = "free_x", dir = "v", ncol = 3, nrow = 2) +
    scale_color_manual(values = c("darkgreen", "darkred", "darkgoldenrod2")) +
    scale_y_continuous(limits = c(30,190), breaks = c(25,50,75,100,125,150,175)) +
    theme_AGL + labs(y = NULL, x = NULL) +
    theme(plot.margin = unit(c(0.1,0,0.3,0), "cm"))
}
# Plot (b) DTF, DTS and DTM

```

```

mp2.1 <- ggDistroDTF(xx %>% filter(MacroEnv == "Temperate")) +
  labs(y = "Days After Planting") +
  theme(strip.background = element_rect(fill = alpha("darkgreen", 0.3)),
        panel.grid.major.x = element_blank())
mp2.2 <- ggDistroDTF(xx %>% filter(MacroEnv == "South Asia")) +
  theme(strip.background = element_rect(fill = alpha("darkgoldenrod2", 0.3)),
        panel.grid.major.x = element_blank(),
        axis.text.y = element_blank(),
        axis.ticks.y = element_blank())
mp2.3 <- ggDistroDTF(xx %>% filter(MacroEnv == "Mediterranean")) +
  scale_y_continuous(limits = c(30,190), breaks = c(25,50,75,100,125,150,175),
                     sec.axis = sec_axis(~ ., name = "Days After Planting",
                     breaks = c(25,50,75,100,125,150,175))) +
  theme(strip.background = element_rect(fill = alpha("darkblue", 0.3)),
        panel.grid.major.x = element_blank(),
        panel.grid.minor.x = element_line(),
        axis.text.y.left = element_blank(),
        axis.ticks.y.left = element_blank())
# Append
mp2 <- ggarrange(mp2.1, mp2.2, mp2.3, nrow = 1, ncol = 3, align = "h", legend = "none")
# Prep data
xx <- dd %>% select(Entry, Name, Expt, ExptShort, Location, Year, VEG, REP) %>%
  left_join(select(ff, Expt, MacroEnv), by = "Expt") %>%
  gather(Trait, Value, VEG, REP) %>%
  mutate(Trait = factor(Trait, levels = c("VEG", "REP")))
# Create plot function
ggDistroREP <- function(x) {
  ggplot(x, aes(x = Trait, y = Value)) +
    geom_violin(color = NA, fill = "grey", alpha = 0.3) +
    geom_quasirandom(size = 0.3, aes(color = Trait)) +
    facet_wrap(ExptShort ~ ., scales = "free_x", dir = "v", ncol = 3, nrow = 2) +
    scale_color_manual(values = c("steelblue", "purple")) +
    scale_y_continuous(limits = c(25,135), breaks = c(25,50,75,100,125)) +
    theme_AGL + labs(x = NULL, y = NULL) +
    theme(plot.margin = unit(c(0,0,0.3,0), "cm"))
}
# Plot (c) REP and VEG
mp3.1 <- ggDistroREP(xx %>% filter(MacroEnv == "Temperate")) +
  labs(y = "Days") +
  theme(strip.background = element_rect(fill = alpha("darkgreen", 0.3)),
        panel.grid.major.x = element_blank())
mp3.2 <- ggDistroREP(xx %>% filter(MacroEnv == "South Asia")) +
  theme(strip.background = element_rect(fill = alpha("darkgoldenrod2", 0.3)),
        panel.grid.major.x = element_blank(),
        axis.text.y = element_blank(),
        axis.ticks.y = element_blank())
mp3.3 <- ggDistroREP(xx %>% filter(MacroEnv == "Mediterranean")) +
  scale_y_continuous(limits = c(25,135), breaks = c(25,50,75,100,125),
                     sec.axis = sec_axis(~ ., name = "Days",
                     breaks = c(25,50,75,100,125))) +
  theme(strip.background = element_rect(fill = alpha("darkblue", 0.3)),
        panel.grid.major.x = element_blank(),
        axis.text.y.left = element_blank(),

```

```

    axis.ticks.y.left = element_blank())
# Append
mp3 <- ggarrange(mp3.1, mp3.2, mp3.3, nrow = 1, ncol = 3, align = "h", legend = "none")
# Save
ggsave("Additional/Temp/Temp_F02_1.png", mp1, width = 12, height = 4, dpi = 500)
ggsave("Additional/Temp/Temp_F02_2.png", mp2, width = 12, height = 4, dpi = 500)
ggsave("Additional/Temp/Temp_F02_3.png", mp3, width = 12, height = 4, dpi = 500)
# Append (a), (b) and (c)
mp1 <- image_read("Additional/Temp/Temp_F02_1.png") %>%
  image_annotate("(a)", size = 150)
mp2 <- image_read("Additional/Temp/Temp_F02_2.png") %>%
  image_annotate("(b)", size = 150)
mp3 <- image_read("Additional/Temp/Temp_F02_3.png") %>%
  image_annotate("(c)", size = 150)
mp <- image_append(c(mp1, mp2, mp3), stack = T)
image_write(mp, "Figure_02.png")

```

Additional Figures - Entry Phenology

```

# Create plotting function
gg_phenol <- function(x, xE, colnums) {
  mycols <- c("darkgreen", "darkorange3", "darkblue")
  ggplot(xE, aes(x = Trait, y = Value, group = Entry, color = MacroEnv)) +
    geom_line(data = x, color = "grey", alpha = 0.5) +
    geom_line() + geom_point() +
    facet_grid(MacroEnv ~ ExptShort) +
    scale_color_manual(values = mycols[colnums]) +
    theme_AGL +
    theme(legend.position = "none", panel.grid.major.x = element_blank()) +
    ylim(c(min(x$Value, na.rm = T), max(x$Value, na.rm = T))) +
    labs(x = NULL, y = "Days")
}

# Prep data
xx <- dd %>% select(Entry, Name, ExptShort, DTF, DTS, DTM) %>%
  left_join(select(ff, ExptShort, MacroEnv), by = "ExptShort") %>%
  gather(Trait, Value, DTF, DTS, DTM) %>%
  mutate(Trait = factor(Trait, levels = c("DTF", "DTS", "DTM")))
x1 <- xx %>% filter(MacroEnv == "Temperate")
x2 <- xx %>% filter(MacroEnv == "South Asia")
x3 <- xx %>% filter(MacroEnv == "Mediterranean")
# Create PDF
pdf("Additional/pdf_Phenology.pdf", width = 8, height = 6)
for(i in 1:324) {
  xE1 <- xx %>% filter(Entry == i, !is.na(Value), MacroEnv == "Temperate")
  xE2 <- xx %>% filter(Entry == i, !is.na(Value), MacroEnv == "South Asia")
  xE3 <- xx %>% filter(Entry == i, !is.na(Value), MacroEnv == "Mediterranean")
  mp1 <- gg_phenol(x1, xE1, 1)
  mp2 <- gg_phenol(x2, xE2, 2)
  mp3 <- gg_phenol(x3, xE3, 3)
  figlab <- paste("Entry", str_pad(i, 3, "left", "0"), "|", unique(xE1>Name))
  mp <- ggarrange(mp1, mp2, mp3, nrow = 3, ncol = 1) %>%
    annotate_figure(top = figlab)
  print(mp)
}

```


```

ggsave(paste0("Additional/Entry_Phenology/Phenology_Entry_",
              str_pad(i, 3, "left", "0"), ".png"),
      mp, width = 8, height = 6, dpi = 600)
}

dev.off() #dev.set(dev.next())

```

Additional Figure 2 DTF DTS DTM

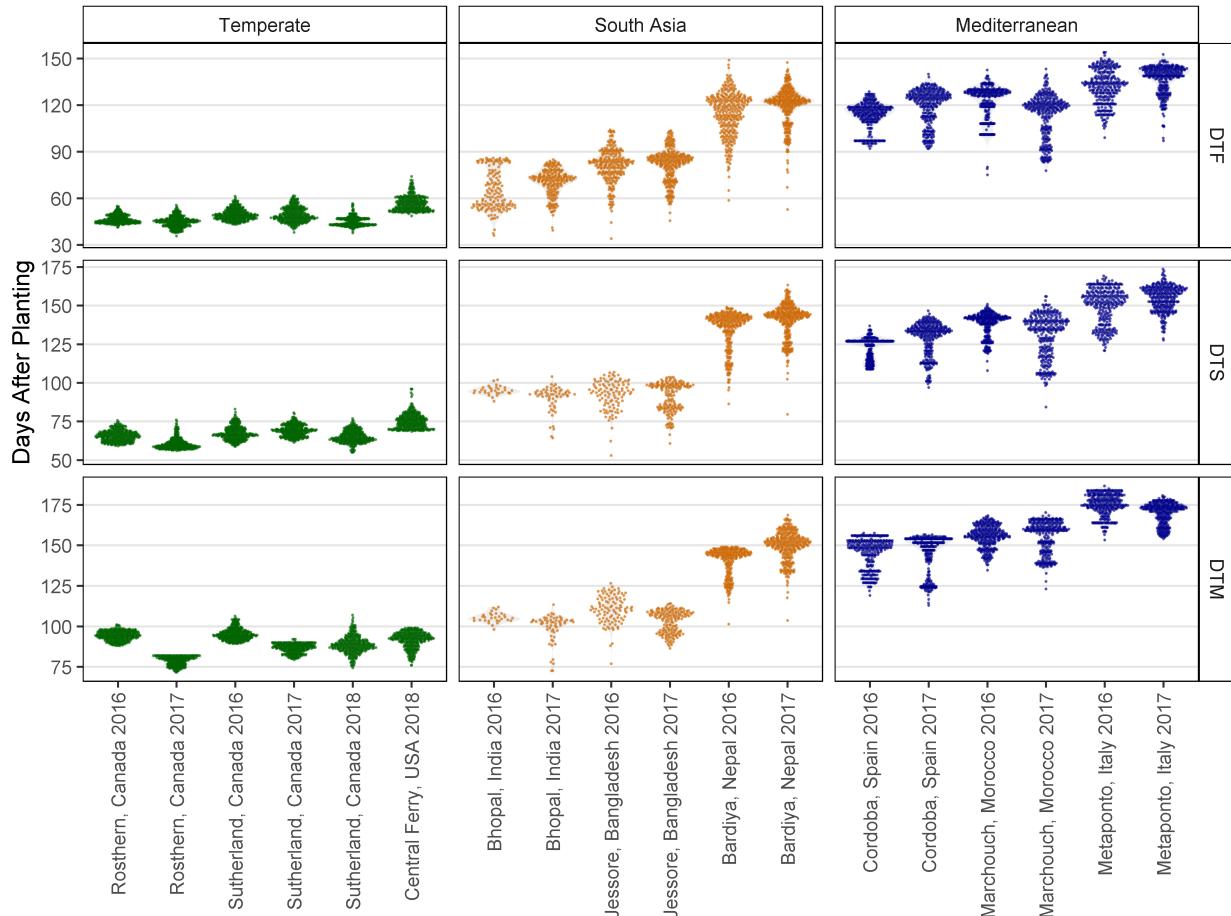

```

# Prep data
xx <- dd %>% select(Entry, Expt, ExptShort, DTF, DTS, DTM) %>%
  left_join(select(ff, Expt, MacroEnv), by = "Expt") %>%
  gather(Trait, Value, DTF, DTS, DTM) %>%
  mutate(Trait = factor(Trait, levels = c("DTF", "DTS", "DTM")))

# Plot
mp <- ggplot(xx, aes(x = Expt, y = Value)) +
  geom_violin(fill = "grey", alpha = 0.25, color = NA) +
  geom_quasirandom(size = 0.1, alpha = 0.5, aes(color = MacroEnv)) +
  facet_grid(Trait ~ MacroEnv, scales = "free") +
  scale_color_manual(values = c("darkgreen", "darkorange3", "darkblue")) +
  theme_AGL +
  theme(legend.position = "none",
        panel.grid.major.x = element_blank(),
        axis.text.x = element_text(angle = 90, vjust = 0.5, hjust = 1)) +


```

```

  labs(x = NULL, y = "Days After Planting")
  ggsave("Additional/Additional_Figure_02.png", mp, width = 8, height = 6, dpi = 600)

```

Additional Figure 3 MacroEnv Phenology

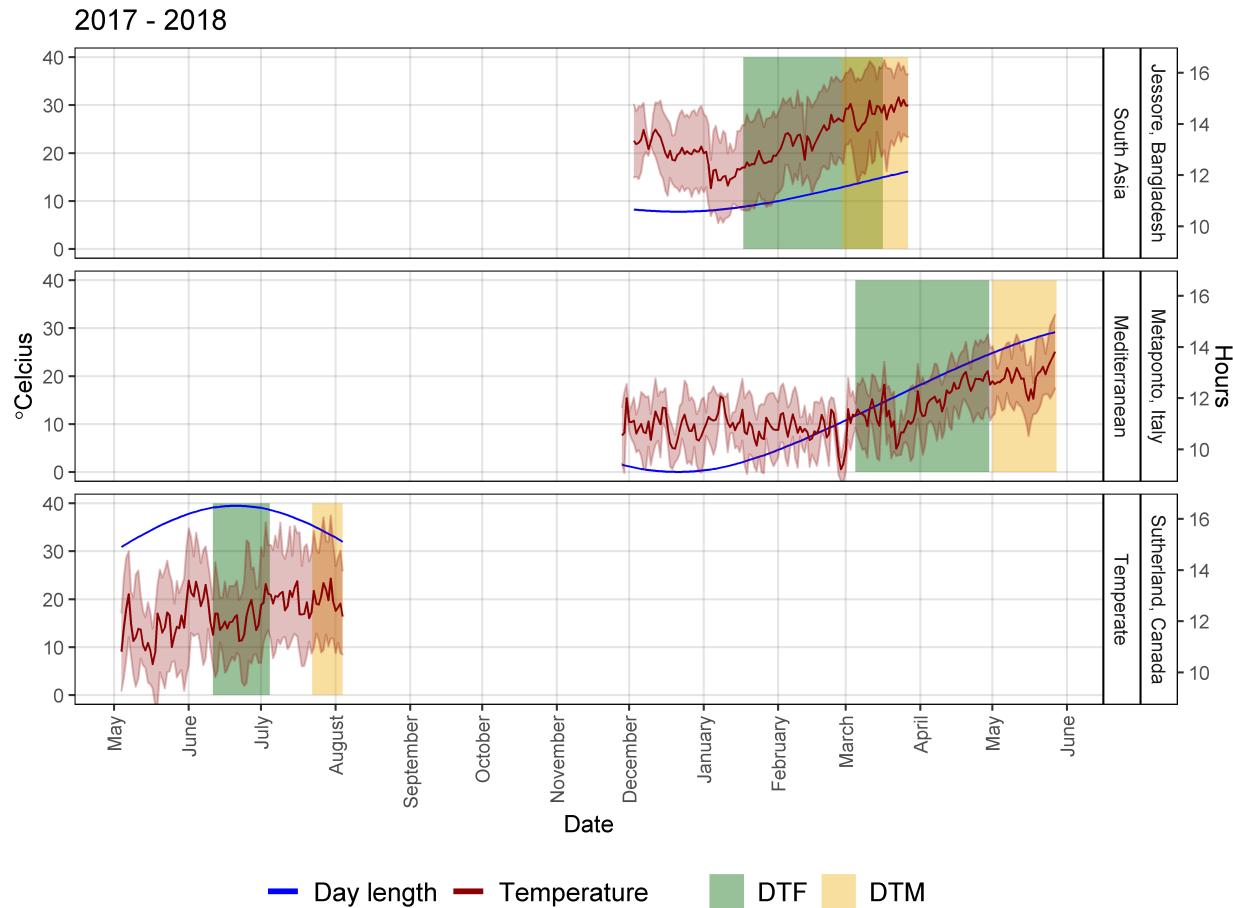

```

# Prep data
xx <- ee %>% filter(ExptShort %in% c("Su17", "Ba17", "It17"))
yy <- ff %>% filter(Expt %in% unique(xx$Expt)) %>%
  mutate(DTF_min = Start + DTF_min, DTF_max = Start + DTF_max,
         DTM_min = Start + DTM_min, DTM_max = Start + DTM_max)
y1 <- select(yy, Expt, Location, Year, MacroEnv, min = DTF_min, max = DTF_max) %>%
  mutate(Trait = "DTF")
y2 <- select(yy, Expt, Location, Year, MacroEnv, min = DTM_min, max = DTM_max) %>%
  mutate(Trait = "DTM")
yy <- bind_rows(y1, y2)
# Plot
mp <- ggplot(xx) +
  geom_rect(data = yy, aes(xmin = min, xmax = max, fill = Trait),
            ymin = 0, ymax = 40, alpha = 0.4) +
  geom_line(aes(x = Date, y = DayLength_rescaled, color = "Blue")) +
  geom_line(aes(x = Date, y = Temp_mean, color = "darkred")) +
  geom_ribbon(aes(x = Date, ymin = Temp_min, ymax = Temp_max),
              fill = alpha("darkred", 0.25), color = alpha("darkred", 0.25)) +


```

```

facet_grid(Location ~ MacroEnv ~ ., scales = "free_x", space = "free_x") +
  scale_color_manual(name = NULL, values = c("Blue", "darkred"),
                     labels = c("Day length", "Temperature")) +
  scale_fill_manual(name = NULL, values = c("darkgreen", "darkgoldenrod2")) +
  coord_cartesian(ylim = c(0,40)) +
  theme_AGL +
  theme(legend.position = "bottom",
        legend.text = element_text(size = 12),
        axis.text.x = element_text(angle = 90, hjust = 1, vjust = 0.5)) +
  scale_x_date(breaks = "1 month", labels = date_format("%B")) +
  scale_y_continuous(sec.axis = sec_axis(~ (16.62 - 9.11) * . / (40 - 0) + 9.11,
                                         breaks = c(10, 12, 14, 16), name = "Hours")) +
  labs(title = "2017 - 2018", y = expression(paste(degree, "Celcius")), x = NULL)) +
  guides(colour = guide_legend(order = 1, override.aes = list(size = 1.25)),
         fill = guide_legend(order = 2))
ggsave("Additional/Additional_Figure_03.png", mp, width = 8, height = 6, dpi = 600)

```

Additional Figure 4 ggribbles

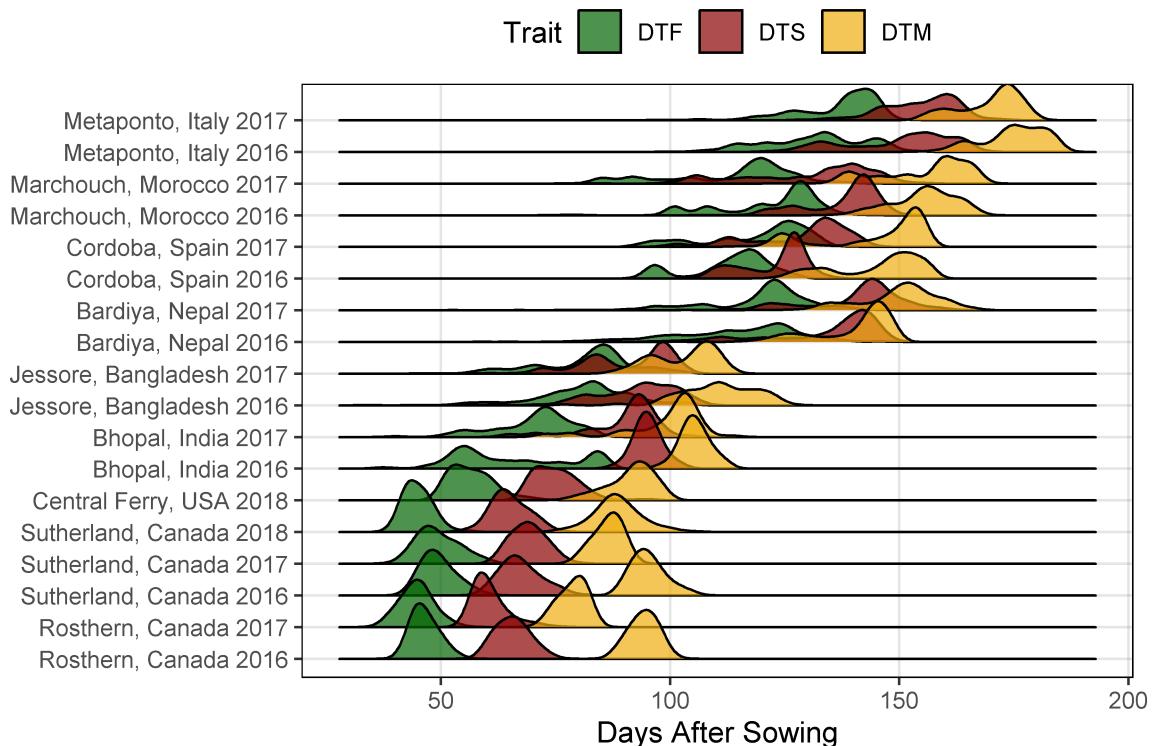

```

# Prep data
xx <- dd %>% select(Expt, DTF, DTS, DTM) %>%
  gather(Trait, Value, DTF, DTS, DTM) %>%
  mutate(Trait = factor(Trait, levels = c("DTF", "DTS", "DTM")))
# Plot
mp <- ggplot(xx, aes(x = Value, y = Expt, fill = Trait)) +
  ggridges::geom_density_ridges(alpha = 0.7) +
  scale_fill_manual(values = c("darkgreen", "darkred", "darkgoldenrod2")) +
  theme_AGL +


```

```

theme(legend.position = "top", legend.margin = unit(c(0,0,0,0), "cm")) +
  labs(y = NULL, x = "Days After Sowing")
ggsave("Additional/Additional_Figure_04.png", mp, width = 6, height = 4, dpi = 600)

```

Supplemental Figure 2 Missing Data

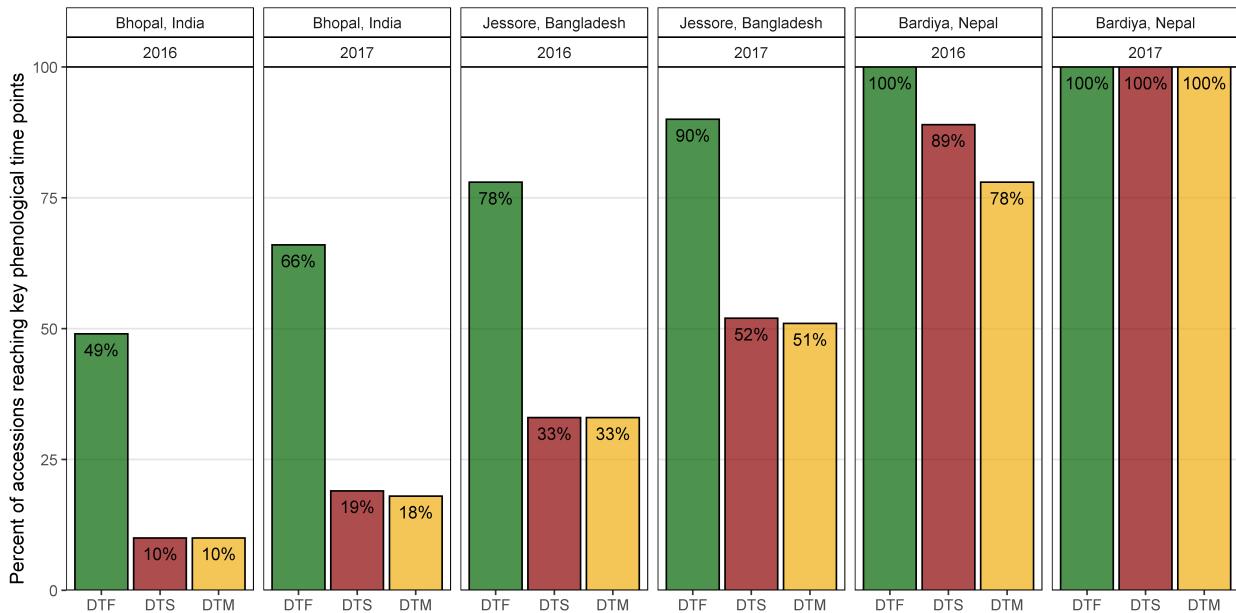


```

# Prep data
xx <- dd %>%
  filter(Location %in% c("Bhopal, India", "Jessore, Bangladesh", "Bardiya, Nepal")) %>%
  mutate(DTF = ifelse(is.na(DTF), 0, 1),
        DTS = ifelse(is.na(DTS), 0, 1),
        DTM = ifelse(is.na(DTM), 0, 1)) %>%
  group_by(Expt, Location, Year) %>%
  summarise_at(vars(DTF, DTS, DTM), funs(sum), na.rm = T) %>%
  ungroup() %>%
  gather(Trait, Flowered, DTF, DTS, DTM) %>%
  mutate(Total = ifelse(Expt == "Bardiya, Nepal 2016", 323, 324),
        # One accession was not planted in Bardiya, Nepal 2016
        DidNotFlower = Total - Flowered,
        Percent = round(100 * Flowered / Total),
        Label = paste0(Percent, "%"),
        Trait = factor(Trait, levels = c("DTF", "DTS", "DTM")))
# Plot
mp <- ggplot(xx, aes(x = Trait, y = Percent, fill = Trait)) +
  geom_bar(stat = "identity", color = "black", alpha = 0.7) +
  geom_text(aes(label = Label), nudge_y = -3, size = 3.5) +
  facet_grid(. ~ Location + Year) +
  scale_fill_manual(values = c("darkgreen", "darkred", "darkgoldenrod2")) +
  scale_y_continuous(limits = c(0,100), expand = c(0,0)) +
  theme_AGL +
  theme(legend.position = "none",
        panel.grid.major.x = element_blank() ) +
  labs(x = NULL, y = "Percent of accessions reaching key phenological time points")

```

```
ggsave("Supplemental_Figure_02.png", width = 10, height = 5, dpi = 600)
```

Supplemental Figure 3 Correlation Plots

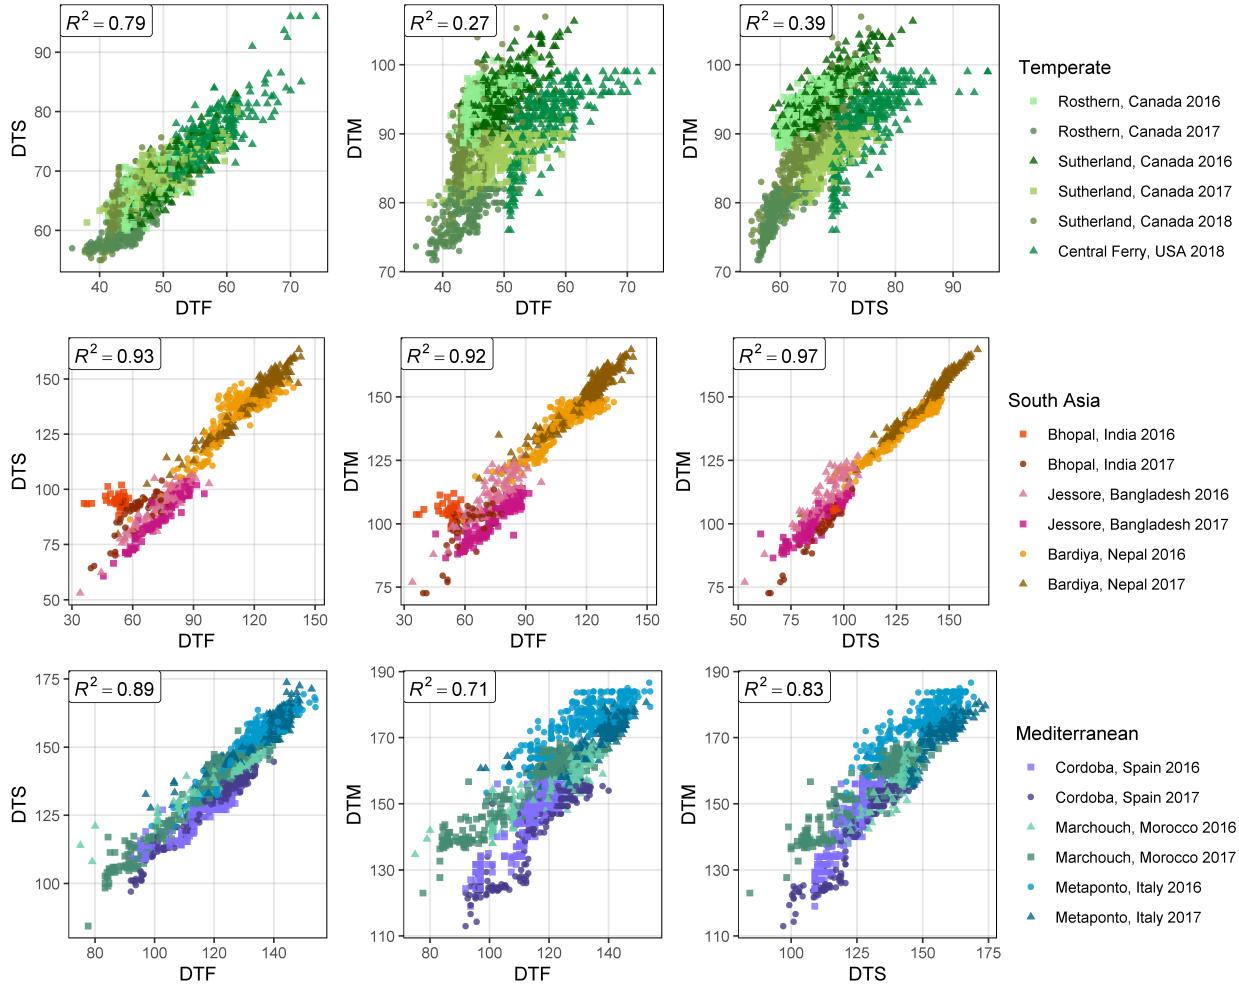

```
# Prep data
xx <- dd %>% left_join(select(ff, Expt, MacroEnv), by = "Expt") %>%
  select(Entry, Expt, MacroEnv, DTF, DTS, DTM)
# Create plotting function
ggCorPlot <- function(x, legend.title, colNums) {
  # Plot (a)
  r2 <- round(cor(x$DTF, x$DTS, use = "complete", method = "pearson")^2, 2)
  tp1 <- ggplot(x) + theme_AGL +
    geom_point(aes(x = DTF, y = DTS, color = Expt, shape = Expt), alpha = 0.8) +
    geom_label(x = -Inf, y = Inf, hjust = 0, vjust = 1, parse = T,
               label = paste("italic(R)^2 == ", r2)) +
    scale_color_manual(name = legend.title, values = colors_Expt[colNums]) +
    scale_shape_manual(name = legend.title, values = c(15,16,17,15,16,17))
  # Plot (b)
  r2 <- round(cor(x$DTF, x$DTM, use = "complete.obs", method = "pearson")^2, 2)
  tp2 <- ggplot(x) + theme_AGL +
    geom_point(aes(x = DTF, y = DTM, color = Expt, shape = Expt), alpha = 0.8) +
```



```

geom_label(x = -Inf, y = Inf, hjust = 0, vjust = 1, parse = T,
           label = paste("italic(R)^2 == ", r2) ) +
scale_color_manual(name = legend.title, values = colors_Expt[colNums]) +
scale_shape_manual(name = legend.title, values = c(15,16,17,15,16,17))
# Plot (c)
r2 <- round(cor(x$DTS, x$DTM, use = "complete", method = "pearson")^2, 2)
tp3 <- ggplot(x) + theme_AGL +
  geom_point(aes(x = DTS, y = DTM, color = Expt, shape = Expt), alpha = 0.8) +
  geom_label(x = -Inf, y = Inf, hjust = 0, vjust = 1, parse = T,
             label = paste("italic(R)^2 == ", r2) ) +
  scale_color_manual(name = legend.title, values = colors_Expt[colNums]) +
  scale_shape_manual(name = legend.title, values = c(15,16,17,15,16,17))
# Append (a), (b) and (c)
mp <- ggarrange(tp1, tp2, tp3, nrow = 1, ncol = 3,
                 common.legend = T, legend = "right")
mp
}
# Plot
mp1 <- ggCorPlot(xx %>% filter(MacroEnv == "Temperate"),      "Temperate",      1:6 )
mp2 <- ggCorPlot(xx %>% filter(MacroEnv == "South Asia"),      "South Asia",      7:12)
mp3 <- ggCorPlot(xx %>% filter(MacroEnv == "Mediterranean"), "Mediterranean", 13:18)
mp <- ggarrange(mp1, mp2, mp3, nrow = 3, ncol = 1, common.legend = T, legend = "right")
ggsave("Supplemental_Figure_03.png", mp, width = 10, height = 8, dpi = 600)

```

Additional Figures - Correlations

ALL

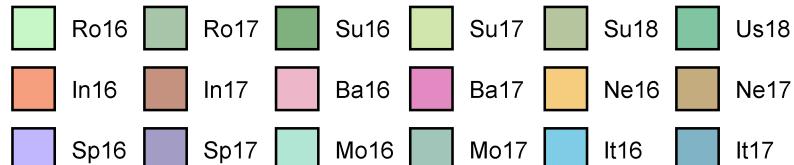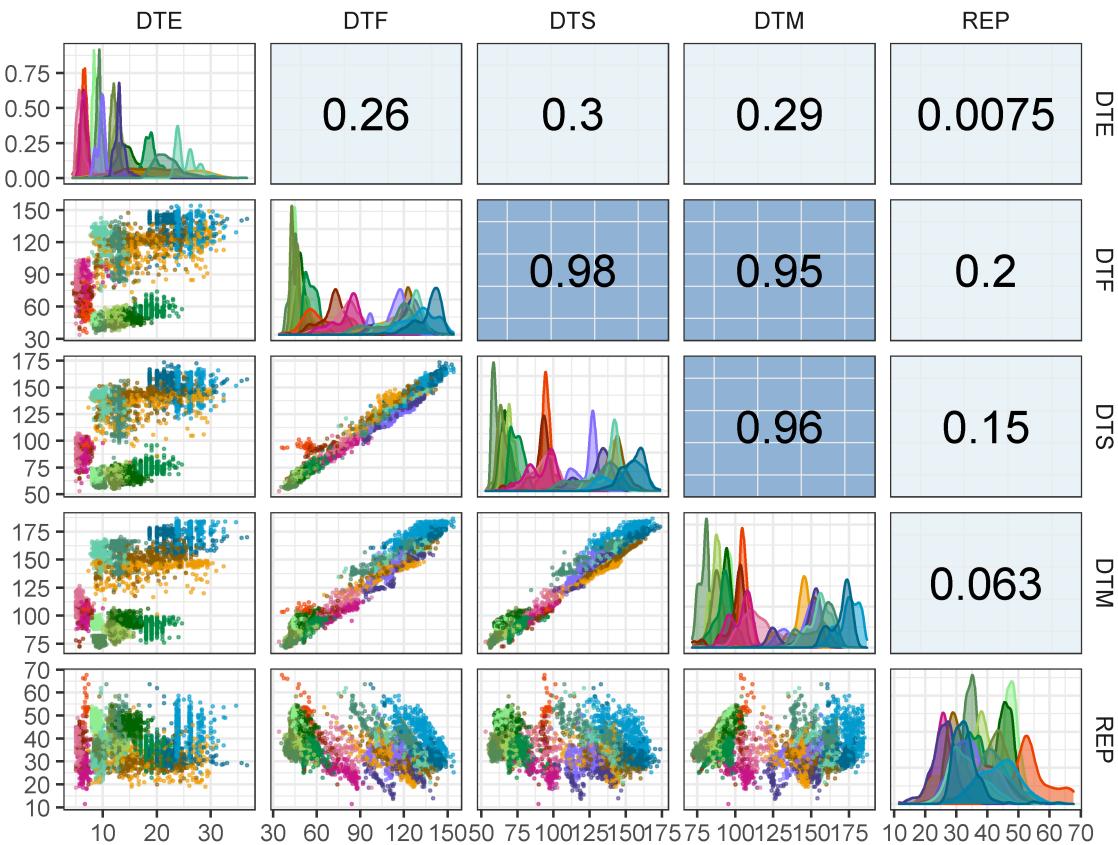

```
# Prep data
xx <- dd %>% left_join(select(ff, Expt, MacroEnv), by = "Expt") %>%
  mutate(DTE = ifelse(Location == "Cordoba, Spain", NA, DTE))
x1 <- xx %>% filter(MacroEnv == "Temperate")
x2 <- xx %>% filter(MacroEnv == "South Asia")
x3 <- xx %>% filter(MacroEnv == "Mediterranean")
# Create plotting functions
my_lower <- function(data, mapping, cols = colors_Expt, ...) {
  ggplot(data = data, mapping = mapping) +
    geom_point(alpha = 0.5, size = 0.3, aes(color = Expt)) +
    theme_bw() +
    scale_color_manual(values = cols)
}
my_middle <- function(data, mapping, cols = colors_Expt, ...) {
  ggplot(data = data, mapping = mapping) +
```

```

geom_density(alpha = 0.5) + theme_bw() +
scale_color_manual(name = NULL, values = cols) +
scale_fill_manual(name = NULL, values = cols) +
guides(color = F, fill = guide_legend(nrow = 3, byrow = T))
}

# See: https://github.com/ggobi/ggally/issues/139
my_upper <- function(data, mapping, color = I("black"), sizeRange = c(1,5), ...) {
  # Prep data
  x <- eval_data_col(data, mapping$x)
  y <- eval_data_col(data, mapping$y)
  #
  r2 <- cor(x, y, method = "pearson", use = "complete.obs")^2
  rt <- format(r2, digits = 2)[1]
  cex <- max(sizeRange)
  tt <- as.character(rt)
  # plot the cor value
  p <- ggally_text(label = tt, mapping = aes(), color = color,
                    xP = 0.5, yP = 0.5, size = 6, ... ) + theme_bw()
  # Create color palette
  corColors <- RColorBrewer::brewer.pal(n = 10, name = "RdBu")[2:9]
  if (r2 <= -0.9) { corCol <- alpha(corColors[1], 0.5)
  } else if (r2 >= -0.9 & r2 <= -0.6) { corCol <- alpha(corColors[2], 0.5)
  } else if (r2 >= -0.6 & r2 <= -0.3) { corCol <- alpha(corColors[3], 0.5)
  } else if (r2 >= -0.3 & r2 <= 0) { corCol <- alpha(corColors[4], 0.5)
  } else if (r2 >= 0 & r2 <= 0.3) { corCol <- alpha(corColors[5], 0.5)
  } else if (r2 >= 0.3 & r2 <= 0.6) { corCol <- alpha(corColors[6], 0.5)
  } else if (r2 >= 0.6 & r2 <= 0.9) { corCol <- alpha(corColors[7], 0.5)
  } else { corCol <- alpha(corColors[8], 0.5) }
  # Plot
  p <- p +
    theme(panel.background = element_rect(fill = corCol),
          panel.grid.major = element_blank(),
          #panel.grid.minor = element_blank(),
          axis.text = element_text(size = 5))
  p
}

# Plot Correlations for each Expt
for(i in 1:length(names_Expt)) {
  mp <- ggpairs(xx %>% filter(Expt == names_Expt[i]),
                columns = c("DTE", "DTF", "DTS", "DTM", "REP"),
                upper = list(continuous = my_upper),
                diag = list(continuous = my_middle),
                lower = list(continuous = wrap(my_lower, cols = "black")),
                title = names_Expt[i]) +
    theme(strip.background = element_rect(fill = "White"))
  ggsave(paste0("Additional/Corr/Corr_", str_pad(i, 2, "left", "0"),
                "_", names_Expt[i], ".png"),
         mp, width = 6, height = 6, dpi = 600)
}

# Plot (a) Temperate
mp1 <- ggpairs(x1, columns = c("DTE", "DTF", "DTS", "DTM", "REP"),
               aes(color = Expt, fill = Expt),
               upper=list(continuous = my_upper),

```


```

diag =list(continuous = wrap(my_middle, cols = colors_Expt[1:6])),
lower=list(continuous = wrap(my_lower, cols = colors_Expt[1:6])),
title = "(a) Temperate",
legend = c(2,2)) +
theme(strip.background = element_rect(fill = "White"),
legend.position = "bottom")
ggsave("Additional/Corr/Corr_Temperate.png", mp1, width = 6, height = 6, dpi = 600)
# Plot (b) South Asia
mp2 <- ggpairs(x2, columns = c("DTE", "DTF", "DTS", "DTM", "REP"),
aes(color = Expt, fill = Expt),
upper = list(continuous = my_upper),
diag = list(continuous = wrap(my_middle, cols = colors_Expt[7:12])),
lower = list(continuous = wrap(my_lower, cols = colors_Expt[7:12])),
title = "(b) South Asia",
legend = c(2,2)) +
theme(strip.background = element_rect(fill = "White"),
legend.position = "bottom")
ggsave("Additional/Corr/Corr_SouthAsia.png", mp2, width = 6, height = 6, dpi = 600)
# Plot (c) Mediterranean
mp3 <- ggpairs(x3, columns = c("DTE", "DTF", "DTS", "DTM", "REP"),
aes(color = Expt, fill = Expt),
upper = list(continuous = my_upper),
diag = list(continuous = wrap(my_middle, cols = colors_Expt[13:18])),
lower = list(continuous = wrap(my_lower, cols = colors_Expt[13:18])),
title = "(c) Mediterranean",
legend = c(2,2)) +
theme(strip.background = element_rect(fill = "White"),
legend.position = "bottom")
ggsave("Additional/Corr/Corr_Mediterranean.png", mp3, width = 6, height = 6, dpi = 600)
# Plot All
mp4 <- ggpairs(xx, columns = c("DTE", "DTF", "DTS", "DTM", "REP"),
aes(color = ExptShort, fill = ExptShort),
upper = list(continuous = my_upper),
diag = list(continuous = my_middle),
lower = list(continuous = my_lower),
title = "ALL",
legend = c(2,2)) +
theme(strip.background = element_rect(fill = "White"),
legend.position = "bottom")
ggsave("Additional/Corr/Corr_All.png", mp4, width = 6, height = 6, dpi = 600)

```

PCA

Figure 3 PCA

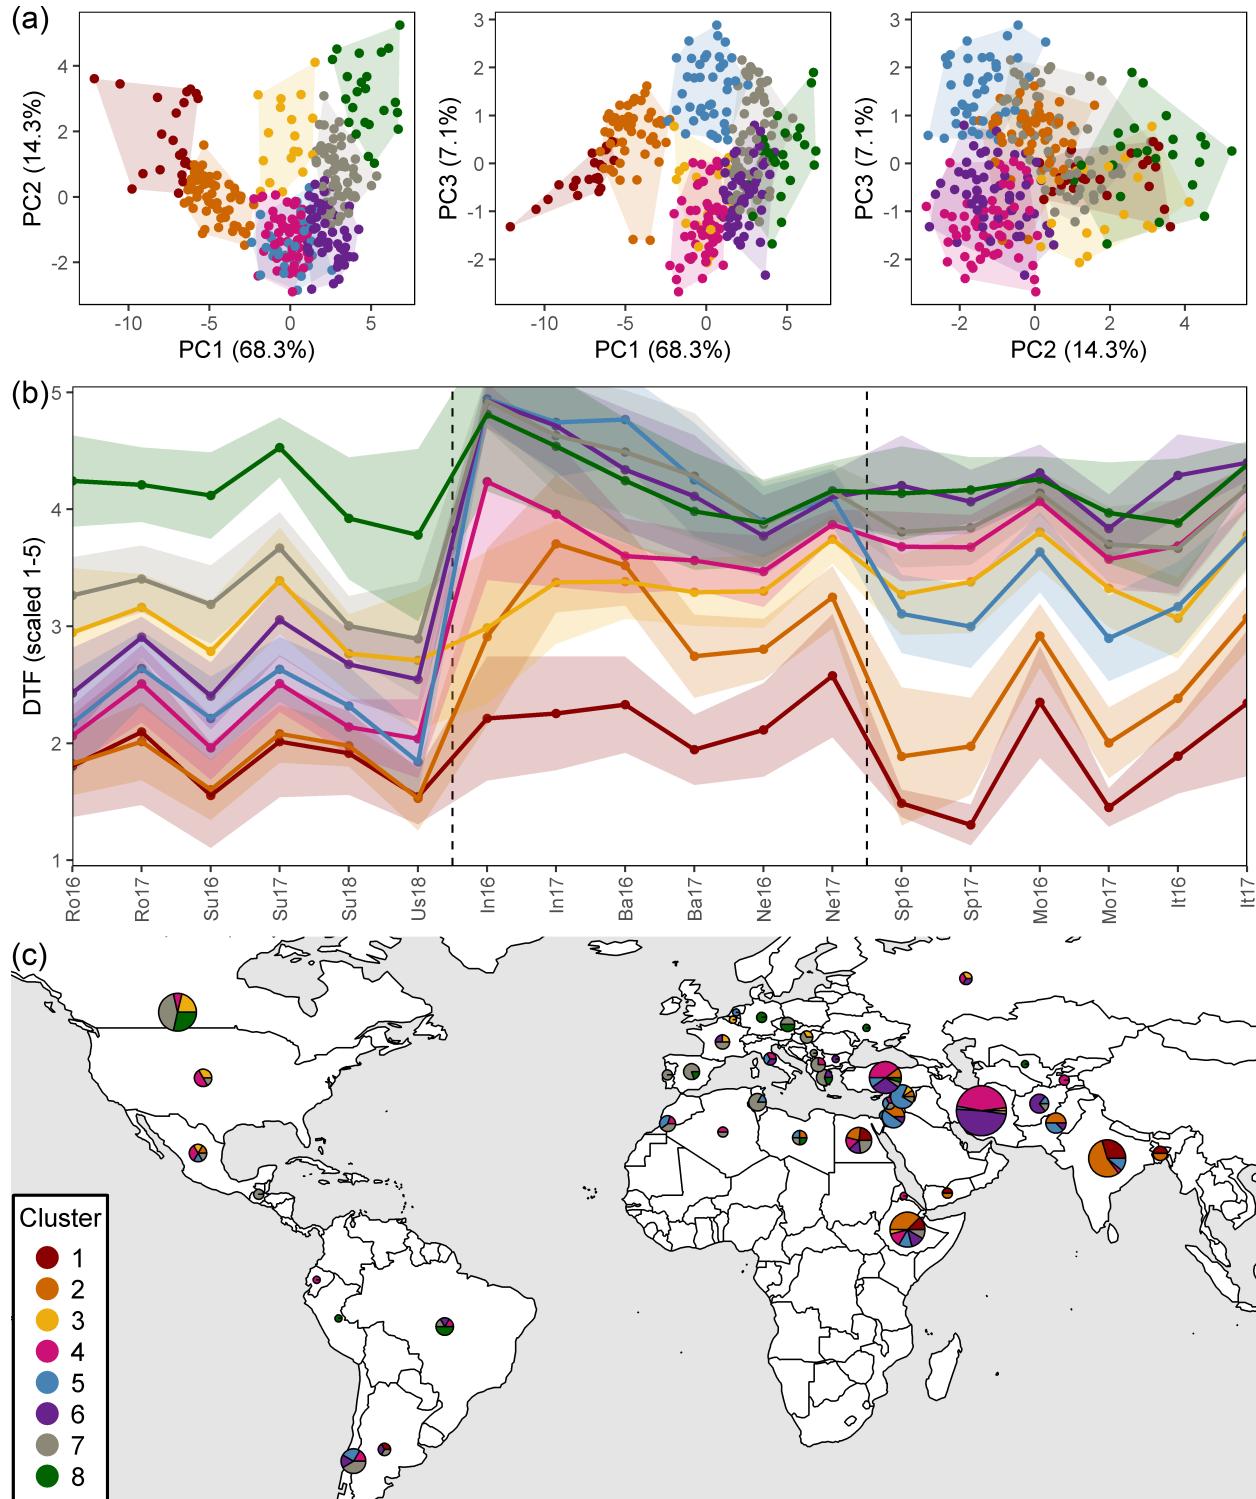

```
# Prep data
xx <- dd %>% select(Entry, Expt, DTF2_scaled) %>%
```

```

spread(Expt, DTF2_scaled)
xx <- xx %>% column_to_rownames("Entry") %>% as.matrix()
# PCA
mypca <- PCA(xx, ncp = 10, graph = F)
# Hierarchical clustering
mypcaH <- HCPC(mypca, nb.clust = 8, graph = F)
perc <- round(mypca[[1]][,2], 1)
x1.1 <- mypcaH[[1]] %>% rownames_to_column("Entry")
x1.2 <- mypca[[3]]$coord %>% as.data.frame() %>% rownames_to_column("Entry")
x1 <- left_join(x1.1, x1.2, by = "Entry") %>%
  mutate(Entry = as.numeric(Entry)) %>%
  left_join(select(ldp, Entry, Name, Origin), by = "Entry") %>%
  left_join(select(ct, Origin=Country, Region), by = "Origin") %>%
  select(Entry, Name, Origin, Region, Cluster=clust,
         PC1=Dim.1, PC2=Dim.2, PC3=Dim.3, PC4=Dim.4, PC5=Dim.5,
         PC6=Dim.6, PC7=Dim.7, PC8=Dim.8, PC9=Dim.9, PC10=Dim.10)
write.csv(x1, "data/data_pca_results.csv", row.names = F)
# Prep data
x2 <- dd %>% left_join(select(x1, Entry, Cluster), by = "Entry") %>%
  group_by(Expt, ExptShort, Cluster) %>%
  summarise(mean = mean(DTF2_scaled, na.rm = T), sd = sd(DTF2_scaled, na.rm = T)) %>%
  ungroup() %>%
  mutate(ClusterNum = plyr::mapvalues(Cluster, as.character(1:8), summary(x1$Cluster)))
x3 <- x1 %>% count(Cluster) %>%
  mutate(Cluster = factor(Cluster, levels = rev(levels(Cluster))), y = n/2)
for(i in 2:nrow(x3)) { x3$y[i] <- sum(x3$n[1:(i-1)]) + (x3$n[i]/2) }
# Plot (a) PCA 1v2
find_hull <- function(df) df[chull(df[, "PC1"], df[, "PC2"]), ]
polys <- plyr::ddply(x1, "Cluster", find_hull) %>% mutate(Cluster = factor(Cluster))
mp1.1 <- ggplot(x1) +
  geom_polygon(data = polys, alpha = 0.15, aes(x = PC1, y = PC2, fill = Cluster)) +
  geom_point(aes(x = PC1, y = PC2, colour = Cluster)) +
  scale_fill_manual(values = colors) +
  scale_color_manual(values = colors) +
  theme_AGL +
  theme(legend.position = "none", panel.grid = element_blank()) +
  labs(x = paste0("PC1 (", perc[1], "%)"),
       y = paste0("PC2 (", perc[2], "%)"))
# Plot (a) PCA 1v3
find_hull <- function(df) df[chull(df[, "PC1"], df[, "PC3"]), ]
polys <- plyr::ddply(x1, "Cluster", find_hull) %>% mutate(Cluster = factor(Cluster))
mp1.2 <- ggplot(x1) +
  geom_polygon(data = polys, alpha = 0.15, aes(x = PC1, y = PC3, fill = Cluster)) +
  geom_point(aes(x = PC1, y = PC3, colour = Cluster)) +
  scale_fill_manual(values = colors) +
  scale_color_manual(values = colors) +
  theme_AGL +
  theme(legend.position = "none", panel.grid = element_blank()) +
  labs(x = paste0("PC1 (", perc[1], "%)"),
       y = paste0("PC3 (", perc[3], "%)"))
# Plot (a) PCA 2v3
find_hull <- function(df) df[chull(df[, "PC2"], df[, "PC3"]), ]
polys <- plyr::ddply(x1, "Cluster", find_hull) %>% mutate(Cluster = factor(Cluster))

```

```

mp1.3 <- ggplot(x1) +
  geom_polygon(data = polys, alpha = 0.15, aes(x = PC2, y = PC3, fill = Cluster)) +
  geom_point(aes(x = PC2, y = PC3, colour = Cluster)) +
  scale_fill_manual(values = colors) +
  scale_color_manual(values = colors) +
  theme_AGL +
  theme(legend.position = "none", panel.grid = element_blank()) +
  labs(x = paste0("PC2 (", perc[2], "%)"),
       y = paste0("PC3 (", perc[3], "%)"))

# Append
mp1 <- ggarrange(mp1.1, mp1.2, mp1.3, nrow = 1, ncol = 3, hjust = 0)

# Plot (b) DTF
mp2 <- ggplot(x2, aes(x = ExptShort, y = mean, group = Cluster)) +
  geom_point(aes(color = Cluster)) +
  geom_vline(xintercept = 6.5, lty = 2) +
  geom_vline(xintercept = 12.5, lty = 2) +
  geom_ribbon(aes(ymin = mean - sd, ymax = mean + sd, fill = Cluster),
              alpha = 0.2, color = NA) +
  geom_line(aes(color = Cluster), size = 1) +
  scale_color_manual(values = colors) +
  scale_fill_manual(values = colors) +
  coord_cartesian(ylim = c(0.95,5.05), expand = F) +
  theme_AGL +
  theme(axis.text.x = element_text(angle = 90, hjust = 1, vjust = 0.5),
        legend.position = "none", panel.grid = element_blank()) +
  labs(y = "DTF (scaled 1-5)", x = NULL)

#
ggsave("Additional/Temp/Temp_F03_1.png", mp1, width = 8, height = 1*6/2.5, dpi = 600)
ggsave("Additional/Temp/Temp_F03_2.png", mp2, width = 8, height = 1.5*6/2.5, dpi = 600)

# Plot (c)
xx <- ldp %>% left_join(select(x1, Entry, Cluster), by = "Entry") %>%
  mutate(test1 = factor(paste(Origin, Cluster)))
xx <- xx %>% filter(!Origin %in% c("ICARDA", "USDA", "Unknown")) %>%
  group_by(Origin, Cluster) %>% summarise(Count = n()) %>%
  spread(Cluster, Count) %>%
  left_join(select(ct, Origin=Country, Lat, Lon), by = "Origin") %>%
  ungroup() %>% as.data.frame()
xx[is.na(xx)] <- 0
invisible(png("Additional/Temp/Temp_F03_3.png", width = 4800, height = 2200, res = 600))
par(mai = c(0,0,0,0), xaxs = "i", yaxs = "i")
mapPies(dF = xx, nameX = "Lon", nameY = "Lat", zColours = colors,
         nameZs = c("1", "2", "3", "4", "5", "6", "7", "8"), lwd = 1,
         xlim = c(-140, 110), ylim = c(0, 20), addCatLegend = F,
         oceanCol = "grey90", landCol = "white", borderCol = "black")

symbolMaxSize= 5 maxSumValues= 49 symbolScale= 0.7142857
List of 2
$ x: num [1:100] -125 -125 -125 -125 -125 ...
$ y: num [1:100] 57.3 57.6 57.9 58.2 58.5 ...
legend(-139.5, 15.5, title = "Cluster", legend = 1:8, col = colors,
       pch = 16, cex = 1, pt.cex = 2, box.lwd = 2)
invisible(dev.off())
# Append (a), (b) and (c)

```

```

im1 <- image_read("Additional/Temp/Temp_F03_1.png") %>%
  image_annotate("(a)", size = 120, location = "+0+0")
im2 <- image_read("Additional/Temp/Temp_F03_2.png") %>%
  image_annotate("(b)", size = 120, location = "+0+0")
im3 <- image_read("Additional/Temp/Temp_F03_3.png") %>%
  image_annotate("(c)", size = 120, location = "+0+0")
im <- image_append(c(im1, im2, im3), stack = T)
image_write(im, "Figure_03.png")

```


Additional Figure 5 Interactive PCA Plot

```

pca <- read.csv("data/data_pca_results.csv") %>%
  mutate(Cluster = factor(Cluster),
         myColors = plyr::mapvalues(Cluster, 1:8, colors))
rgl::plot3d(pca[,5:7], col = pca$myColors, size = 15)
rgl::writeWebGL(filename = "Additional/Additional_Figure_05.html",
                 width = 650, height = 650)

```

Additional Figure 6 PCA

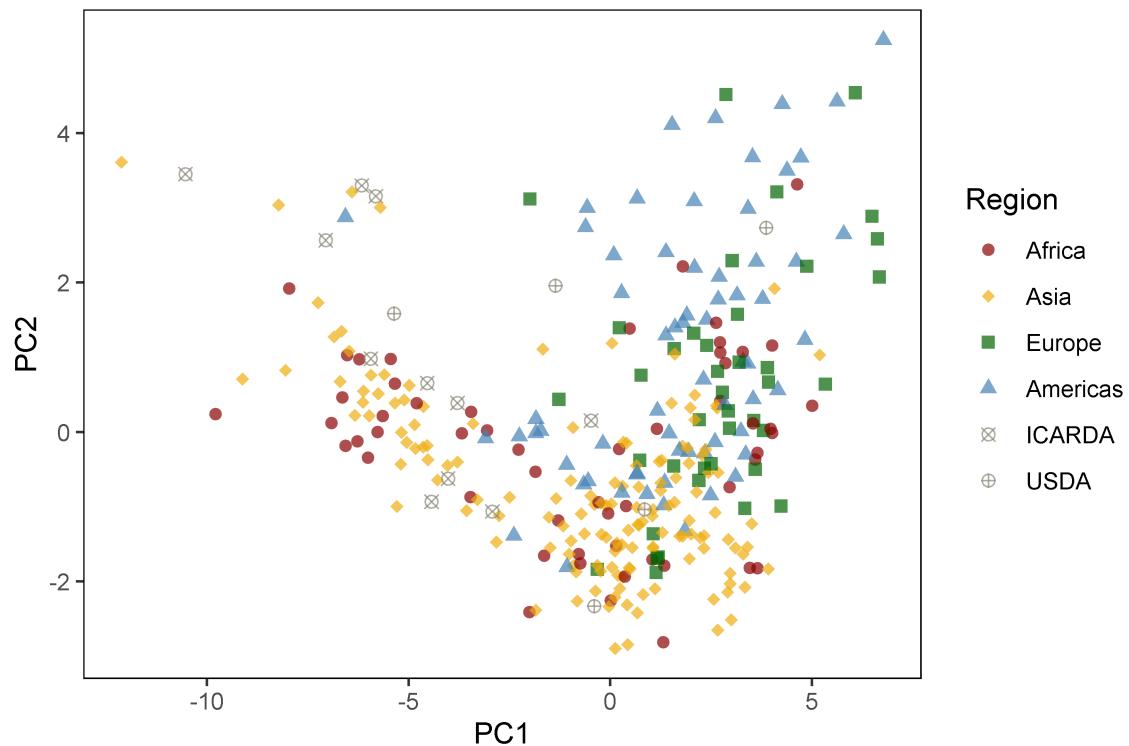

```

# Prep data
levs <- c("Africa", "Asia", "Europe", "Americas", "ICARDA", "USDA")
xx <- read.csv("data/data_pca_results.csv") %>%
  filter(Origin != "Unknown") %>%
  mutate(Region = as.character(Region), Origin = as.character(Origin),
         Region = ifelse(Origin %in% levs[5:6], Origin, Region),
         Region = factor(Region, levels = levs))
# Plot


```

```

mp <- ggplot(xx, aes(x = PC1, y = PC2, color = Region, shape = Region)) +
  geom_point(alpha = 0.7, size = 2) +
  scale_color_manual(values = colors[c(1,3,8,5,7,7)]) +
  scale_shape_manual(values = c(16,18,15,17,13,10)) +
  theme_AGL +
  theme(panel.grid.major.x = element_blank(),
        panel.grid.major.y = element_blank())
ggsave("Additional/Additional_Figure_06.png", mp, width = 6, height = 4, dpi = 600)

```

Additional Figure 7 DTF By Cluster

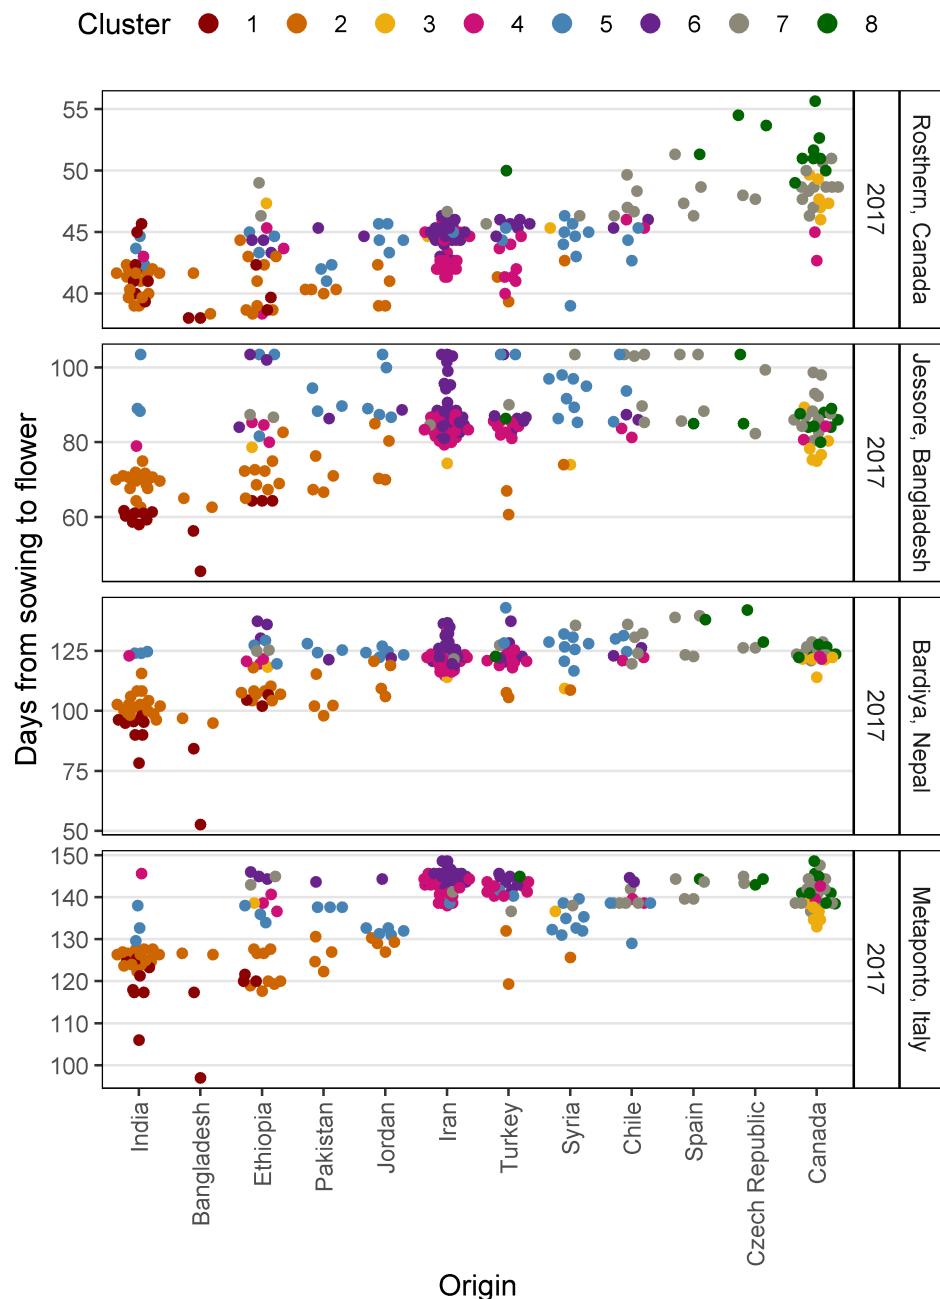


```

# Prep data
x1 <- read.csv("data/data_pca_results.csv") %>% mutate(Cluster = factor(Cluster))
yy <- c("India", "Bangladesh", "Ethiopia", "Pakistan", "Jordan",
       "Iran", "Turkey", "Syria", "Chile", "Spain", "Czech Republic", "Canada" )
xx <- dd %>% left_join(ldp, by = "Entry") %>%
  filter(ExptShort %in% c("Ro17", "Ba17", "Ne17", "It17"), Origin != "Unknown") %>%
  left_join(select(x1, Entry, Cluster), by = "Entry") %>%
  mutate(Origin = factor(Origin, levels = unique(Origin)[rev(order(unique(Origin))]))) %>%
  filter(Origin %in% yy) %>%
  mutate(Origin = factor(Origin, levels = yy))

# Plot
mp <- ggplot(xx, aes(y = DTF2, x = Origin)) +
  geom_quasirandom(aes(color = Cluster)) +
  facet_grid(Location+Year ~ ., scales = "free_y") +
  scale_color_manual(values = colors) +
  theme_AGL +
  theme(legend.position = "top",
        panel.grid.major.x = element_blank(),
        axis.text.x = element_text(angle = 90, hjust = 1, vjust = 0.5)) +
  guides(colour = guide_legend(nrow = 1, override.aes = list(size = 3))) +
  labs(y = "Days from sowing to flower")
ggsave("Additional/Additional_Figure_07.png", mp, width = 5, height = 7, dpi = 600)

```

Additional Figure 8 Cluster Origins

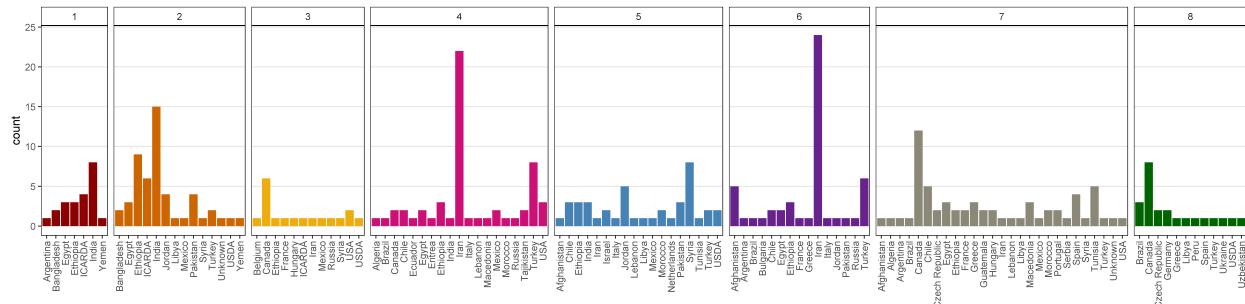

```

# Prep data
pca <- read.csv("data/data_pca_results.csv") %>% mutate(Cluster = factor(Cluster))
xx <- ldp %>% left_join(select(pca, Entry, Cluster), by = "Entry") %>%
  mutate(test1 = factor(paste(Origin, Cluster)))
x1 <- xx %>% filter(Origin != "ICARDA") %>%
  group_by(Origin, Cluster) %>% summarise(Count = n()) %>%
  spread(Cluster, Count) %>%
  left_join(select(ct, Origin=Country, Lat, Lon), by = "Origin") %>%
  ungroup() %>% as.data.frame()
x1[is.na(x1)] <- 0

# Plot
mp <- ggplot(xx, aes(x = Origin, fill = Cluster)) +
  geom_bar(stat = "count") +
  facet_grid(. ~ Cluster, scales = "free", space = "free") +
  scale_fill_manual(values = colors) +
  theme_AGL +
  theme(legend.position = "none",
        panel.grid.major.x = element_blank(),
        axis.text.x = element_text(angle = 90, hjust = 1, vjust = 0.5))


```

```

    axis.text.x = element_text(angle = 90, hjust = 1, vjust = 0.5)) +
  labs(x = NULL)
ggsave("Additional/Additional_Figure_08.png", width = 16, height = 4, dpi = 600)

```

Additional Figure 9 LDP Origins By Cluster

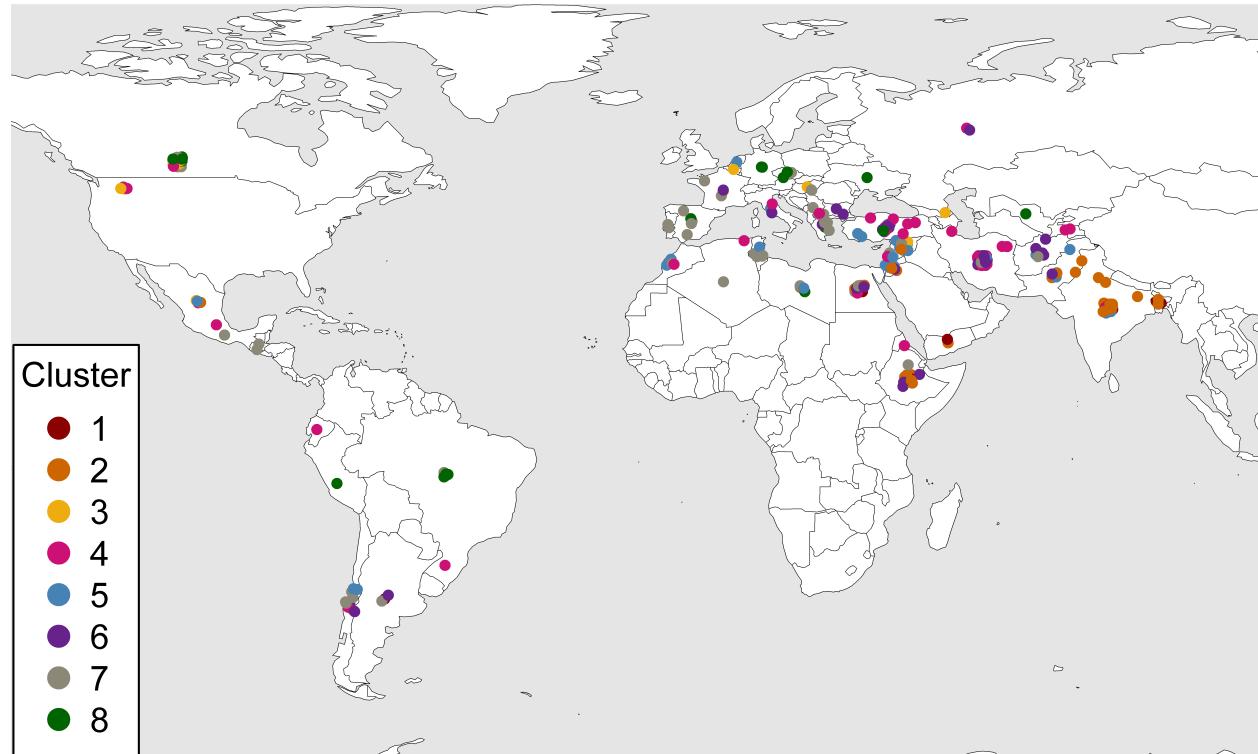

```

# Prep data
x1 <- read.csv("data/data_pca_results.csv") %>% mutate(Cluster = factor(Cluster))
xx <- ldp %>% select(Entry, Name, Lat, Lon) %>% left_join(x1, by = "Entry") %>%
  left_join(select(ct, Origin=Country, cLat=Lat, cLon=Lon), by = "Origin") %>%
  mutate(Lat = ifelse(is.na(Lat), cLat, Lat),
         Lon = ifelse(is.na(Lon), cLon, Lon),
         Lat = ifelse(duplicated(Lat), jitter(Lat, 1, 1), Lat),
         Lon = ifelse(duplicated(Lon), jitter(Lon, 1, 1), Lon), Size = 1)

# Plot
invisible(png("Additional/Additional_Figure_09.png",
              width = 7200, height = 4400, res = 600)) #res = 150
par(mai = c(0,0,0,0), xaxs = "i", yaxs = "i")
mapBubbles(dF = xx, nameX = "Lon", nameY = "Lat", nameZColour = "Cluster",
            nameZSize = "Size", symbolSize = 0.5, pch = 20, addLegend = F,
            colourPalette = colors[1:8], addColourLegend = F,
            xlim = c(-140,110), ylim = c(0,20),
            oceanCol = "grey90", landCol = "white", borderCol = "black")
legend(-139.5, 15.5, title = "Cluster", legend = 1:8, col = colors,
       pch = 16, cex = 2, pt.cex = 3, box.lwd = 2)
invisible(dev.off())


```

Modeling DTF

Additional Figures - Entry Regressions

```
myfills <- alpha(c("darkgreen", "darkorange3", "darkblue"), 0.5)
mymin <- min(rr$RDTF, na.rm = T); mymax <- max(rr$RDTF, na.rm = T)
mp <- list()
for(i in 1:324) {
  xx <- rr %>% filter(Entry == i) %>%
    left_join(select(ff, Expt, MacroEnv, T_mean, P_mean), by = "Expt") %>%
    mutate(myfill = MacroEnv)
  x1 <- xx %>% filter(MacroEnv != "South Asia")
  x2 <- xx %>% filter(MacroEnv != "Temperate")
  x3 <- xx %>% filter(MacroEnv != "Mediterranean")
  figlab <- paste("Entry", str_pad(i, 3, "left", "0"), "|", unique(xx>Name))
  # Plot (a) 1/f = a + bT
  mp1 <- ggplot(xx, aes(x = T_mean, y = RDTF)) +
    geom_point(aes(shape = MacroEnv, color = MacroEnv)) +
    geom_smooth(data = x1, method = "lm", se = F, color = "black", lty = 3) +
    geom_smooth(data = x2, method = "lm", se = F, color = "black") +
    scale_y_continuous(sec.axis = dup_axis(~ 1/, name = NULL, breaks = c(35,50,100,150)),
                       trans = "reverse", breaks = c(0.01,0.02,0.03),
                       limits = c(mymax, mymin)) +
    scale_x_continuous(breaks = c(11,13,15,17,19,21)) +
    scale_shape_manual(name = "Macro-environment", values = c(16,15,17)) +
    scale_color_manual(name = "Macro-environment", values = myfills) +
    theme_AGL +
    labs(title = figlab, y = "1 / DTF",
         x = expression(paste("Temperature (", degree, "C)", sep = "")))
  # Plot (b) 1/f = a + cP
  mp2 <- ggplot(xx, aes(x = P_mean, y = RDTF)) +
    geom_point(aes(shape = MacroEnv, color = MacroEnv)) +
    geom_smooth(data = x1, method = "lm", se = F, color = "black", lty = 3) +
    geom_smooth(data = x3, method = "lm", se = F, color = "black") +
    scale_y_continuous(sec.axis = dup_axis(~ 1/, name="DTF", breaks = c(35,50,100,150)),
                       trans = "reverse", breaks = c(0.01,0.02,0.03),
                       limits = c(mymax, mymin)) +
    scale_x_continuous(breaks = c(11,12,13,14,15,16)) +
    scale_shape_manual(name = "Macro-environment", values = c(16,15,17)) +
    scale_color_manual(name = "Macro-environment", values = myfills) +
    theme_AGL +
    labs(title = "", y = NULL, x = "Photoperiod (hours)")
  #
  mp[[i]] <- ggarrange(mp1, mp2, ncol = 2, common.legend = T, legend = "bottom")
  ggsave(paste0("Additional/Entry_TP/TP_Entry_", str_pad(i, 3, pad = "0"), ".png"),
         mp[[i]], width = 8, height = 4, dpi = 600)
}
pdf("Additional/pdf_TP.pdf", width = 8, height = 4)
for(i in 1:324) { print(mp[[i]]) }
dev.off() #dev.set(dev.next())
```

Entry 001 | CDC Asterix AGL

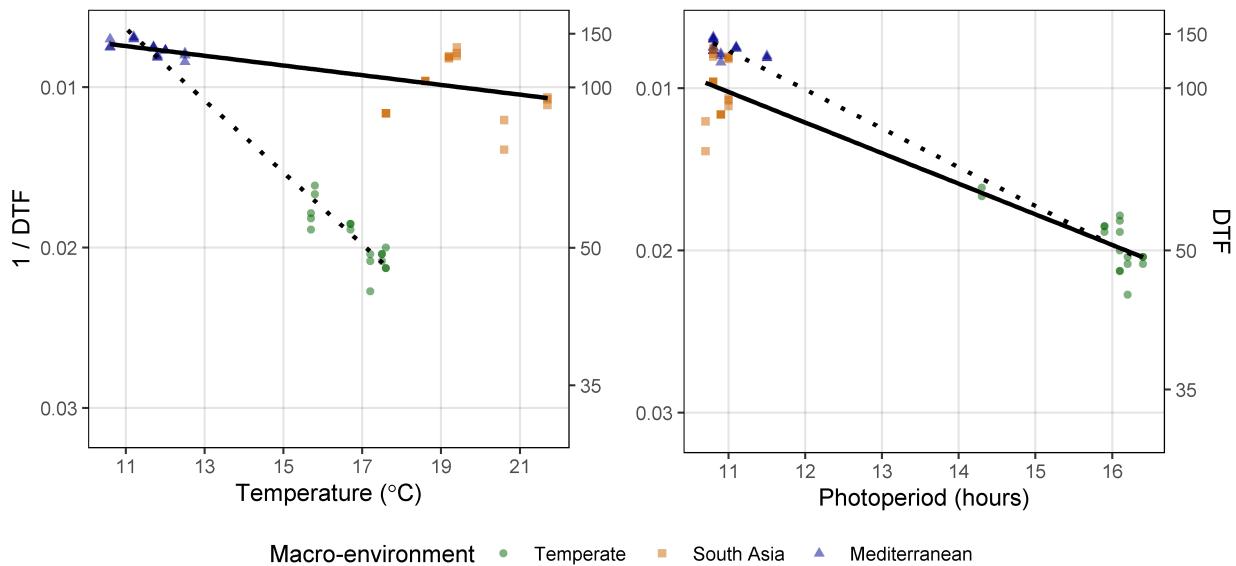

PhotoThermal Plane

```
# Prep data
xx <- rr %>% filter(!is.na(RDTF)) %>%
  left_join(select(ff, Expt, T_mean, P_mean, MacroEnv), by = "Expt")
# Create plotting function
gg_PTplane <- function(x, i) {
  x1 <- x %>% filter(Entry == i)
  x <- x1$T_mean
  y <- x1$P_mean
  z <- x1$RDTF
  fit <- lm(z ~ x + y)
  # Create PhotoThermal plane
  fitp <- predict(fit)
  grid.lines <- 12
  x.p <- seq(min(x), max(x), length.out = grid.lines)
  y.p <- seq(min(y), max(y), length.out = grid.lines)
  xy <- expand.grid(x = x.p, y = y.p)
  z.p <- matrix(predict(fit, newdata = xy), nrow = grid.lines, ncol = grid.lines)
  pchs <- plyr::mapvalues(x1$Expt, names_Expt, c(rep(16,6),rep(15,6),rep(17,6))) %>%
    as.character() %>% as.numeric()
  # Plot with regression plane
  par(mar=c(1.5, 2.5, 1.5, 0.5))
  scatter3D(x, y, z, pch = pchs, cex = 2, main = unique(x1>Name),
            col = alpha(c("darkgreen", "darkorange3", "darkblue"), 0.5),
            colvar = as.numeric(x1$MacroEnv), colkey = F, col.grid = "gray90", bty = "u",
            theta = 40, phi = 25, ticktype = "detailed", cex.lab = 1, cex.axis = 0.5,
            xlab = "Temperature", ylab = "Photoperiod", zlab = "1 / DTF", zlim = c(0.005,0.03),
            surf = list(x = x.p, y = y.p, z = z.p, col = "black", facets = NA, fit = fitp) )
}
# Plot each Entry
for (i in 1:324) {
  png(paste0("Additional/Entry_3D/3D_Entry_", str_pad(i, 3, pad = "0"), ".png"),


```

```


    width = 1000, height = 1000, res = 600) #res = 200
gg_PTplane(xx, i)
dev.off()
}
# Create PDF
pdf("Additional/pdf_3D.pdf")
par(mar=c(1.5, 2.5, 1.5, 0.5))
for (i in 1:324) {
  gg_PTplane(xx, i)
}
dev.off() #dev.set(dev.next())
#
# Plot ILL 5888 & ILL 4400 & Laird
xx <- xx %>% mutate(Name = gsub(" AGL", "", Name))
for (i in c(235, 94, 128)) {
  png(paste0("Additional/Temp/3D_Entry_", str_pad(i, 3, pad = "0"), ".png"),
      width = 1000, height = 1000, res = 600) # res = 200
  gg_PTplane(xx, i)
  dev.off()
}
# Create animation
xx <- read.csv("data/model_t+p_coefs.csv") %>% arrange(b, c)
lf <- list.files("Additional/Entry_3D")[xx$Entry]
mp <- image_read(paste0("Additional/Entry_3D/", lf))
animation <- image_animate(mp, fps = 10)
image_write(animation, "Additional/Animation_3D.gif")

```

CDC Asterix AGL

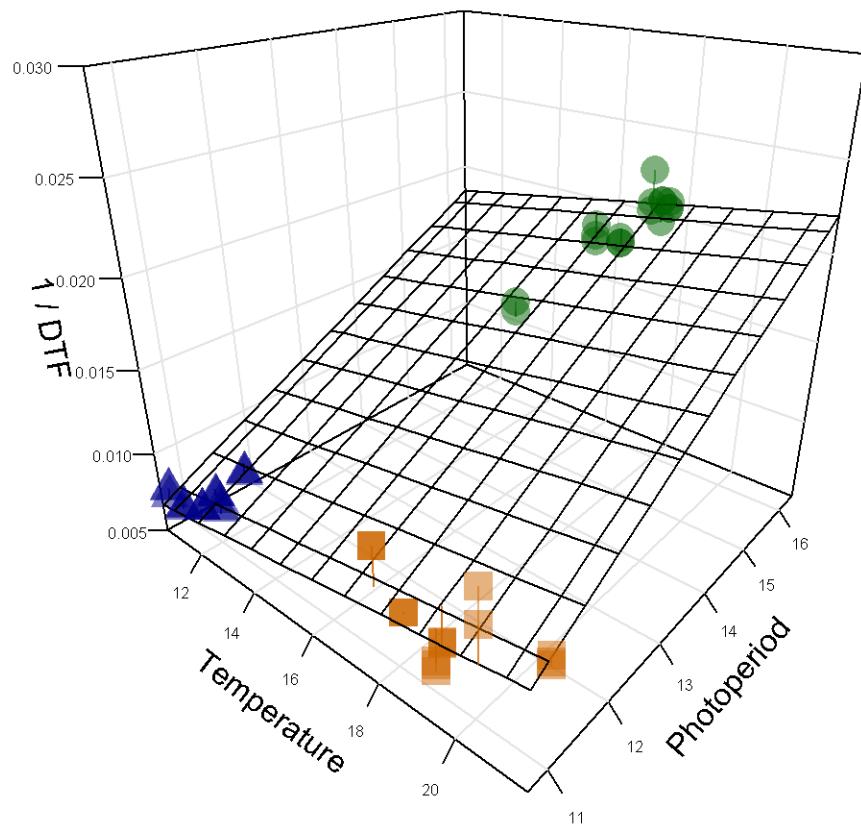

Supplemental Figure 4 Regressions

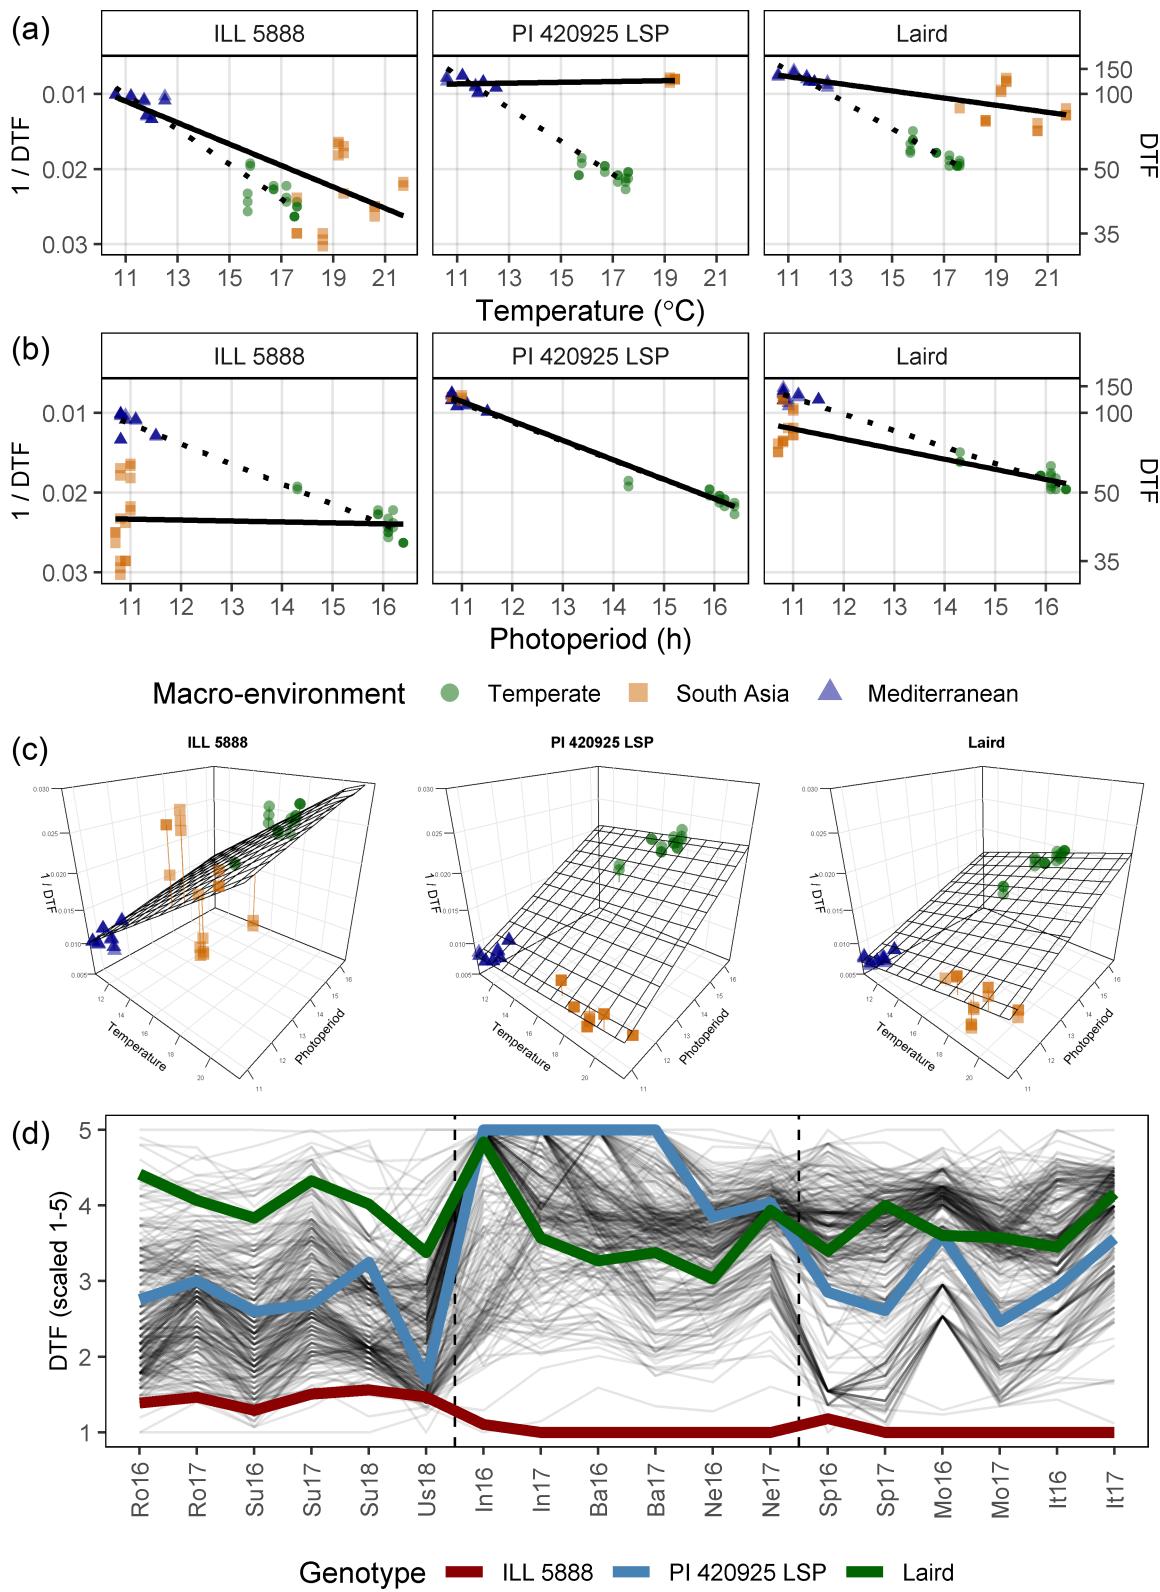

```
# Prep data
myfills <- alpha(c("darkgreen", "darkorange3", "darkblue"), 0.5)
```

```

yy <- c("ILL 5888 AGL", "PI 420925 LSP AGL", "Laird AGL")
xx <- rr %>% filter(Name %in% yy, !is.na(DTF)) %>%
  left_join(select(ff, Expt, MacroEnv, T_mean, P_mean), by = "Expt") %>%
  mutate(Name = gsub(" AGL", "", Name),
         Name = factor(Name, levels = gsub(" AGL", "", yy)),
         myfill = MacroEnv)
x1 <- xx %>% filter(MacroEnv != "South Asia")
x2 <- xx %>% filter(MacroEnv != "Temperate")
x3 <- xx %>% filter(MacroEnv != "Mediterranean")
# Plot (a) 1/f = a + bT
mp1 <- ggplot(xx, aes(x = T_mean, y = RDTF)) +
  geom_point(aes(shape = MacroEnv, color = MacroEnv)) +
  geom_smooth(data = x1, method = "lm", se = F, color = "black", lty = 3) +
  geom_smooth(data = x2, method = "lm", se = F, color = "black") +
  scale_y_continuous(trans = "reverse", breaks = c(0.01,0.02,0.03),
    sec.axis = dup_axis(~ 1/, name = "DTF", breaks = c(35,50,100,150))) +
  scale_x_continuous(breaks = c(11,13,15,17,19,21)) +
  scale_shape_manual(name = "Macro-environment", values = c(16,15,17)) +
  scale_color_manual(name = "Macro-environment", values = myfills) +
  theme_AGL + facet_grid(. ~ Name) +
  theme(axis.title.y = element_text(size = 9),
        plot.margin = unit(c(0,0,0,0), "cm")) +
  guides(colour = guide_legend(override.aes = list(size = 3))) +
  labs(y = "1 / DTF", x = expression(paste("Temperature (", degree, "C)", sep = "")))
# Plot (b) 1/f = a + cP
mp2 <- ggplot(xx, aes(x = P_mean, y = RDTF)) +
  geom_point(aes(shape = MacroEnv, color = MacroEnv)) +
  geom_smooth(data = x1, method = "lm", se = F, color = "black", lty = 3) +
  geom_smooth(data = x3, method = "lm", se = F, color = "black") +
  scale_y_continuous(trans = "reverse", breaks = c(0.01,0.02,0.03),
    sec.axis = dup_axis(~ 1/, name = "DTF", breaks = c(35,50,100,150))) +
  scale_x_continuous(breaks = c(11,12,13,14,15,16)) +
  scale_shape_manual(name = "Macro-environment", values = c(16,15,17)) +
  scale_color_manual(name = "Macro-environment", values = myfills) +
  theme_AGL + facet_grid(. ~ Name) +
  theme(axis.title.y = element_text(size = 9),
        plot.margin = unit(c(0,0,0,0), "cm")) +
  guides(colour = guide_legend(override.aes = list(size = 3))) +
  labs(y = "1 / DTF", x = "Photoperiod (h)")
# Append (a) and (b)
mp <- ggarrange(mp1, mp2, ncol = 1, common.legend = T, legend = "bottom")
ggsave("Additional/Temp/Temp_SF04_1.png", mp, width = 6, height = 3.75, dpi = 600)
# Append (c)s
im1 <- image_read("Additional/Temp/3D_Entry_094.png")
im2 <- image_read("Additional/Temp/3D_Entry_235.png")
im3 <- image_read("Additional/Temp/3D_Entry_128.png")
im <- image_append(c(im1, im2, im3)) %>% image_scale("3600x")
image_write(im, "Additional/Temp/Temp_SF04_2.png")
# Prep data
xx <- dd %>% filter(Name %in% yy) %>%
  mutate(Name = gsub(" AGL", "", Name),
         Name = factor(Name, levels = gsub(" AGL", "", yy)))
# Plot D)

```

```

mp3 <- ggplot(dd, aes(x = ExptShort, y = DTF2_scaled, group = Name)) +
  geom_line(color = "black", alpha = 0.1) +
  geom_vline(xintercept = 6.5, lty = 2) +
  geom_vline(xintercept = 12.5, lty = 2) +
  geom_line(data = xx, aes(color = Name), size = 2) +
  scale_color_manual(name = "Genotype", values = colors[c(1,5,8)]) +
  theme_AGL + labs(y = "DTF (scaled 1-5)", x = NULL) +
  theme(legend.position = "bottom",
        legend.margin = unit(c(0,0,0,0), "cm"),
        plot.margin = unit(c(0,0.2,0,0.5), "cm"),
        panel.grid = element_blank(),
        axis.title.y = element_text(size = 9),
        axis.text.x = element_text(angle = 90, vjust = 0.5))
ggsave("Additional/Temp/Temp_SF04_3.png", mp3, width = 6, height = 2.5, dpi = 600)
# Append (a), (b), C and D
im1 <- image_read("Additional/Temp/Temp_SF04_1.png") %>%
  image_annotate("(a)", size = 100, location = "+0+0") %>%
  image_annotate("(b)", size = 100, location = "+0+1000")
im2 <- image_read("Additional/Temp/Temp_SF04_2.png") %>%
  image_annotate("(c)", size = 100)
im3 <- image_read("Additional/Temp/Temp_SF04_3.png") %>%
  image_annotate("(d)", size = 100)
im <- image_append(c(im1, im2, im3), stack = T)
image_write(im, "Supplemental_Figure_04.png")

```

Modeling DTF - functions

```

# Create functions
# Plot Observed vs Predicted
gg_model_1 <- function(x, title = NULL, type = 1,
  mymin = min(c(x$DTF,x$Predicted_DTF)) - 2,
  mymax = max(c(x$DTF,x$Predicted_DTF)) + 2 ) {
  x <- x %>% mutate(Flowered = ifelse(is.na(DTF), "Did not Flower", "Flowered"))
  # Prep data
  if(type == 1) {
    myx <- "DTF"; myy <- "Predicted_DTF"
    x <- x %>% filter(!is.na(DTF))
  }
  if(type == 2) {
    myx <- "RDTF"; myy <- "Predicted_RDTF"
    x <- x %>% filter(!is.na(RDTF))
  }
  myPal <- colors_Expt[names_Expt %in% unique(x$Expt)]
  r2 <- round(modelR2(x = x[,myx], y = x[,myy]), 3)
  # Plot
  mp <- ggplot(x) +
    geom_point(aes(x = get(myx), y = get(myy), color = Expt)) +
    geom_abline() +
    geom_label(x = mymin, y = mymax, hjust = 0, vjust = 1, parse = T,
              label = paste("italic(R)^2 == ", r2)) +
    scale_x_continuous(limits = c(mymin, mymax), expand = c(0, 0)) +
    scale_y_continuous(limits = c(mymin, mymax), expand = c(0, 0)) +
    scale_color_manual(name = NULL, values = myPal) +

```

```

    theme_AGL + guides(colour = guide_legend(override.aes = list(size = 2)))
  if(type == 1) {
    mp <- mp + labs(y = "Predicted DTF (days)", x = "Observed DTF (days)")
  }
  if(type == 2) {
    mp <- mp +
      scale_x_reverse(limits = c(mymax, mymin), expand = c(0, 0)) +
      scale_y_reverse(limits = c(mymax, mymin), expand = c(0, 0)) +
      labs(y = "Predicted RDTF (1/day)", x = "Observed RDTF (1/day)")
  }
  if(!is.null(title)) { mp <- mp + labs(title = title) }
  mp
}
# Facets by Expt
gg_model_2 <- function(x, myX = "DTF", myY = "Predicted_DTF", title = NULL,
                        x1 = 30, x2 = 30, y1 = 145, y2 = 120, legend.pos = "bottom") {
  # Prep data
  pca <- read.csv("data/data_pca_results.csv") %>% select(Entry, Cluster) %>%
    mutate(Cluster = factor(Cluster))
  x <- x %>%
    filter(!is.na(get(myX))) %>%
    left_join(pca, by = "Entry")
  xf <- x %>% group_by(Expt) %>%
    summarise(Mean = mean(DTF)) %>% ungroup() %>%
    mutate(r2 = NULL, RMSE = NULL)
  for(i in 1:nrow(xf)) {
    xi <- x %>% filter(Expt == xf$Expt[i])
    xf[i,"r2"] <- round(modelR2(x = xi[,myX], y = xi[,myY]), 2)
    xf[i,"RMSE"] <- round(modelRMSE(x = xi[,myX], y = xi[,myY]), 1)
  }
  # Plot
  mp <- ggplot(x, aes(x = get(myX), y = get(myY))) +
    geom_point(aes(color = Cluster), size = 0.75, alpha = 0.7) + geom_abline() +
    geom_text(x = x1, y = y1, color = "black", hjust = 0, vjust = 0, size = 3,
              aes(label = paste("RMSE = ", RMSE, sep = "")), data = xf) +
    geom_text(x = x2, y = y2, color = "black", hjust = 0, vjust = 0, size = 3,
              aes(label = paste("italic(R)^2 == ", r2)), parse = T, data = xf) +
    facet_wrap(Expt ~ ., ncol = 6, labeller = label_wrap_gen(width = 17)) +
    scale_x_continuous(limits = c(min(x[,myX]), max(x[,myX]))) +
    scale_y_continuous(limits = c(min(x[,myX]), max(x[,myX]))) +
    scale_color_manual(values = colors) +
    theme_AGL +
    theme(legend.position = legend.pos, legend.margin = unit(c(0,0,0,0), "cm"),
          panel.grid = element_blank()) +
    guides(colour = guide_legend(nrow = 1, override.aes = list(size = 3))) +
    labs(y = "Predicted DTF (days)", x = "Observed DTF (days)")
  if(!is.null(title)) { mp <- mp + labs(title = title) }
  mp
}
# R^2 function
modelR2 <- function(x, y) {
  1 - (sum((x - y)^2, na.rm = T) / sum((x - mean(x, na.rm = T))^2, na.rm = T))
}

```

```
# RMSE function
modelRMSE <- function(x, y) {
  sqrt(sum((x-y)^2, na.rm = T) / length(x))
}
```

$$R^2 = 1 - \frac{SS_{residuals}}{SS_{total}} = 1 - \frac{\sum(x-y)^2}{\sum(x-\bar{x})}$$

$$RMSE = \sqrt{\frac{\sum(y-x)^2}{n}}$$

Modeling DTF (T + P) - All Site-years

```
#####
# 1/f = a + bT + cP (All) #
#####

# Prep data
xx <- rr %>% filter(!is.na(RDTF)) %>%
  left_join(select(ff, Expt, T_mean, P_mean), by = "Expt") %>%
  select(Plot, Entry, Name, Rep, Expt, ExptShort, T_mean, P_mean, RDTF, DTF)
mr <- NULL; md <- NULL
mc <- select(ldp, Entry, Name) %>%
  mutate(a = NA, b = NA, c = NA, RR = NA, Environments = NA,
        aP = NA, bP = NA, cP = NA)

# Model
for(i in 1:324) {
  # Prep data
  xri <- xx %>% filter(Entry == i)
  xdi <- xri %>% group_by(Entry, Name, Expt, ExptShort) %>%
    summarise_at(vars(DTF, RDTF, T_mean, P_mean), funs(mean), na.rm = T) %>%
    ungroup()
  # Train Model
  mi <- lm(RDTF ~ T_mean + P_mean, data = xri)
  # Predict DTF
  xri <- xri %>% mutate(Predicted_RDTF = predict(mi),
                           Predicted_DTF = 1 / predict(mi))
  xdi <- xdi %>% mutate(Predicted_RDTF = predict(mi, newdata = xdi),
                           Predicted_DTF = 1 / predict(mi, newdata = xdi))
  # Save to table
  mr <- bind_rows(mr, xri)
  md <- bind_rows(md, xdi)
  # Save coefficients
  mc[i,c("a","b","c")] <- mi$coefficients
  # Calculate rr and # of environments used
  mc[i,"RR"] <- 1 - sum((xri$DTF - xri$Predicted_DTF)^2, na.rm = T) /
    sum((xri$Predicted_DTF - mean(xri$DTF, na.rm = T))^2, na.rm = T)
  mc[i,"Environments"] <- length(unique(xri$Expt[!is.na(xri$DTF)]))
  mc[i,"aP"] <- summary(mi)[[4]][1,4]
  mc[i,"bP"] <- summary(mi)[[4]][2,4]
  mc[i,"cP"] <- summary(mi)[[4]][3,4]
}
mr <- mr %>% mutate(Expt = factor(Expt, levels = names_Expt))
md <- md %>% mutate(Expt = factor(Expt, levels = names_Expt))
# Save Results
write.csv(mr, "data/model_t+p.csv", row.names = F)
```


```

write.csv(md, "data/model_t+p_d.csv", row.names = F)
write.csv(mc, "data/model_t+p_coefs.csv", row.names = F)
#
# Plot Each Entry
mp <- list()
for(i in 1:324) {
  mp1 <- gg_model_1(mr %>% filter(Entry == i), paste("Entry", i, "| DTF"),
    mymin = min(c(mr$Predicted_DTF, mr$DTF), na.rm = T),
    mymax = max(c(mr$Predicted_DTF, mr$DTF), na.rm = T))
  mp2 <- gg_model_1(mr %>% filter(Entry == i), paste("Entry", i, "| RDTF"), type = 2,
    mymin = min(c(mr$Predicted_RDTF, mr$RDTF)) - 0.001,
    mymax = max(c(mr$Predicted_RDTF, mr$RDTF)) + 0.001)
  mp[[i]] <- ggarrange(mp1, mp2, ncol = 2, common.legend = T, legend = "right")
  fname <- paste0("Additional/entry_model/model_entry_", str_pad(i, 3, pad = "0"), ".png")
  ggsave(fname, mp[[i]], width = 10, height = 4.5, dpi = 600)
}
pdf("Additional/pdf_model.pdf", width = 10, height = 4.5)
for (i in 1:324) { print(mp[[i]]) }
dev.off() #dev.set(dev.next())

# Prep data
xx <- read.csv("data/model_t+p_d.csv") %>%
  mutate(Expt = factor(Expt, levels = names_Expt))
# Plot Observed vs Predicted
mp <- gg_model_1(xx, title = "Model = T + P")
ggsave("Additional/Model/Model_1_1.png", mp, width = 7, height = 5, dpi = 600)


```

Model = T + P

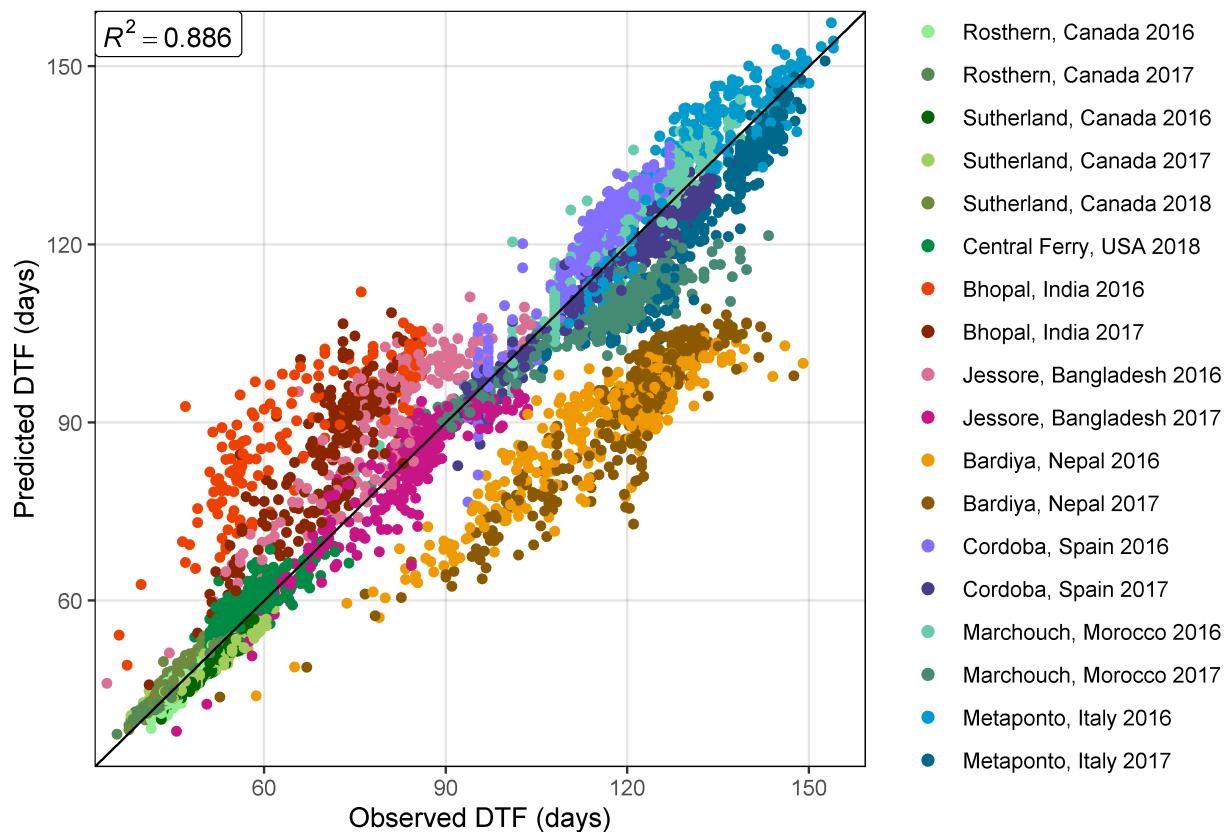


```
# Plot Observed vs Predicted
mp <- gg_model_2(xx, title = "Model = T + P")
ggsave("Additional/Model/Model_2_1.png", mp, width = 8, height = 5.5, dpi = 600)
```

Model = T + P

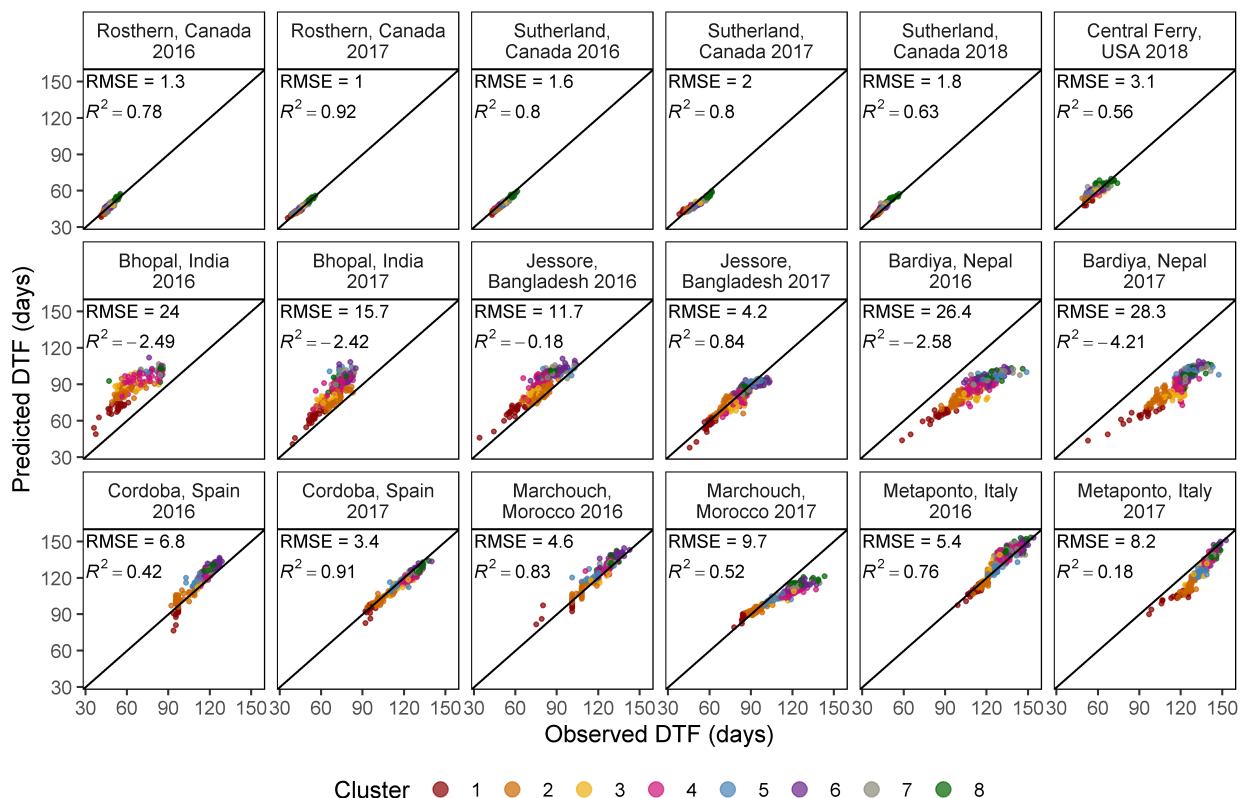

```
# Plot Observed vs Predicted for Temperate Locations
myexpts <- c("Ro16", "Ro17", "Su16", "Su17", "Su18", "Us18")
mp <- gg_model_2(xx %>% filter(ExptShort %in% myexpts))
ggsave("Additional/Model/Model_3_1.png", mp, width = 8, height = 3, dpi = 600)
```

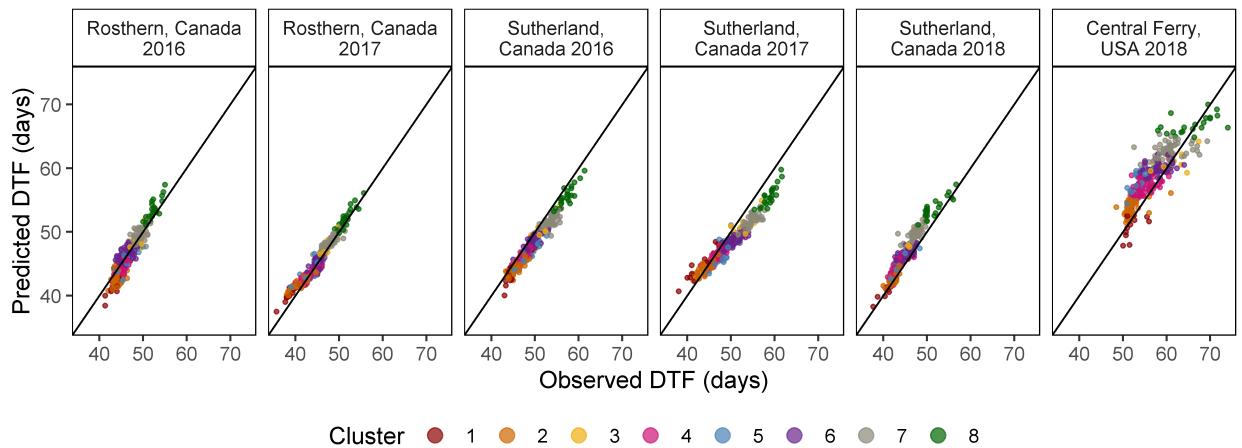

Modeling DTF (T x P) - All Site-years

```
#####
# 1/f = a + bT + cP (All) #
#####
# Prep data
```


```

xx <- rr %>% filter(!is.na(RDTF)) %>%
  left_join(select(ff, Expt, T_mean, P_mean), by = "Expt") %>%
  select(Plot, Entry, Name, Rep, Expt, ExptShort, T_mean, P_mean, RDTF, DTF)
mr <- NULL; md <- NULL
mc <- select(ldp, Entry, Name) %>%
  mutate(a = NA, b = NA, c = NA, d = NA, RR = NA, Environments = NA,
        aP = NA, bP = NA, cP = NA, dP = NA)
# Model
for(i in 1:324) {
  # Prep data
  xri <- xx %>% filter(Entry == i)
  xdi <- xri %>% group_by(Entry, Name, Expt, ExptShort) %>%
    summarise_at(vars(DTF, RDTF, T_mean, P_mean), funs(mean), na.rm = T) %>%
    ungroup()
  # Train Model
  mi <- lm(RDTF ~ T_mean * P_mean, data = xri)
  # Predict DTF
  xri <- xri %>% mutate(Predicted_RDTF = predict(mi),
                           Predicted_DTF = 1 / predict(mi))
  xdi <- xdi %>% mutate(Predicted_RDTF = predict(mi, newdata = xdi),
                           Predicted_DTF = 1 / predict(mi, newdata = xdi))
  # Save to table
  mr <- bind_rows(mr, xri)
  md <- bind_rows(md, xdi)
  # Save coefficients
  mc[i,c("a","b","c","d")] <- mi$coefficients
  # Calculate rr and # of environments used
  mc[i,"RR"] <- 1 - sum((xri$DTF - xri$Predicted_DTF)^2, na.rm = T) /
    sum((xri$Predicted_DTF - mean(xri$DTF, na.rm = T))^2, na.rm = T)
  mc[i,"Environments"] <- length(unique(xri$Expt[!is.na(xri$DTF)]))
  mc[i,"aP"] <- summary(mi)[[4]][1,4]
  mc[i,"bP"] <- summary(mi)[[4]][2,4]
  mc[i,"cP"] <- summary(mi)[[4]][3,4]
  mc[i,"dP"] <- summary(mi)[[4]][4,4]
}
mr <- mr %>% mutate(Expt = factor(Expt, levels = names_Expt))
md <- md %>% mutate(Expt = factor(Expt, levels = names_Expt))
# Save Results
write.csv(mr, "data/model_txp.csv", row.names = F)
write.csv(md, "data/model_txp_d.csv", row.names = F)
write.csv(mc, "data/model_txp_coefs.csv", row.names = F)

# Prep data
xx <- read.csv("data/model_txp_d.csv") %>%
  mutate(Expt = factor(Expt, levels = names_Expt))
# Plot Observed vs Predicted
mp <- gg_model_1(xx, title = "Model = T x P")
ggsave("Additional/Model/Model_1_2.png", mp, width = 7, height = 5, dpi = 600)


```

Model = T + P

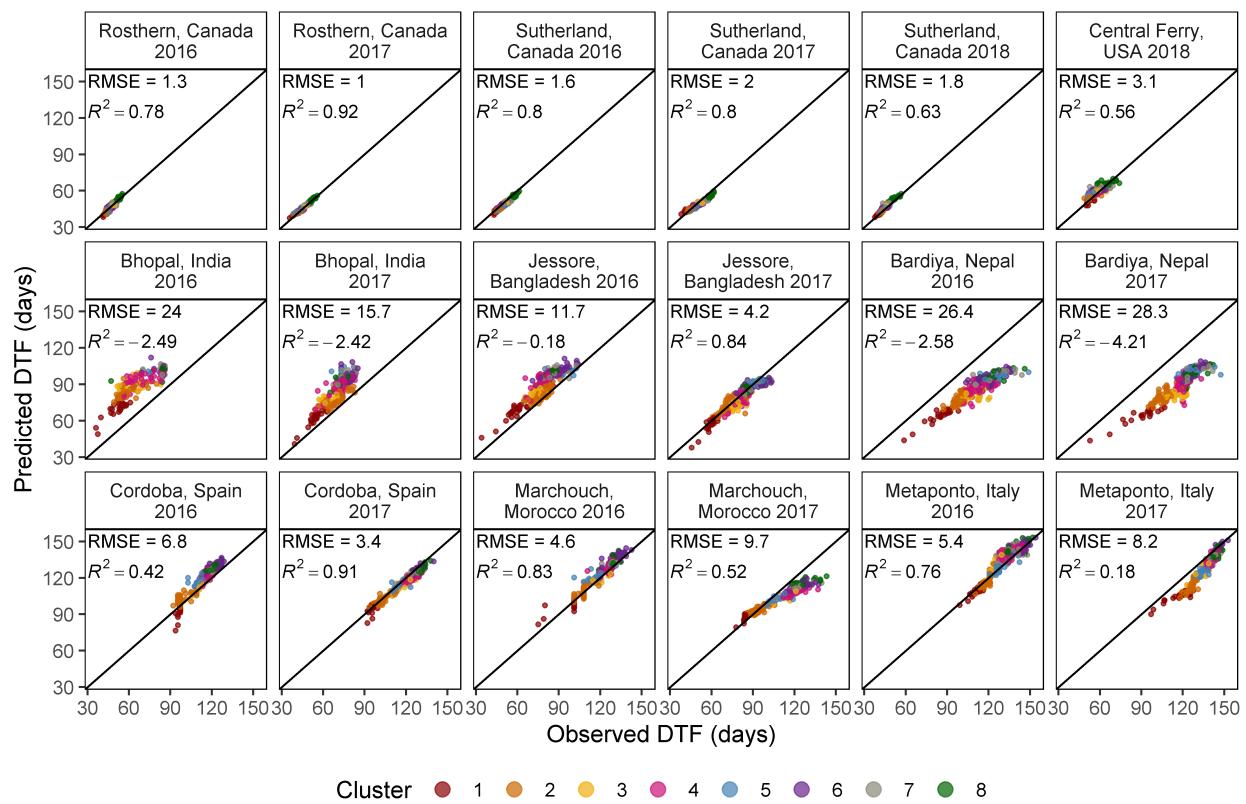

Plot Observed vs Predicted

```
mp <- gg_model_2(xx, title = "Model = T x P")
ggsave("Additional/Model/Model_2_2.png", mp, width = 8, height = 5.5, dpi = 600)
```

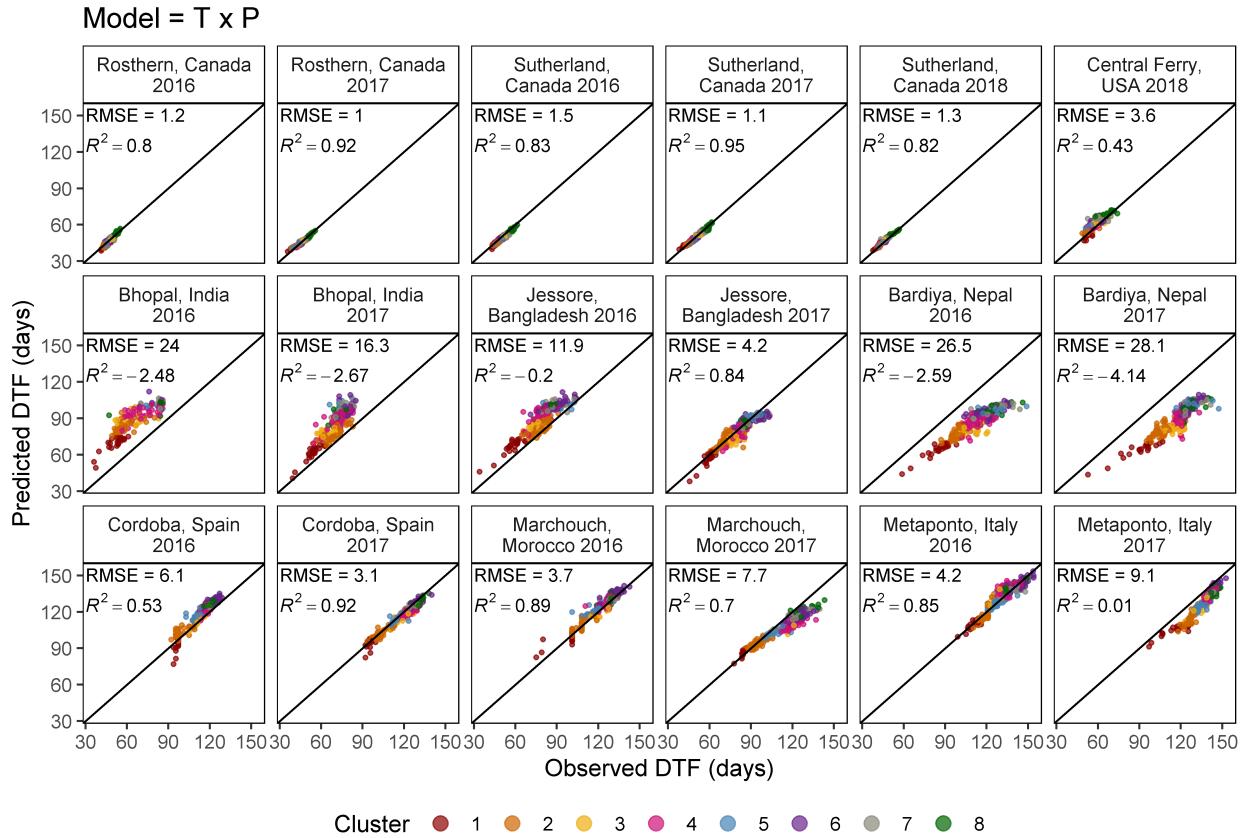


Supplemental Table 3 Model Constants

```
# Prep data
x1 <- read.csv("data/model_t+p_coefs.csv")
x2 <- read.csv("data/model_txp_coefs.csv")
xx <- bind_rows(x1, x2) %>% arrange(Entry) %>%
  select(Entry, Name, a, b, c, d, RR, Environments,
         a_p.value=aP, b_p.value=bP, c_p.value=cP, d_p.value=dP)
# Save
write.csv(xx, "Supplemental_Table_03.csv", na = "", row.names = F)
```

```
'data.frame': 648 obs. of 12 variables:
 $ Entry      : int  1 1 2 2 3 3 4 4 5 5 ...
 $ Name        : chr  "CDC Asterix AGL" "CDC Asterix AGL" "CDC Rosie AGL" "CDC Rosie AGL" ...
 $ a           : num -0.01877 0.00727 -0.01468 0.02093 -0.01388 ...
 $ b           : num 0.000337 -0.001202 0.000352 -0.001752 0.000356 ...
 $ c           : num 0.002046 -0.000317 0.001691 -0.001534 0.001587 ...
 $ d           : num NA 0.00014 NA 0.000191 NA ...
 $ RR          : num 0.898 0.899 0.846 0.843 0.883 ...
 $ Environments: int 16 16 18 18 16 16 17 17 17 17 ...
 $ a_p.value   : num 2.41e-21 6.20e-01 1.99e-15 1.69e-01 3.05e-18 ...
 $ b_p.value   : num 5.43e-08 1.69e-01 2.76e-07 5.34e-02 3.33e-10 ...
 $ c_p.value   : num 3.68e-31 8.11e-01 1.07e-24 2.63e-01 4.76e-29 ...
 $ d_p.value   : num NA 0.0794 NA 0.0213 NA ...
```

Additional Figure 10 significant T x P interactions

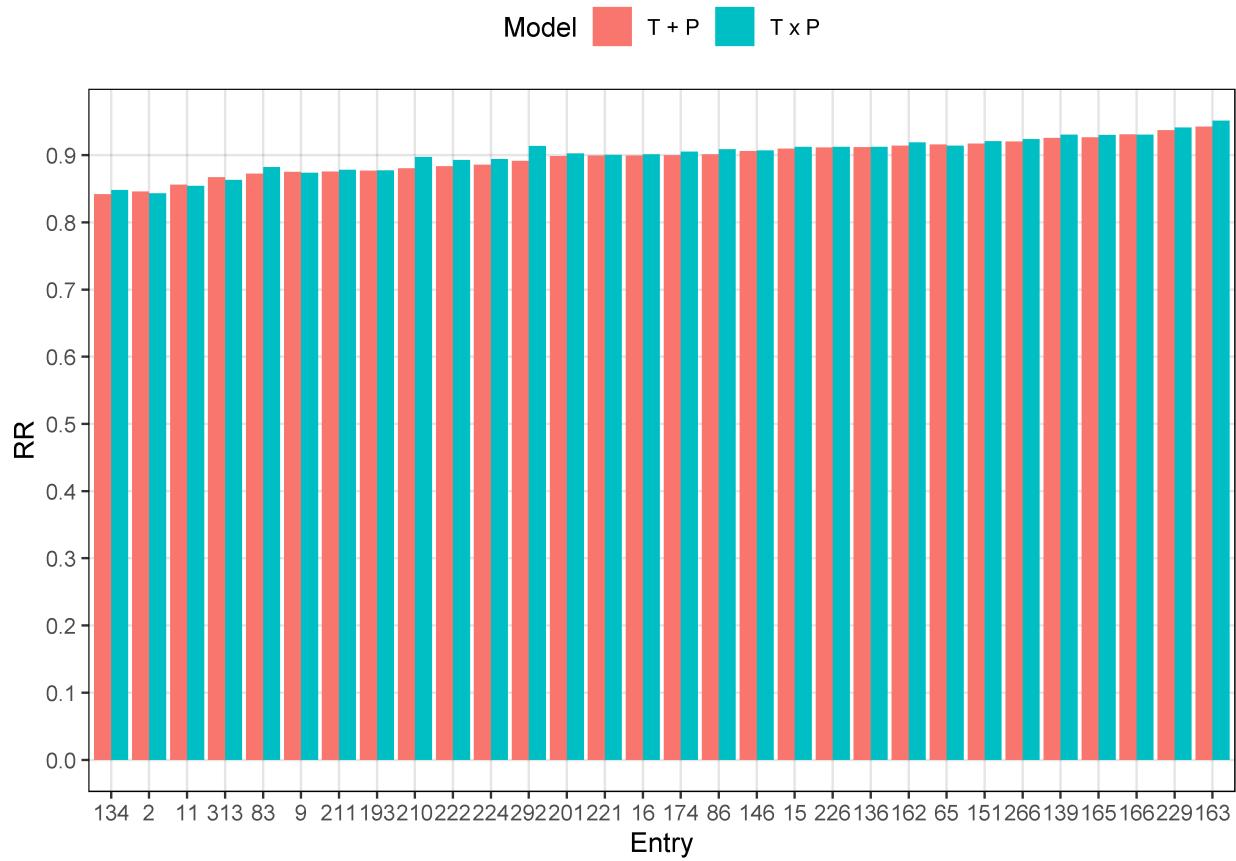


```
# Prep data
ents <- x2 %>% filter(dP < 0.05) %>% pull(Entry)
xx <- xx %>% filter(Entry %in% ents)
xx <- xx %>% arrange(RR) %>%
  mutate(Entry = factor(Entry, levels = unique(Entry)),
        Model = ifelse(is.na(d), "T + P", "T x P"))
length(ents)

[1] 30


# Plot
mp <- ggplot(xx, aes(x = Entry, y = RR, fill = Model)) +
  geom_bar(stat = "identity", position = "dodge") +
  scale_y_continuous(breaks = seq(0,1,0.1), minor_breaks = seq(0,1,0.01)) +
  theme_AGL +
  theme(legend.position = "top")
ggsave("Additional/Additional_Figure_10.png", mp, width = 7, height = 5, dpi = 600)
```

Supplemental Figure 5 Model T + P vs T x P

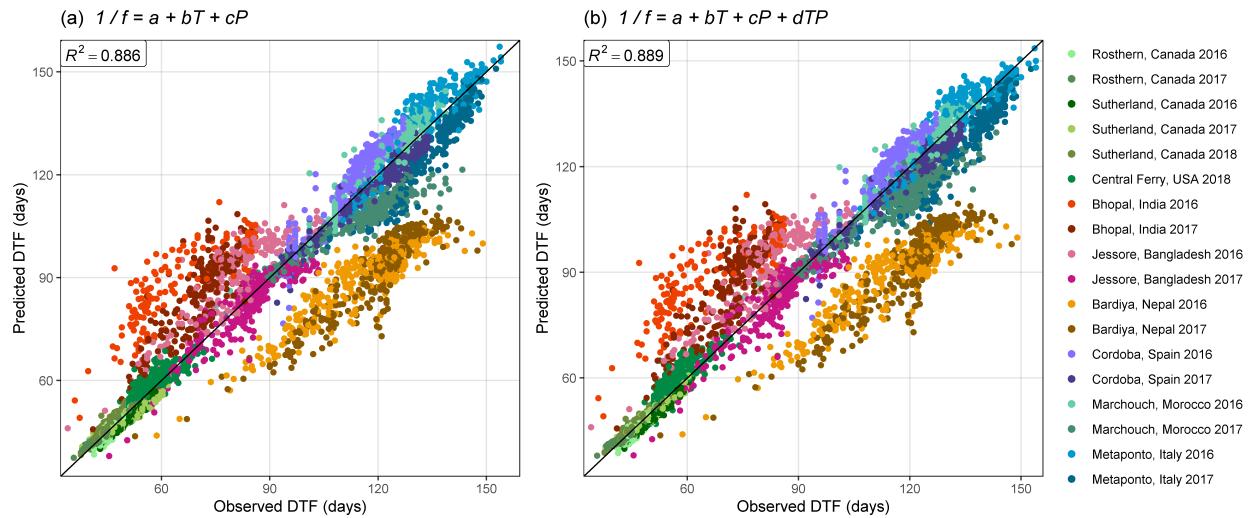

```
# Prep data
xx <- read.csv("data/model_t+p_d.csv") %>%
  mutate(Expt = factor(Expt, levels = names_Expt))
# Plot Observed vs Predicted
mp1 <- gg_model_1(xx,
  title = expression(paste("(a) ", italic(" 1 / f = a + bT + cP"))))
# Prep data
xx <- read.csv("data/model_txp_d.csv") %>%
  mutate(Expt = factor(Expt, levels = names_Expt))
# Plot Observed vs Predicted
mp2 <- gg_model_1(xx,
  title = expression(paste("(b) ", italic(" 1 / f = a + bT + cP + dTP"))))
# Append
mp <- ggarrange(mp1, mp2, ncol = 2, common.legend = T, legend = "right")
ggsave("Supplemental_Figure_05.png", mp, width = 12, height = 5, dpi = 600)
```

Additional Figure 11 Constants

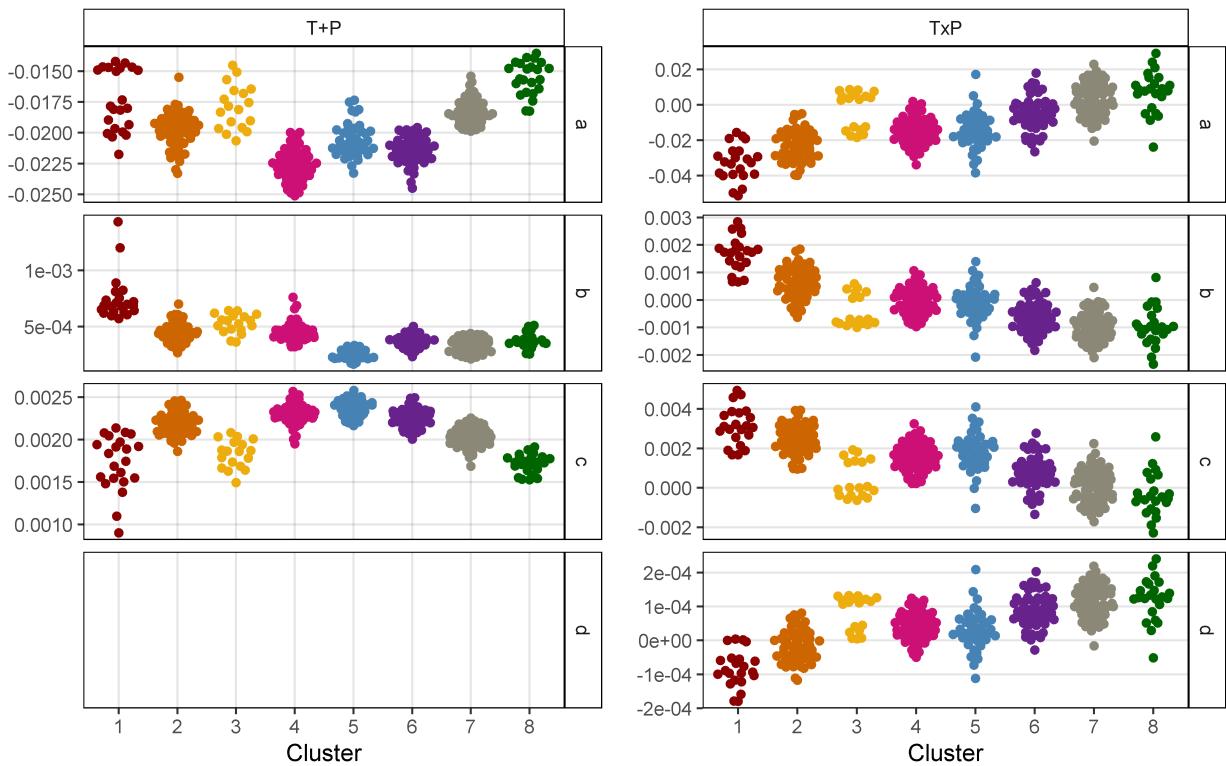


```

# Prep data
pca <- read.csv("data/data_pca_results.csv") %>% mutate(Cluster = factor(Cluster))
x1 <- read.csv("data/model_t+p_coefs.csv") %>% mutate(Model = "T+P")
x2 <- read.csv("data/model_txp_coefs.csv") %>% mutate(Model = "TxP")
xx <- bind_rows(x1, x2) %>%
  gather(Coef, Value, a,b,c,d) %>%
  left_join(pca, by = "Entry") %>% mutate(Cluster = factor(Cluster))
# Plot
mp1 <- ggplot(xx%>%filter(Model=="T+P"), aes(x = Cluster, y = Value, color = Cluster)) +
  geom_quasirandom() + theme_AGL +
  facet_grid(Coef~Model, scales = "free_y") +
  scale_color_manual(values = colors) + labs(y = NULL)
mp2 <- ggplot(xx%>%filter(Model=="TxP"), aes(x = Cluster, y = Value, color = Cluster)) +
  geom_quasirandom() +
  facet_grid(Coef~Model, scales = "free_y") +
  theme_AGL +
  theme(panel.grid.major.x = element_blank()) +
  scale_color_manual(values = colors) + labs(y = NULL)
mp <- ggarrange(mp1, mp2, ncol = 2, legend = "none")
ggsave("Additional/Additional_Figure_11.png", mp, width = 8, height = 5, dpi = 600)

```

Additional Figure 12 Coefficient p-values

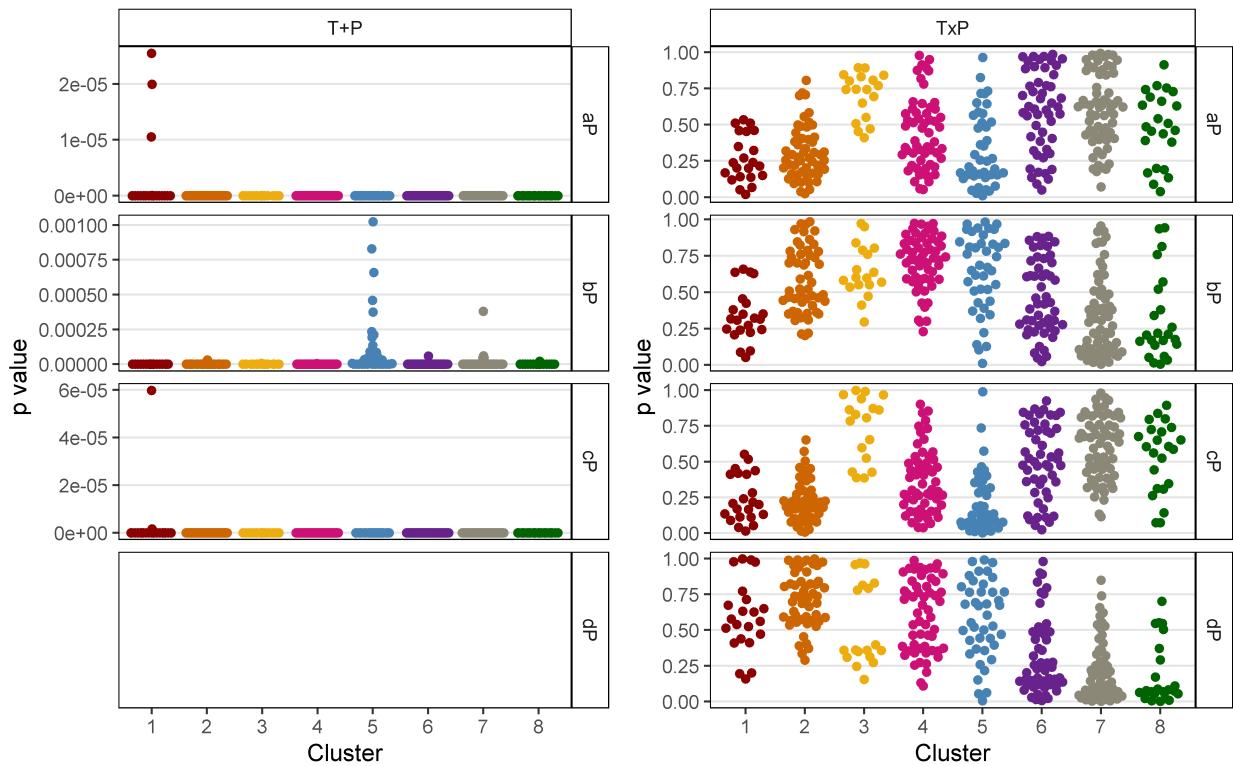


```

# Prep data
pca <- read.csv("data/data_pca_results.csv") %>% mutate(Cluster = factor(Cluster))
x1 <- read.csv("data/model_t+p_coefs.csv") %>% mutate(Model = "T+P")
x2 <- read.csv("data/model_txp_coefs.csv") %>% mutate(Model = "TxP")
xx <- bind_rows(x1, x2) %>% gather(Coef, Value, aP,bP,cP,dP) %>%
  left_join(pca, by = "Entry") %>% mutate(Cluster = factor(Cluster))
# Plot
mp1 <- ggplot(xx%>%filter(Model=="T+P"), aes(x = Cluster, y = Value, color = Cluster)) +
  geom_quasirandom() +
  facet_grid(Coef~Model, scales = "free_y") +
  scale_color_manual(values = colors) +
  theme_AGL +
  theme(panel.grid.major.x = element_blank()) +
  labs(y = "p value")
mp2 <- ggplot(xx%>%filter(Model=="TxP"), aes(x = Cluster, y = Value, color = Cluster)) +
  geom_quasirandom() +
  facet_grid(Coef ~ Model, scales = "free_y") +
  theme_AGL +
  theme(panel.grid.major.x = element_blank()) +
  scale_color_manual(values = colors) +
  labs(y = "p value")
mp <- ggarrange(mp1,mp2,ncol=2, legend = "none")
ggsave("Additional/Additional_Figure_12.png", mp, width = 8, height = 5, dpi = 600)

```

Additional Figure 13 p-values b c

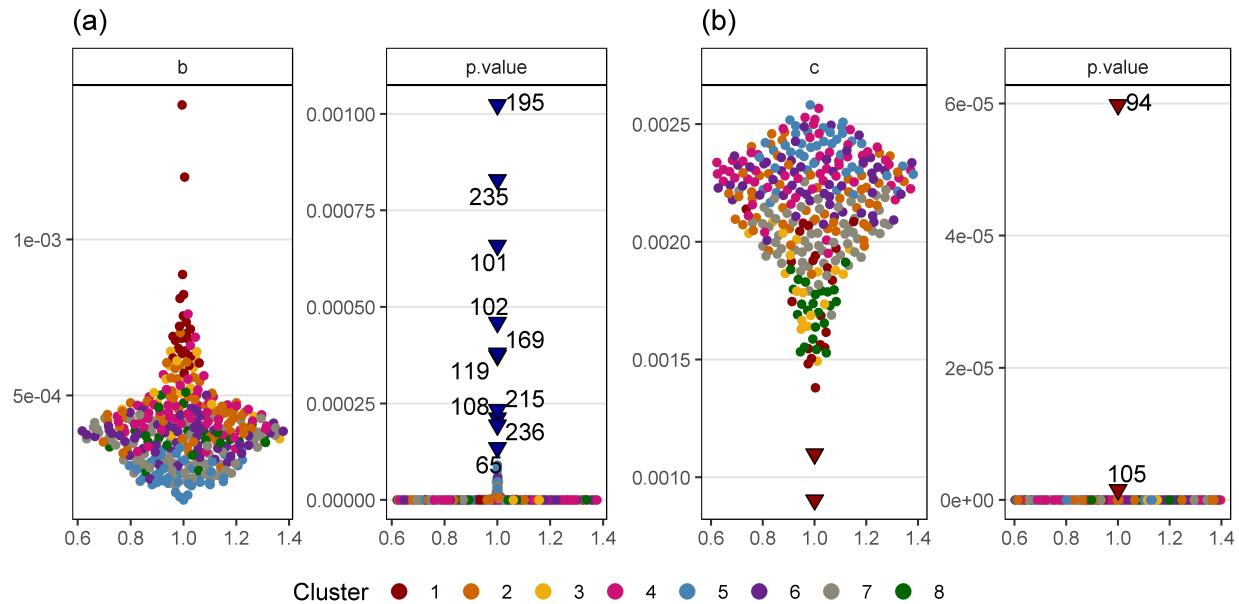

```
# Prep data
pca <- read.csv("data/data_pca_results.csv") %>% mutate(Cluster = factor(Cluster))
xx <- read.csv("data/model_t+p_coefs.csv") %>%
  mutate(Sig = factor(ifelse(bP > 0.0001, "Sig", "Less Sig"))) %>%
  select(Entry, Sig, p.value=bP, b) %>%
  gather(Trait, Value, p.value, b) %>%
  left_join(pca, by = "Entry")
x1 <- xx %>% filter(Sig == "Sig", Trait == "p.value")
# Plot (a)
mp1 <- ggplot(xx, aes(x = 1, y = Value)) +
  geom_quasirandom(aes(color = Cluster)) +
  geom_point(data = x1, size = 2.5, pch = 25, color = "black", fill = "darkblue") +
  geom_text_repel(data = x1, aes(label = Entry)) +
  facet_wrap(~Trait, scales = "free_y") +
  scale_color_manual(values = colors) +
  guides(colour = guide_legend(nrow = 1, override.aes = list(size = 3))) +
  theme_AGL +
  theme(panel.grid.major.x = element_blank()) +
  labs(title = "(a)", x = NULL, y = NULL)
# Prep data
xx <- read.csv("data/model_t+p_coefs.csv") %>%
  mutate(Sig = factor(ifelse(cP > 0.000001, "Sig", "Less Sig"))) %>%
  select(Entry, Sig, p.value=cP, c) %>%
  gather(Trait, Value, p.value, c) %>%
  left_join(pca, by = "Entry")
x1 <- xx %>% filter(Sig == "Sig")
# Plot B)
mp2 <- ggplot(xx, aes(x = 1, y = Value)) +
  geom_quasirandom(aes(color = Cluster)) +
  geom_point(data = x1, size = 2.5, pch = 25, color = "black", fill = "darkred") +
  geom_text_repel(data = x1 %>% filter(Trait == "p.value"), aes(label = Entry)) +
  facet_wrap(~Trait, scales = "free_y") +
```

```

scale_color_manual(values = colors) +
guides(colour = guide_legend(nrow = 1, override.aes = list(size = 3))) +
theme_AGL +
theme(panel.grid.major.x = element_blank()) +
labs(title = "(b)", x = NULL, y = NULL)
# Append (a) and (b)
mp <- ggarrange(mp1, mp2, ncol = 2, common.legend = T, legend = "bottom")
ggsave("Additional/Additional_Figure_13.png", mp, width = 8, height = 4, dpi = 600)

```

Modeling DTF (T + P) - Location Out

Train the model without the location used for prediction

```


#####
#  $1/f = a + bT + cP$  (Location Out) #
#####

# Prep data
xx <- rr %>% filter(!is.na(RDTF)) %>%
  left_join(select(ff, Expt, T_mean, P_mean), by = "Expt")
mr <- NULL; md <- NULL
# Model - For each Location, the model is re-trained without that locations data
for(i in 1:324) {
  for(k in unique(xx$Location)) {
    # Prep data
    xi1 <- xx %>% filter(Entry == i, Location != k)
    xi2 <- xx %>% filter(Entry == i, Location == k)
    xd2 <- xi2 %>% group_by(Entry, Name, Expt, ExptShort) %>%
      summarise_at(vars(DTF, RDTF, T_mean, P_mean), funs(mean), na.rm = T) %>%
      ungroup()
    # Train model
    mi <- lm(RDTF ~ T_mean * P_mean, data = xi1)
    # Predict DTF
    xi2 <- xi2 %>% mutate(Predicted_DTF = 1 / predict(mi, newdata = xi2))
    xd2 <- xd2 %>% mutate(Predicted_DTF = 1 / predict(mi, newdata = xd2))
    # Save to table
    mr <- bind_rows(mr, xi2)
    md <- bind_rows(md, xd2)
  }
}
# Save Results
write.csv(mr, "data/model_test.csv", row.names = F)
write.csv(md, "data/model_test_d.csv", row.names = F)

```


Figure 4 Test Model

Model = T + P | Location Out

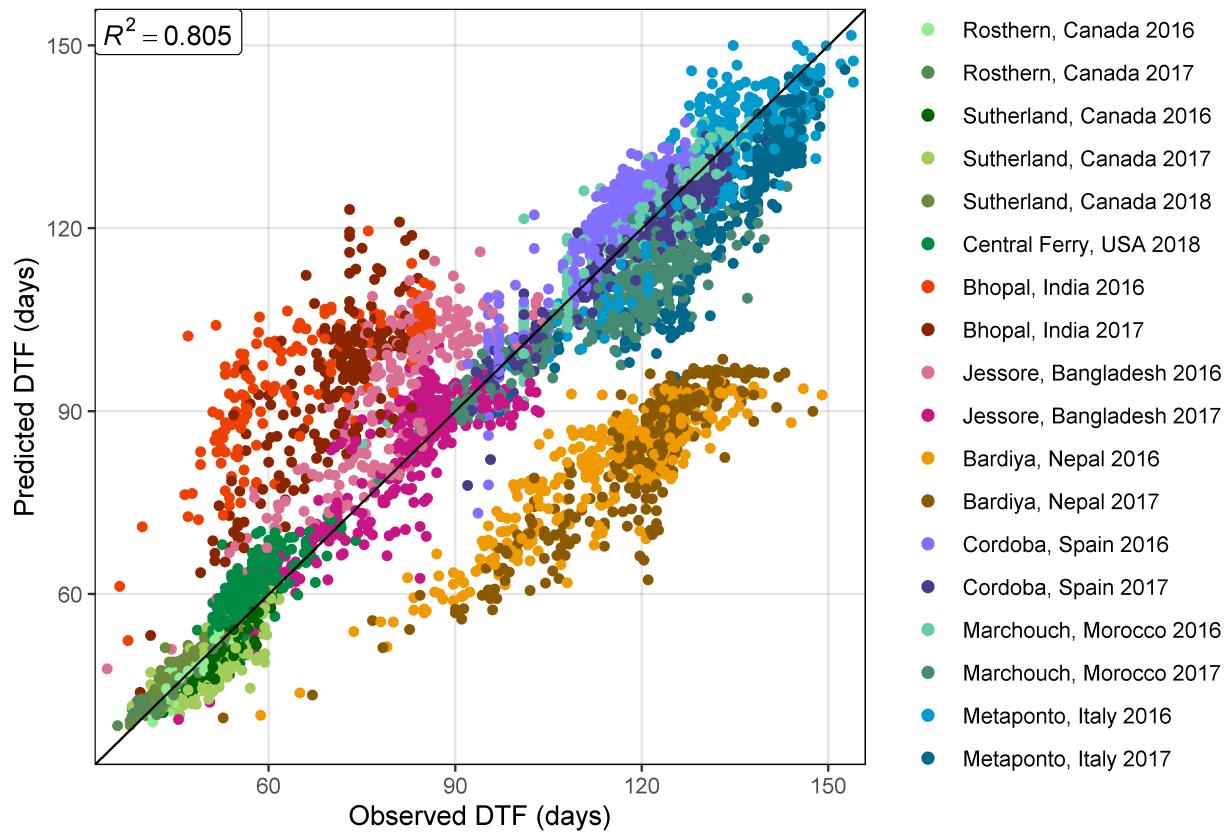

```
# Prep data
xx <- read.csv("data/model_test_d.csv") %>%
  mutate(Expt = factor(Expt, levels = names_Expt))
# Plot Observed vs Predicted
mp <- gg_model_1(xx, title = "Model = T + P | Location Out")
ggsave("Additional/Model/Model_1_3.png", mp, width = 7, height = 5, dpi = 600)
```

Overall: $R^2 = 0.804$ | RMSE = 15.0

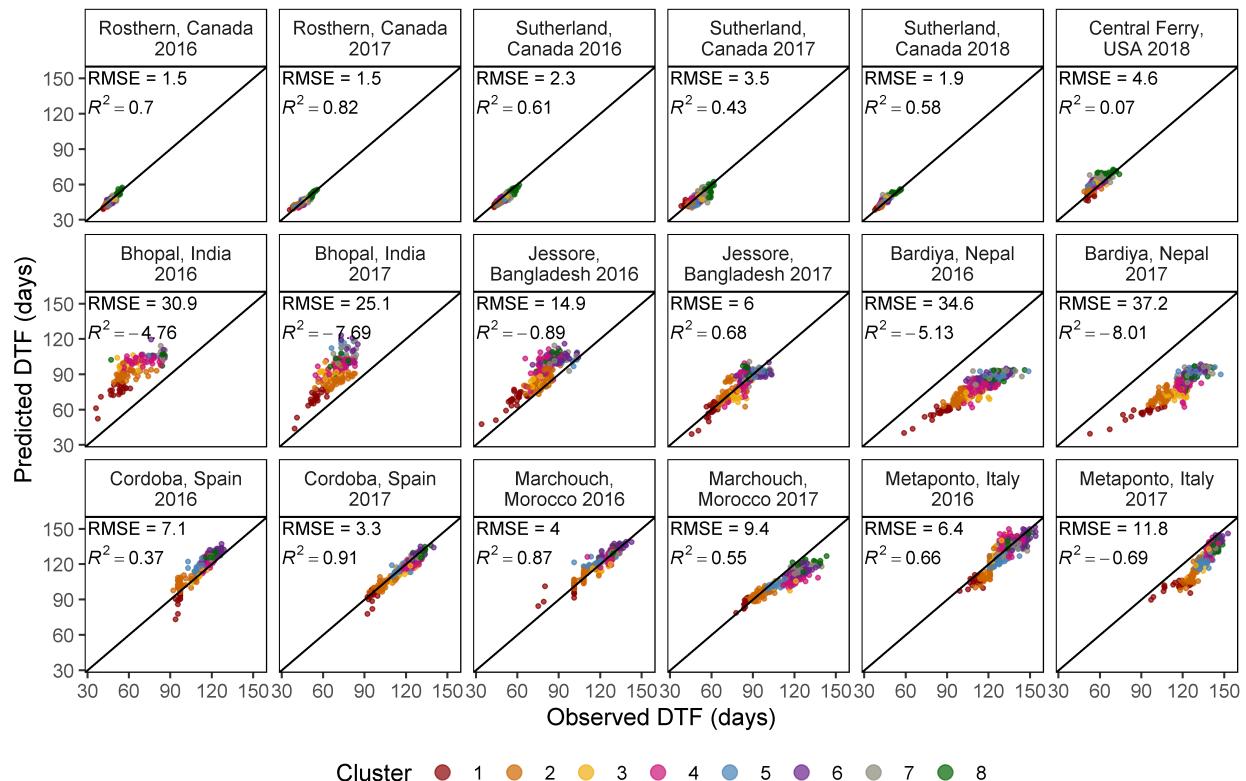

```
modelR2(xx$DTF, xx$Predicted_DTF)
```


```
[1] 0.8045254
```

```
modelRMSE(xx$DTF, xx$Predicted_DTF)
```

```
[1] 15.01078
```

```
# Plot (a)
mp <- gg_model_2(xx, title = expression(paste("Overall: ",
      italic("R")^2, " = 0.804 | RMSE = 15.0"))))
ggsave("Figure_04.png", mp, width = 8, height = 5.5, dpi = 600)
mp <- gg_model_2(xx, title = "Model = T + P | Location Out")
ggsave("Additional/Model/Model_2_3.png", mp, width = 8, height = 5.5, dpi = 600)
```

Model = T + P | Location Out

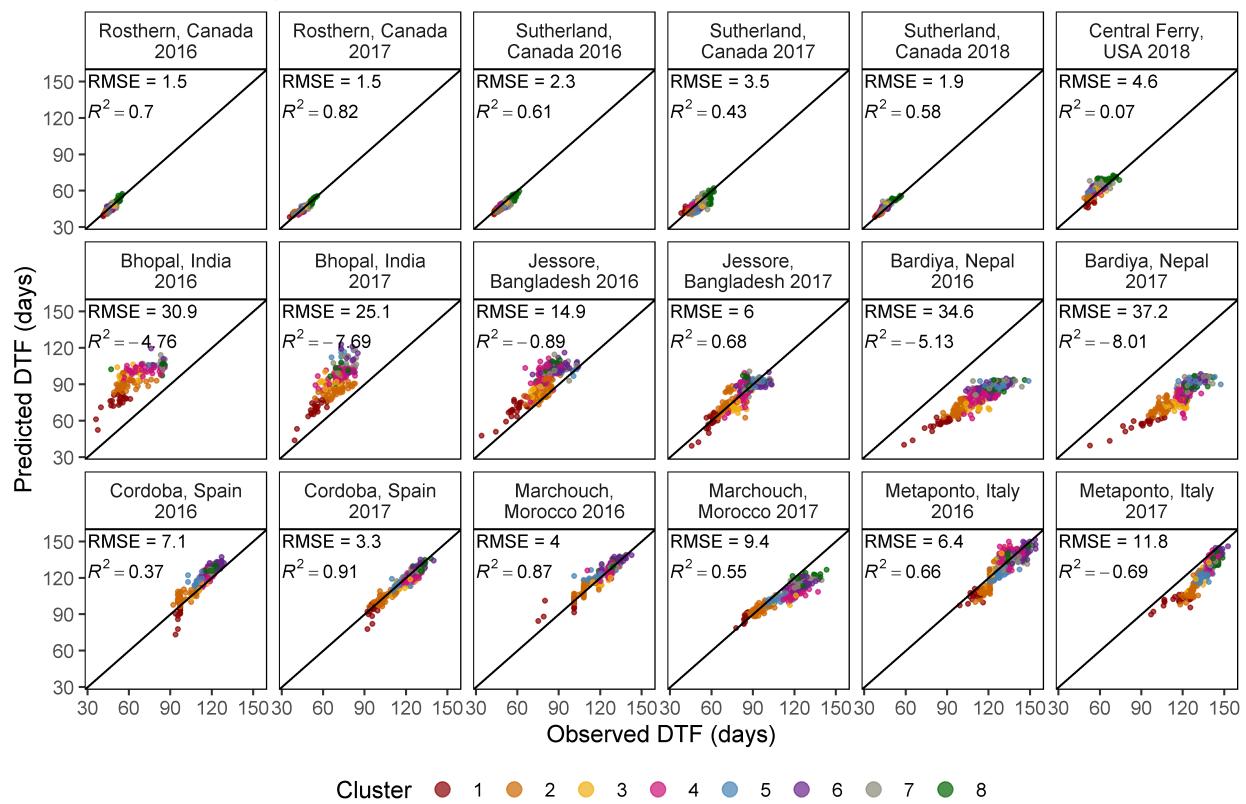

Supplemental Table 4 Test Model

```
#####
# 1/f = a + bT + cP (3 Locations) #
#####

# Prep data
xx <- rr %>% #filter(!is.na(DTF)) %>%
  left_join(select(ff, Expt, T_mean, P_mean), by = "Expt")
mt <- data.frame(Temperate_Location      = rep(names_ExptShort[1:6], each = 36),
                  SouthAsian_Location    = rep(names_ExptShort[7:12], times = 36)) %>%
  arrange(SouthAsian_Location) %>%
  mutate(Mediterranean_Location = rep(names_ExptShort[13:18], 36),
         RR = NA, Genotypes = NA)

# Run each combination
for(t in names_ExptShort[1:6]) { # Temperate site-years
  for(s in names_ExptShort[7:12]) { # South asian site-years
    for(m in names_ExptShort[13:18]) { # Mediterranean site-years
      mr <- NULL; md <- NULL
      for(i in 1:324) {
        # Prep data
        xi1 <- xx %>% filter(Entry == i, ExptShort %in% c(t, s, m))
        xi2 <- xx %>% filter(Entry == i)
        xd2 <- xi2 %>% group_by(Entry, Name, Expt, ExptShort) %>%
          summarise_at(vars(DTF, RDTF, T_mean, P_mean), funs(mean), na.rm = T) %>%
          ungroup()
      }
    }
  }
}
```

```


# Train model
mi <- lm(RDTF ~ T_mean + P_mean, data = xi1)
# Predict DTF
xi2 <- xi2 %>% mutate(Predicted_DTF = 1 / predict(mi, newdata = xi2))
xd2 <- xd2 %>% mutate(Predicted_DTF = 1 / predict(mi, newdata = xd2))
# Save to table
mr <- bind_rows(mr, xi2)
md <- bind_rows(md, xd2)
}
remEntries <- unique(md$Entry[is.na(md$DTF) & md$ExptShort %in% c(t, s, m)])
md2 <- md %>% filter(!Entry %in% remEntries, !md$ExptShort %in% c(t, s, m))
myrow <- mt$Temperate_Location == t &
mt$SouthAsian_Location == s &
mt$Mediterranean_Location == m
mt[myrow, "RR"] <- round(modelR2(md2$DTF, md2$Predicted_DTF), 6)
mt[myrow, "Genotypes"] <- length(unique(md2$Entry))
}
}
# Save
write.csv(mt %>% arrange(RR), "Supplemental_Table_04.csv", row.names = F)

```


| | Temperate_Location | SouthAsian_Location | Mediterranean_Location | RR | Genotypes |
|-----|--------------------|---------------------|------------------------|----------|-----------|
| 1 | Ro17 | In16 | Sp16 | 0.461770 | 159 |
| 2 | Su18 | In16 | Sp16 | 0.462242 | 159 |
| 3 | Ro16 | In16 | Sp16 | 0.466809 | 159 |
| 4 | Su17 | In16 | Sp16 | 0.469932 | 159 |
| 5 | Su16 | In16 | Sp16 | 0.473691 | 159 |
| 6 | Ro17 | In16 | It17 | 0.475920 | 159 |
| 211 | Ro17 | Ba17 | Sp17 | 0.858843 | 291 |
| 212 | Su16 | Ba17 | Mo16 | 0.858923 | 291 |
| 213 | Ro16 | Ba17 | Sp17 | 0.859936 | 291 |
| 214 | Us18 | Ba17 | Sp17 | 0.861168 | 289 |
| 215 | Su17 | Ba17 | Sp17 | 0.862977 | 291 |
| 216 | Su16 | Ba17 | Sp17 | 0.863054 | 291 |

Modeling DTF (T + P) - 3 Best

3 Best Locations | Su16,Ba17,Sp17 | 291/324

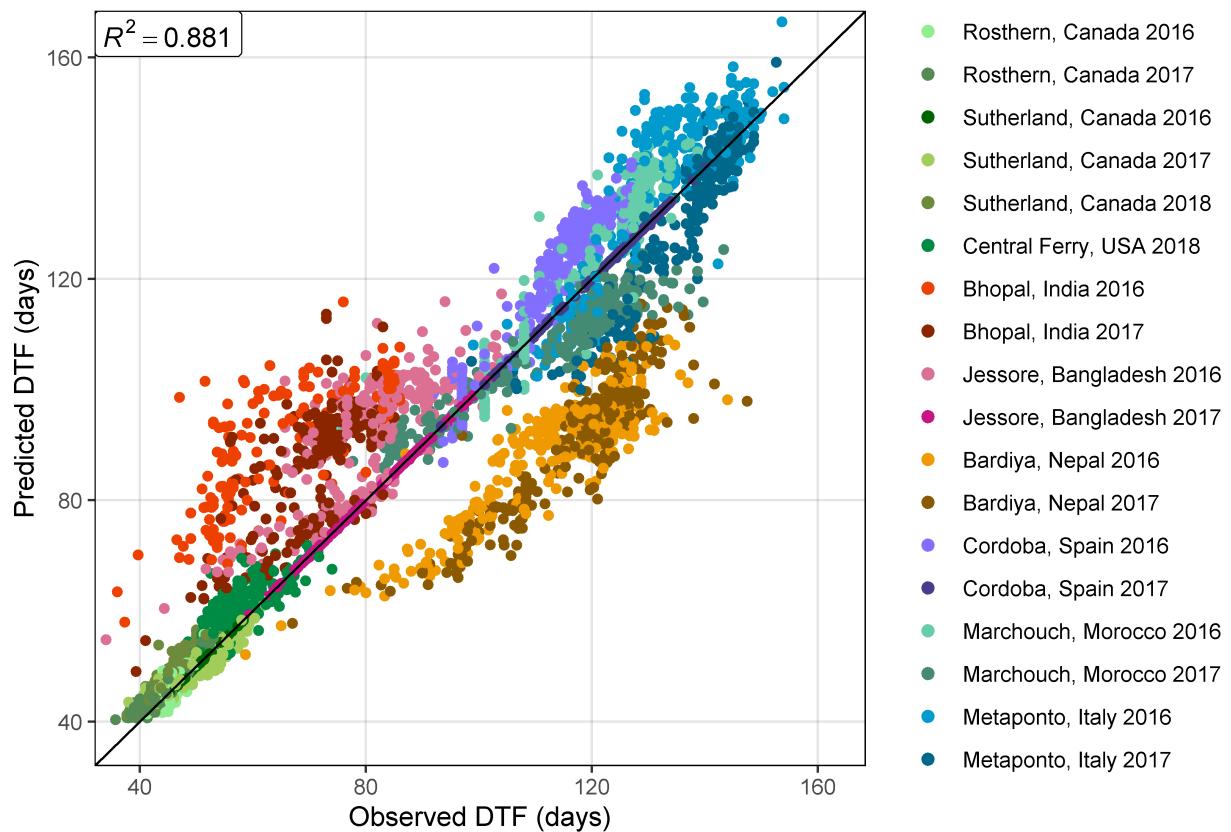

3 Best Locations | Su16,Ba17,Sp17 | 291/324

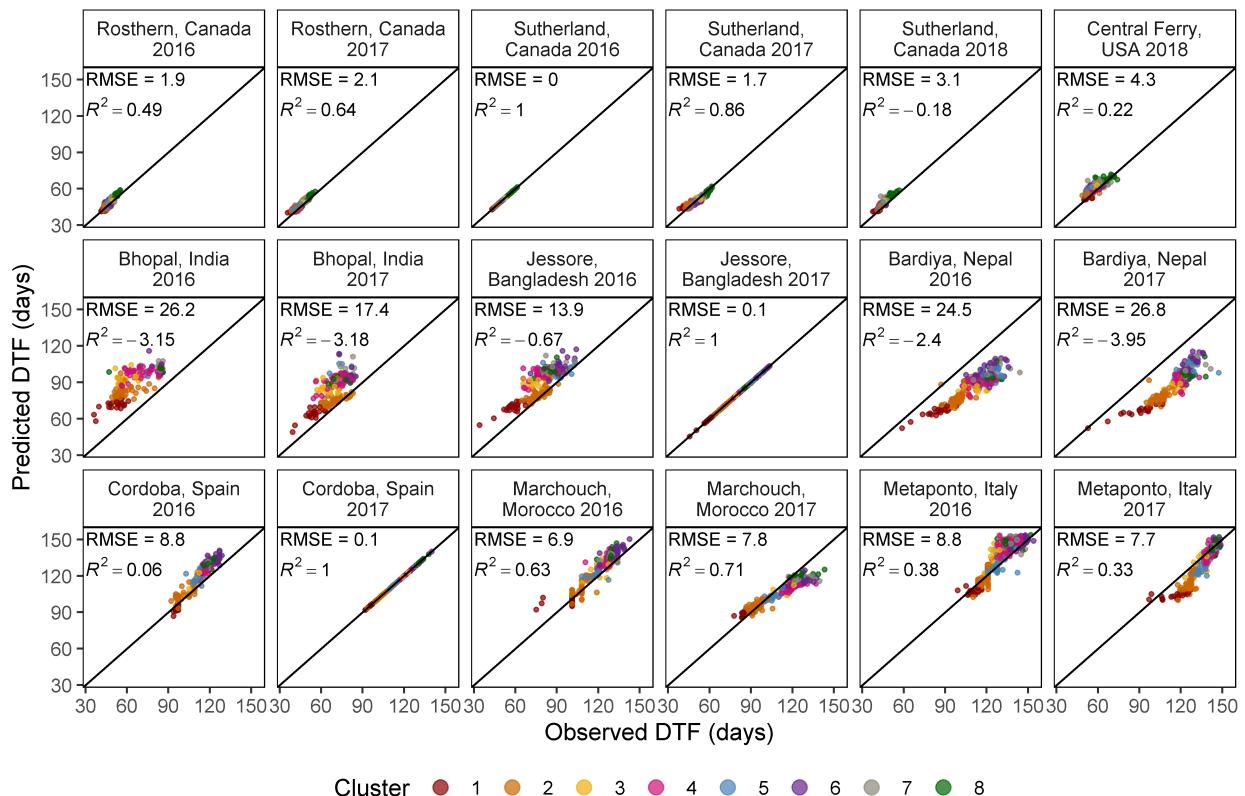

```
#####
# 1/f = a + bT + cP (3 Locations) #
#####
# Prep data
xx <- rr %>% filter(!is.na(RDTF)) %>%
  left_join(select(ff, Expt, T_mean, P_mean), by = "Expt")
mr <- NULL; md <- NULL
mc <- select(ldp, Entry, Name) %>%
  mutate(a = NA, b = NA, c = NA, RR = NA, Environments = NA )
k <- c("Sutherland, Canada 2016", "Jessore, Bangladesh 2017", "Cordoba, Spain 2017")
# Model - only the ^above^ three site-years are used to train the model
for(i in 1:324) {
  # Prep data
  xi1 <- xx %>% filter(Entry == i, Expt %in% k)
  xi2 <- xx %>% filter(Entry == i)
  xd2 <- xi2 %>% group_by(Entry, Name, Expt, ExptShort) %>%
    summarise_at(vars(DTF, RDTF, T_mean, P_mean), funs(mean), na.rm = T) %>%
    ungroup()
  # Train model
  mi <- lm(RDTF ~ T_mean * P_mean, data = xi1)
  # Predict DTF
  xi2 <- xi2 %>% mutate(Predicted_DTF = 1 / predict(mi, newdata = xi2))
  xd2 <- xd2 %>% mutate(Predicted_DTF = 1 / predict(mi, newdata = xd2))
  # Save to table
  mr <- bind_rows(mr, xi2)
  md <- bind_rows(md, xd2)
```

```

# Save coefficients
mc[i,c(3:5)] <- mi$coefficients
# Calculate rr and # of environments used
mc[i,6] <- 1 - sum((xi2$DTF - xi2$Predicted_DTF)^2) /
  sum((xi2$Predicted_DTF - mean(xi2$DTF))^2)
mc[i,7] <- length(unique(xi2$Expt))
}
ents <- xx %>% filter(ExptShort %in% c("Su16", "Ba17", "Sp17"), is.na(DTF)) %>%
  pull(Entry) %>% unique()
mr <- mr %>% filter(!Entry %in% ents)
md <- md %>% filter(!Entry %in% ents)
mc <- mc %>% filter(!Entry %in% ents)
# Save Results
write.csv(mr, "data/model_3best.csv", row.names = F)
write.csv(md, "data/model_3best_d.csv", row.names = F)
write.csv(mc, "data/model_3best_coefs.csv", row.names = F)

# Prep data
xx <- read.csv("data/model_3best_d.csv") %>%
  mutate(Expt = factor(Expt, levels = names_Expt))
length(unique(xx$Entry))

[1] 291


# Plot Observed vs Predicted
mp <- gg_model_1(xx, title = "3 Best Locations | Su16,Ba17,Sp17 | 291/324")
ggsave("Additional/Model/Model_1_4.png", mp, width = 7, height = 5, dpi = 600)

# Plot B)
mp <- gg_model_2(xx, title = "3 Best Locations | Su16,Ba17,Sp17 | 291/324")
ggsave("Additional/Model/Model_2_4.png", mp, width = 8, height = 5.5, dpi = 600)


```

Modeling DTF (T + P) - 3 Worst

3 Worst Locations | Su18,In16,Sp16 | 159/324

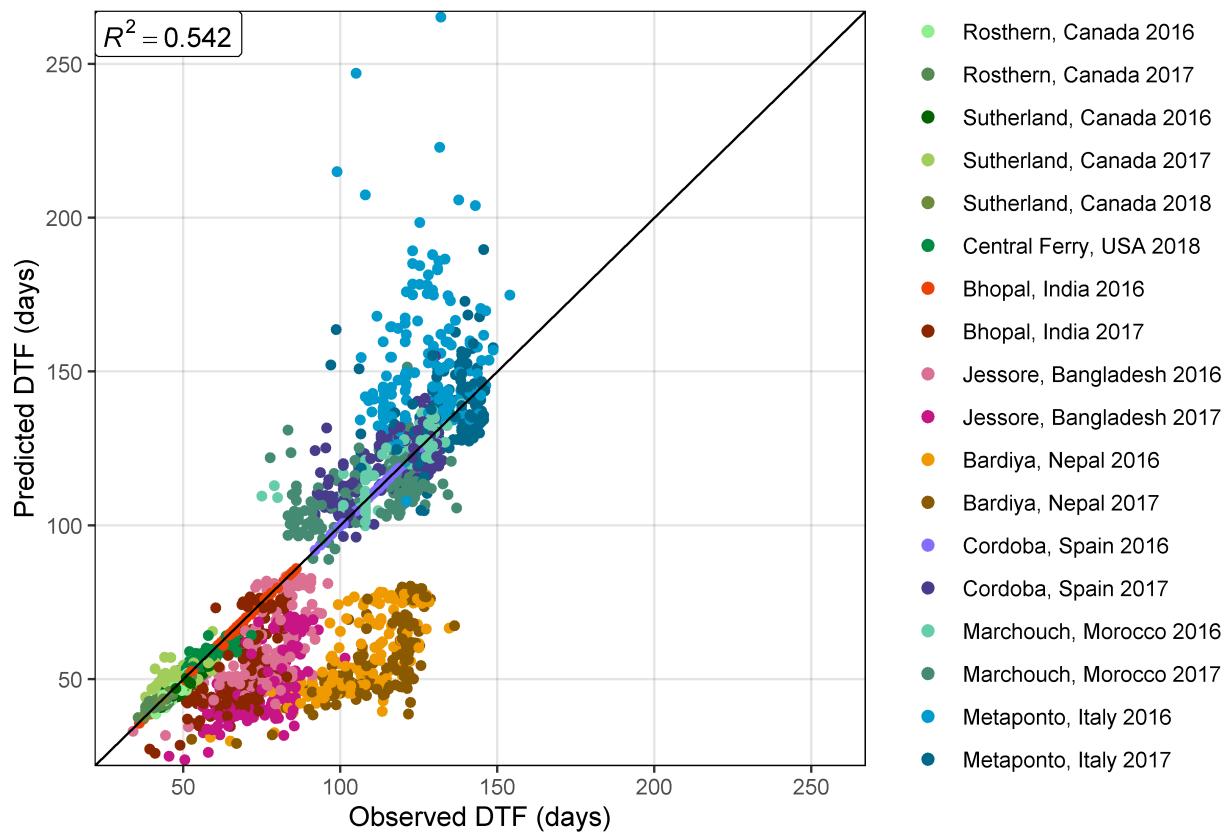

3 Worst Locations | Su18,In16,Sp16 | 159/324

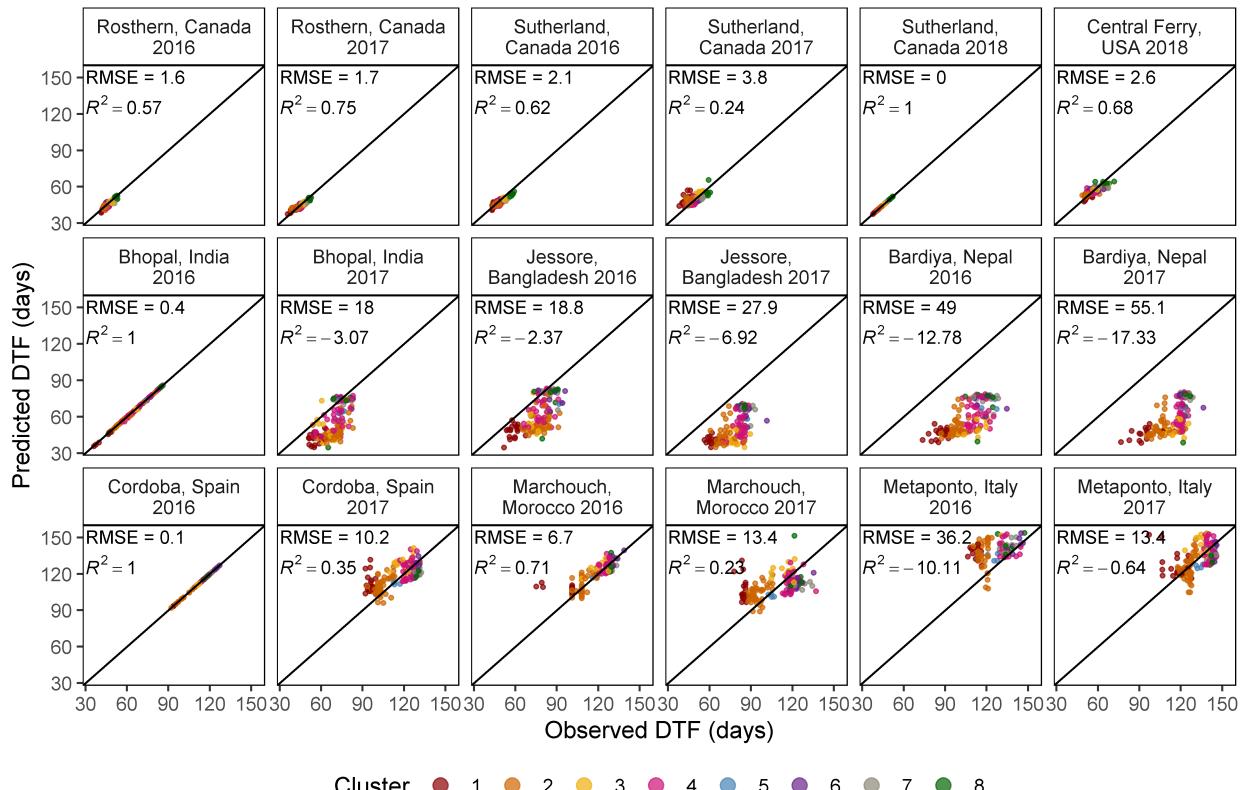

```
#####
# 1/f = a + bT + cP (3 Locations) #
#####
# Prep data
xx <- rr %>% filter(!is.na(RDTF)) %>%
  left_join(select(ff, Expt, T_mean, P_mean), by = "Expt")
mr <- NULL; md <- NULL
mc <- select(ldp, Entry, Name) %>%
  mutate(a = NA, b = NA, c = NA, RR = NA, Environments = NA )
k <- c("Sutherland, Canada 2018", "Bhopal, India 2016", "Cordoba, Spain 2016")
# Model - only the ^above^ three site-years are used to train the model
for(i in 1:324) {
  # Prep data
  xi1 <- xx %>% filter(Entry == i, Expt %in% k)
  xi2 <- xx %>% filter(Entry == i)
  xd2 <- xi2 %>% group_by(Entry, Name, Expt, ExptShort) %>%
    summarise_at(vars(DTF, RDTF, T_mean, P_mean), funs(mean), na.rm = T) %>%
    ungroup()
  # Train model
  mi <- lm(RDTF ~ T_mean * P_mean, data = xi1)
  # Predict DTF
  xi2 <- xi2 %>% mutate(Predicted_DTF = 1 / predict(mi, newdata = xi2))
  xd2 <- xd2 %>% mutate(Predicted_DTF = 1 / predict(mi, newdata = xd2))
  # Save to table
  mr <- bind_rows(mr, xi2)
  md <- bind_rows(md, xd2)
```

```

# Save coefficients
mc[i,c(3:5)] <- mi$coefficients
# Calculate rr and # of environments used
mc[i,6] <- 1 - sum((xi2$DTF - xi2$Predicted_DTF)^2) /
  sum((xi2$Predicted_DTF - mean(xi2$DTF))^2)
mc[i,7] <- length(unique(xi2$Expt))
}
ents <- xx %>% filter(ExptShort %in% c("Su18", "In16", "Sp16"), is.na(DTF)) %>%
  pull(Entry) %>% unique()
mr <- mr %>% filter(!Entry %in% ents)
md <- md %>% filter(!Entry %in% ents)
mc <- mc %>% filter(!Entry %in% ents)
# Save Results
write.csv(mr, "data/model_3worst.csv", row.names = F)
write.csv(md, "data/model_3worst_d.csv", row.names = F)
write.csv(mc, "data/model_3worst_coefs.csv", row.names = F)

# Prep data
xx <- read.csv("data/model_3worst_d.csv") %>%
  mutate(Expt = factor(Expt, levels = names_Expt))
length(unique(xx$Entry))


[1] 159

# Plot Observed vs Predicted
mp <- gg_model_1(xx, title = "3 Worst Locations | Su18,In16,Sp16 | 159/324")
ggsave("Additional/Model/Model_1_5.png", mp, width = 7, height = 5, dpi = 600)

# Plot B)
mp <- gg_model_2(xx, title = "3 Worst Locations | Su18,In16,Sp16 | 159/324")
ggsave("Additional/Model/Model_2_5.png", mp, width = 8, height = 5.5, dpi = 600)


```

DTF Model correlation coefficients

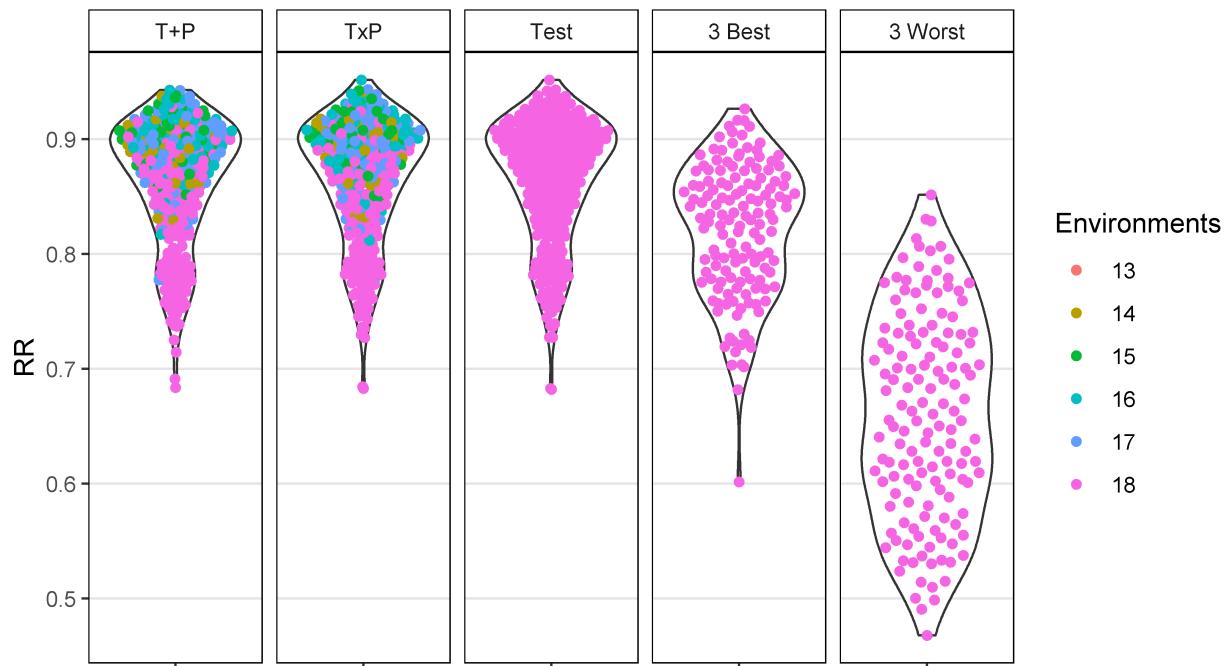

```
# Prep data
x1 <- read.csv("data/model_t+p_coefs.csv") %>% mutate(Model = "T+P")
x2 <- read.csv("data/model_txp_coefs.csv") %>% mutate(Model = "TxP")
x3 <- read.csv("data/model_test_coefs.csv") %>% mutate(Model = "Test")
x4 <- read.csv("data/model_3best_coefs.csv") %>% mutate(Model = "3 Best")
x5 <- read.csv("data/model_3worst_coefs.csv") %>% mutate(Model = "3 Worst")
xx <- bind_rows(x1, x2, x3, x4, x5) %>%
  mutate(Model = factor(Model, levels = unique(Model)),
         Environments = factor(Environments))
# Plot RR
mp <- ggplot(xx, aes(x = "", y = RR)) +
  geom_violin() + geom_quasirandom(aes(color = Environments)) +
  facet_grid(. ~ Model) +
  theme_AGL +
  theme(panel.grid.major.x = element_blank()) +
  labs(x = NULL)
ggsave("Additional/Model/Model_pvalues.png", mp, width = 7, height = 4, dpi = 600)
```

Supplemental Figure 6 Compare Constants Entry

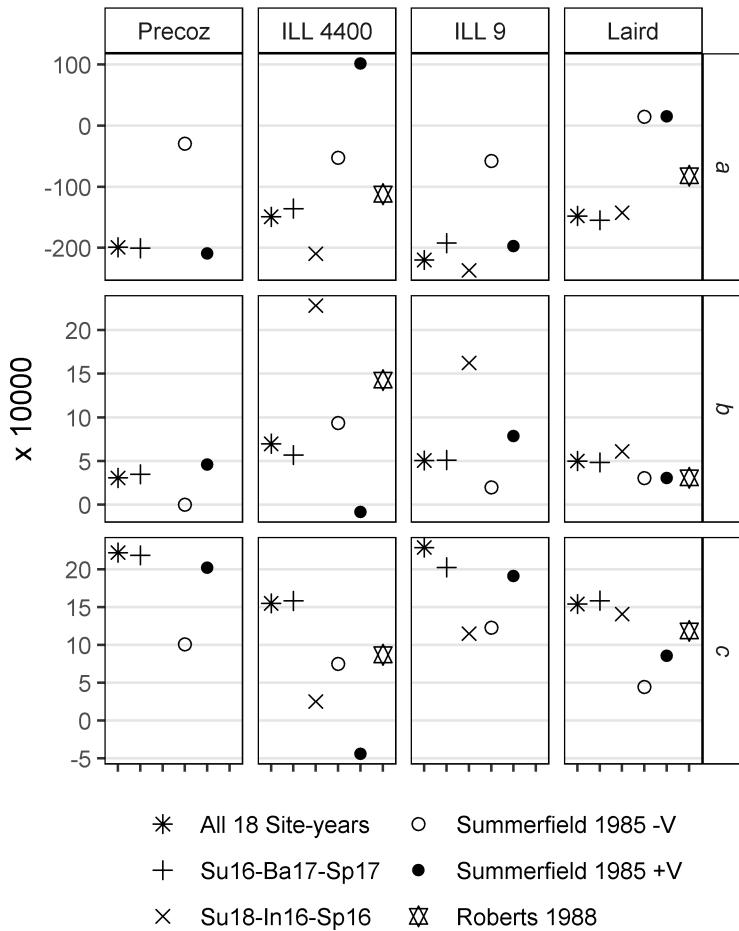

- Entry 76 = ILL 4400 (Syrian Local Large)
- Entry 77 = ILL 4605 (Precoz)
- Entry 118 = ILL 9
- Entry 128 = Laird

```
# Prep data
x1 <- read.csv("data/model_t+p_coefs.csv") %>%
  filter(Entry %in% c(76, 77, 118, 128)) %>%
  mutate(Expt = "All 18 Site-years")
x2.1 <- read.csv("data/model_3best_coefs.csv") %>%
  filter(Entry %in% c(76, 77, 118, 128)) %>%
  mutate(Expt = "Su16-Ba17-Sp17")
x2.2 <- read.csv("data/model_3worst_coefs.csv") %>%
  filter(Entry %in% c(76, 77, 118, 128)) %>%
  mutate(Expt = "Su18-In16-Sp16")
# Summerfield et al., 1985
x3 <- x1 %>% mutate(Expt = "Summerfield 1985 -V")
x3[x3$Entry == 76, c("a", "b", "c")] <- c(-0.002918, 0, 0.0010093)
x3[x3$Entry == 77, c("a", "b", "c")] <- c(-0.0052226, 0.00093643, 0.00075104)
x3[x3$Entry == 118, c("a", "b", "c")] <- c(-0.0057408, 0.00020113, 0.0012292)
x3[x3$Entry == 128, c("a", "b", "c")] <- c(0.0014689, 0.00030622, 0.00044640)
x4 <- x1 %>% mutate(Expt = "Summerfield 1985 +V")
```


```

x4[x4$Entry == 76, c("a","b","c")] <- c(-0.020910, 0.00045813, 0.0020210)
x4[x4$Entry == 77, c("a","b","c")] <- c( 0.0101590, -0.00008401, -0.00044067)
x4[x4$Entry == 118, c("a","b","c")] <- c(-0.0196948, 0.00078441, 0.0019110)
x4[x4$Entry == 128, c("a","b","c")] <- c( 0.0015094, 0.00030622, 0.00085502)
# Roberts et al., 1988
x5 <- x1 %>% filter(Entry %in% c(77, 128)) %>% mutate(Expt = "Roberts 1988")
x5[x5$Entry == 77, c("a","b","c")] <- c(-0.0112, 0.001427, 0.000871)
x5[x5$Entry == 128, c("a","b","c")] <- c(-0.008172, 0.000309, 0.001187)
#
xx <- bind_rows(x1, x2.1, x2.2, x3, x4, x5) %>%
  gather(Constant, Value, a, b, c) %>%
  mutate(Entry = factor(Entry),
         Name = plyr::mapvalues(Entry, c(76,77,118,128),
                                c("Precoz","ILL 4400","ILL 9","Laird")),
         Expt = factor(Expt, levels = c("All 18 Site-years",
                                         "Su16-Ba17-Sp17", "Su18-In16-Sp16",
                                         "Summerfield 1985 -V", "Summerfield 1985 +V", "Roberts 1988")))
# Plot
mp <- ggplot(xx, aes(x = Expt, y = Value * 10000, shape = Expt)) +
  geom_quasirandom(size = 2, width = 0.2) +
  facet_grid(Constant ~ Name, scales = "free_y") +
  scale_shape_manual(name = NULL, values = c(8,3,4,1,16,11)) +
  guides(shape=guide_legend(nrow = 3, byrow = F)) +
  theme_AGL +
  theme(legend.position = "bottom", legend.margin = unit(c(0,0,0,0), "cm"),
        strip.text.y = element_text(face = "italic"),
        panel.grid.major.x = element_blank(),
        #panel.grid.minor = element_blank(),
        axis.text.x = element_blank()) +
  labs(x = NULL, y = "x 10000")
ggsave("Supplemental_Figure_06.png", mp, width = 4, height = 5, dpi = 600)


```

Supplemental Figure 7 3 best 3 worst

(a) 3 Best Locations | Su16-Ba17-Sp17 | 291/324

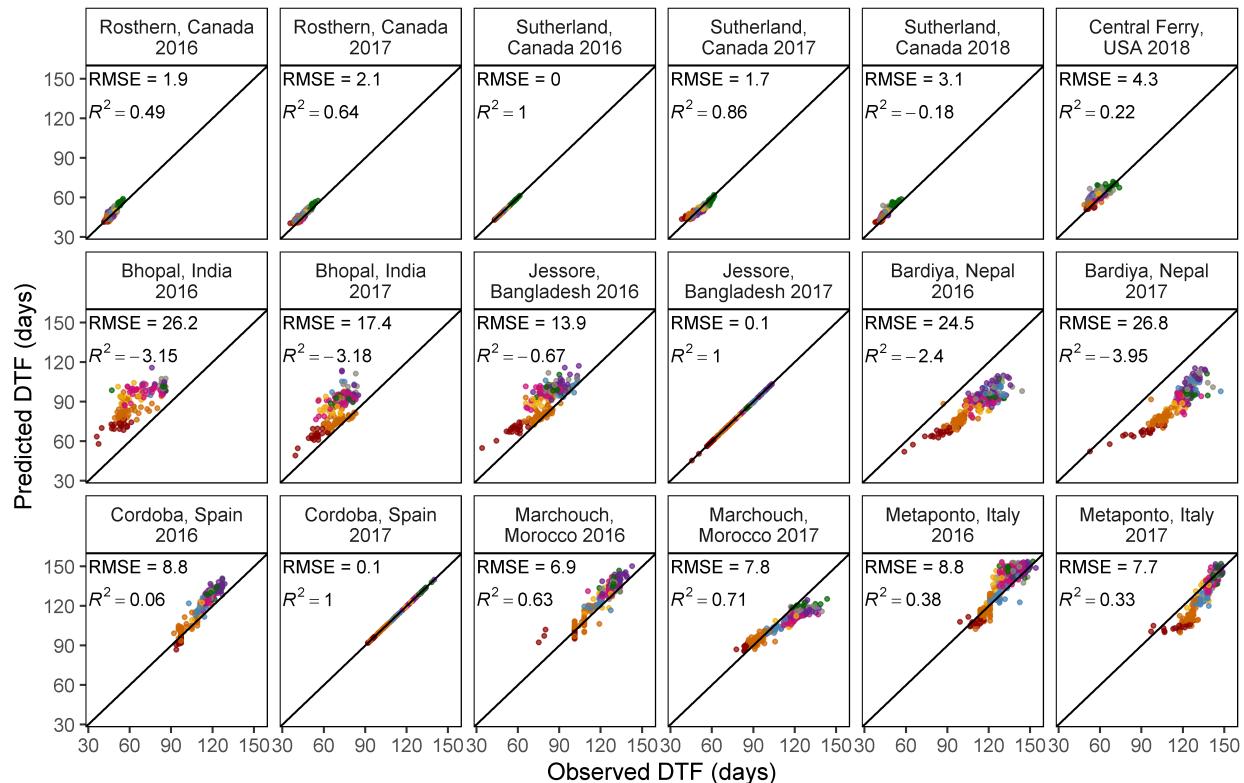

(b) 3 Worst Locations | Su18-In16-Sp16 | 159/324

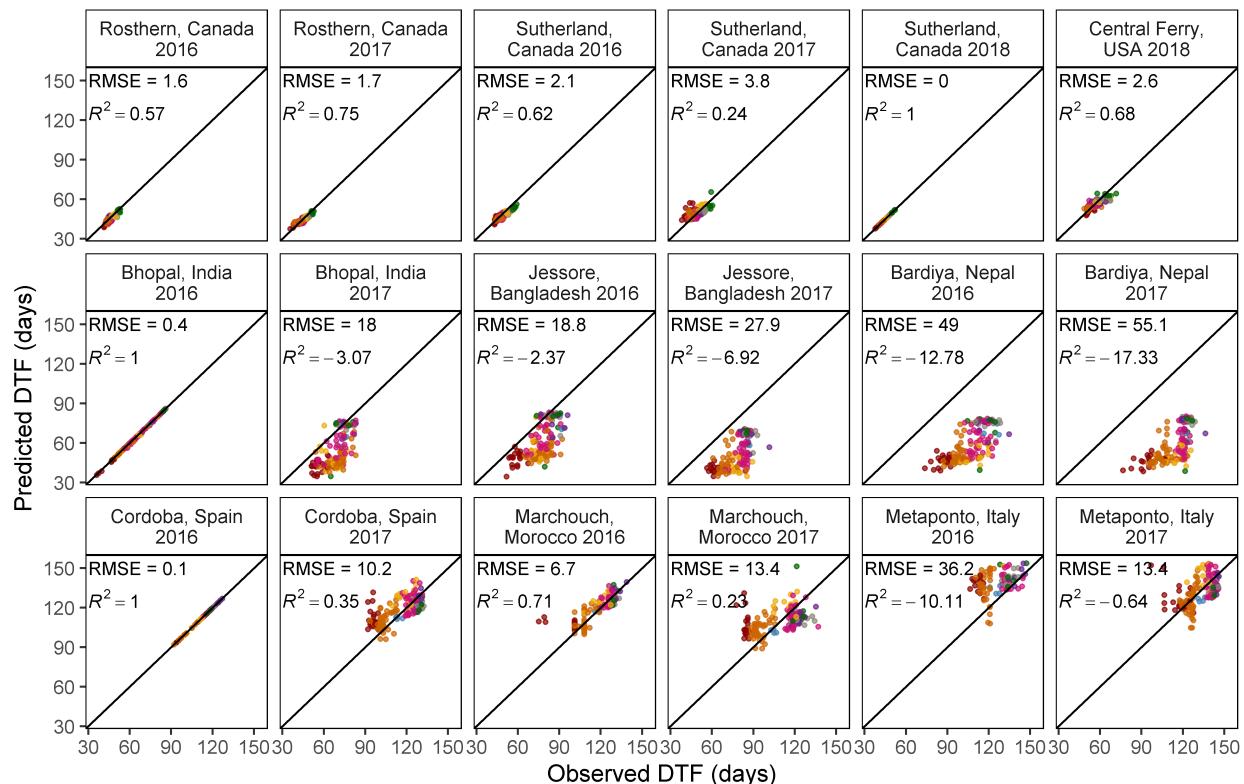


Cluster 1 2 3 4 5 6 7 8

```

# Plot (a)
xx <- read.csv("data/model_3best_d.csv") %>%
  mutate(Expt = factor(Expt, levels = names_Expt))
mp1 <- gg_model_2(xx, title = "(a) 3 Best Locations | Su16-Ba17-Sp17 | 291/324")
# Plot (b)
xx <- read.csv("data/model_3worst_d.csv") %>%
  mutate(Expt = factor(Expt, levels = names_Expt))
mp2 <- gg_model_2(xx, title = "(b) 3 Worst Locations | Su18-In16-Sp16 | 159/324")
# Append (a) and (b)
mp <- ggarrange(mp1, mp2, ncol = 1, common.legend = T, legend = "bottom")
ggsave("Supplemental_Figure_07.png", mp, width = 8, height = 11, dpi = 600)

```

Supplemental Figure 8 Compare Constants All

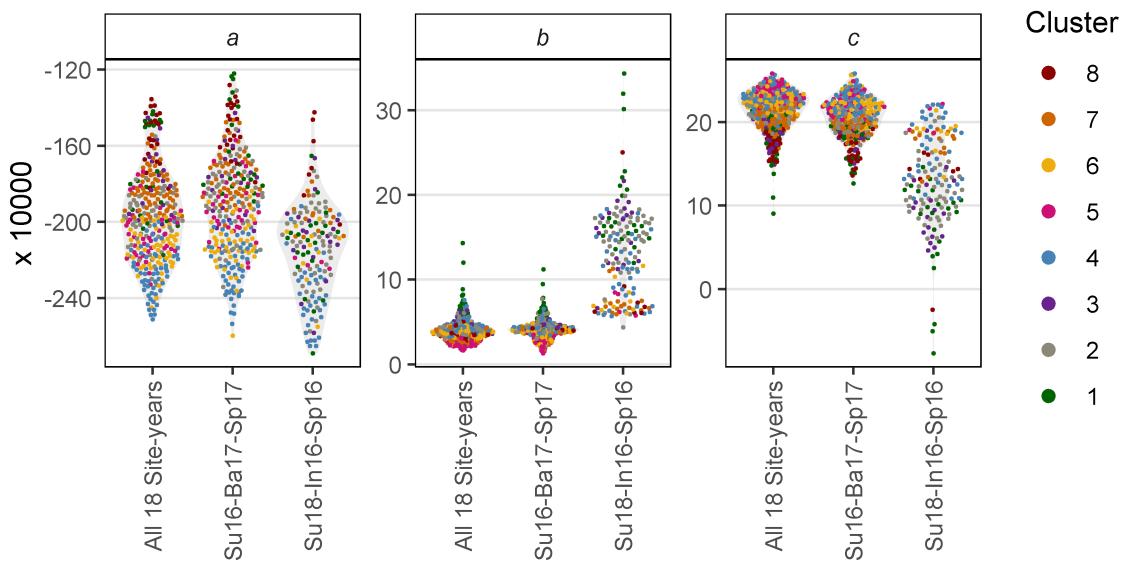

```

# Prep data
levs <- c("All 18 Site-years", "Su16-Ba17-Sp17", "Su18-In16-Sp16")
pca <- read.csv("data/data_pca_results.csv") %>% select(Entry, Cluster) %>%
  mutate(Cluster = factor(Cluster))
x1 <- read.csv("data/model_t+p_coefs.csv") %>%
  mutate(Expt = levs[1]) %>% select(-RR)
x2 <- read.csv("data/model_3best_coefs.csv") %>%
  mutate(Expt = levs[2])
x3 <- read.csv("data/model_3worst_coefs.csv") %>%
  mutate(Expt = levs[3])
xx <- bind_rows(x1, x2, x3) %>%
  left_join(pca, by = "Entry") %>%
  gather(Trait, Value, a, b, c) %>%
  mutate(Expt = factor(Expt, levels = levs))
# Plot
mp <- ggplot(xx, aes(x = Expt, y = Value * 10000 )) +
  geom_violin(alpha = 0.3, color = NA, fill = "grey") +
  geom_quasirandom(aes(color = Cluster), size = 0.3) +
  facet_wrap(Trait ~ ., scales = "free") +
  scale_color_manual(values = colors, breaks = 8:1) +

```

```

theme_AGL +
  theme(strip.text = element_text(face = "italic"),
        panel.grid.major.x = element_blank(),
        axis.text.x = element_text(angle = 90, vjust = 0.5, hjust = 1)) +
  guides(colour = guide_legend(override.aes = list(size = 2))) +
  labs(x = NULL, y = "x 10000")
ggsave("Supplemental_Figure_08.png", mp, width = 6, height = 3, dpi = 600)

```


Base Temperature & Critical Photoperiod

```

# Calculate Tf and Pf
xx <- read.csv("data/model_t+p_coefs.csv") %>% select(-Name) %>%
  mutate(predicted_Tf = 1/b, predicted_Pf = 1/c )
xx <- rr %>% left_join(xx, by = "Entry") %>%
  left_join(select(ff, Expt, T_mean, P_mean), by = "Expt") %>%
  mutate(Tb = -(a + c * P_mean) / b,
         Pc = -(a + b * T_mean) / c,
         Tf_0 = NA, Tf_5 = NA, Tf = NA, Pf = NA, PTT = NA)
for(i in 1:nrow(xx)) {
  e1 <- ee %>% filter(Expt == xx$Expt[i])
  for(k in 1:nrow(e1)) {
    e1$Tfsum[k] <- sum(e1$Temp_mean[1:k] - xx$Tb[i])
    e1$Pfsum[k] <- sum(e1$DayLength[1:k] - xx$Pc[i])
  }
  ei <- e1 %>%
    filter(Date <= xx$PlantingDate[i] + xx$DTF2[i], !is.na(Temp_mean))
  if(nrow(ei) > 0) {
    xx$Tf_0[i] <- round(sum(ei$Temp_mean), 1)
    xx$Tf_5[i] <- round(sum(ei$Temp_mean - 5), 1)
    xx$Tf[i] <- round(sum(ei$Temp_mean - xx$Tb[i]), 1)
    xx$Pf_0[i] <- round(sum(ei$DayLength), 1)
    xx$Pf_7[i] <- round(sum(ei$DayLength - 7), 1)
    xx$Pf[i] <- round(sum(ei$DayLength - xx$Pc[i]), 1)
    xx$PTT_0[i] <- round(sum(ei$Temp_mean * ei$DayLength), 1)
    xx$PTT[i] <- round(sum((ei$Temp_mean - xx$Tb[i]) * (ei$DayLength - xx$Pc[i])), 1)
    eTf <- e1 %>% filter(Tfsum > xx$predicted_Tf[i])
    ePf <- e1 %>% filter(Pfsum > xx$predicted_Pf[i])
    xx$predicted_DTF_Tf[i] <- eTf$DaysAfterPlanting[1]
    xx$predicted_DTF_Pf[i] <- ePf$DaysAfterPlanting[1]
  }
}
xx <- xx %>% left_join(select(ff, Expt, MacroEnv), by = "Expt") %>%
  group_by(Entry, Name, Expt, ExptShort, MacroEnv) %>%
  summarise_at(vars(DTF, Tb, Pc, Tf_0, Tf_5, Tf, Pf_0, Pf_7, Pf, PTT, PTT_0,
                     predicted_DTF_Tf, predicted_DTF_Pf,
                     predicted_Pf, predicted_Tf), funs(mean), na.rm = T) %>%
  ungroup()
# Save
write.csv(xx, "data/data_tb_pc.csv", row.names = F)

```

Figure 5 Tb and Pc

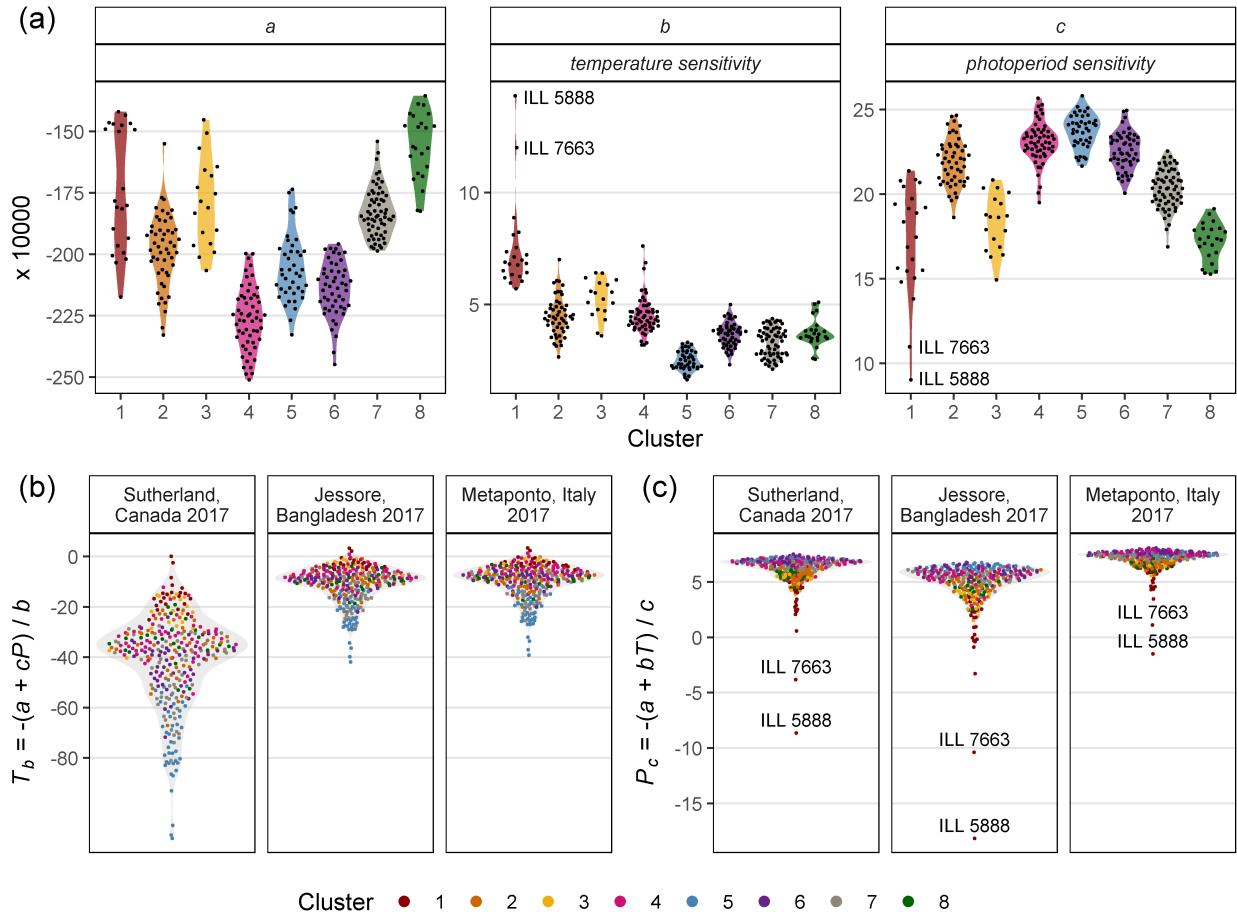


```
# Prep data for (a) a, b and c
pca <- read.csv("data/data_pca_results.csv") %>% select(Entry, Cluster) %>%
  mutate(Cluster = factor(Cluster))
xx <- read.csv("data/model_t+p_coefs.csv") %>%
  left_join(pca, by = "Entry") %>%
  select(Entry, Name, Cluster, a, b, c) %>%
  gather(Constant, Value, 4:ncol(.)) %>%
  mutate(Meaning = plyr::mapvalues(Constant, c("a","b","c"),
    c("", "temperature sensitivity", "photoperiod sensitivity")))
x1 <- xx %>% filter(Entry %in% c(94,105), Constant != "a") %>%
  mutate(Name = gsub(" AGL", "", Name))
# Plot (a) a, b and c
mp1 <- ggplot(xx, aes(x = Cluster, y = Value * 10000) ) +
  geom_violin(aes(fill = Cluster), color = NA, alpha = 0.7) +
  geom_quasirandom(size = 0.3) +
  geom_text_repel(data = x1, aes(label = Name), size = 3, nudge_x = 0.5) +
  facet_wrap(Constant+Meaning ~ ., nrow = 1, scales = "free") +
  theme_AGL +
  theme(strip.text = element_text(face = "italic"),
    legend.position = "none", panel.grid.major.x = element_blank()) +
  scale_fill_manual(name = NULL, values = colors) +
  guides(fill = F) +
```

```

  labs(y = "x 10000")
# Prep data
xx <- read.csv("data/data_tb_pc.csv") %>%
  left_join(pca, by = "Entry") %>%
  mutate(Expt = factor(Expt, levels = names_Expt)) %>%
  select(Entry, Name, Expt, ExptShort, Cluster, Tb, Pc, predicted_Tf, predicted_Pf)
x1 <- xx %>%
  filter(ExptShort %in% c("Su17", "Ba17", "It17")) %>%
  group_by(Entry, Name, Expt, ExptShort, Cluster) %>%
  summarise_at(vars(Tb, Pc), funs(mean), na.rm = T)
# Plot (b) Tb
mp2.1 <- ggplot(x1, aes(x = 1, y = Tb)) +
  geom_violin(fill = "grey", alpha = 0.3, color = NA) +
  geom_quasirandom(aes(color = Cluster), size = 0.3) +
  facet_grid(. ~ Expt, labeller = label_wrap_gen(width = 17)) +
  scale_y_continuous(breaks = seq(-80, 0, 20), minor_breaks = seq(-110, 0, 10)) +
  scale_color_manual(values = colors) +
  theme_AGL +
  theme(axis.text.x = element_blank(),
        axis.ticks.x = element_blank(),
        panel.grid.major.x = element_blank()) +
  guides(colour = guide_legend(nrow = 1, override.aes = list(size=2))) +
  labs(y = expression(paste(italic("T") [italic("b")], " = -(", italic("a"), " + ",
                            italic("cP")), ") / ", italic("b"))), x = NULL)
# Plot (c) Pc
x2 <- x1 %>% filter(Entry %in% c(94, 105)) %>%
  ungroup() %>% mutate(Name = gsub(" AGL", "", Name))
mp2.2 <- ggplot(x1, aes(x = 1, y = Pc)) +
  geom_violin(fill = "grey", alpha = 0.3, color = NA) +
  geom_quasirandom(aes(color = Cluster), size = 0.3) +
  facet_grid(. ~ Expt, labeller = label_wrap_gen(width = 17)) +
  geom_text(data = x2, aes(label = Name), size = 3, nudge_y = 1.2) +
  scale_y_continuous(breaks = c(-20, -15, -10, -5, 0, 5)) +
  scale_color_manual(values = colors) +
  theme_AGL +
  theme(axis.text.x = element_blank(),
        axis.ticks.x = element_blank(),
        panel.grid.major.x = element_blank()) +
  guides(colour = guide_legend(nrow = 1, override.aes = list(size=2))) +
  labs(y = expression(paste(italic("P") [italic("c")], " = -(", italic("a"), " + ",
                            italic("bT")), ") / ", italic("c"))), x = NULL)
mp2 <- ggarrange(mp2.1, mp2.2, nrow = 1, ncol = 2, common.legend = T, legend = "bottom",
                  labels = c("(b)", "(c)"), font.label = list(face = "plain"))
#
mp <- ggarrange(mp1, mp2, nrow = 2, ncol = 1, align = "hv",
                 labels = c("(a)", ""), font.label = list(face = "plain")) #heights =
ggsave("Figure_05.png", mp, width = 8, height = 6, dpi = 600)

```

Figure 6 Origin Constants

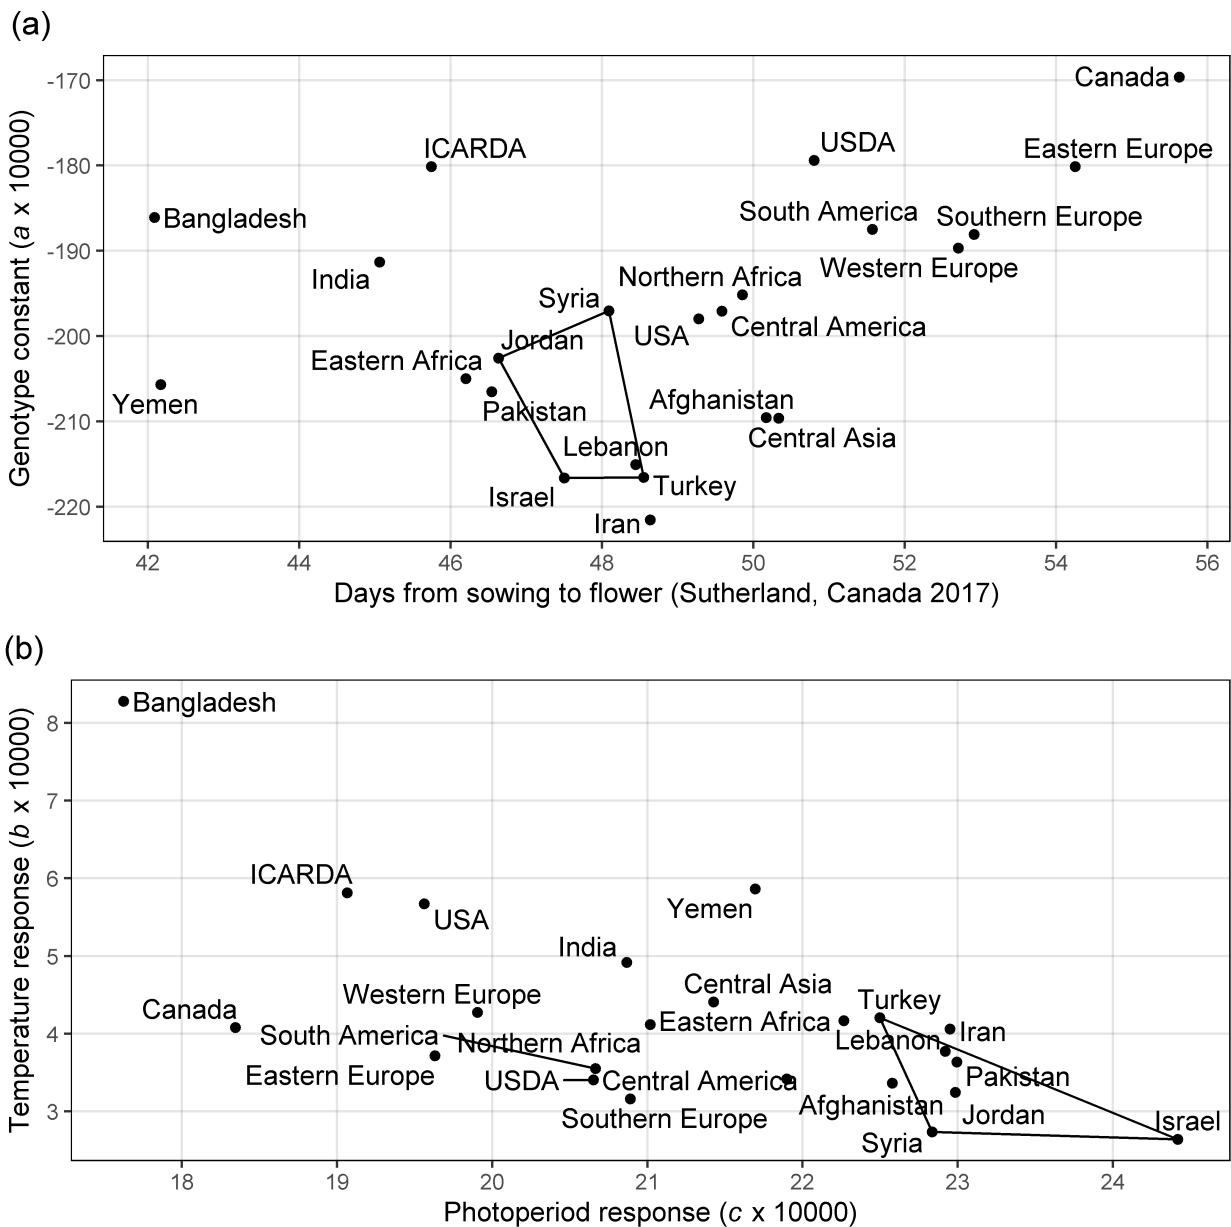

```
# Prep data
mycts <- c("Canada", "USA", "Iran", "Yemen",
          "India", "Pakistan", "Bangladesh", "Afghanistan",
          "Syria", "Jordan", "Turkey", "Lebanon", "Israel")
xx <- read.csv("data/model_t+p_coefs.csv") %>%
  left_join(select(ldp, Entry, Origin), by = "Entry") %>%
  left_join(select(ct, Origin=Country, SubRegion), by = "Origin") %>%
  filter(Origin != "Unknown") %>%
  mutate(SubRegion = as.character(SubRegion), Origin = as.character(Origin),
         SubRegion = ifelse(Origin %in% c("ICARDA", "USDA"),
                           Origin, as.character(SubRegion)),
         Origin = ifelse(Origin %in% mycts, Origin, as.character(SubRegion)))
```

```

x1 <- xx %>%
  left_join(dd %>% filter(ExptShort == "Su17") %>% select(Entry, DTF), by = "Entry") %>%
  group_by(Origin) %>%
  summarise_at(vars(DTF, a, b, c), funs(mean, sd)) %>%
  filter(Origin != "Unknown")
x2 <- x1 %>% mutate(CO = 1) %>%
  filter(Origin %in% c("Syria", "Jordan", "Turkey", "Lebanon", "Israel"))
# Plot (a) a vs DTF
find_hull <- function(df) df[chull(df[, "DTF_mean"], df[, "a_mean"])]
polys <- plyr::ddply(x2, "CO", find_hull)
mp1 <- ggplot(x1, aes(x = DTF_mean, y = a_mean * 10000)) +
  geom_polygon(data = polys, fill = NA, color = "black") +
  geom_point() + geom_text_repel(aes(label = Origin)) +
  scale_x_continuous(breaks = seq(42, 56, 2)) +
  theme_AGL +
  theme(plot.title = element_text(hjust = -0.085)) +
  labs(title = "(a)",
       y = expression(paste("Genotype constant (", italic(a), " x 10000)")),
       x = "Days from sowing to flower (Sutherland, Canada 2017)")
# Plot (b) b vs c
find_hull <- function(df) df[chull(df[, "c_mean"], df[, "b_mean"])]
polys <- plyr::ddply(x2, "CO", find_hull)
mp2 <- ggplot(x1, aes(x = c_mean * 10000, y = b_mean * 10000)) +
  geom_polygon(data = polys, fill = NA, color = "black") +
  geom_point() + geom_text_repel(aes(label = Origin)) +
  scale_x_continuous(breaks = seq(18, 24, 1)) +
  scale_y_continuous(breaks = 3:8) +
  theme_AGL +
  theme(plot.title = element_text(hjust = -0.06)) +
  labs(title = "(b)",
       y = expression(paste("Temperature response (", italic(b), " x 10000)")),
       x = expression(paste("Photoperiod response (", italic(c), " x 10000)")))
# Append (a) and (b)
mp <- ggarrange(mp1, mp2, ncol = 1, nrow = 2)
ggsave("Figure_06.png", mp, width = 7, height = 7, dpi = 600)
ggsave("Additional/Temp/Temp_F06_1.png", mp1, width = 8, height = 4, dpi = 600)
ggsave("Additional/Temp/Temp_F06_2.png", mp2, width = 8, height = 4, dpi = 600)

# Prep data
mycts <- c("Canada", "USA", "Iran", "Yemen",
           "India", "Pakistan", "Bangladesh", "Afghanistan",
           "Syria", "Jordan", "Turkey", "Lebanon", "Israel")
xx <- read.csv("data/model_t+p_coefs.csv") %>%
  left_join(select(ldp, Entry, Origin), by = "Entry") %>%
  left_join(select(ct, Origin=Country, SubRegion), by = "Origin") %>%
  filter(Origin != "Unknown") %>%
  mutate(SubRegion = as.character(SubRegion), Origin = as.character(Origin),
         SubRegion = ifelse(Origin %in% c("ICARDA", "USDA"),
                           Origin, as.character(SubRegion)),
         Origin = ifelse(Origin %in% mycts, Origin, as.character(SubRegion)))
x1 <- xx %>%
  left_join(dd %>% filter(ExptShort == "Su17") %>% select(Entry, DTF), by = "Entry") %>%
  group_by(Origin) %>%
  summarise_at(vars(DTF, a, b, c), funs(mean, sd)) %>%

```


```

filter(Origin != "Unknown")
x2 <- x1 %>% mutate(C0 = 1) %>%
  filter(Origin %in% c("Syria", "Jordan", "Turkey", "Lebanon", "Israel"))
# Plot (a) a vs DTF
find_hull <- function(df) df[chull(df[, "DTF_mean"], df[, "a_mean"]), ]
polys <- plyr::ddply(x2, "C0", find_hull)
mp1 <- ggplot(x1, aes(x = DTF_mean, y = a_mean * 10000)) +
  geom_polygon(data = polys, fill = NA, color = "black") +
  geom_point() + geom_text_repel(aes(label = Origin)) +
  scale_x_continuous(breaks = seq(42, 56, 2)) +
  theme_AGL +
  theme(plot.title = element_text(hjust = -0.085)) +
  labs(title = "(a)",
       y = expression(paste("Genotype constant (", italic(a), " x 10000)")),
       x = "Days from sowing to flower (Sutherland, Canada 2017)")
# Plot (b) b vs c
find_hull <- function(df) df[chull(df[, "c_mean"], df[, "b_mean"]), ]
polys <- plyr::ddply(x2, "C0", find_hull)
mp2 <- ggplot(x1, aes(x = c_mean * 10000, y = b_mean * 10000)) +
  geom_polygon(data = polys, fill = NA, color = "black") +
  geom_point() + geom_text_repel(aes(label = Origin)) +
  scale_x_continuous(breaks = seq(18, 24, 1)) +
  scale_y_continuous(breaks = 3:8) +
  theme_AGL +
  theme(plot.title = element_text(hjust = -0.06)) +
  labs(title = "(b)",
       y = expression(paste("Temperature response (", italic(b), " x 10000)")),
       x = expression(paste("Photoperiod response (", italic(c), " x 10000)")))
# Append (a) and (b)
mp <- ggarrange(mp1, mp2, ncol = 1, nrow = 2)
ggsave("Figure_06.png", mp, width = 7, height = 7, dpi = 600)
ggsave("Additional/Temp/Temp_F06_1.png", mp1, width = 8, height = 4, dpi = 600)
ggsave("Additional/Temp/Temp_F06_2.png", mp2, width = 8, height = 4, dpi = 600)


```

Supplemental Figure 9 Pc Tf PTT

(a) Thermal sum required for flowering

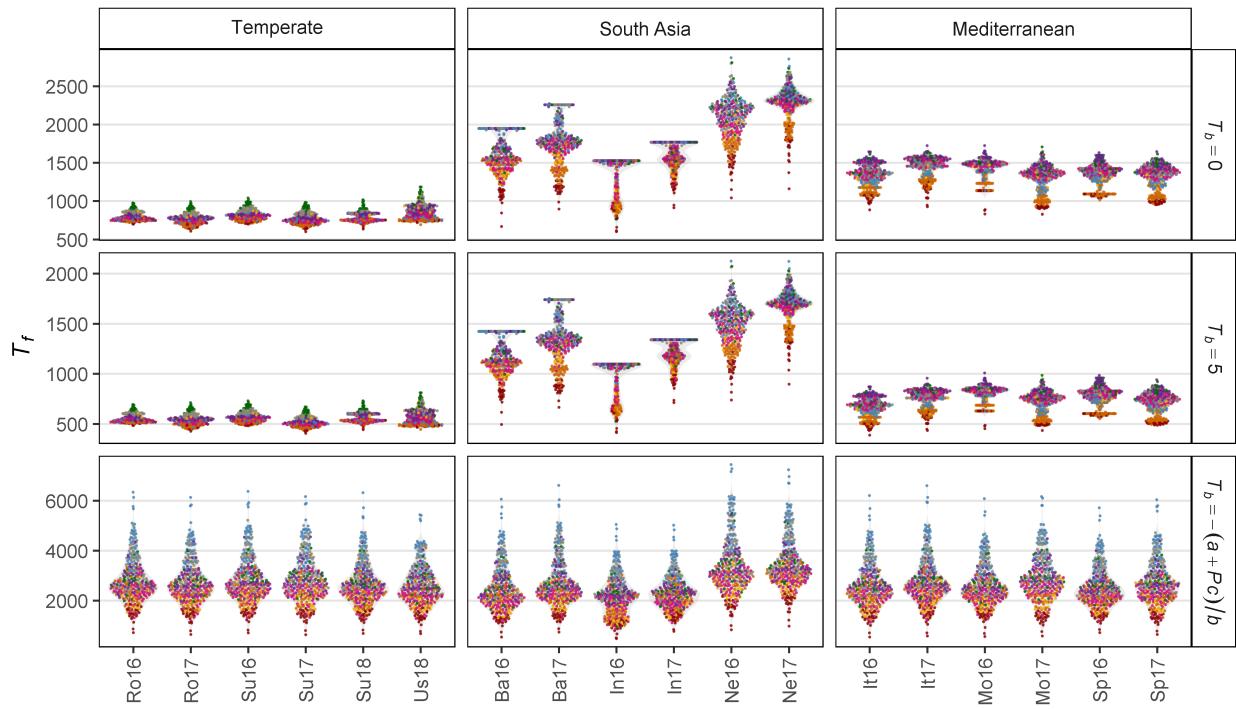

(b) Photoperiodic sum required for flowering

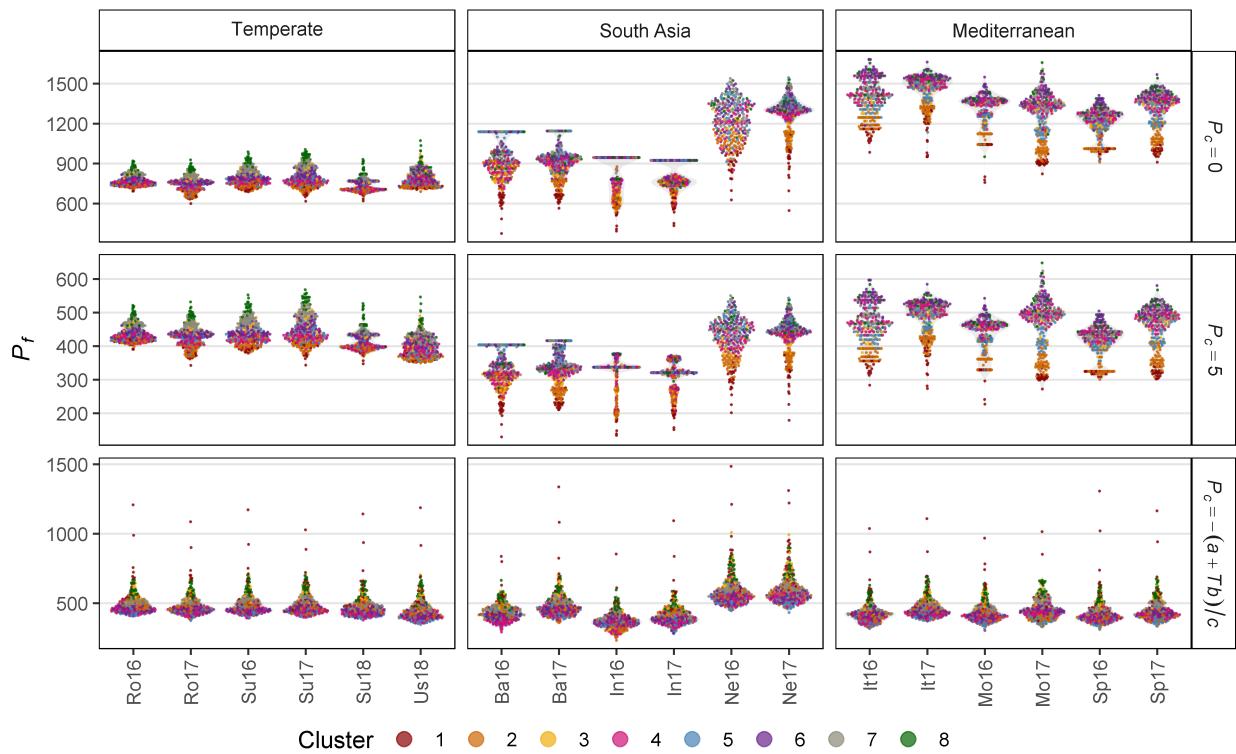

```
# Prep data for (a) Tf
pca <- read.csv("data/data_pca_results.csv") %>% select(Entry, Cluster) %>%
  mutate(Cluster = factor(Cluster))
```

```

xx <- read.csv("data/data_tb_pc.csv") %>%
  left_join(pca, by = "Entry") %>%
  mutate(MacroEnv = factor(MacroEnv, levels = macroEnvs))
x1 <- xx %>%
  select(Entry, Name, Expt, ExptShort, MacroEnv, Cluster, Tf_0, Tf_5, Tf) %>%
  gather(Trait, Value, Tf_0, Tf_5, Tf) %>%
  mutate(Trait = factor(Trait, levels = c("Tf_0", "Tf_5", "Tf")))
new.lab <- as_labeller(c(
  Tf_0 = "italic(T)[italic(b)]==0", Tf_5 = "italic(T)[italic(b)]==5",
  Tf = "italic(T)[italic(b)]==-(italic(a)+italic(Pc))/italic(b)",
  Mediterranean = "Mediterranean", Temperate = "Temperate",
  `South Asia` = "South-Asia"), label_parsed)
# Plot (a) Tf
mp1 <- ggplot(x1, aes(x = ExptShort, y = Value)) +
  geom_violin(fill = "grey", alpha = 0.3, color = NA) +
  geom_quasirandom(aes(color = Cluster), size = 0.1, alpha = 0.7) +
  facet_grid(Trait ~ MacroEnv, scales = "free", labeller = new.lab) +
  scale_color_manual(values = colors) +
  theme_AGL +
  theme(legend.position = "bottom",
        legend.margin = unit(c(0,0,0,0), "cm"),
        panel.grid.major.x = element_blank(),
        axis.text.x = element_text(angle = 90, hjust = 1, vjust = 0.5)) +
  guides(colour = guide_legend(nrow = 1, override.aes = list(size = 3))) +
  labs(title = "(a) Thermal sum required for flowering",
       y = expression(italic("T")[italic("f")]), x = NULL)
# Prep data for B) Pf
x1 <- xx %>%
  select(Entry, Expt, ExptShort, MacroEnv, Cluster, Pf_0, Pf_7, Pf) %>%
  gather(Trait, Value, Pf_0, Pf_7, Pf) %>%
  mutate(Trait = factor(Trait, levels = c("Pf_0", "Pf_7", "Pf")))
new.lab <- as_labeller(c(
  Pf_0 = "italic(P)[italic(c)]==0", Pf_7 = "italic(P)[italic(c)]==5",
  Pf = "italic(P)[italic(c)]==-(italic(a)+italic(Tb))/italic(c)",
  Mediterranean = "Mediterranean", Temperate = "Temperate",
  `South Asia` = "South-Asia"), label_parsed)
# Plot (b) Pf
mp2 <- ggplot(x1, aes(x = ExptShort, y = Value)) +
  geom_violin(fill = "grey", alpha = 0.3, color = NA) +
  geom_quasirandom(aes(color = Cluster), size = 0.1, alpha = 0.7) +
  facet_grid(Trait ~ MacroEnv, scales = "free", labeller = new.lab) +
  scale_color_manual(values = colors) +
  theme_AGL +
  theme(legend.position = "bottom",
        panel.grid.major.x = element_blank(),
        axis.text.x = element_text(angle = 90, hjust = 1, vjust = 0.5)) +
  guides(colour = guide_legend(nrow = 1, override.aes = list(size = 3))) +
  labs(title = "(b) Photoperiodic sum required for flowering",
       y = expression(italic("P")[italic("f")]), x = NULL)

# Append (a), (b) and (c)
mp <- ggarrange(mp1, mp2, ncol = 1, common.legend = T, legend = "bottom")
# Save


```

```

ggsave("Additional/Temp/Temp_SF09_1.png", mp1,
       width = 10, height = 13 * 3 / 8.2, dpi = 600)
ggsave("Additional/Temp/Temp_SF09_2.png", mp2,
       width = 10, height = 13 * 3 / 8.2, dpi = 600)
ggsave("Supplemental_Figure_09.png", mp, width = 8, height = 10, dpi = 600)

```

Additional Figure 14 PTT

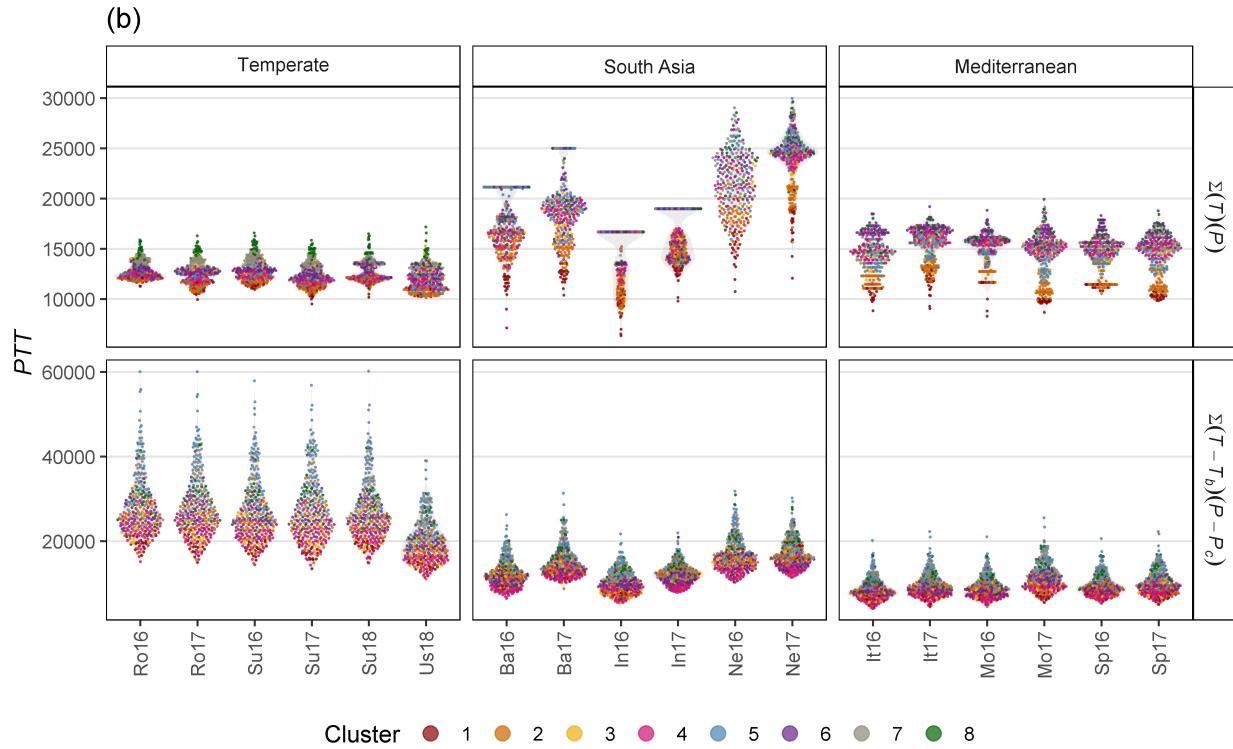

```


# Prep data
pca <- read.csv("data/data_pca_results.csv") %>% select(Entry, Cluster) %>%
  mutate(Cluster = factor(Cluster))
xx <- read.csv("data/data_tb_pc.csv") %>%
  left_join(pca, by = "Entry") %>%
  mutate(MacroEnv = factor(MacroEnv, levels = macroEnvs)) %>%
  select(Entry, Expt, ExptShort, MacroEnv, Cluster, PTT_0, PTT) %>%
  gather(Trait, Value, PTT_0, PTT) %>%
  mutate(Trait = factor(Trait, levels = c("PTT_0", "PTT")))
new.lab <- as_labeller(c(PTT_0 = "Sigma(\mathit{T})(\mathit{P})",
  PTT = "Sigma(\mathit{T}-\mathit{\bar{T}})[\mathit{b}](\mathit{P}-\mathit{\bar{P}})[\mathit{c}]"),
  Mediterranean = "Mediterranean", Temperate = "Temperate",
  `South Asia` = "South~Asia"), label_parsed)
# Plot PTT
mp <- ggplot(xx, aes(x = ExptShort, y = Value)) +
  geom_violin(fill = "grey", alpha = 0.3, color = NA) +
  geom_quasirandom(aes(color = Cluster), size = 0.1, alpha = 0.7) +
  facet_grid(Trait ~ MacroEnv, scales = "free", labeller = new.lab) +
  scale_color_manual(values = colors) +
  theme_AGL +
  theme(legend.position = "bottom", legend.title = "Cluster", legend.box = "horizontal")

```


```
theme(legend.position = "bottom",
      panel.grid.major.x = element_blank(),
      axis.text.x = element_text(angle = 90, hjust = 1, vjust = 0.5)) +
guides(colour = guide_legend(nrow = 1, override.aes = list(size = 3))) +
labs(title = "(b)", y = expression(italic("PTT")), x = NULL)
ggsave("Additional/Additional_Figure_14.png", mp, width = 8, height = 5, dpi = 600)
```

Supplemental Figure 10 Thermal Sums

(a) Thermal sum required for flowering

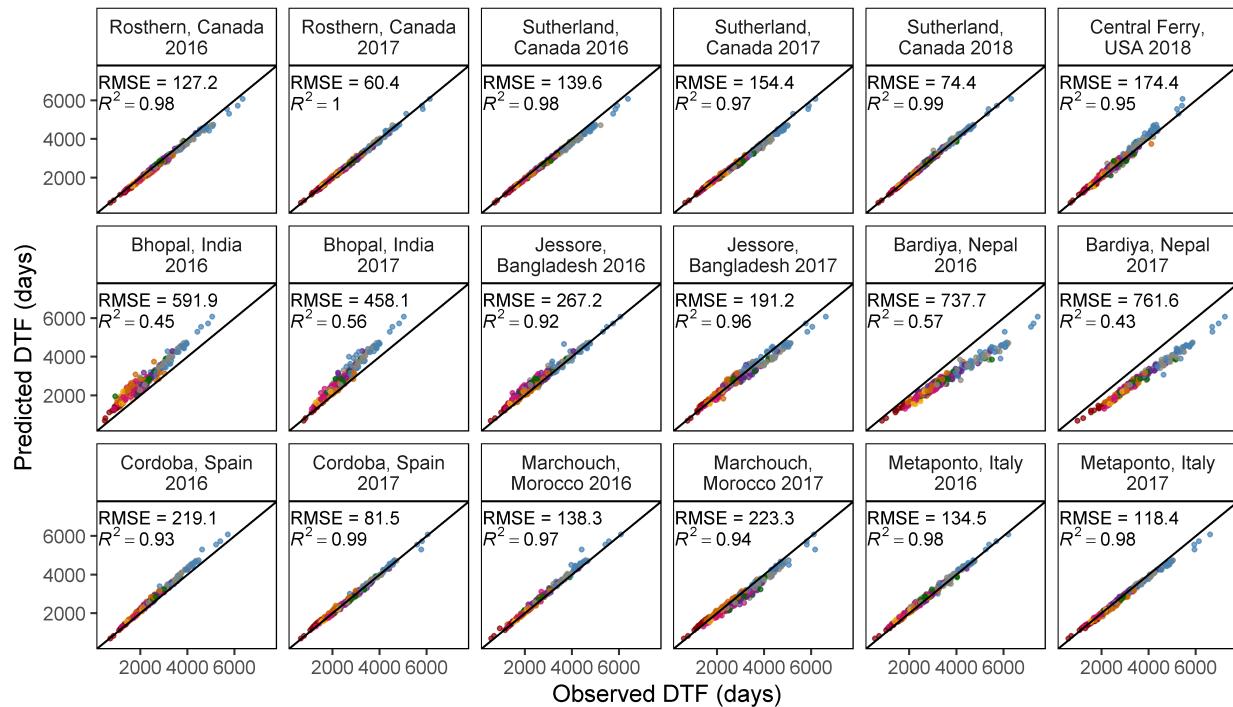

(b) Days from sowing to flower

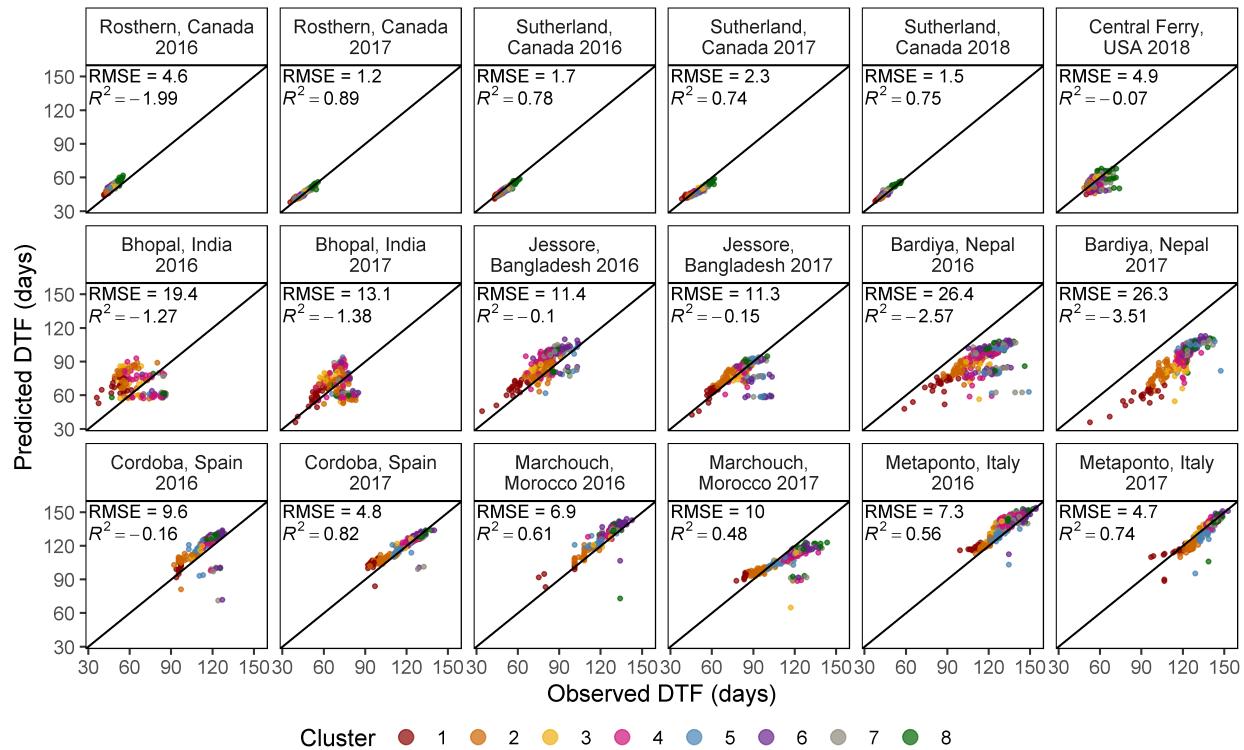


```
# Prep data
xx <- read.csv("data/data_tb_pc.csv") %>% #select(-MacroEnv) %>%
  mutate(Expt = factor(Expt, levels = names_Expt))
```


```
# Plot (a)
mp1 <- gg_model_2(xx, "Tf", "predicted_Tf", "(a) Thermal sum required for flowering",
                  200, 200, 6600, 5500)
# Plot (b)
mp2 <- gg_model_2(xx, "DTF", "predicted_DTF_Tf", "(b) Days from sowing to flower",
                  30, 30, 145, 125)
# Append (a) and (b)
mp <- ggarrange(mp1, mp2, nrow = 2, ncol = 1, common.legend = T, legend = "bottom")
ggsave("Supplemental_Figure_10.png", mp, width = 8, height = 10, dpi = 600)
```

Supplemental Figure 11 Photoperiodic Sums

(a) Photoperiodic sum required for flowering

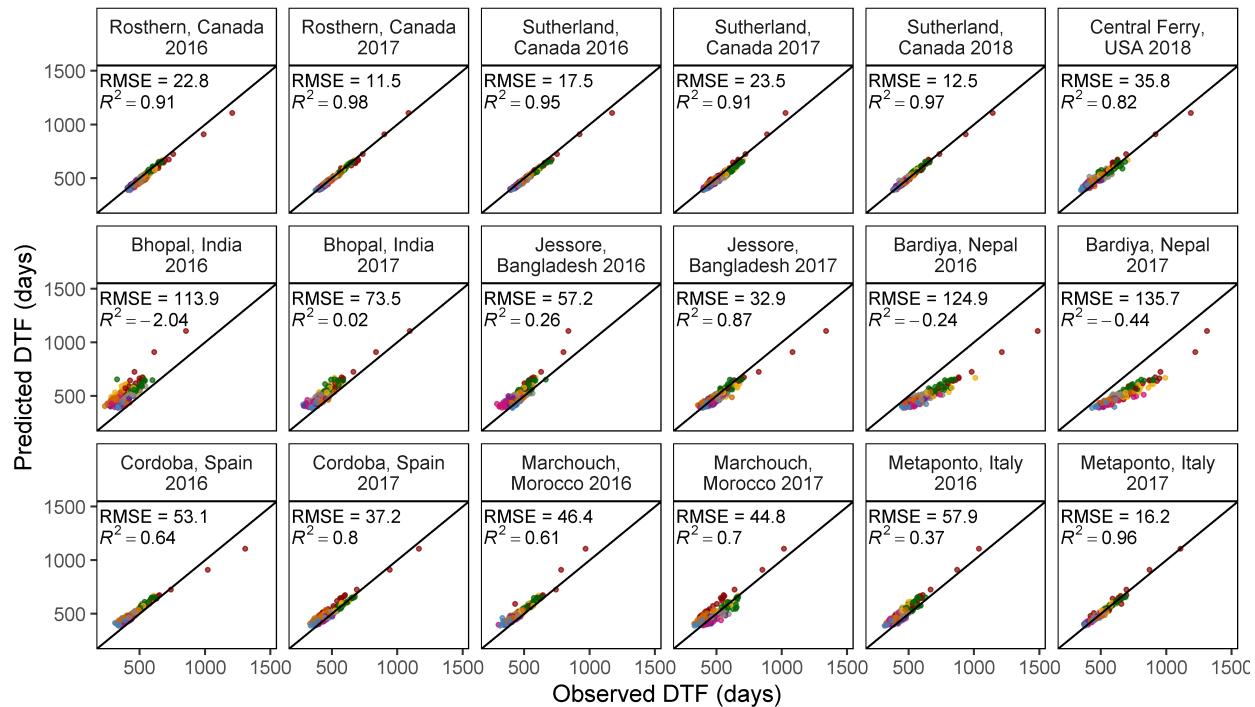

(b) Days from sowing to flower

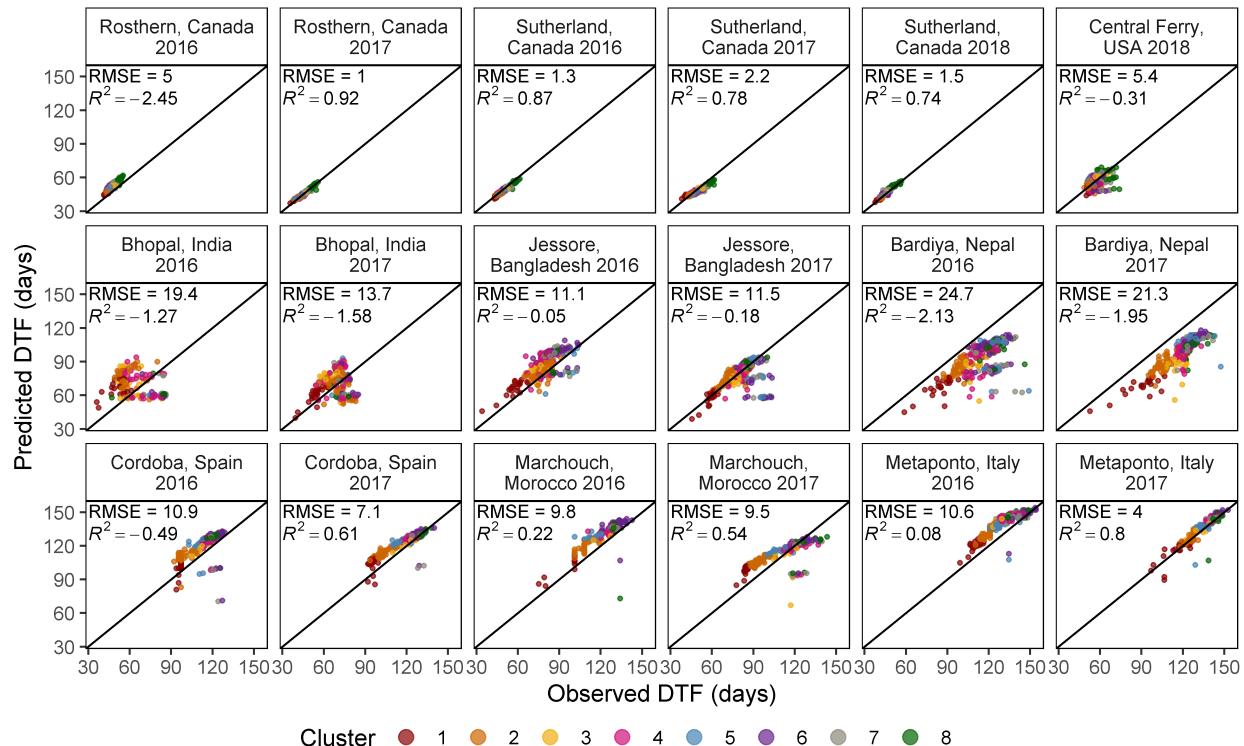

Cluster 1 2 3 4 5 6 7 8


```
# Prep data
xx <- read.csv("data/data_tb_pc.csv") %>% #select(-MacroEnv) %>%
  mutate(Expt = factor(Expt, levels = names_Expt))
```

```

# Plot (a)
mp1 <- gg_model_2(xx, "Pf", "predicted_Pf", "(a) Photoperiodic sum required for flowering",
                    190, 190, 1350, 1150)
# Plot (b)
mp2 <- gg_model_2(xx, "DTF", "predicted_DTF_Pf", "(b) Days from sowing to flower",
                    30, 30, 145, 125)
# Append (a) and (b)
mp <- ggarrange(mp1, mp2, nrow = 2, ncol = 1, common.legend = T, legend = "bottom")
ggsave("Supplemental_Figure_11.png", mp, width = 8, height = 10, dpi = 600)

```

Figure 7 Temperature Increase By MacroEnv

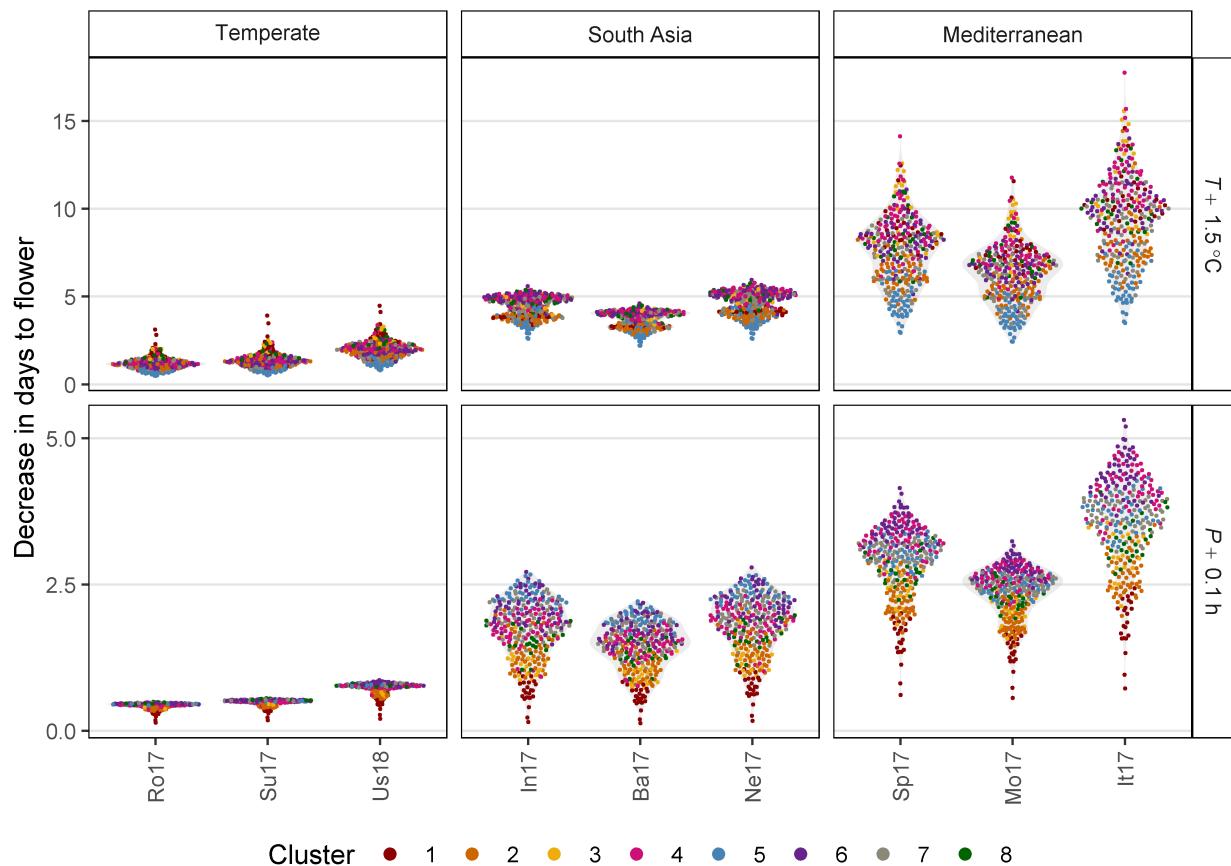

```

# Prep data
yy <- c("Ro17", "Su17", "Us18", "In17", "Ba17", "Ne17", "Sp17", "Mo17", "It17")
coefs <- read.csv("data/model_t+p_coefs.csv")
pca <- read.csv("data/data_pca_results.csv") %>% select(Entry, Cluster) %>%
  mutate(Cluster = factor(Cluster))
xx <- dd %>%
  select(Entry, Expt, ExptShort, DTF) %>%
  left_join(coefs, by = "Entry") %>%
  left_join(pca, by = "Entry") %>%
  left_join(select(ff, Expt, MacroEnv, T_mean, P_mean), by = "Expt")
# Temp +1
x1 <- xx %>%
  mutate(T_mean_1.5 = T_mean + 1.5,

```

```

DTF_1 = 1 / (a + b * T_mean_1.5 + c * P_mean),
DTF_0 = 1 / (a + b * T_mean + c * P_mean),
Difference = DTF_0 - DTF_1) %>%
filter(ExptShort %in% yy)
x2 <- xx %>%
mutate(P_mean_0.1 = P_mean + 0.1,
DTF_1 = 1 / (a + b * T_mean + c * P_mean_0.1),
DTF_0 = 1 / (a + b * T_mean + c * P_mean),
Difference = DTF_0 - DTF_1) %>%
filter(ExptShort %in% yy)
x1 <- x1 %>% mutate(Treatment = "T + 1.5")
x2 <- x2 %>% mutate(Treatment = "P + 0.1")
knitr::kable(x1 %>% group_by(MacroEnv) %>%
summarise(Min = round(min(Difference), 2), Max = round(max(Difference), 2)) )

```

| MacroEnv | Min | Max |
|---------------|------|-------|
| Temperate | 0.48 | 4.48 |
| South Asia | 2.21 | 5.96 |
| Mediterranean | 2.43 | 17.76 |

```

knitr::kable(x2 %>% group_by(MacroEnv) %>%
summarise(Min = round(min(Difference), 2), Max = round(max(Difference), 2)) )

```

| MacroEnv | Min | Max |
|---------------|------|------|
| Temperate | 0.14 | 0.87 |
| South Asia | 0.13 | 2.79 |
| Mediterranean | 0.57 | 5.32 |

```

xx <- bind_rows(x1, x2) %>%
select(Expt, ExptShort, MacroEnv, Entry, Name, Cluster,
DTF_0, DTF_1, Difference, Treatment) %>%
mutate(Treatment = factor(Treatment, levels = c("T + 1.5", "P + 0.1")))
write.csv(xx, "data/data_temp_phtoto_increase.csv", row.names = F)
new.lab <- as_labeller(c(`T + 1.5` = italic(T)~~1.5~degree*C",
`P + 0.1` = italic(P)~~0.1~h", Mediterranean = "Mediterranean",
Temperate = "Temperate", `South Asia` = "South~Asia"), label_parsed)
my_breaks <- function(x) { if (max(x) < 6) c(0,2.5,5) else seq(0,30,5) }
#my_minor_breaks <- function(x) { if (max(x) < 6) 1:5 else 1:30 }
# Plot
mp <- ggplot(xx, aes(x = ExptShort, y = Difference)) +
geom_violin(fill = "grey", alpha = 0.3, color = NA) +
geom_quasirandom(aes(color = Cluster), size = 0.3) +
facet_grid(Treatment ~ MacroEnv, scales = "free", labeller = new.lab) +
scale_y_continuous(minor_breaks = 0:30, breaks = my_breaks) +
scale_color_manual(values = colors) +
theme_AGL +
theme(legend.position = "bottom",
legend.margin = unit(c(0,0,0,0), "cm"),
axis.text.x = element_text(angle = 90, hjust = 1, vjust = 0.5),
panel.grid.major.x = element_blank()) +

```

```
guides(colour = guide_legend(nrow = 1, override.aes = list(size=2))) +  
  labs(y = "Decrease in days to flower", x = NULL)  
ggsave("Figure_07.png", mp, width = 7, height = 5, dpi = 600)
```