

Lecture 8:

CNN Architectures

Two (non-partisan) reminders

2020 Census

All US residents, including non-citizens and international students, can participate in the 2020 Census:

<https://2020census.gov/>

Voter Registration

Turn Up Turnout at the University of Michigan

Voting

Introduction

- Civic engagement is part of the University of Michigan experience, and we are part of the **Big Ten Voting Challenge for 2020**.
- The challenge worked!
- Voter turnout went from 14% to 41% among Michigan students between 2014 and 2018.
- This is a **non-partisan, student-led** voter registration, education, and turnout effort on our campus.
- We want to help all eligible students to register and turn out to vote safely during the COVID-19 pandemic.
- If you aren't eligible to vote, help encourage others to vote.
- If you want to get involved in leading this, email ltwoods@umich.edu or contact Mariah Fiumara in CoE Office of Student Affairs, mariahmo@umich.edu

Voting

Registration Facts

- Students who are U.S. citizens may register at either their student address or their permanent (or home) address. It's your choice.
- Depending on the state where you want to vote, you can either register online or by paper.
- **Only those with MI driver's license or MI ID** may register online to vote in Michigan. You also need the last 4 digits of your Social Security Number.
- If you think you are already registered to vote, **be sure to check:**
 - <https://www.nass.org/can-i-vote/voter-registration-status>

Voting

Get Registered to Vote Online

- To register online in Michigan, go to <https://mi.gov/vote>
- Remember to enter your *voting* address.
- You can register online in all states *except*
- Arkansas, Maine, Mississippi, Montana New Hampshire, New Jersey, North Carolina, Oklahoma, South Dakota, Texas, and Wyoming.
- To register to vote in states other than Michigan, use the following link: <https://umich.turbovote.org/>
- Stop by 143 Chrysler to utilize our experts and our registration resources. Please check our website to confirm office hours for Fall 2020.

Voting

Register to Vote on Paper

- If you want to vote **in Michigan, use the MI form**. Otherwise, use the federal form.
- Remember, if you don't have a Michigan driver's license or personal ID, but want to vote in Michigan, registration by paper is your only option other than going in person to the clerk's office.
- **Access the MI form at:** <https://mi.gov/VoterRegistration>
- **Access the Federal form at** <https://govote.umich.edu/reg-forms>
- The Ginsberg Center has stamps and envelopes or fill out this google form: <https://bit.ly/stamprequest> and they'll send them to you.
- 143 Chrysler Center will also be offering stamps and envelopes on North Campus. Please check the OSA website for Fall 2020 hours.

Voting

Absentee Voting

- To obtain an absentee ballot, you may request one by mail or by going to the clerk's office where you want to vote.
- In Michigan, anyone eligible to vote may vote by absentee ballot.
- There are paper absentee ballot request forms at the front that you can use in Michigan. To download an absentee voter application in Michigan, go to <http://bit.ly/mi-absenteevoting>.

Voting

If you still have questions or would like more assistance, you may:

- Visit govote.umich.edu
- Text “umvote” to (833)4-UMVOTE = (833) 486-8683
- Email voterregquestions@umich.edu
- Contact your local election official.

Voting in Michigan – Key Dates

- **October 7, 2020** It is recommended that a request for an absentee ballot should be done in person at the clerk's office or a satellite location rather than by mail after October 7, 2020.
- **October 15, 2020** If you plan on requesting an absentee ballot after October 15, you should plan on returning it in person to be sure that it counts.
- **October 19, 2020** Registration deadlines- by mail or online
- **October 30, 2020** Recommended deadline to request a Michigan Absentee Ballot. Submit the request to your local election office. You should request your ballot as far in advance of the election as possible. The deadline to request a ballot by mail is (received by) Friday, October 30, 2020.
- **November 3, 2020** Presidential Primary in Michigan: Absentee ballots must be received by the clerk's office by 8 pm. You can still register and vote on the day of the Election by visiting your Clerk of Courts office.

Assignment 3

Assignment 3 is released! It covers:


- Fully-connected networks
- Dropout
- Update rules: SGD+Momentum, RMSprop, Adam
- Convolutional networks
- Batch normalization

Due Friday October 9, 11:59pm


(Website originally said 10/16 – this was a typo!)

Last Time: Components of Convolutional Networks


Convolution Layers

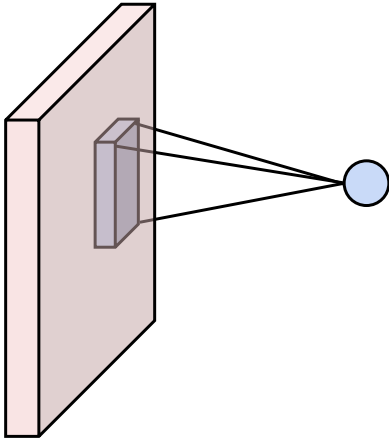


Pooling Layers

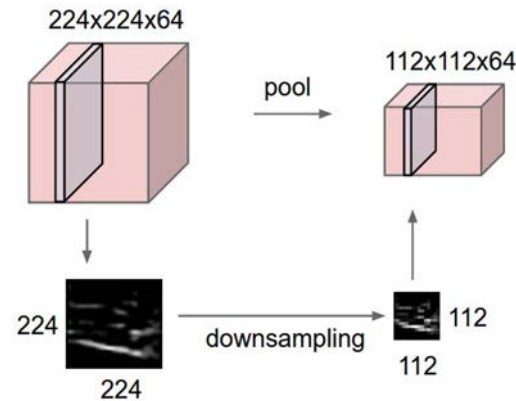

Fully-Connected Layers

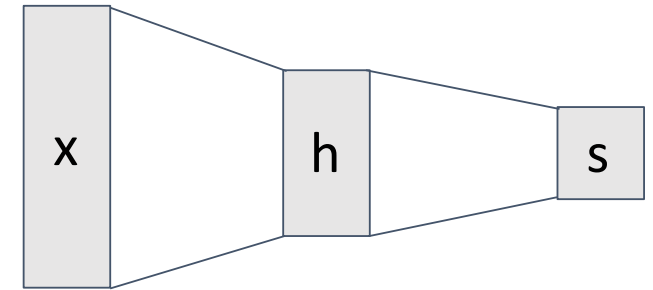


Activation Function

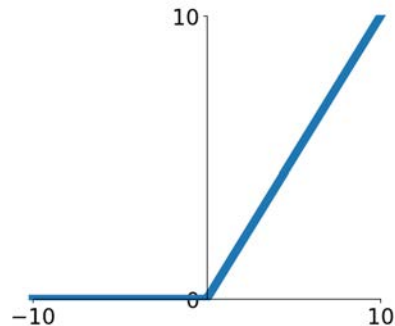


Normalization

$$\hat{x}_{i,j} = \frac{x_{i,j} - \mu_j}{\sqrt{\sigma_j^2 + \varepsilon}}$$


ImageNet Classification Challenge

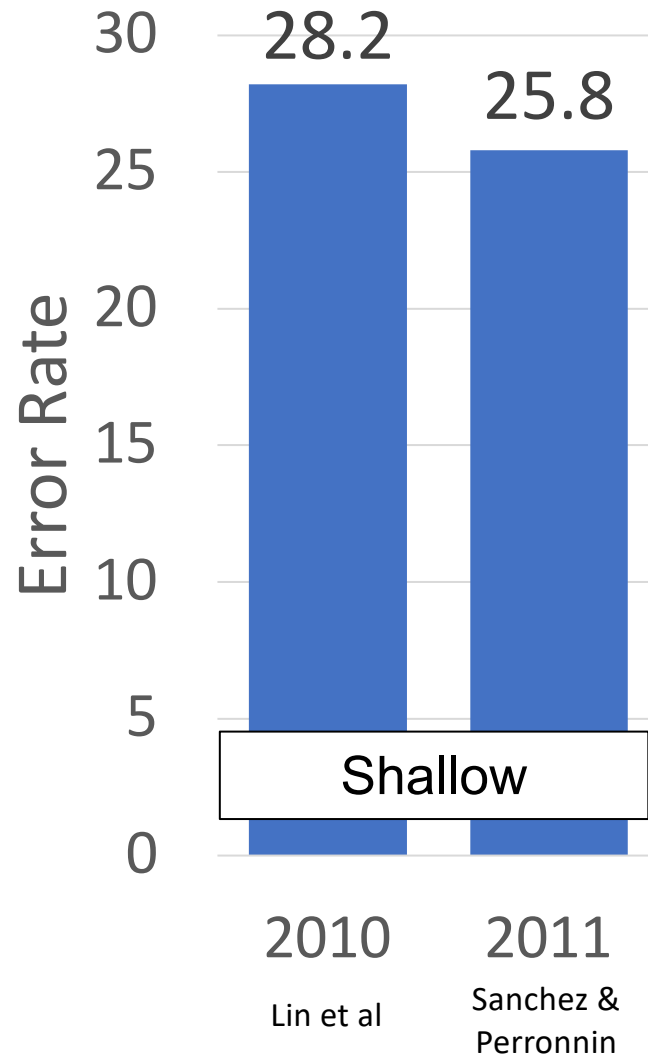

ImageNet Classification Challenge

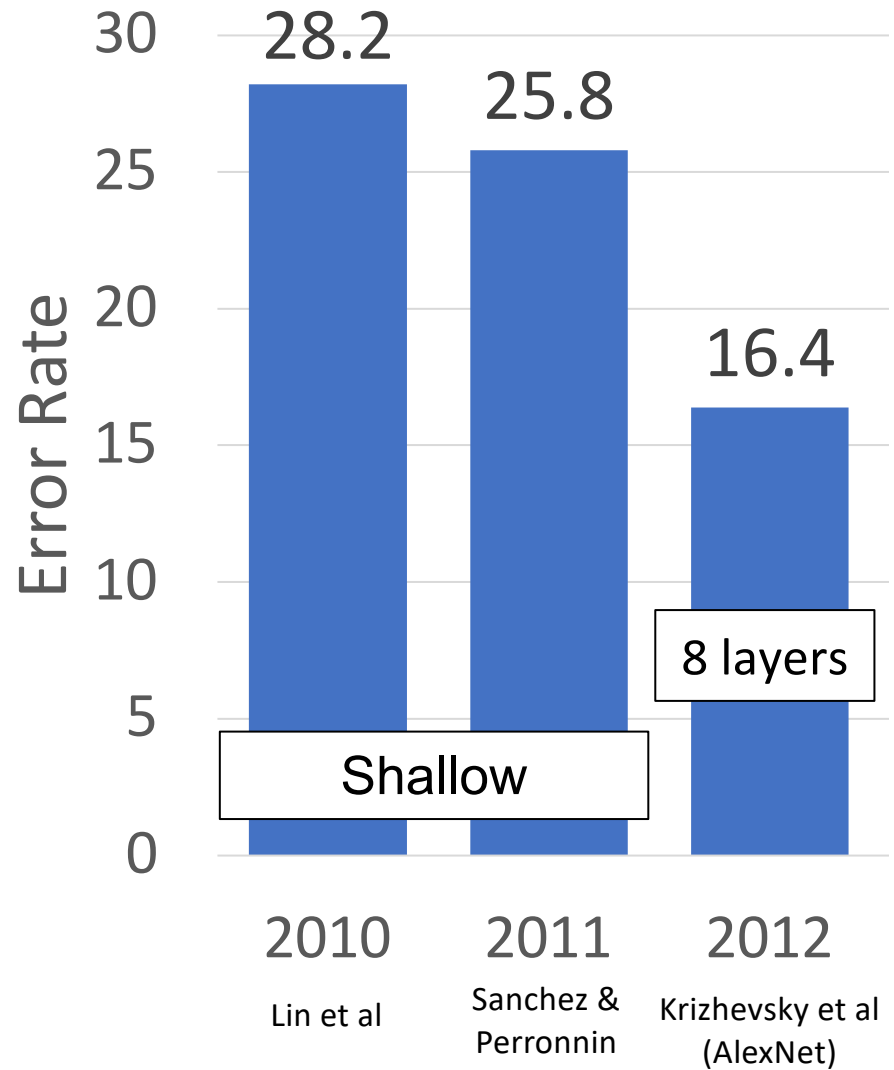


AlexNet

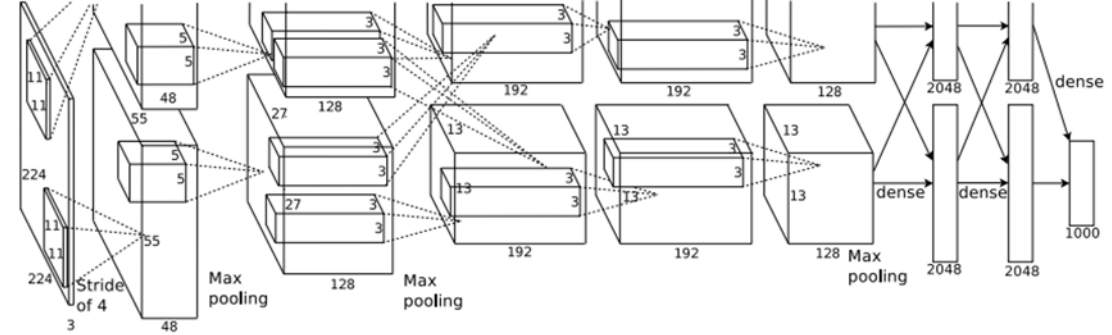

227 x 227 inputs
5 Convolutional layers
Max pooling
3 fully-connected layers
ReLU nonlinearities

Figure copyright Alex Krizhevsky, Ilya Sutskever, and Geoffrey Hinton, 2012. Reproduced with permission.

AlexNet

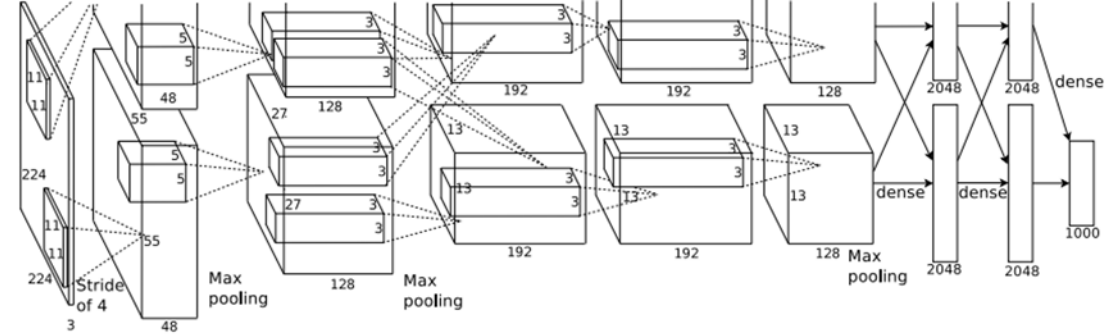

227 x 227 inputs
5 Convolutional layers
Max pooling
3 fully-connected layers
ReLU nonlinearities

Used “Local response normalization”;
Not used anymore

Trained on two GTX 580 GPUs – only
3GB of memory each! Model split
over two GPUs

Figure copyright Alex Krizhevsky, Ilya Sutskever, and Geoffrey Hinton, 2012. Reproduced with permission.

AlexNet


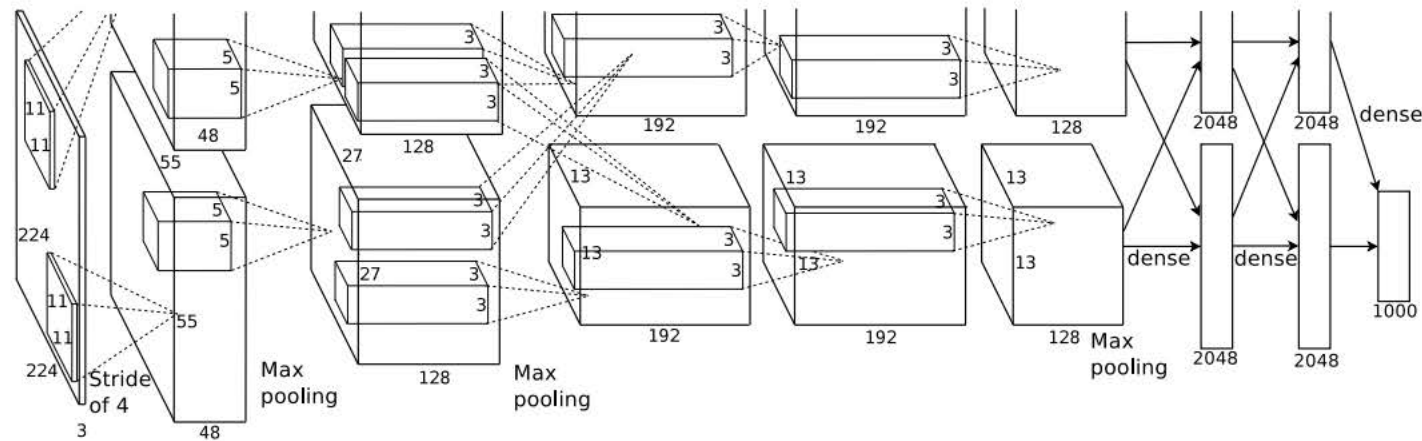



Figure 2: An illustration of the architecture of our CNN, explicitly showing the delineation of responsibilities between the two GPUs. One GPU runs the layer-parts at the top of the figure while the other runs the layer-parts at the bottom. The GPUs communicate only at certain layers. The network's input is 150,528-dimensional, and the number of neurons in the network's remaining layers is given by 253,440–186,624–64,896–64,896–43,264–4096–4096–1000.

Figure copyright Alex Krizhevsky, Ilya Sutskever, and Geoffrey Hinton, 2012. Reproduced with permission.

AlexNet

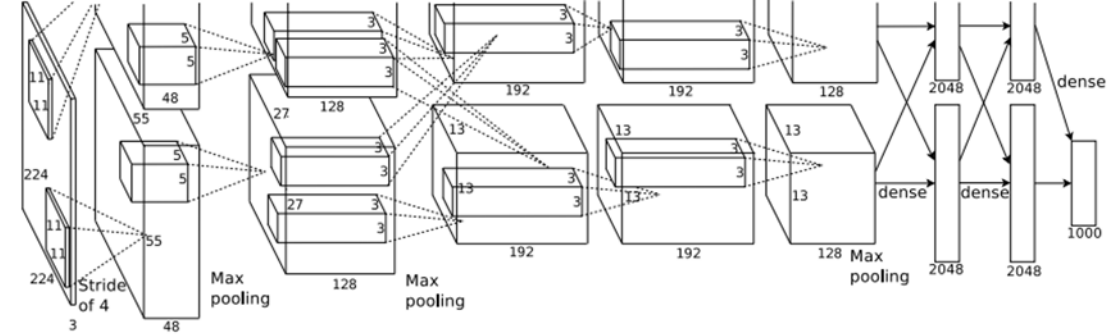

AlexNet Citations per year
(As of 9/27/2020)


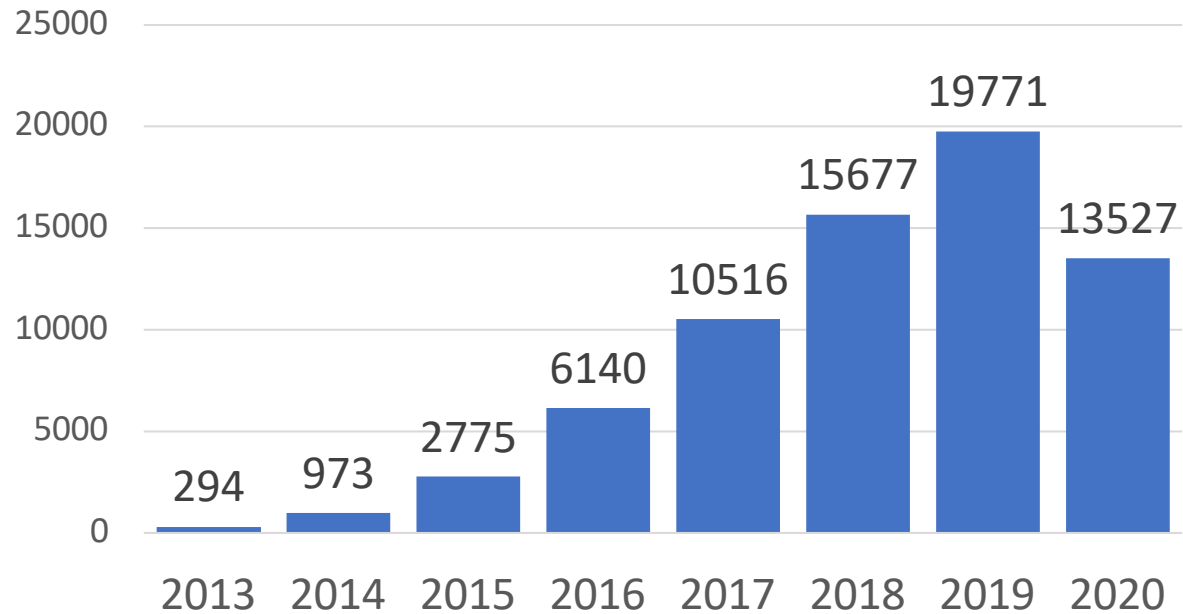


Total Citations: **69,763**

Figure copyright Alex Krizhevsky, Ilya Sutskever, and Geoffrey Hinton, 2012. Reproduced with permission.

AlexNet

AlexNet Citations per year (As of 9/27/2020)

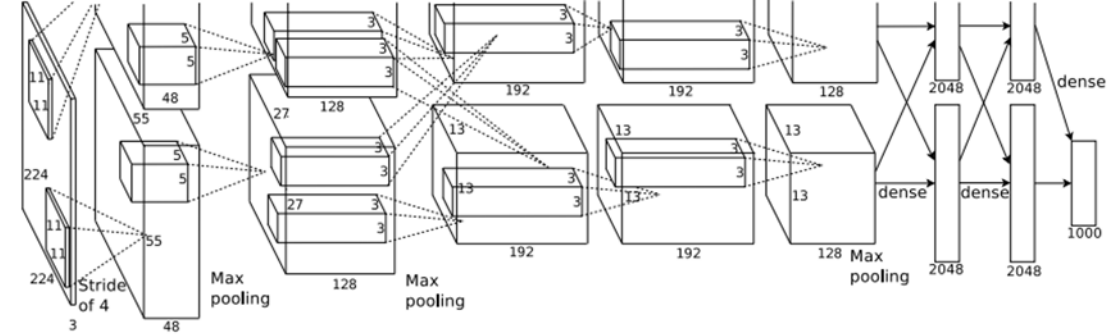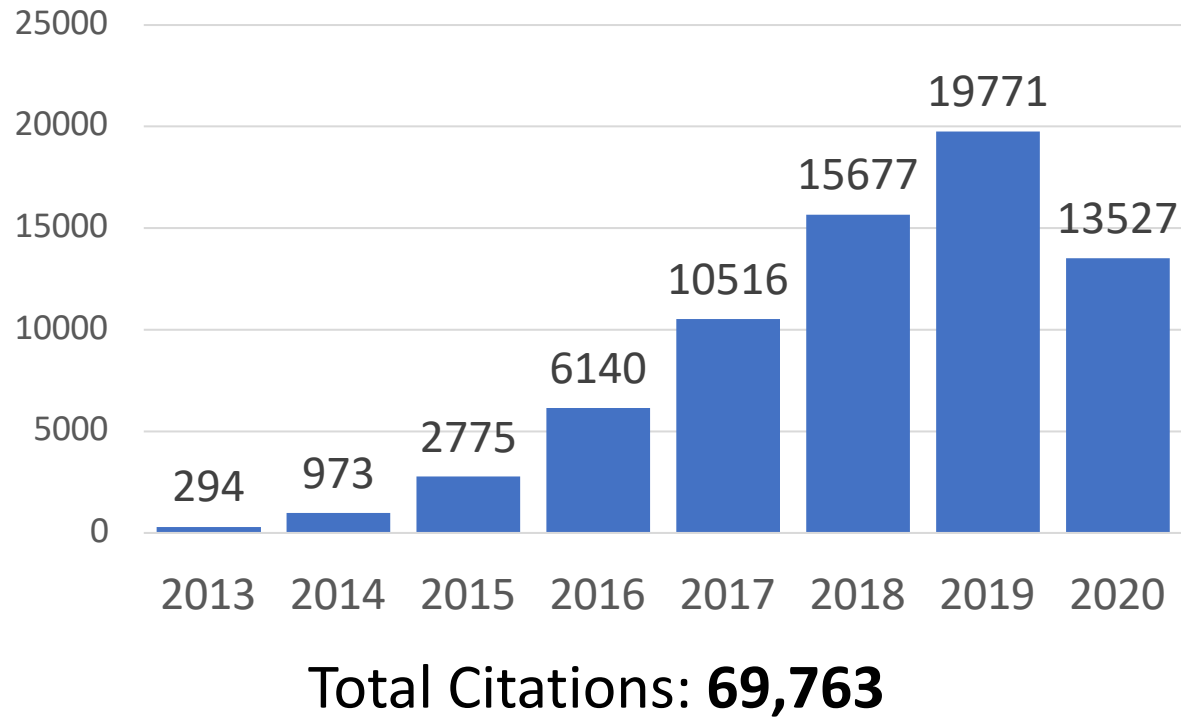

Citation Counts

Darwin, "On the origin of species", 1859: **54,348**


Shannon, "A mathematical theory of communication", 1948: **76,910**

Watson and Crick, "Molecular Structure of Nucleic Acids", 1953: **14,295**

ATLAS Collaboration, "Observation of a new particle in the search for the Standard Model Higgs boson with the ATLAS detector at the LHC", 2012:
16,563

Figure copyright Alex Krizhevsky, Ilya Sutskever, and Geoffrey Hinton, 2012. Reproduced with permission.


AlexNet

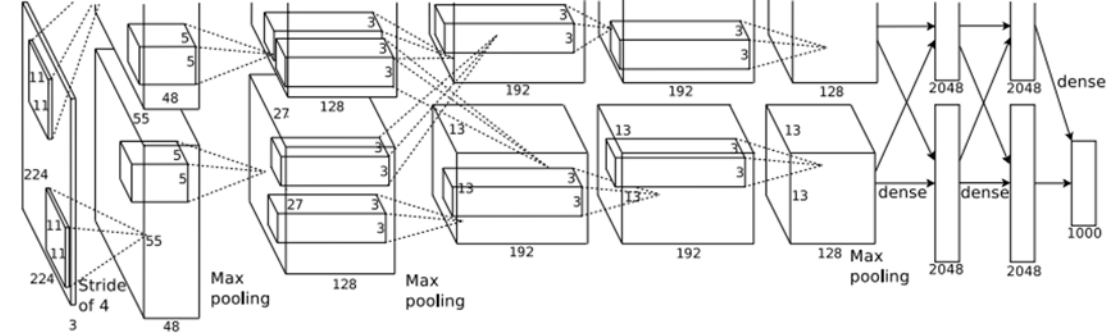

	Input size		Layer				Output size	
Layer	C	H / W	filters	kernel	stride	pad	C	H / W
conv1	3	227	64	11	4	2	?	

Figure copyright Alex Krizhevsky, Ilya Sutskever, and Geoffrey Hinton, 2012. Reproduced with permission.

AlexNet

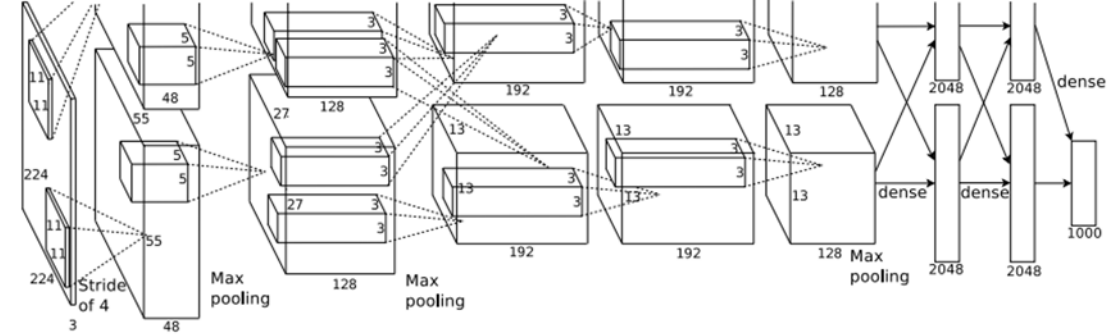


	Input size		Layer				Output size	
Layer	C	H / W	filters	kernel	stride	pad	C	H / W
conv1	3	227	64	11	4	2	64	?

Recall: Output channels = number of filters

Figure copyright Alex Krizhevsky, Ilya Sutskever, and Geoffrey Hinton, 2012. Reproduced with permission.

AlexNet

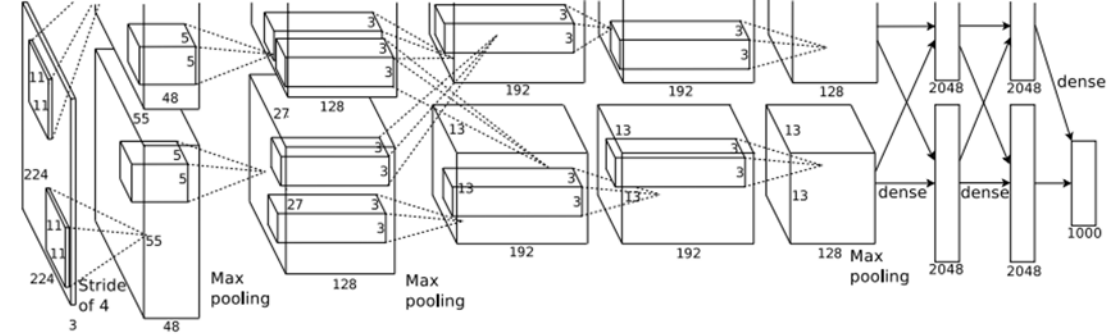


Input size		Layer					Output size	
Layer	C	H / W	filters	kernel	stride	pad	C	H / W
conv1	3	227	64	11	4	2	64	56

$$\begin{aligned}
 \text{Recall: } W' &= (W - K + 2P) / S + 1 \\
 &= 227 - 11 + 2 \cdot 2) / 4 + 1 \\
 &= 220 / 4 + 1 = 56
 \end{aligned}$$

Figure copyright Alex Krizhevsky, Ilya Sutskever, and Geoffrey Hinton, 2012. Reproduced with permission.


AlexNet

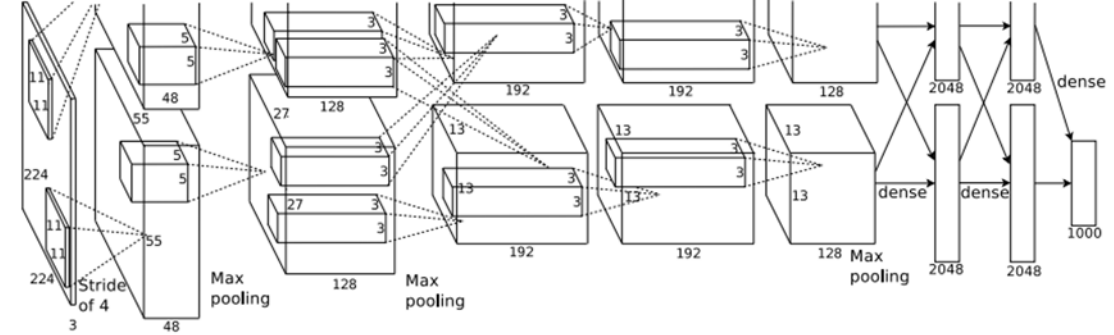

	Input size		Layer				Output size		
Layer	C	H / W	filters	kernel	stride	pad	C	H / W	memory (KB)
conv1	3	227	64	11	4	2	64	56	?

Figure copyright Alex Krizhevsky, Ilya Sutskever, and Geoffrey Hinton, 2012. Reproduced with permission.

AlexNet

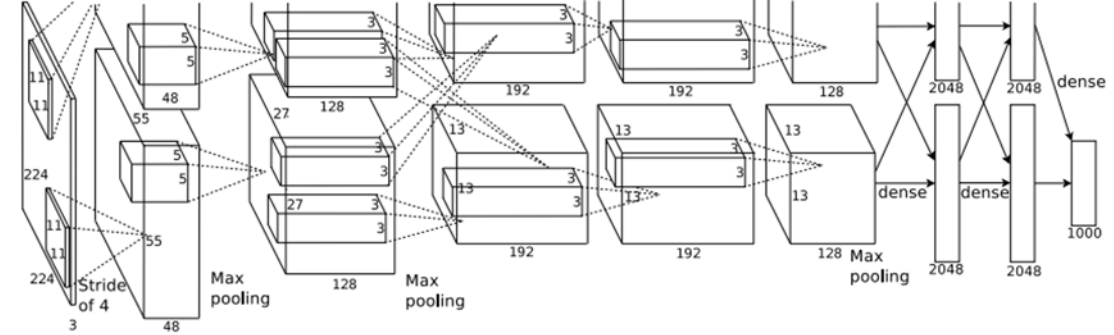

	Input size		Layer				Output size		
Layer	C	H / W	filters	kernel	stride	pad	C	H / W	memory (KB)
conv1	3	227	64	11	4	2	64	56	784


$$\begin{aligned}\text{Number of output elements} &= C * H' * W' \\ &= 64 * 56 * 56 = 200,704\end{aligned}$$

$$\text{Bytes per element} = 4 \text{ (for 32-bit floating point)}$$

$$\begin{aligned}\text{KB} &= (\text{number of elements}) * (\text{bytes per elem}) / 1024 \\ &= 200704 * 4 / 1024 \\ &= \mathbf{784}\end{aligned}$$

Figure copyright Alex Krizhevsky, Ilya Sutskever, and Geoffrey Hinton, 2012. Reproduced with permission.


AlexNet

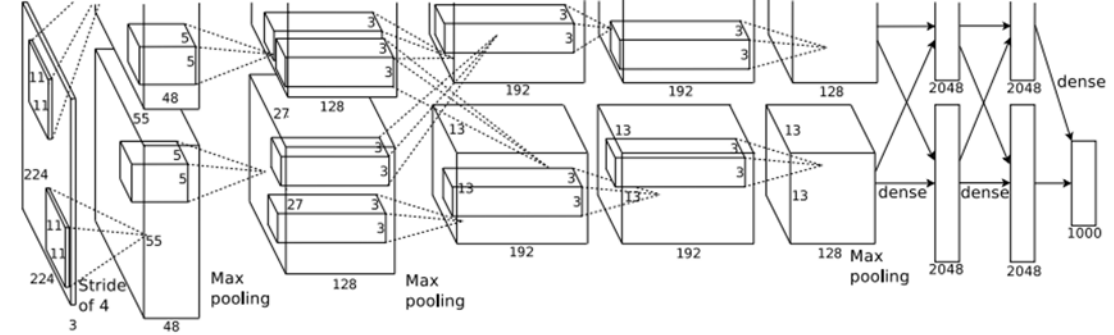

	Input size		Layer				Output size			
Layer	C	H / W	filters	kernel	stride	pad	C	H / W	memory (KB)	params (k)
conv1	3	227	64	11	4	2	64	56	784	?

Figure copyright Alex Krizhevsky, Ilya Sutskever, and Geoffrey Hinton, 2012. Reproduced with permission.

AlexNet

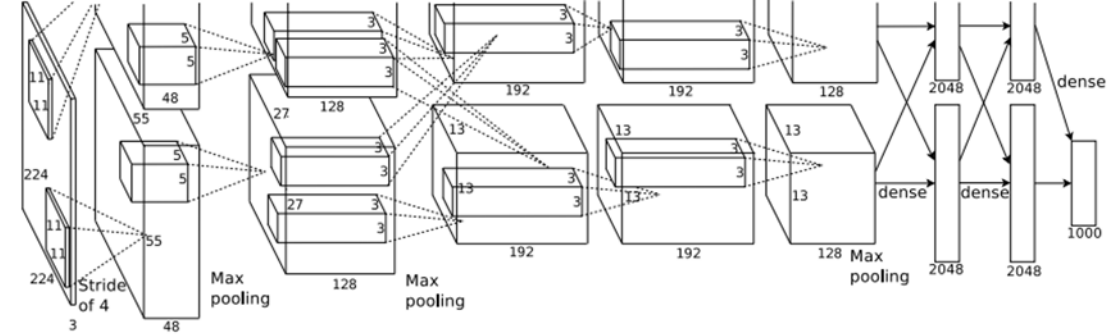

	Input size		Layer				Output size			
Layer	C	H / W	filters	kernel	stride	pad	C	H / W	memory (KB)	params (k)
conv1	3	227	64	11	4	2	64	56	784	23


$$\begin{aligned}\text{Weight shape} &= C_{\text{out}} \times C_{\text{in}} \times K \times K \\ &= 64 \times 3 \times 11 \times 11\end{aligned}$$

$$\text{Bias shape} = C_{\text{out}} = 64$$

$$\begin{aligned}\text{Number of weights} &= 64 \times 3 \times 11 \times 11 + 64 \\ &= \mathbf{23,296}\end{aligned}$$

Figure copyright Alex Krizhevsky, Ilya Sutskever, and Geoffrey Hinton, 2012. Reproduced with permission.


AlexNet

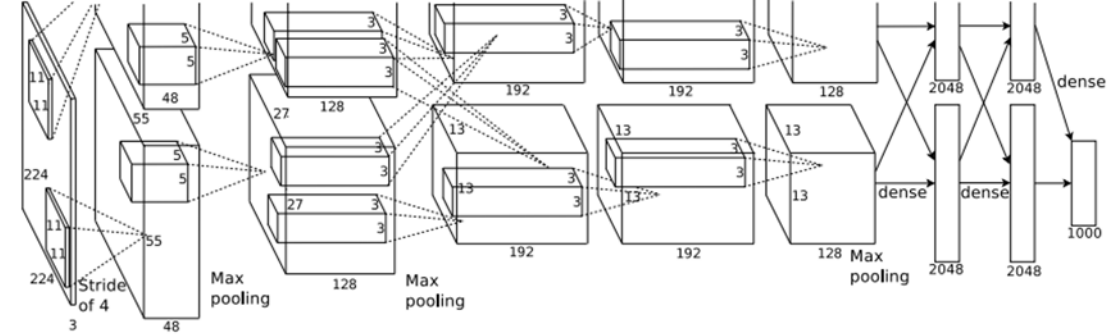

	Input size		Layer				Output size				
Layer	C	H / W	filters	kernel	stride	pad	C	H / W	memory (KB)	params (k)	flop (M)
conv1	3	227	64	11	4	2	64	56	784	23	?

Figure copyright Alex Krizhevsky, Ilya Sutskever, and Geoffrey Hinton, 2012. Reproduced with permission.

AlexNet

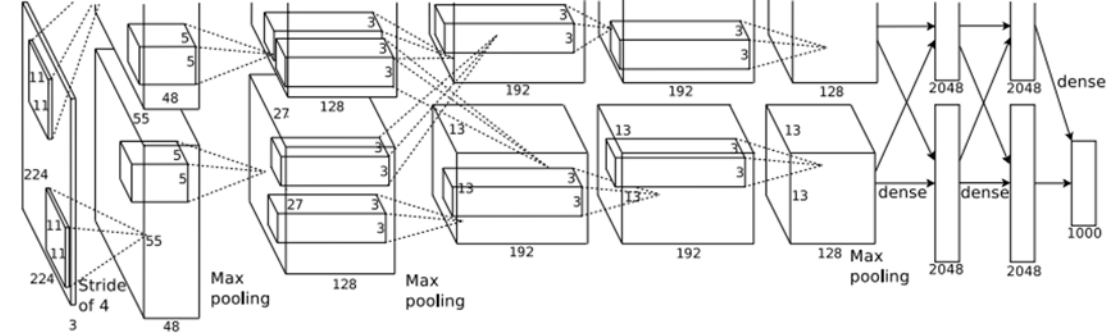


	Input size		Layer				Output size				
Layer	C	H / W	filters	kernel	stride	pad	C	H / W	memory (KB)	params (k)	flop (M)
conv1	3	227	64	11	4	2	64	56	784	23	73

Number of floating point operations (multiply+add)
 = (number of output elements) * (ops per output elem)
 = $(C_{out} \times H' \times W') * (C_{in} \times K \times K)$
 = $(64 * 56 * 56) * (3 * 11 * 11)$
 = $200,704 * 363$
 = **72,855,552**

Figure copyright Alex Krizhevsky, Ilya Sutskever, and Geoffrey Hinton, 2012. Reproduced with permission.


AlexNet

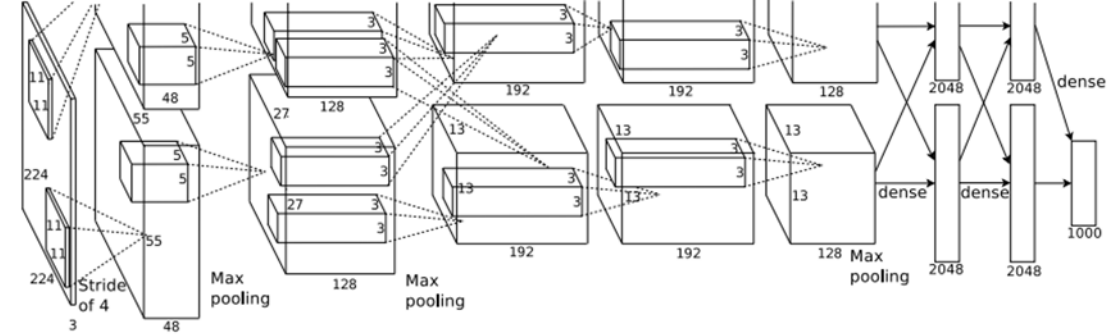

Layer	Input size		Layer				Output size				
	C	H / W	filters	kernel	stride	pad	C	H / W	memory (KB)	params (k)	flop (M)
conv1	3	227	64	11	4	2	64	56	784	23	73
pool1	64	56		3	2	0	?				

Figure copyright Alex Krizhevsky, Ilya Sutskever, and Geoffrey Hinton, 2012. Reproduced with permission.

AlexNet

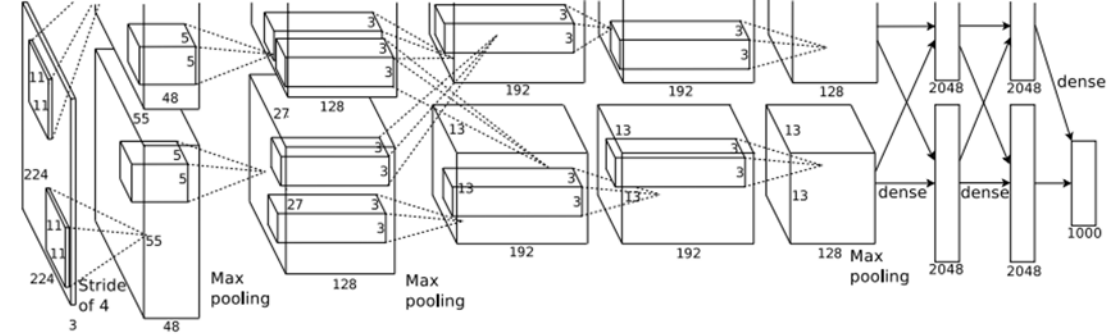

Layer	Input size		Layer				Output size				
	C	H / W	filters	kernel	stride	pad	C	H / W	memory (KB)	params (k)	flop (M)
conv1	3	227	64	11	4	2	64	56	784	23	73
pool1	64	56		3	2	0	64	27			


For pooling layer:

#output channels = #input channels = 64

$$\begin{aligned}
 W' &= \text{floor}((W - K) / S + 1) \\
 &= \text{floor}(53 / 2 + 1) = \text{floor}(27.5) = \mathbf{27}
 \end{aligned}$$

Figure copyright Alex Krizhevsky, Ilya Sutskever, and Geoffrey Hinton, 2012. Reproduced with permission.

AlexNet

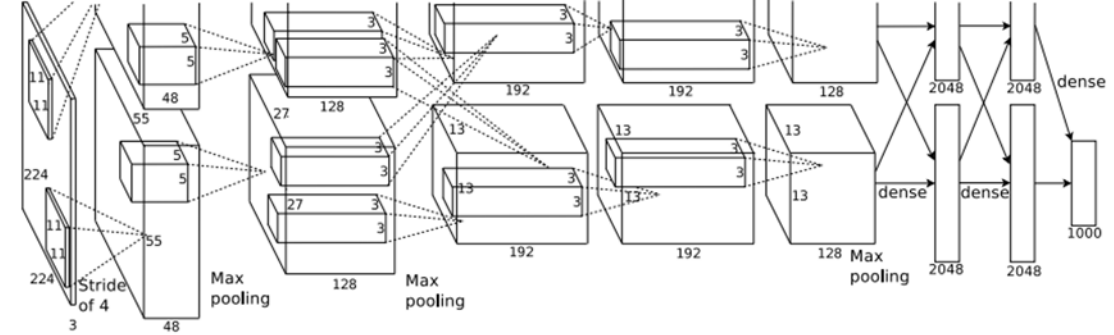

	Input size		Layer				Output size				
Layer	C	H / W	filters	kernel	stride	pad	C	H / W	memory (KB)	params (k)	flop (M)
conv1	3	227	64	11	4	2	64	56	784	23	73
pool1	64	56		3	2	0	64	27	182	?	

$$\# \text{output elems} = C_{\text{out}} \times H' \times W'$$

$$\text{Bytes per elem} = 4$$


$$\text{KB} = C_{\text{out}} * H' * W' * 4 / 1024$$

$$= 64 * 27 * 27 * 4 / 1024$$

$$= \mathbf{182.25}$$

Figure copyright Alex Krizhevsky, Ilya Sutskever, and Geoffrey Hinton, 2012. Reproduced with permission.

AlexNet

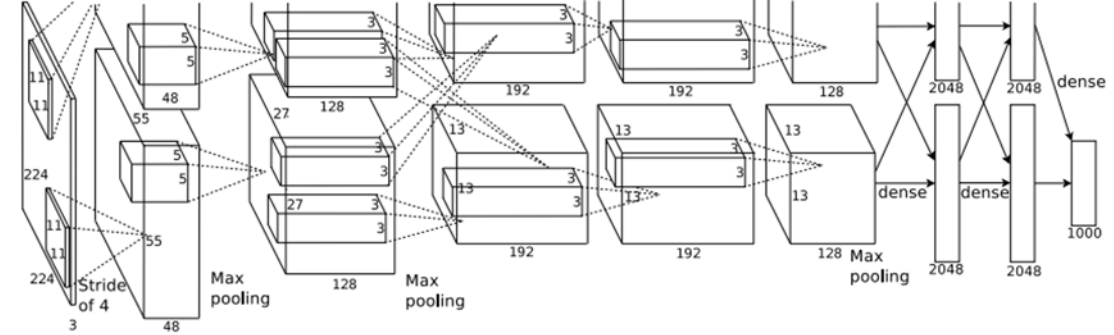


	Input size		Layer				Output size				
Layer	C	H / W	filters	kernel	stride	pad	C	H / W	memory (KB)	params (k)	flop (M)
conv1	3	227	64	11	4	2	64	56	784	23	73
pool1	64	56		3	2	0	64	27	182	0	?

Pooling layers have no learnable parameters!

Figure copyright Alex Krizhevsky, Ilya Sutskever, and Geoffrey Hinton, 2012. Reproduced with permission.

AlexNet

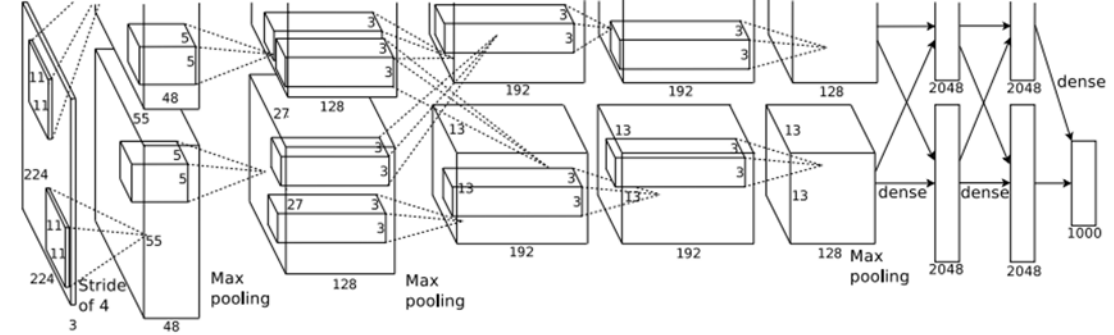

	Input size		Layer				Output size				
Layer	C	H / W	filters	kernel	stride	pad	C	H / W	memory (KB)	params (k)	flop (M)
conv1	3	227	64	11	4	2	64	56	784	23	73
pool1	64	56		3	2	0	64	27	182	0	0

Floating-point ops for pooling layer

= (number of output positions) * (flops per output position)

= $(C_{\text{out}} * H' * W') * (K * K)$


= $(64 * 27 * 27) * (3 * 3)$

= 419,904

= **0.4 MFLOP**

Figure copyright Alex Krizhevsky, Ilya Sutskever, and Geoffrey Hinton, 2012. Reproduced with permission.

AlexNet

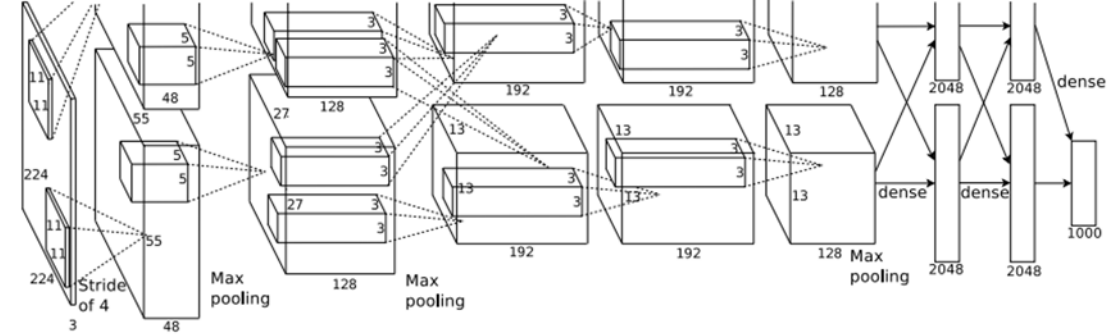


	Input size		Layer				Output size				
Layer	C	H / W	filters	kernel	stride	pad	C	H / W	memory (KB)	params (k)	flop (M)
conv1	3	227	64	11	4	2	64	56	784	23	73
pool1	64	56		3	2	0	64	27	182	0	0
conv2	64	27	192	5	1	2	192	27	547	307	224
pool2	192	27		3	2	0	192	13	127	0	0
conv3	192	13	384	3	1	1	384	13	254	664	112
conv4	384	13	256	3	1	1	256	13	169	885	145
conv5	256	13	256	3	1	1	256	13	169	590	100
pool5	256	13		3	2	0	256	6	36	0	0
flatten	256	6					9216		36	0	0

$$\begin{aligned}
 \text{Flatten output size} &= C_{\text{in}} \times H \times W \\
 &= 256 * 6 * 6 \\
 &= \mathbf{9216}
 \end{aligned}$$

Figure copyright Alex Krizhevsky, Ilya Sutskever, and Geoffrey Hinton, 2012. Reproduced with permission.

AlexNet

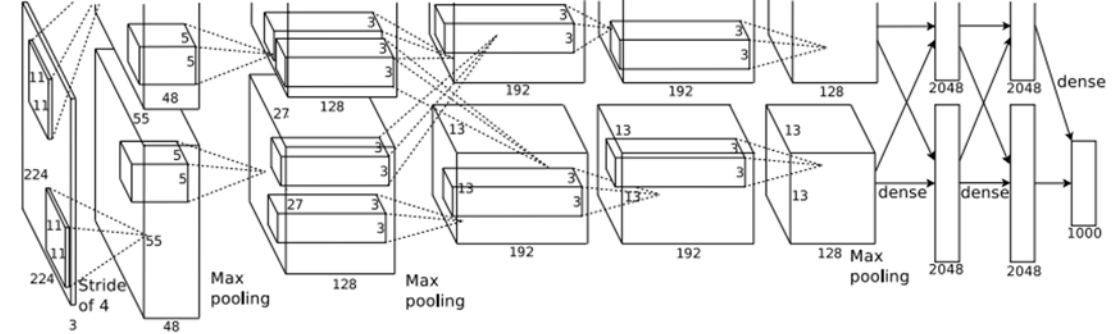


	Input size		Layer				Output size				
Layer	C	H / W	filters	kernel	stride	pad	C	H / W	memory (KB)	params (k)	flop (M)
conv1	3	227	64	11	4	2	64	56	784	23	73
pool1	64	56		3	2	0	64	27	182	0	0
conv2	64	27	192	5	1	2	192	27	547	307	224
pool2	192	27		3	2	0	192	13	127	0	0
conv3	192	13	384	3	1	1	384	13	254	664	112
conv4	384	13	256	3	1	1	256	13	169	885	145
conv5	256	13	256	3	1	1	256	13	169	590	100
pool5	256	13		3	2	0	256	6	36	0	0
flatten	256	6					9216		36	0	0
fc6	9216		4096				4096		16	37,749	38

$$\begin{aligned}
 \text{FC params} &= C_{\text{in}} * C_{\text{out}} + C_{\text{out}} \\
 &= 9216 * 4096 + 4096 \\
 &= 37,725,832
 \end{aligned}$$

$$\begin{aligned}
 \text{FC flops} &= C_{\text{in}} * C_{\text{out}} \\
 &= 9216 * 4096 \\
 &= 37,748,736
 \end{aligned}$$


AlexNet

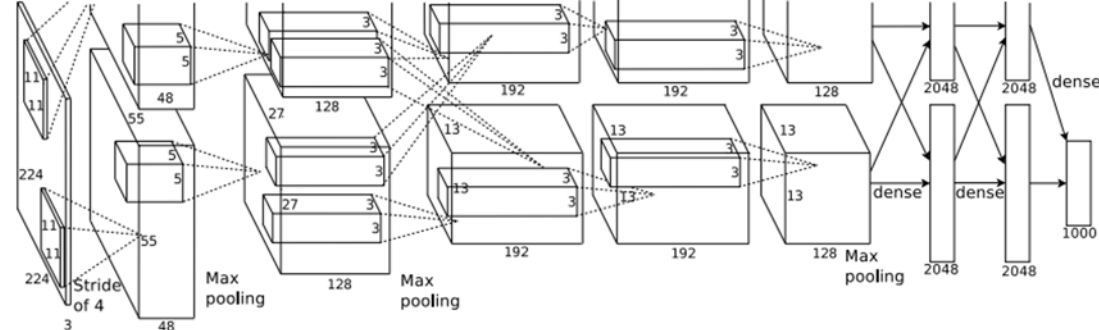

	Input size		Layer				Output size				
Layer	C	H / W	filters	kernel	stride	pad	C	H / W	memory (KB)	params (k)	flop (M)
conv1	3	227	64	11	4	2	64	56	784	23	73
pool1	64	56		3	2	0	64	27	182	0	0
conv2	64	27	192	5	1	2	192	27	547	307	224
pool2	192	27		3	2	0	192	13	127	0	0
conv3	192	13	384	3	1	1	384	13	254	664	112
conv4	384	13	256	3	1	1	256	13	169	885	145
conv5	256	13	256	3	1	1	256	13	169	590	100
pool5	256	13		3	2	0	256	6	36	0	0
flatten	256	6					9216		36	0	0
fc6	9216		4096				4096		16	37,749	38
fc7	4096		4096				4096		16	16,777	17
fc8	4096		1000				1000		4	4,096	4

AlexNet


How to choose this?
Trial and error =

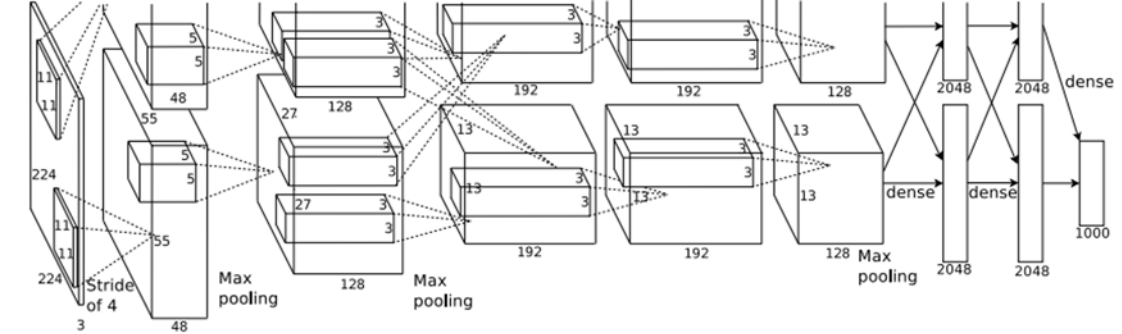

	Input size		Layer				Output size				
Layer	C	H / W	filters	kernel	stride	pad	C	H / W	memory (KB)	params (k)	flop (M)
conv1	3	227	64	11	4	2	64	56	784	23	73
pool1	64	56		3	2	0	64	27	182	0	0
conv2	64	27	192	5	1	2	192	27	547	307	224
pool2	192	27		3	2	0	192	13	127	0	0
conv3	192	13	384	3	1	1	384	13	254	664	112
conv4	384	13	256	3	1	1	256	13	169	885	145
conv5	256	13	256	3	1	1	256	13	169	590	100
pool5	256	13		3	2	0	256	6	36	0	0
flatten	256	6					9216		36	0	0
fc6	9216		4096				4096		16	37,749	38
fc7	4096		4096				4096		16	16,777	17
fc8	4096		1000				1000		4	4,096	4


AlexNet

Interesting trends here!

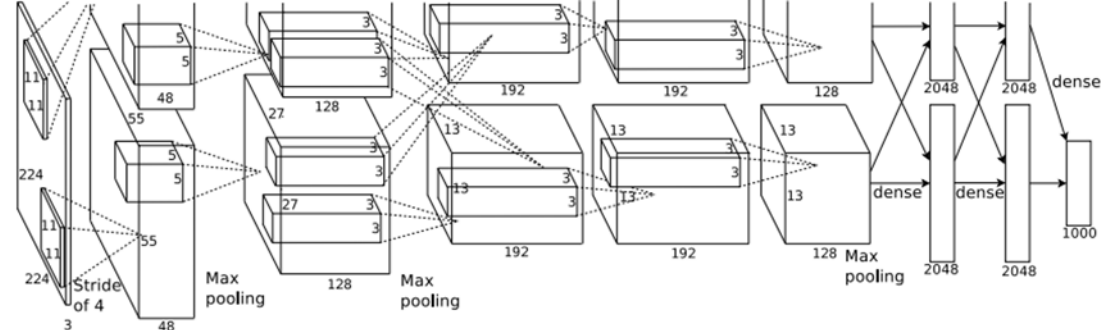

	Input size		Layer				Output size				
Layer	C	H / W	filters	kernel	stride	pad	C	H / W	memory (KB)	params (k)	flop (M)
conv1	3	227	64	11	4	2	64	56	784	23	73
pool1	64	56		3	2	0	64	27	182	0	0
conv2	64	27	192	5	1	2	192	27	547	307	224
pool2	192	27		3	2	0	192	13	127	0	0
conv3	192	13	384	3	1	1	384	13	254	664	112
conv4	384	13	256	3	1	1	256	13	169	885	145
conv5	256	13	256	3	1	1	256	13	169	590	100
pool5	256	13		3	2	0	256	6	36	0	0
flatten	256	6					9216		36	0	0
fc6	9216		4096				4096		16	37,749	38
fc7	4096		4096				4096		16	16,777	17
fc8	4096		1000				1000		4	4,096	4

AlexNet

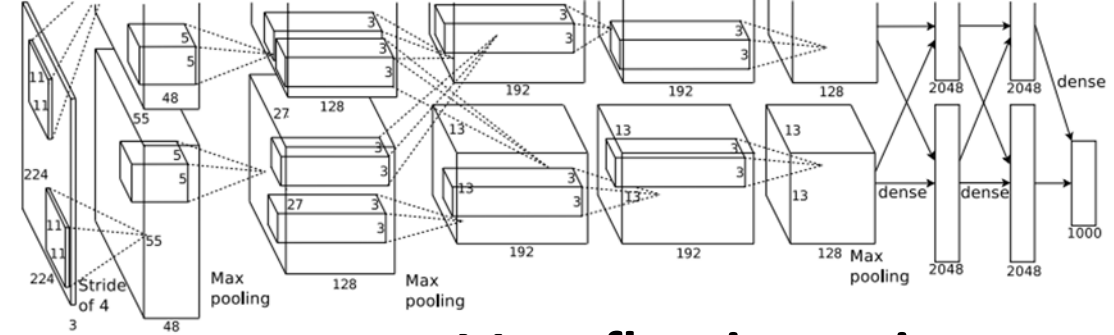


Most of the **memory usage** is in the early convolution layers


Nearly all **parameters** are in the fully-connected layers

Most **floating-point ops** occur in the convolution layers


Memory (KB)

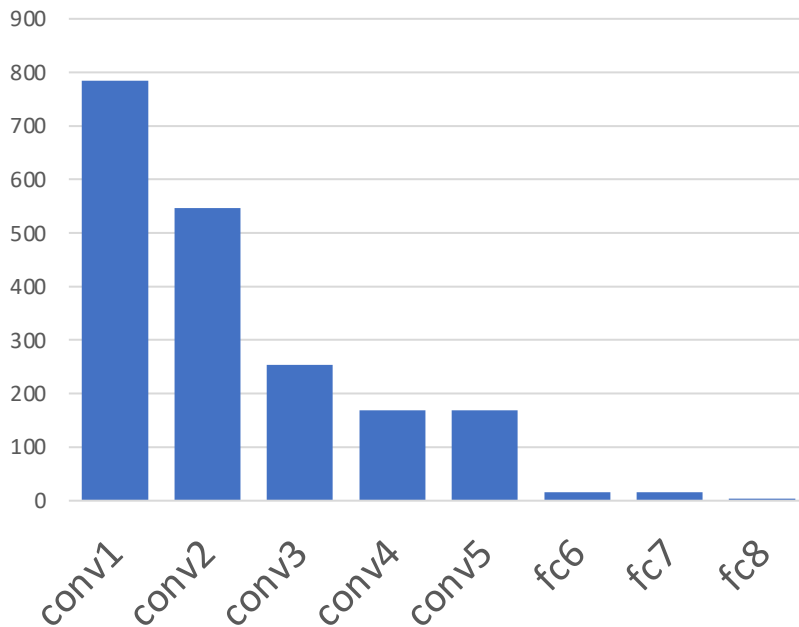


Params (K)

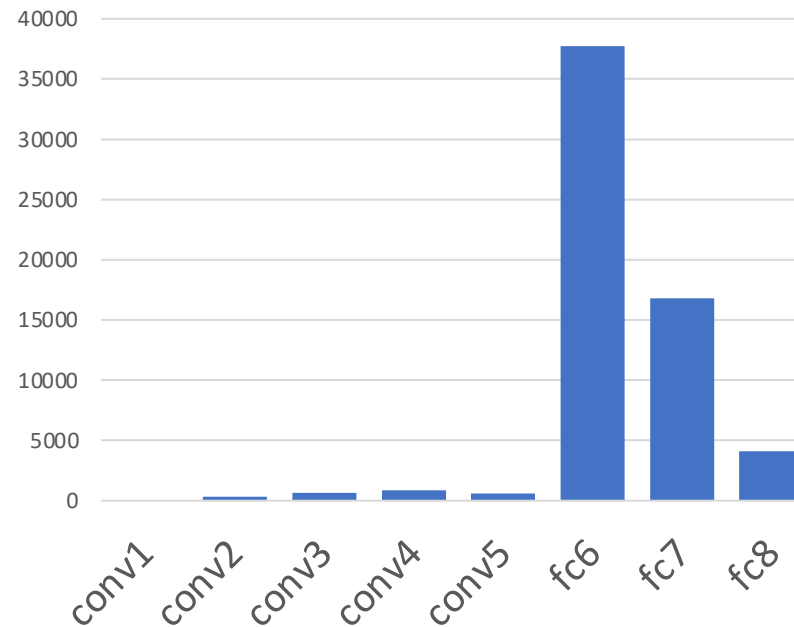


MFLOP

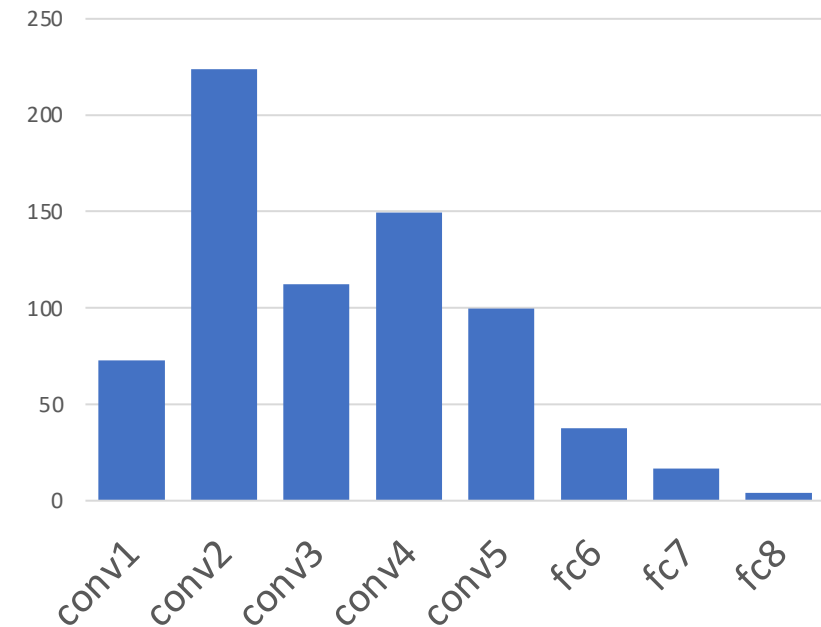

ImageNet Classification Challenge

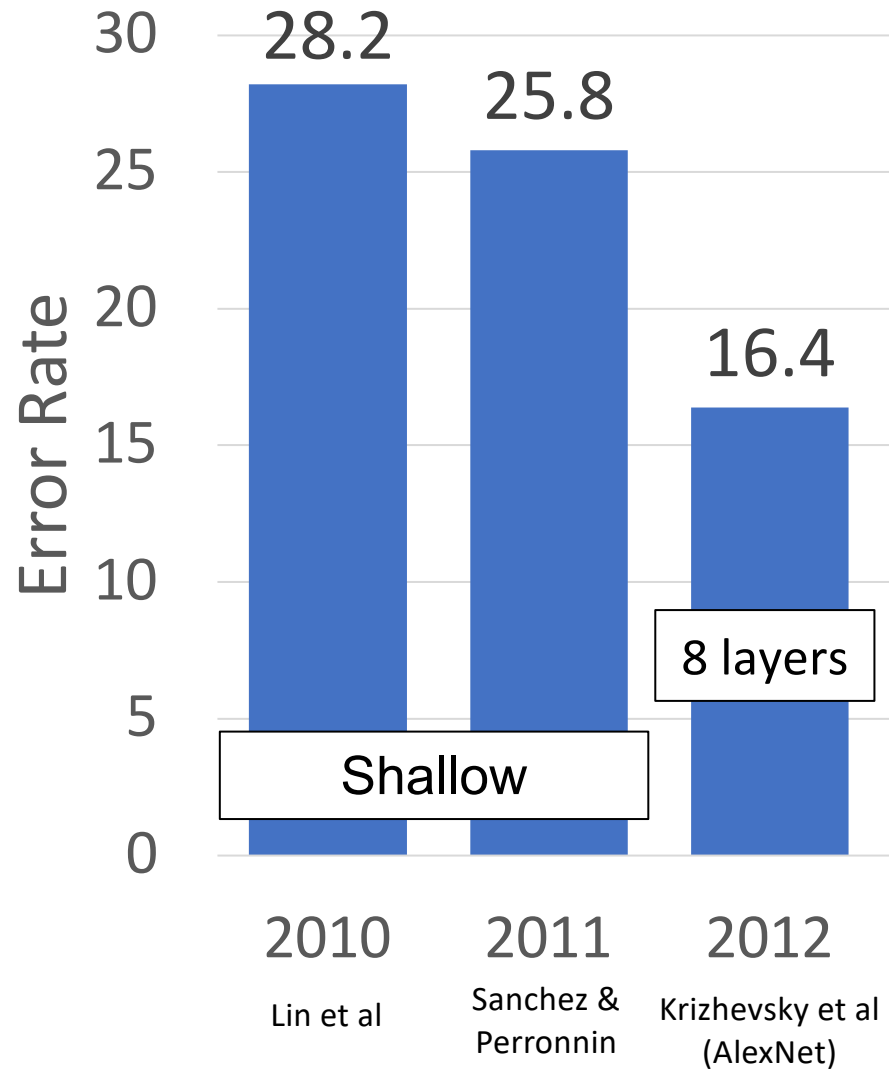


ImageNet Classification Challenge

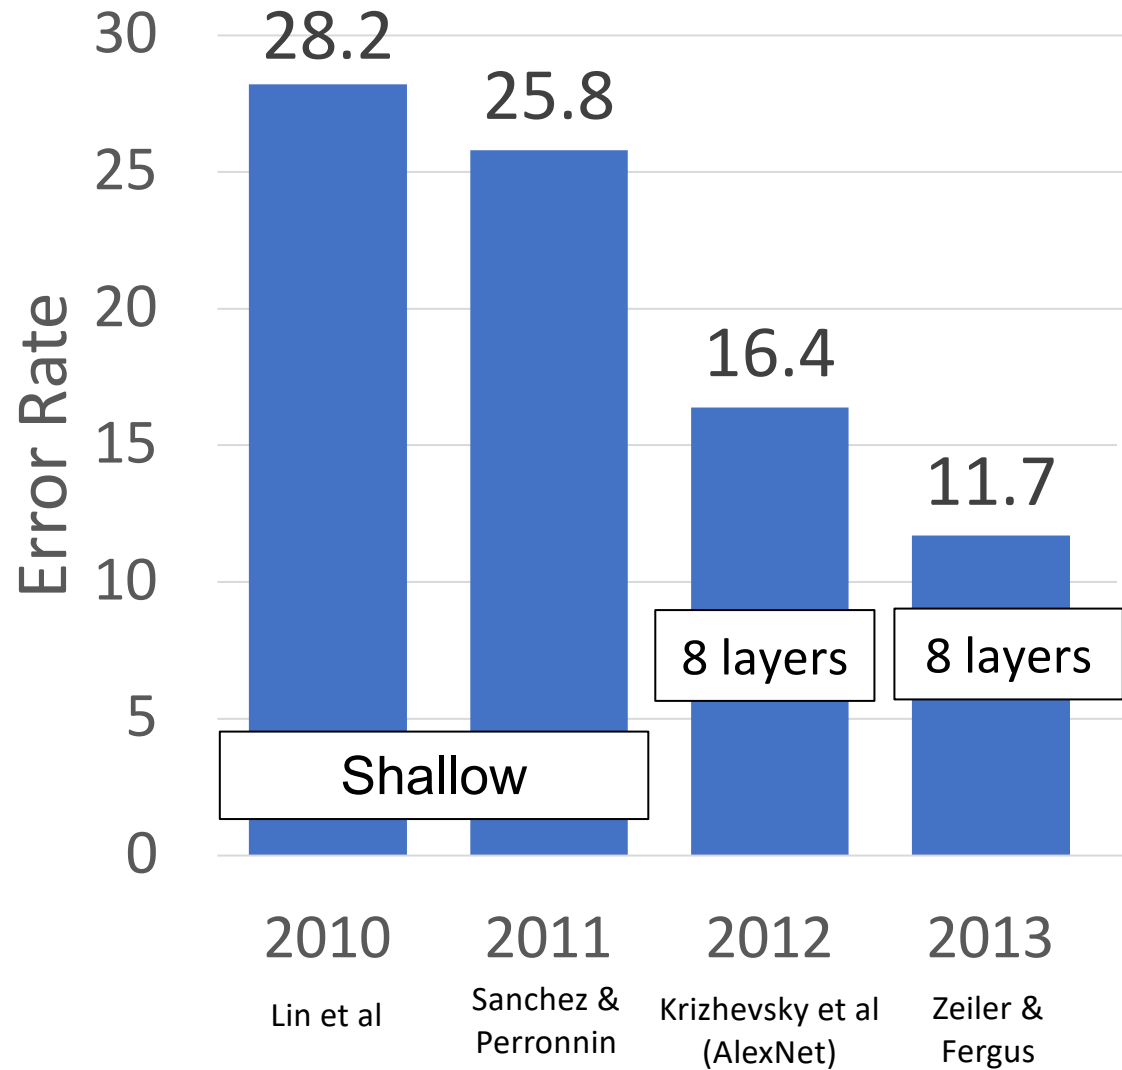

ZFNet: A Bigger AlexNet

ImageNet top 5 error: 16.4% -> 11.7%

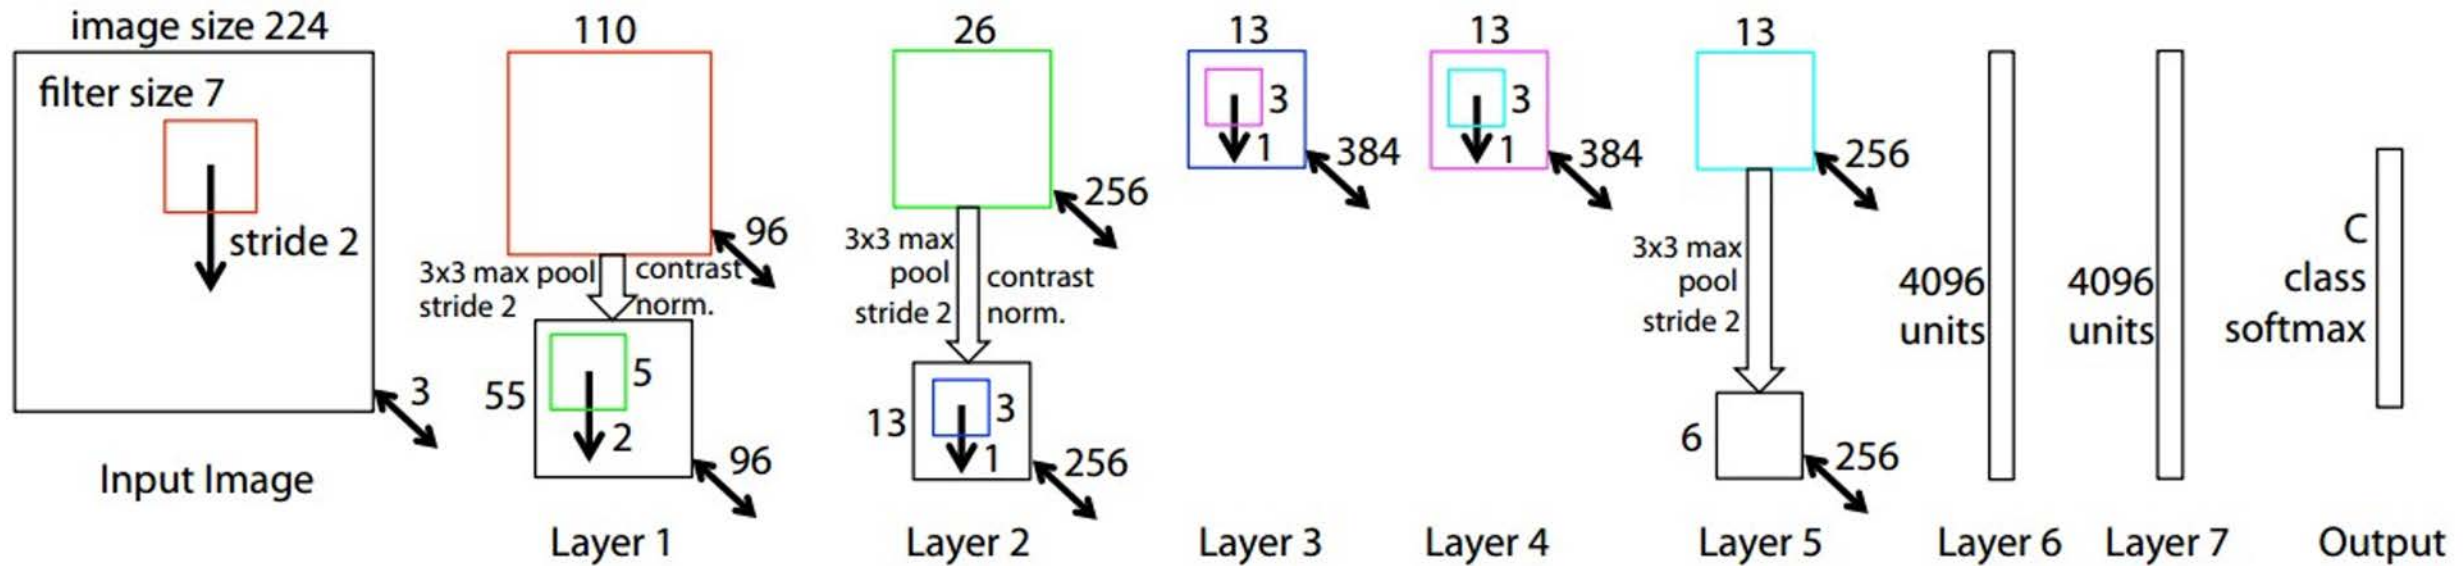

AlexNet but:


CONV1: change from (11x11 stride 4) to (7x7 stride 2)

CONV3,4,5: instead of 384, 384, 256 filters use 512, 1024, 512


More trial and error =(

Zeiler and Fergus, "Visualizing and Understanding Convolutional Networks", ECCV 2014

ImageNet Classification Challenge

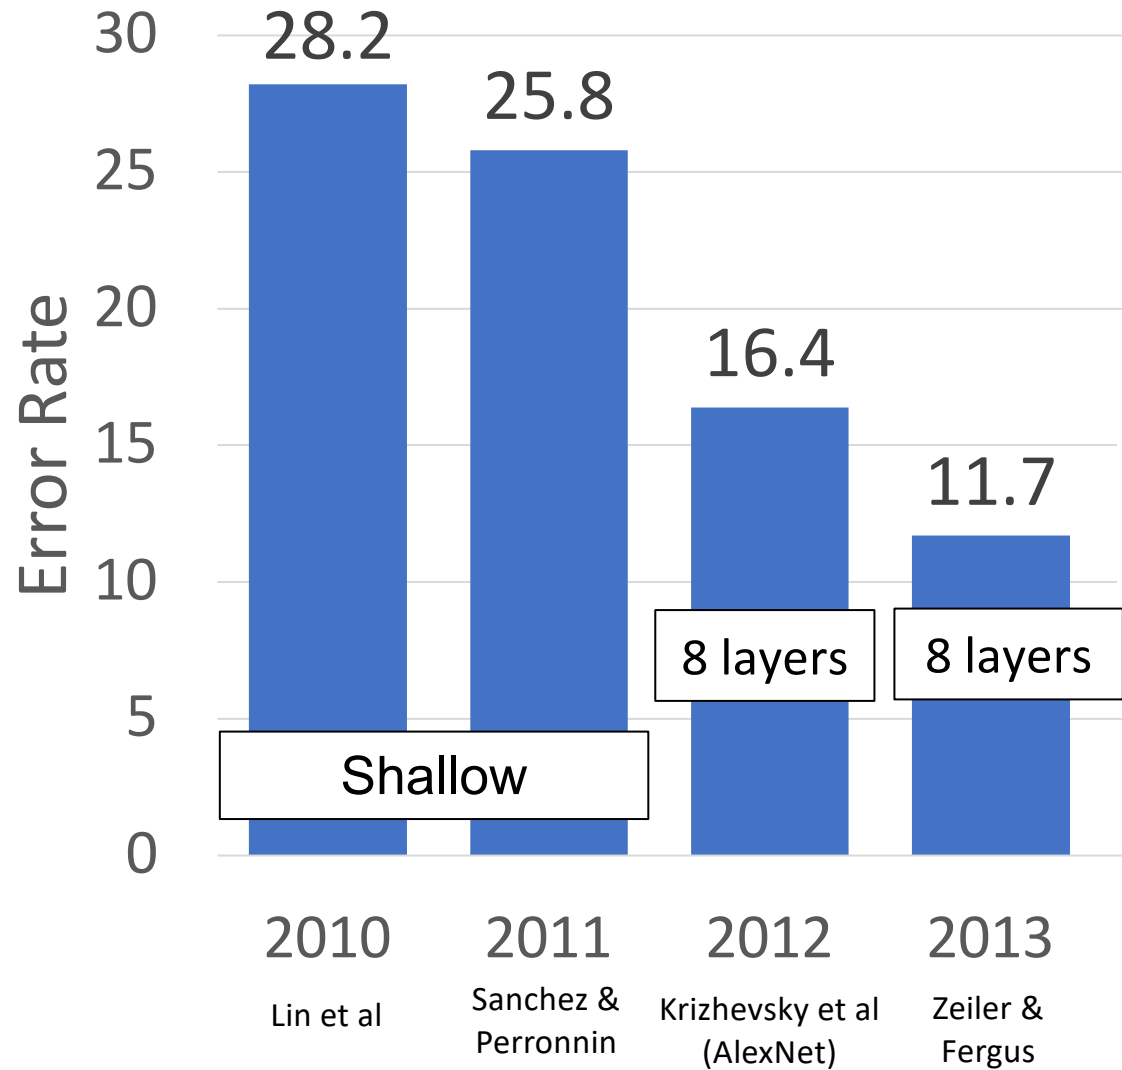

ImageNet Classification Challenge

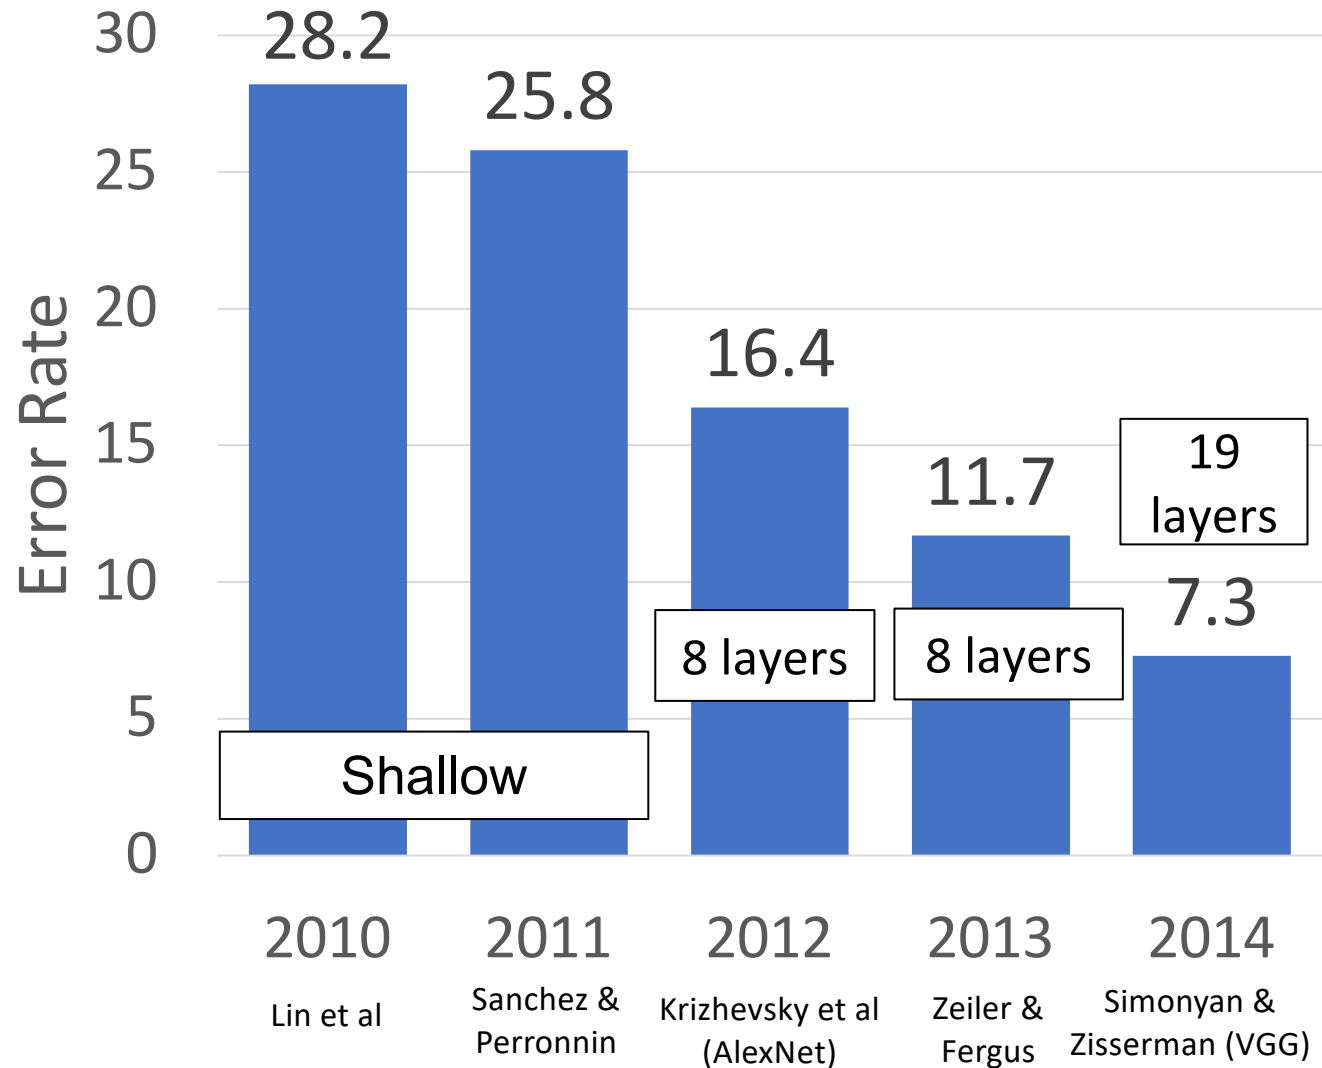


VGG: Deeper Networks, Regular Design

VGG Design rules:


All conv are 3x3 stride 1 pad 1

All max pool are 2x2 stride 2

After pool, double #channels

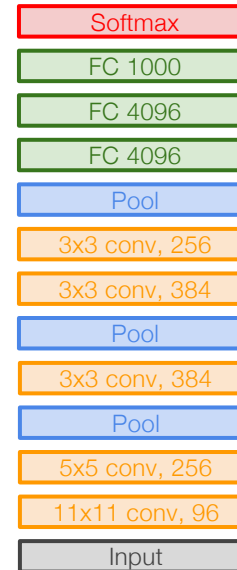

AlexNet

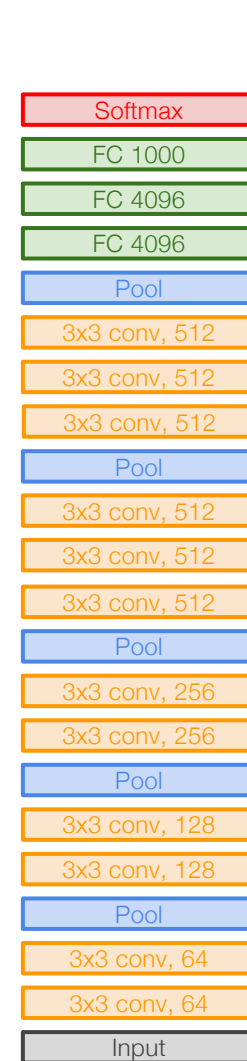

VGG16



VGG19

Simonyan and Zissermann, "Very Deep Convolutional Networks for Large-Scale Image Recognition", ICLR 2015

VGG: Deeper Networks, Regular Design

VGG Design rules:

All conv are 3x3 stride 1 pad 1

All max pool are 2x2 stride 2

After pool, double #channels

Network has 5 convolutional **stages**:

Stage 1: conv-conv-pool


Stage 2: conv-conv-pool

Stage 3: conv-conv-pool

Stage 4: conv-conv-conv-[conv]-pool

Stage 5: conv-conv-conv-[conv]-pool


(VGG-19 has 4 conv in stages 4 and 5)

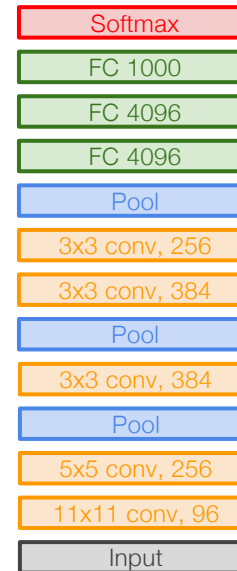

AlexNet



VGG16

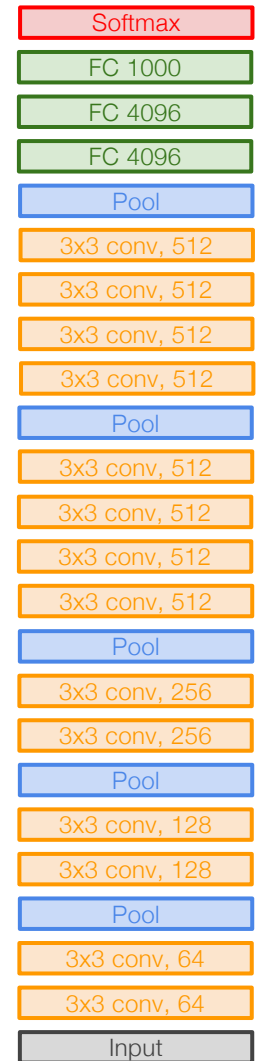

VGG19

VGG: Deeper Networks, Regular Design

VGG Design rules:

All conv are 3x3 stride 1 pad 1

All max pool are 2x2 stride 2


After pool, double #channels

Option 1:


Conv(5x5, C → C)

Params: $25C^2$

FLOPs: $25C^2HW$

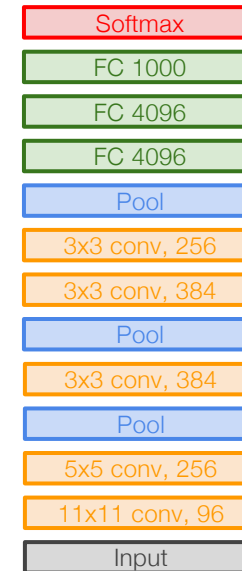

AlexNet

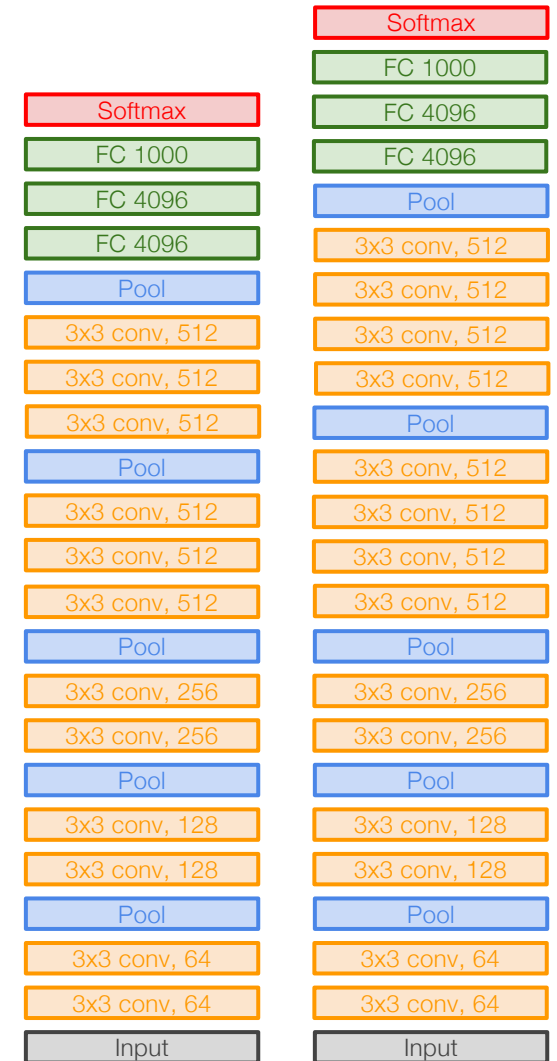

VGG16

VGG19

VGG: Deeper Networks, Regular Design

VGG Design rules:

All conv are 3x3 stride 1 pad 1

All max pool are 2x2 stride 2

After pool, double #channels

Option 1:

Conv(5x5, C -> C)

Params: $25C^2$

FLOPs: $25C^2HW$


Option 2:

Conv(3x3, C -> C)

Conv(3x3, C -> C)

Params: $18C^2$

FLOPs: $18C^2HW$

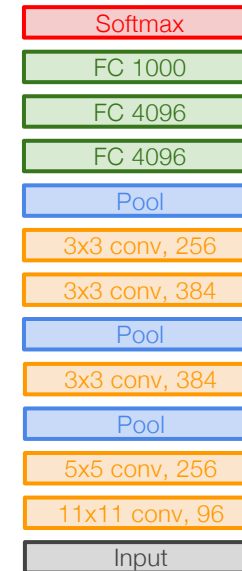

AlexNet



VGG16

VGG19

VGG: Deeper Networks, Regular Design

VGG Design rules:

All conv are 3x3 stride 1 pad 1

All max pool are 2x2 stride 2

After pool, double #channels

Two 3x3 conv has same receptive field as a single 5x5 conv, but has fewer parameters and takes less computation!

Option 1:

Conv(5x5, C → C)

Params: $25C^2$

FLOPs: $25C^2HW$


Option 2:

Conv(3x3, C → C)


Conv(3x3, C → C)

Params: $18C^2$

FLOPs: $18C^2HW$

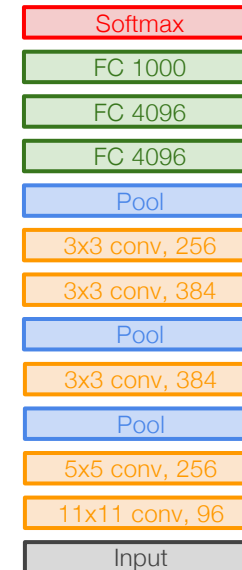

AlexNet

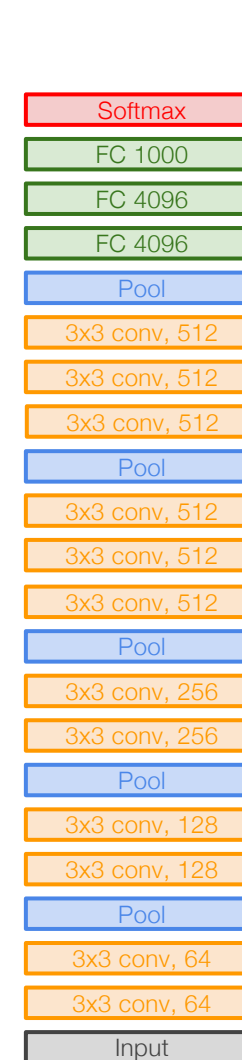

VGG16



VGG19

VGG: Deeper Networks, Regular Design

VGG Design rules:

All conv are 3x3 stride 1 pad 1

All max pool are 2x2 stride 2

After pool, double #channels


Input: $C \times 2H \times 2W$

Layer: Conv(3x3, $C \rightarrow C$)

Memory: $4HWC$

Params: $9C^2$

FLOPs: $36HWC^2$

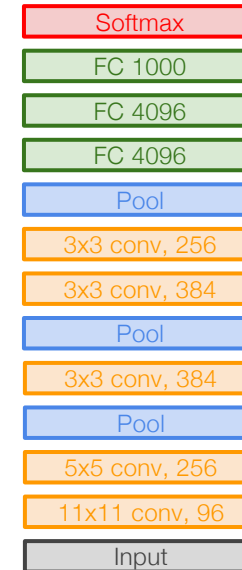

AlexNet



VGG16



VGG19

VGG: Deeper Networks, Regular Design

VGG Design rules:

All conv are 3x3 stride 1 pad 1

All max pool are 2x2 stride 2

After pool, double #channels

Input: $C \times 2H \times 2W$

Layer: Conv(3x3, $C \rightarrow C$)

Memory: $4HWC$

Params: $9C^2$

FLOPs: $36HWC^2$


Input: $2C \times H \times W$

Conv(3x3, $2C \rightarrow 2C$)


Memory: $2HWC$

Params: $36C^2$


FLOPs: $36HWC^2$

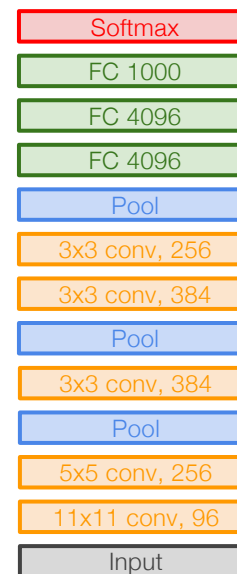

AlexNet

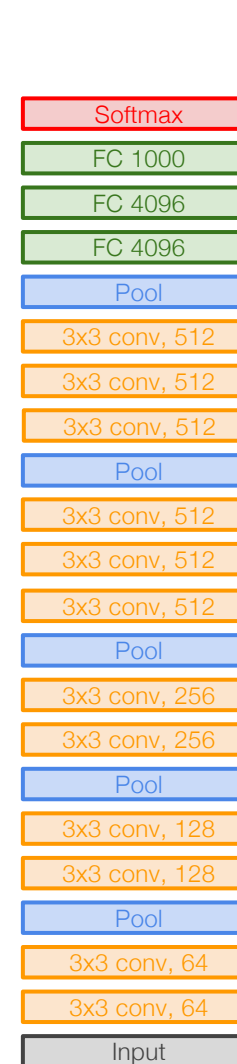

VGG16

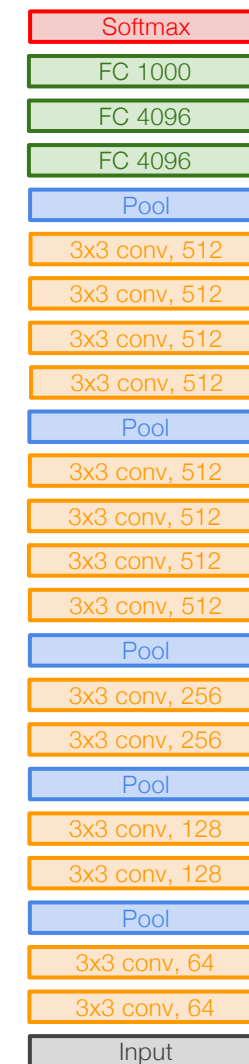

VGG19

VGG: Deeper Networks, Regular Design

VGG Design rules:

All conv are 3x3 stride 1 pad 1

All max pool are 2x2 stride 2

After pool, double #channels

Conv layers at each spatial resolution take the same amount of computation!

Input: $C \times 2H \times 2W$

Layer: Conv(3x3, $C \rightarrow C$)

Memory: $4HWC$

Params: $9C^2$

FLOPs: $36HWC^2$


Input: $2C \times H \times W$

Conv(3x3, $2C \rightarrow 2C$)


Memory: $2HWC$

Params: $36C^2$


FLOPs: $36HWC^2$

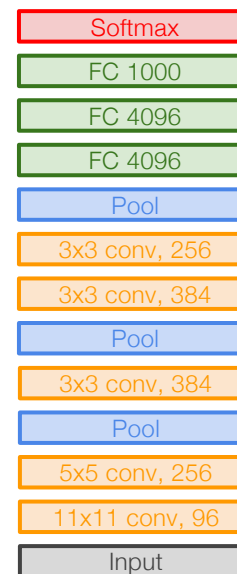

AlexNet

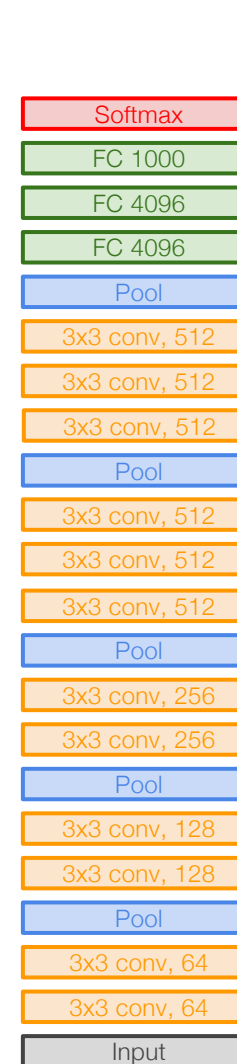


VGG16

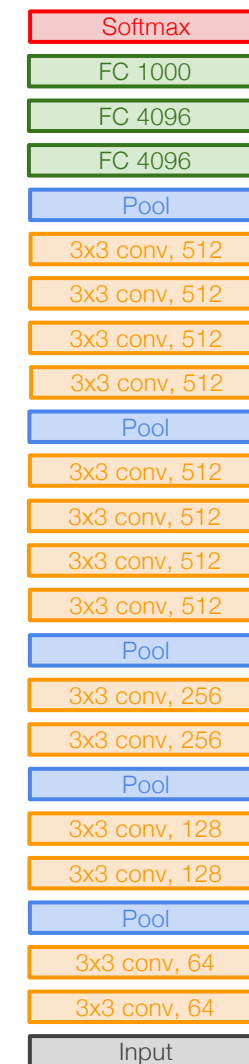

VGG19


AlexNet vs VGG-16: Much bigger network!

AlexNet vs VGG-16
(Memory, KB)

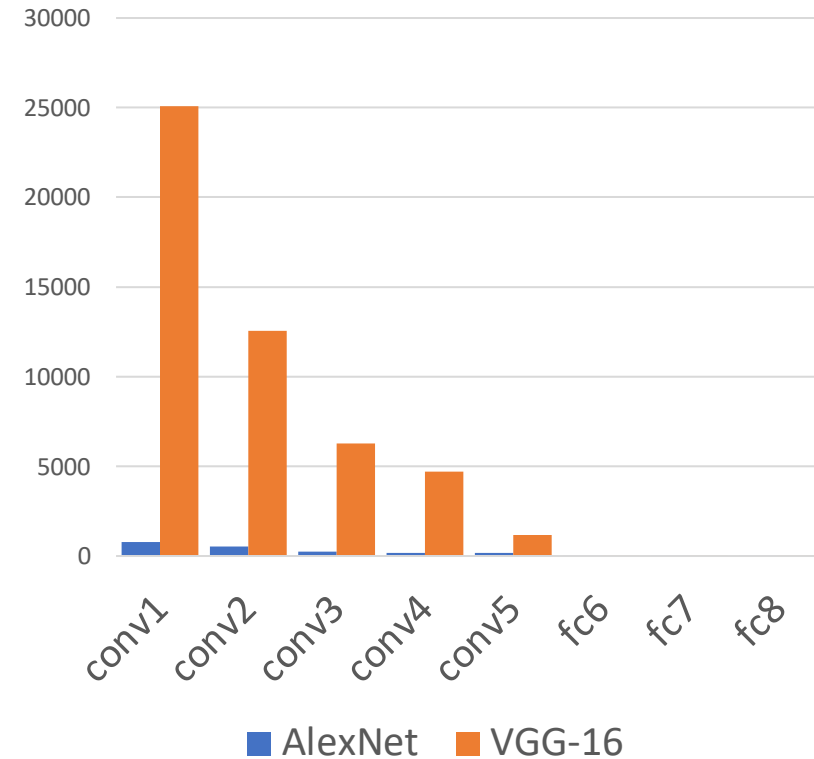


AlexNet total: 1.9 MB
VGG-16 total: 48.6 MB (25x)

AlexNet vs VGG-16
(Params, M)

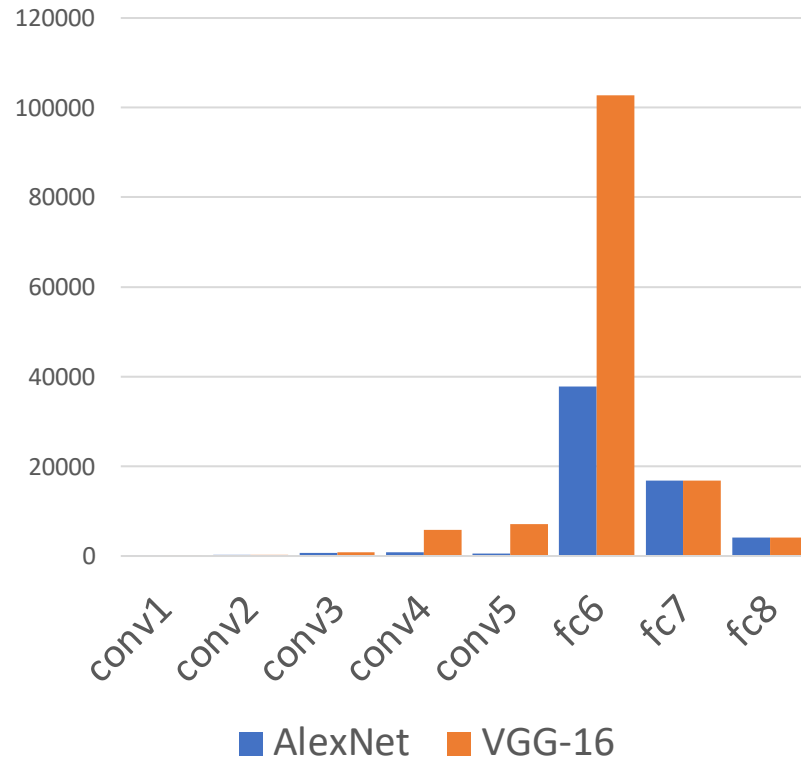


AlexNet total: 61M
VGG-16 total: 138M (2.3x)

AlexNet vs VGG-16
(MFLOPs)

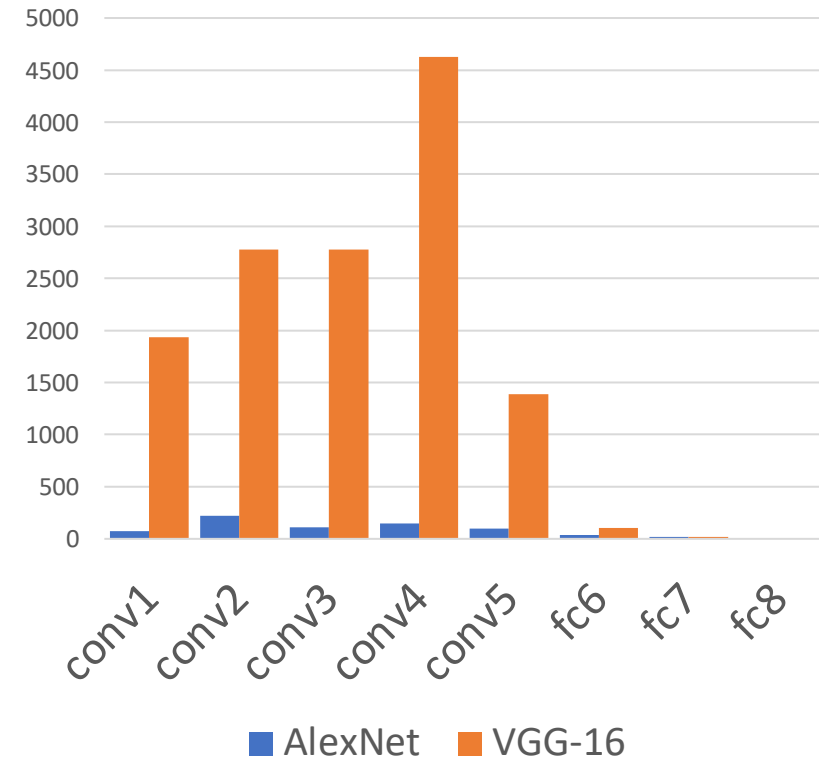


AlexNet total: 0.7 GFLOP
VGG-16 total: 13.6 GFLOP (19.4x)

ImageNet Classification Challenge

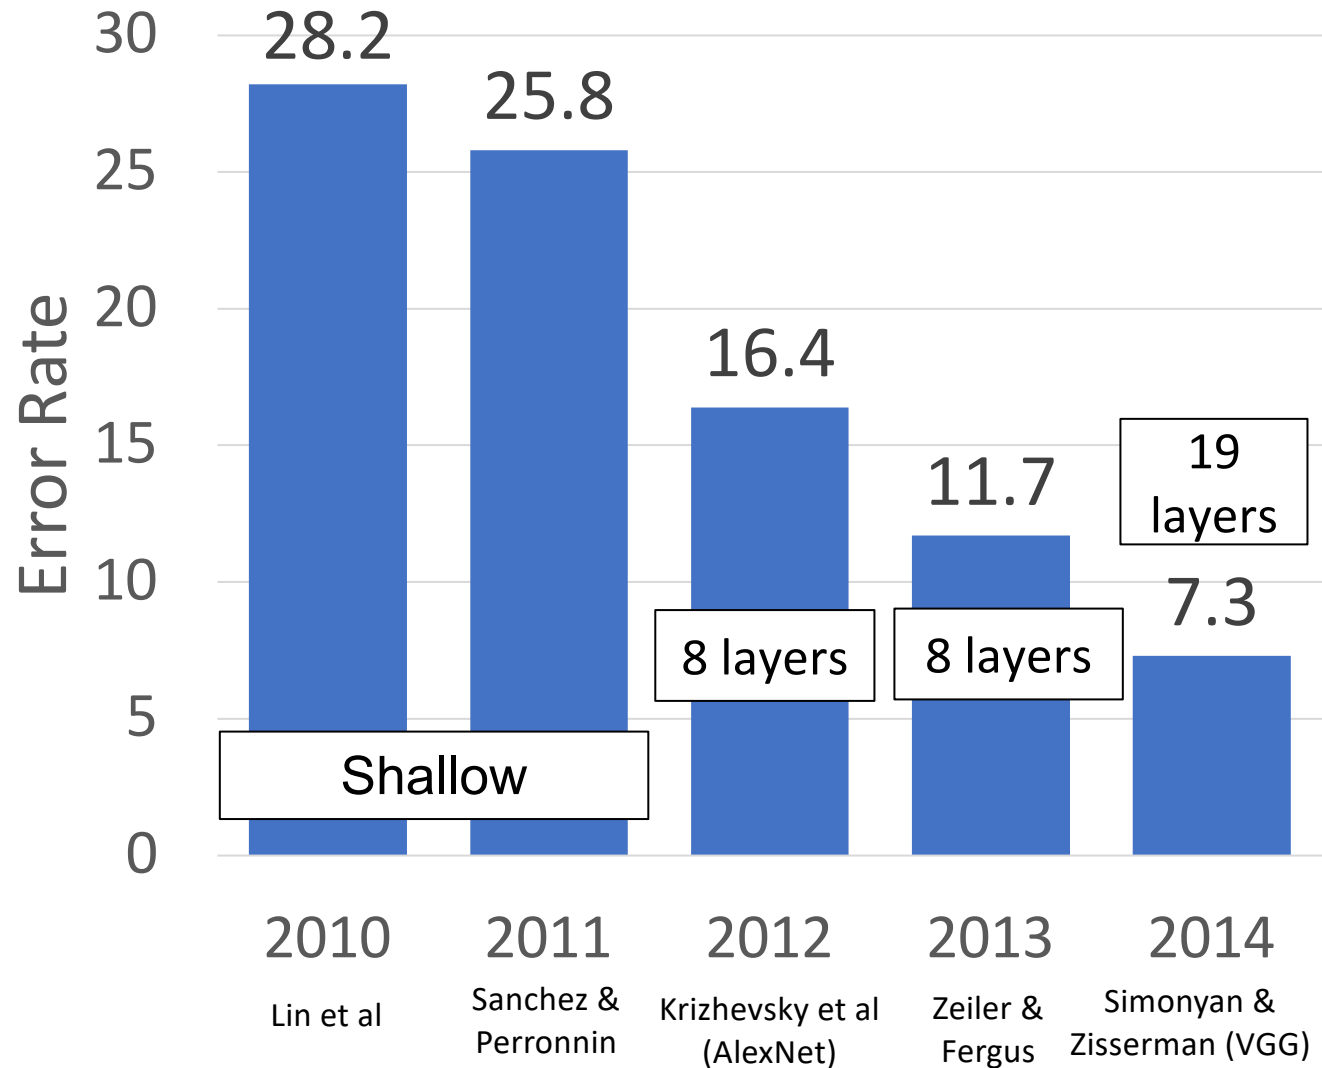


ImageNet Classification Challenge

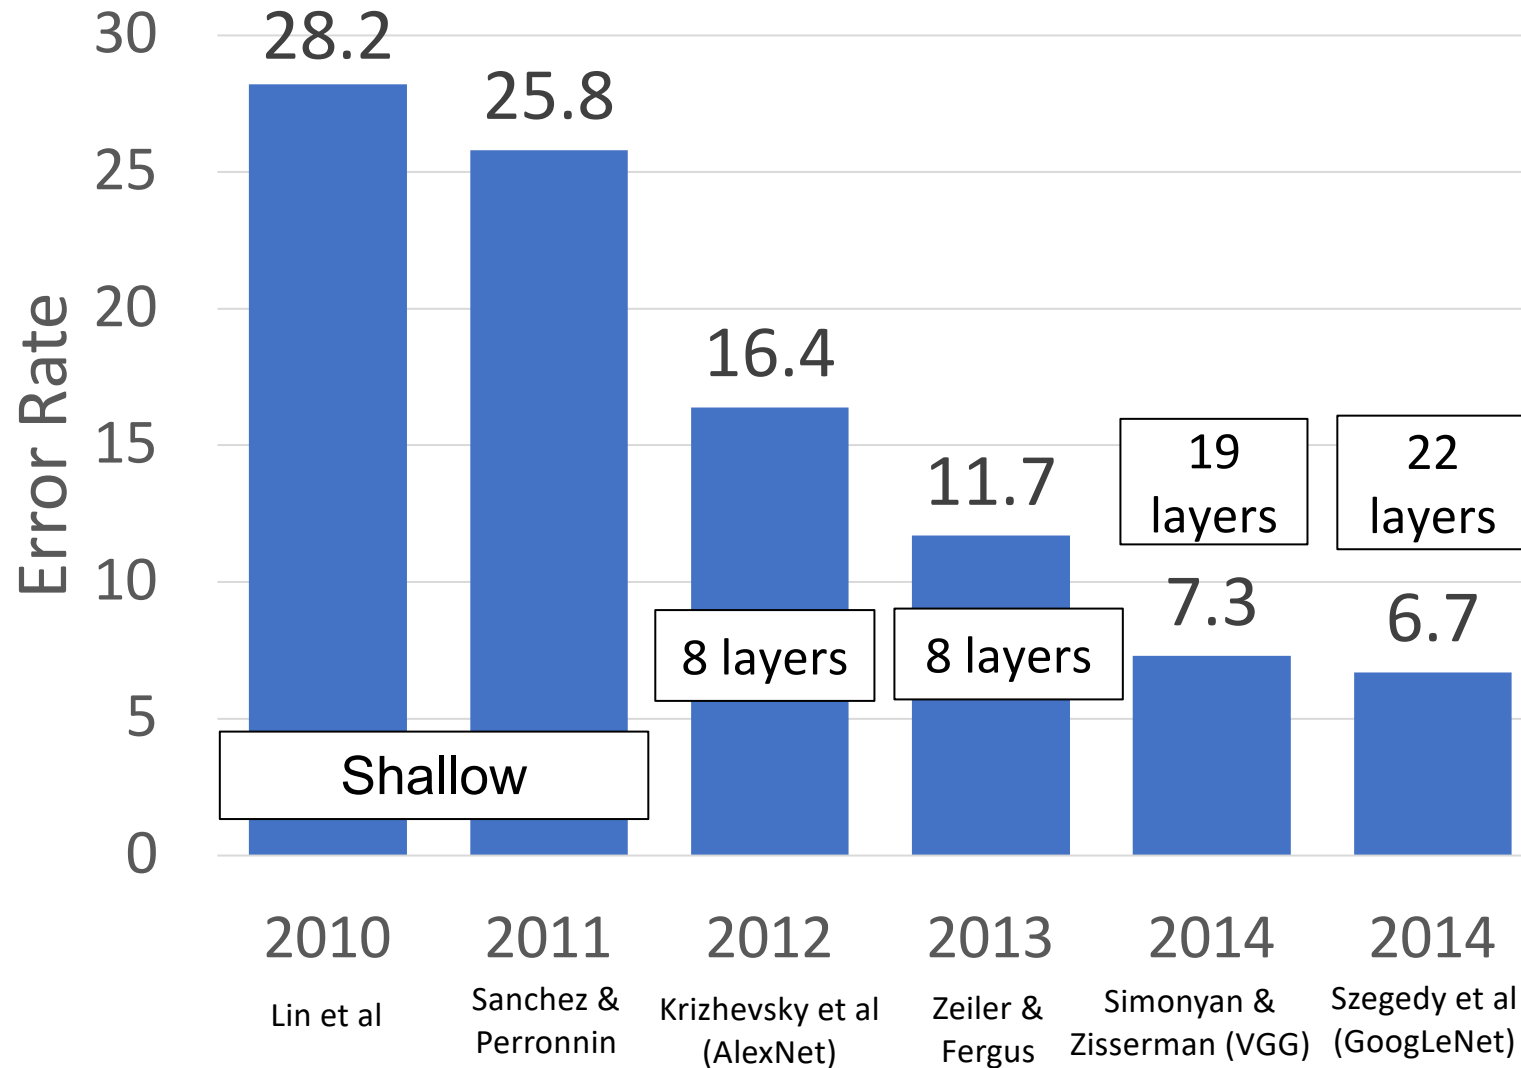

GoogLeNet: Focus on Efficiency


Many innovations for efficiency: reduce parameter count, memory usage, and computation

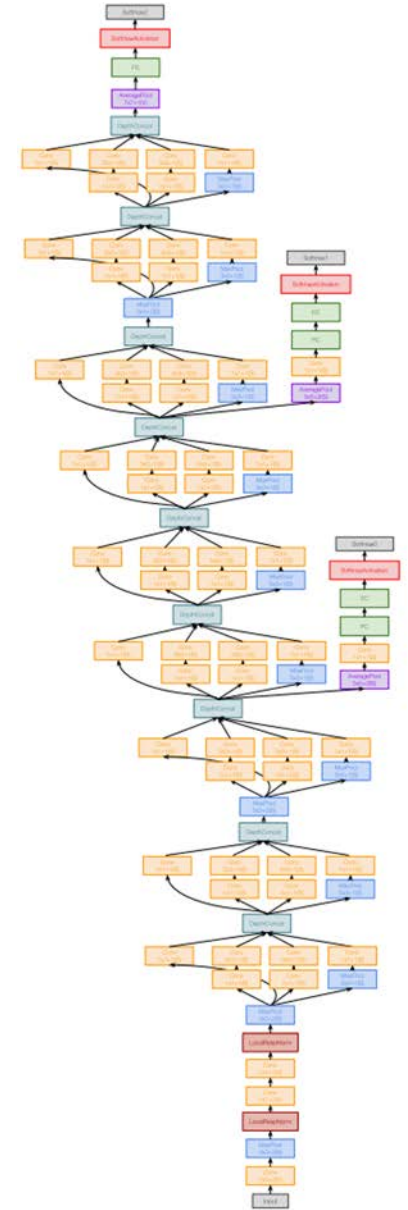

Szegedy et al, "Going deeper with convolutions", CVPR 2015

GoogLeNet: Aggressive Stem

Stem network at the start aggressively downsamples input
(Recall in VGG-16: Most of the compute was at the start)

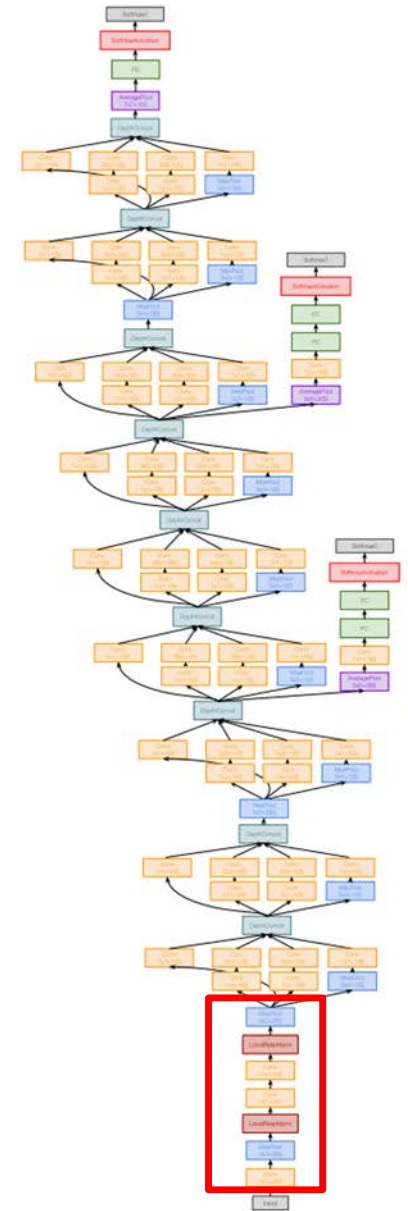

Szegedy et al, "Going deeper with convolutions", CVPR 2015

GoogLeNet: Aggressive Stem

Stem network at the start aggressively downsamples input
(Recall in VGG-16: Most of the compute was at the start)


Layer	Input size			Layer				Output size		memory (KB)	params (K)	flop (M)
	C	H / W		filters	kernel	stride	pad	C	H/W			
conv	3	224		64	7	2	3	64	112	3136	9	118
max-pool	64	112			3	2	1	64	56	784	0	2
conv	64	56		64	1	1	0	64	56	784	4	13
conv	64	56		192	3	1	1	192	56	2352	111	347
max-pool	192	56			3	2	1	192	28	588	0	1

Total from 224 to 28 spatial resolution:

Memory: 7.5 MB

Params: 124K

MFLOP: 418

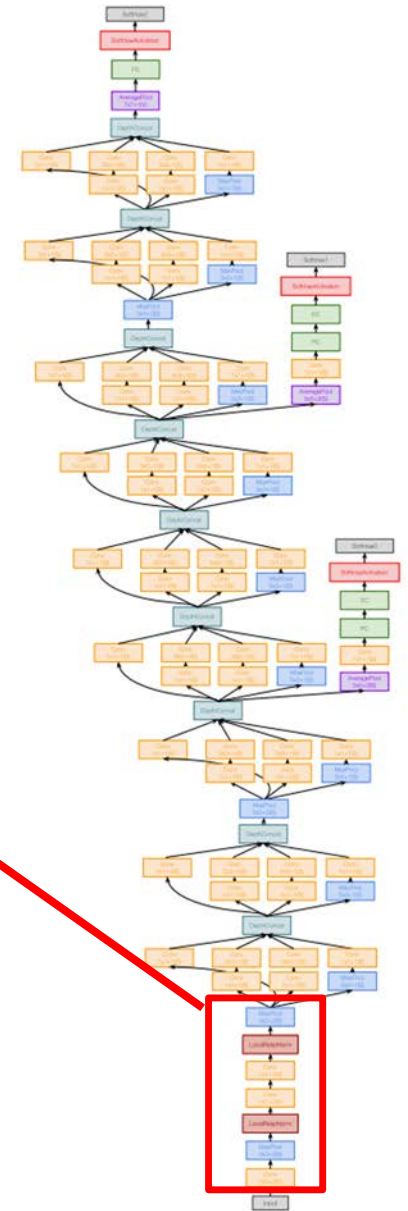

Szegedy et al, "Going deeper with convolutions", CVPR 2015


GoogLeNet: Aggressive Stem

Stem network at the start aggressively downsamples input
(Recall in VGG-16: Most of the compute was at the start)

Layer	Input size			Layer				Output size		memory (KB)	params (K)	flop (M)
	C	H / W		filters	kernel	stride	pad	C	H/W			
conv	3	224		64	7	2	3	64	112	3136	9	118
max-pool	64	112			3	2	1	64	56	784	0	2
conv	64	56		64	1	1	0	64	56	784	4	13
conv	64	56		192	3	1	1	192	56	2352	111	347
max-pool	192	56			3	2	1	192	28	588	0	1

Total from 224 to 28 spatial resolution:
Memory: 7.5 MB
Params: 124K
MFLOP: 418

Compare VGG-16:
Memory: 42.9 MB (5.7x)
Params: 1.1M (8.9x)
MFLOP: 7485 (17.8x)

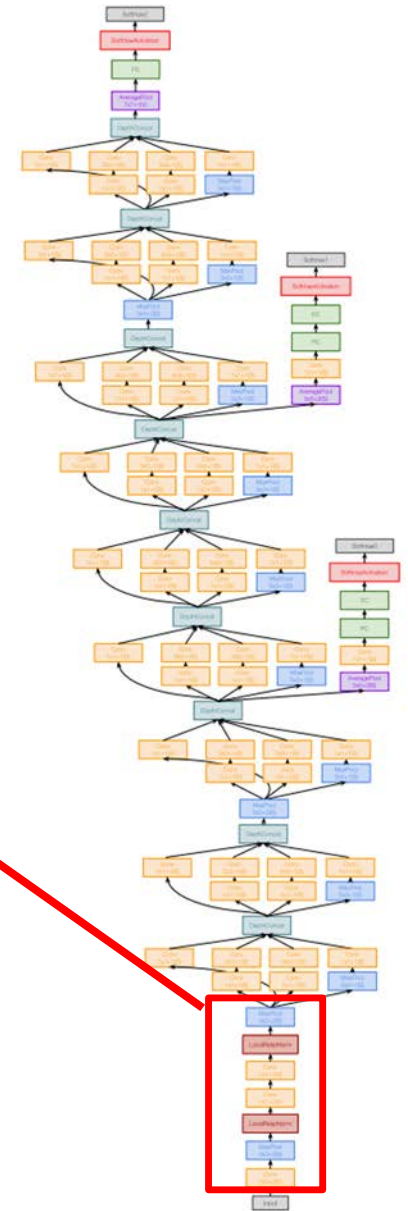



Szegedy et al, "Going deeper with convolutions", CVPR 2015

GoogLeNet: Inception Module

Inception module

Local unit with
parallel branches

Local structure repeated
many times throughout the
network

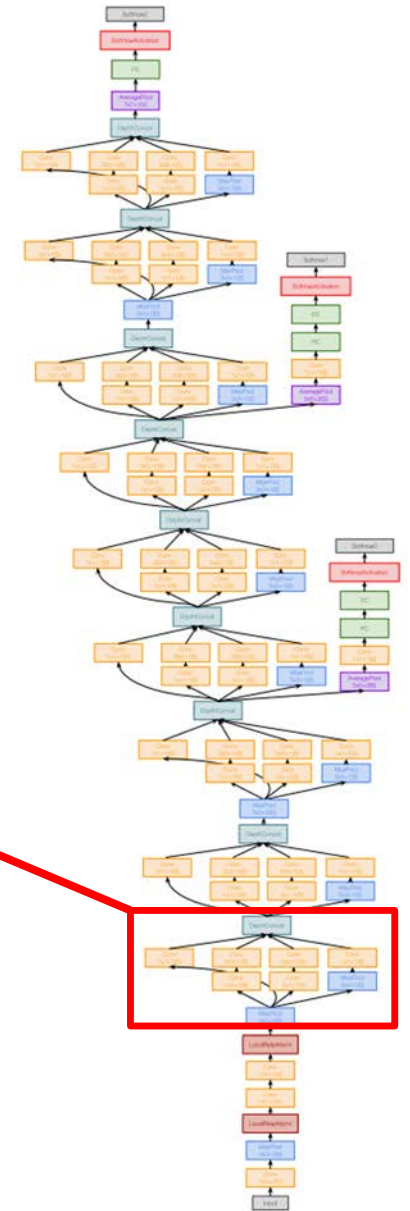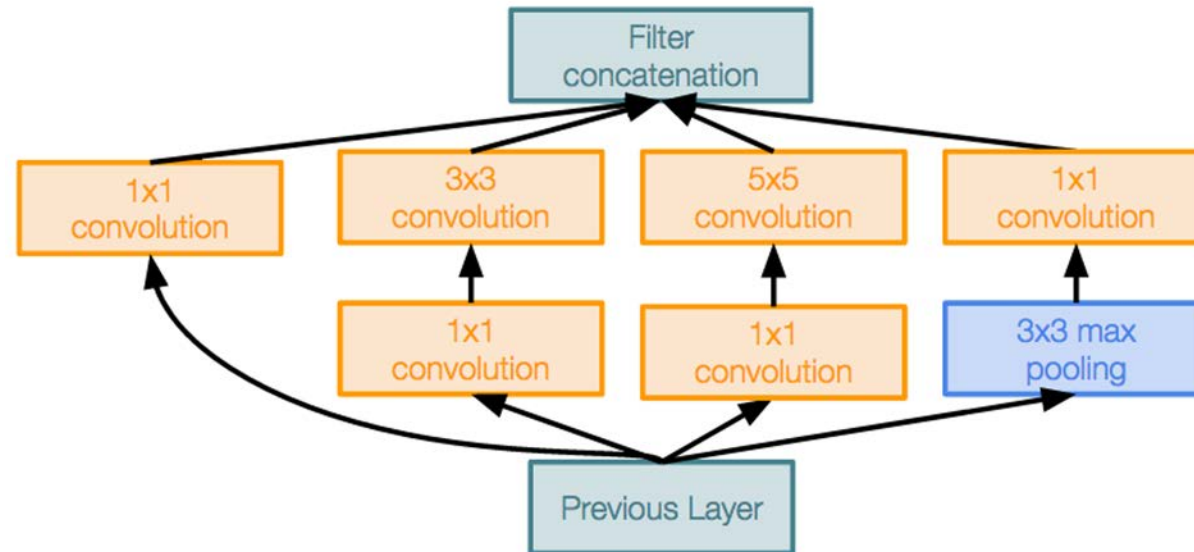

Szegedy et al, "Going deeper with convolutions", CVPR 2015



GoogLeNet: Inception Module

Inception module

Local unit with
parallel branches

Local structure repeated
many times throughout the
network

Uses 1x1 “Bottleneck”
layers to reduce channel
dimension before
expensive conv (we will
revisit this with ResNet!)

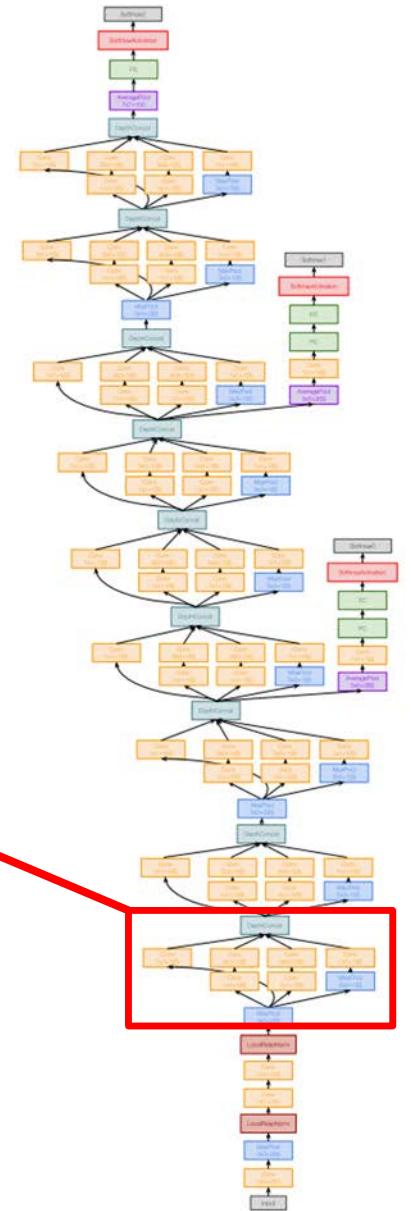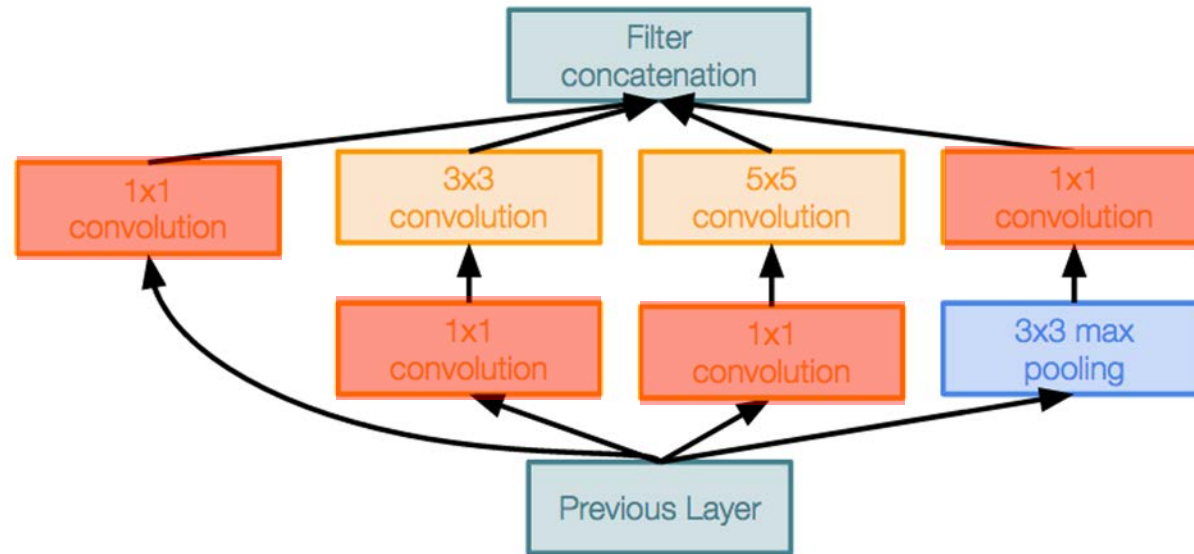


Szegedy et al, “Going deeper with convolutions”, CVPR 2015

GoogLeNet: Global Average Pooling

No large FC layers at the end! Instead uses **global average pooling** to collapse spatial dimensions, and one linear layer to produce class scores (Recall VGG-16: Most parameters were in the FC layers!)

Layer	Input size		Layer				Output size		memory (KB)	params (k)	flop (M)
	C	H/W	filters	kernel	stride	pad	C	H/W			
avg-pool	1024	7		7	1	0	1024	1	4	0	0
fc	1024		1000				1000		0	1025	1

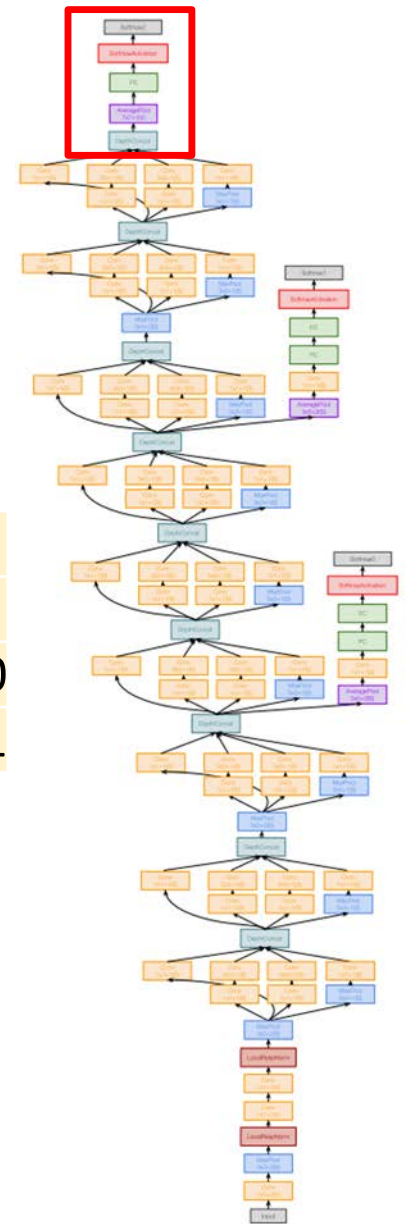


GoogLeNet: Global Average Pooling

No large FC layers at the end! Instead uses “global average pooling” to collapse spatial dimensions, and one linear layer to produce class scores (Recall VGG-16: Most parameters were in the FC layers!)

	Input size		Layer				Output size				
Layer	C	H/W	filters	kernel	stride	pad	C	H/W	memory (KB)	params (k)	flop (M)
avg-pool	1024	7		7	1	0	1024	1	4	0	0
fc	1024		1000				1000		0	1025	1

Compare with VGG-16:

Layer	C	H/W	filters	kernel	stride	pad	C	H/W	memory (KB)	params (K)	flop (M)
flatten	512	7					25088		98		
fc6	25088			4096			4096		16	102760	103
fc7	4096			4096			4096		16	16777	17
fc8	4096			1000			1000		4	4096	4

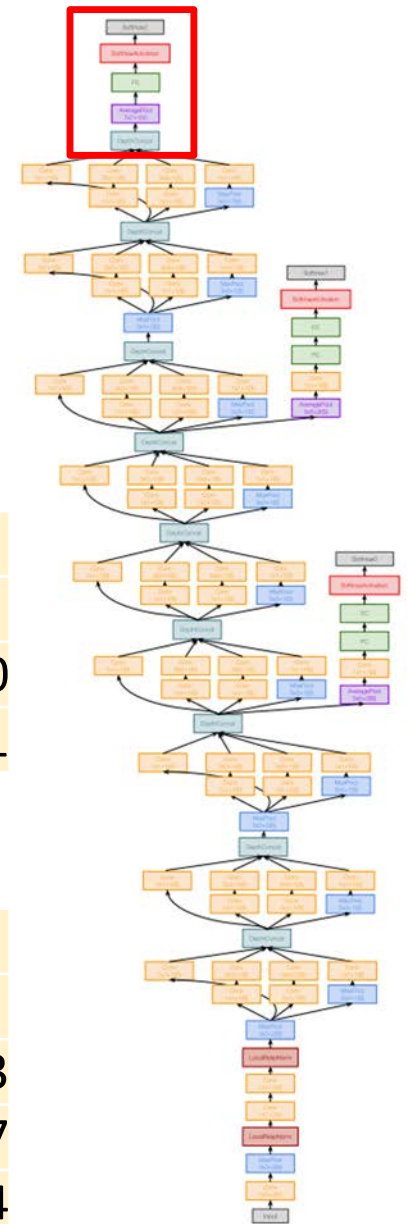


GoogLeNet: Auxiliary Classifiers


Training using loss at the end of the network didn't work well:
Network is too deep, gradients don't propagate cleanly

As a hack, attach “auxiliary classifiers” at several intermediate points in the network that also try to classify the image and receive loss


GoogLeNet was before batch normalization! With BatchNorm no longer need to use this trick

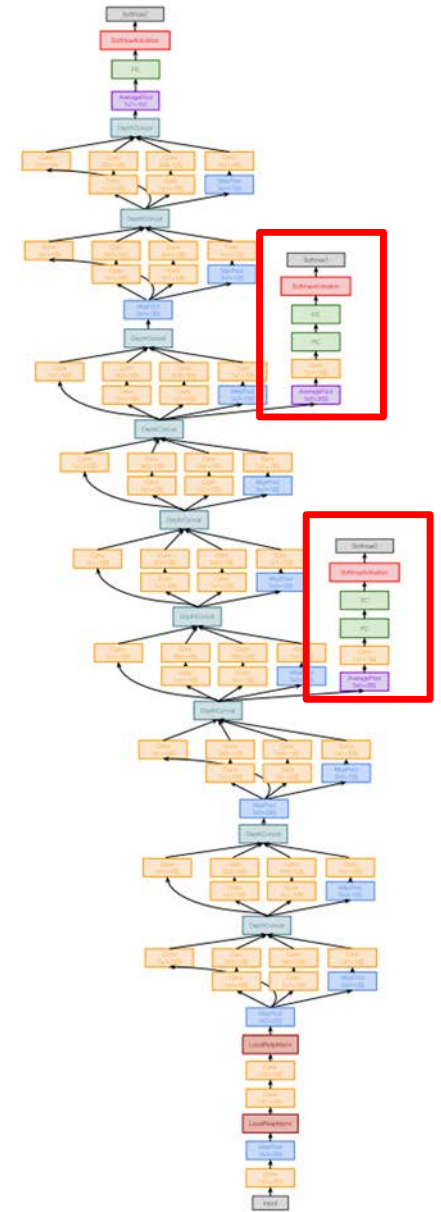

ImageNet Classification Challenge

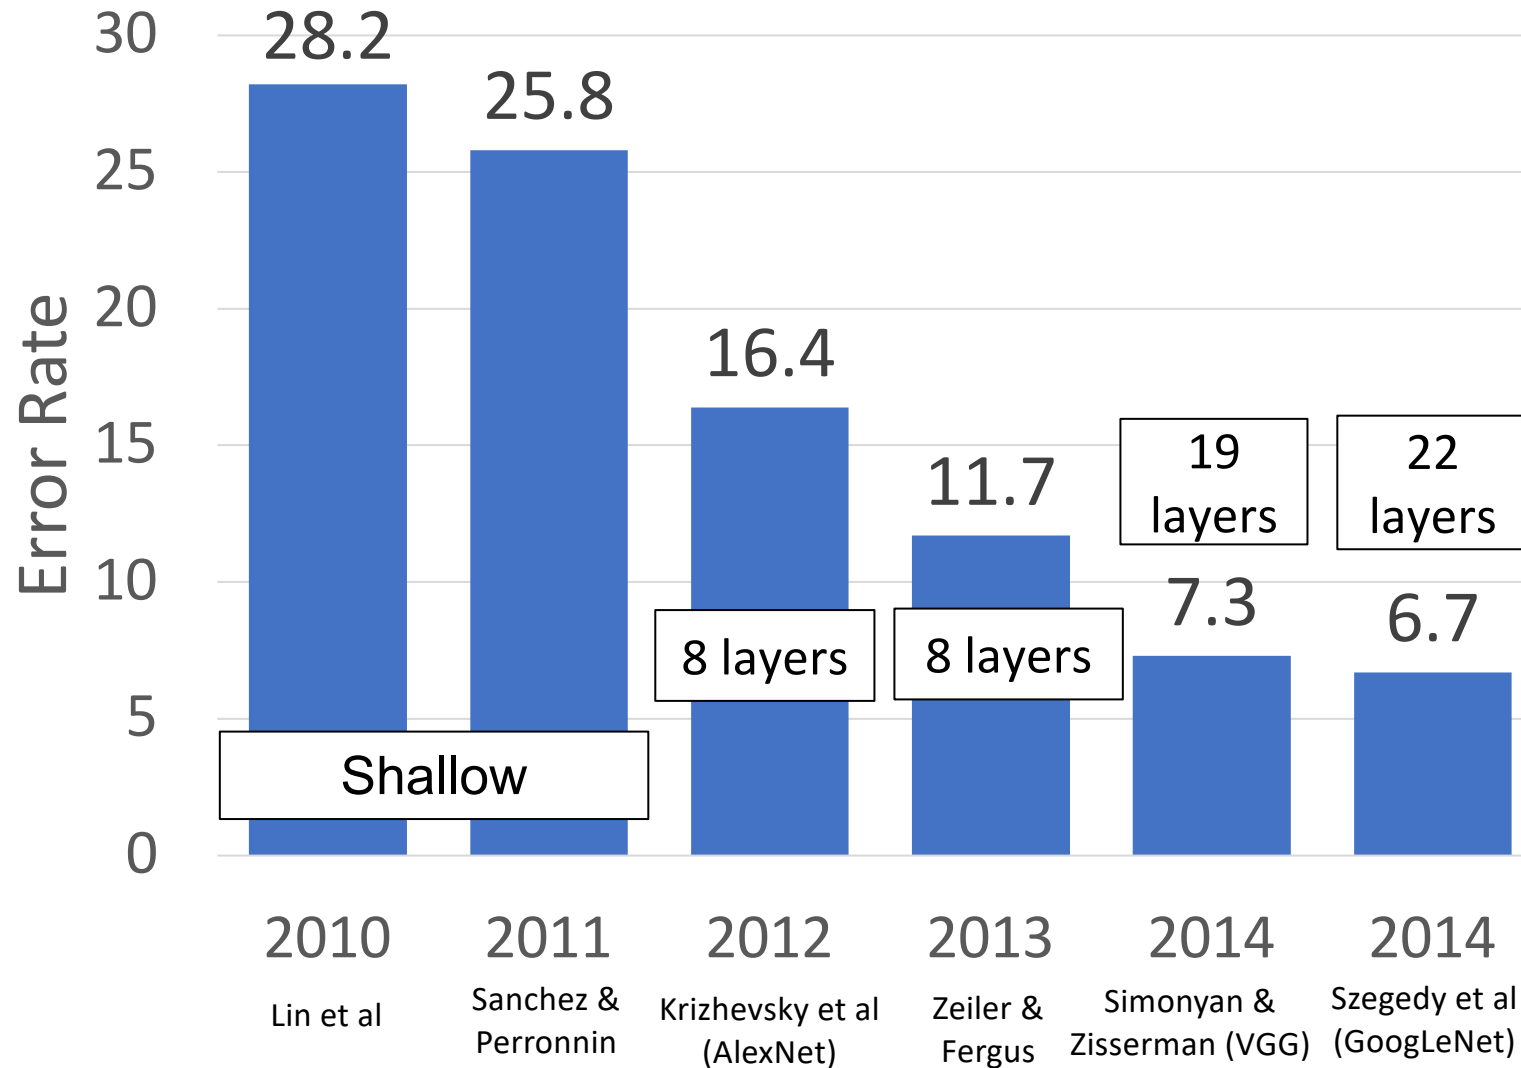

ImageNet Classification Challenge

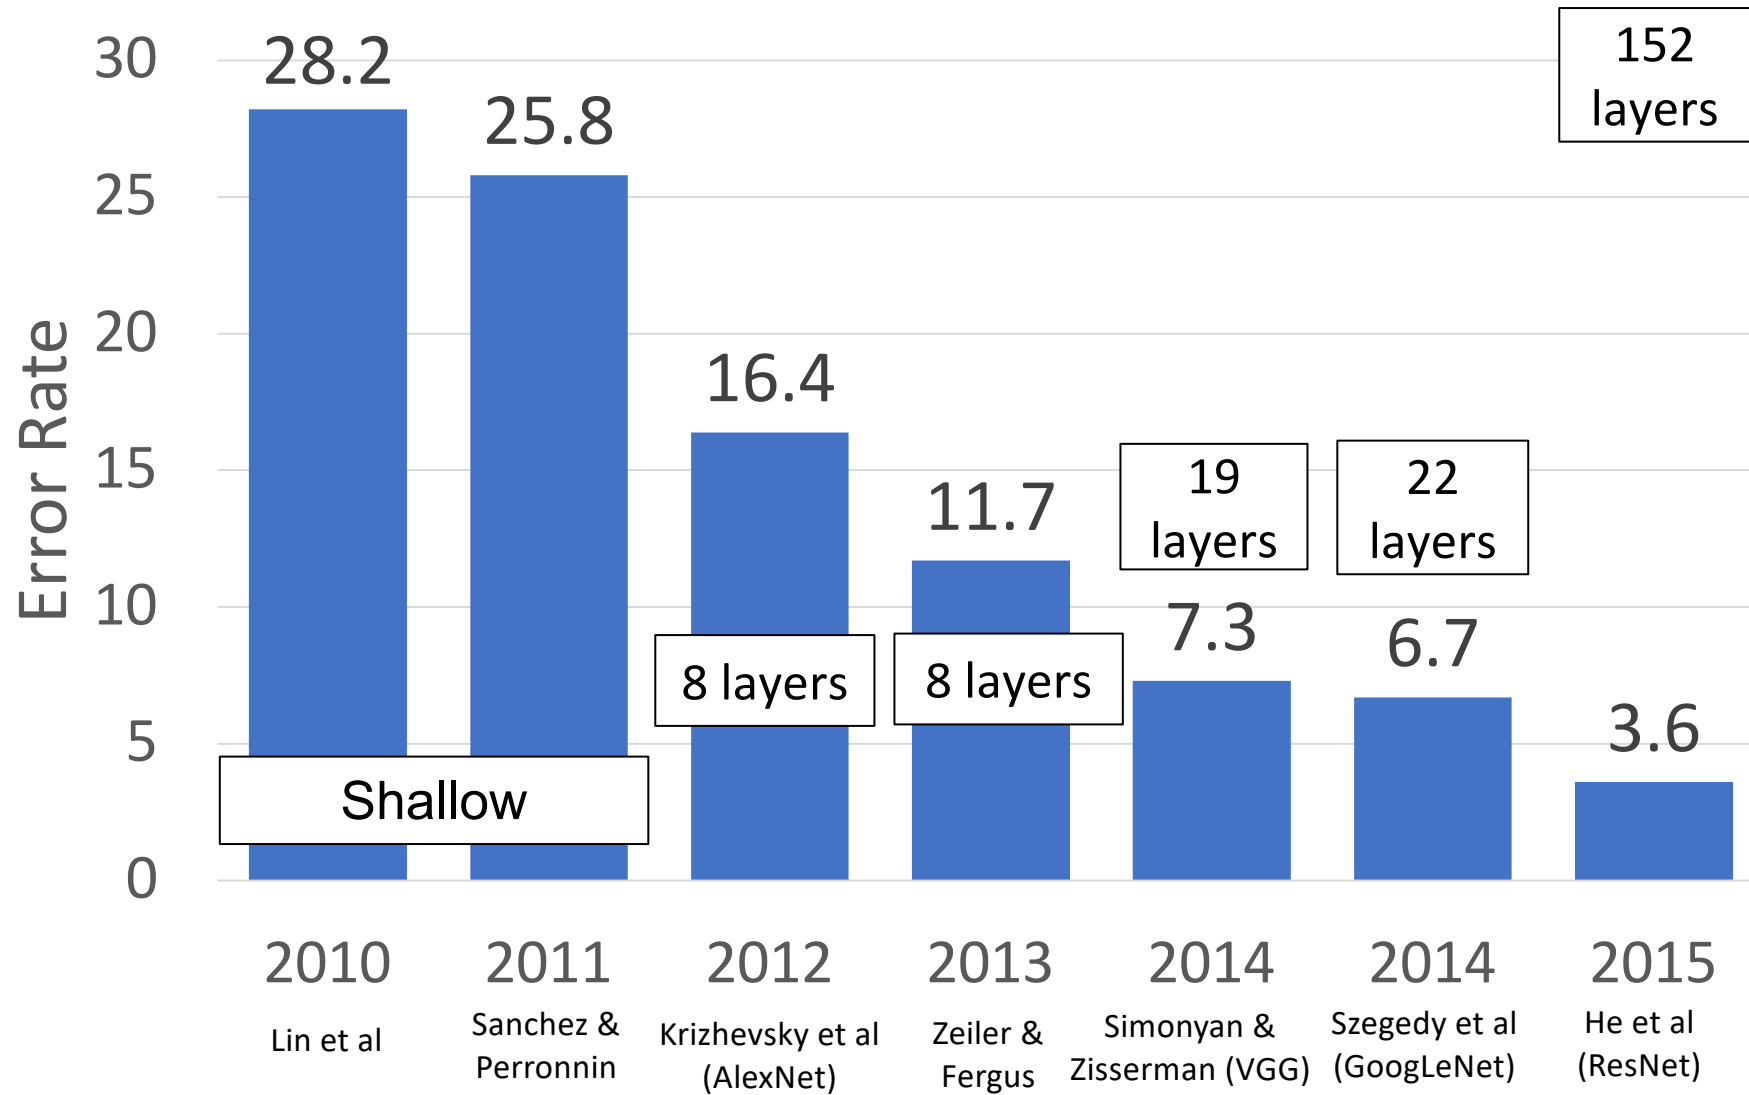

Residual Networks

Once we have Batch Normalization, we can train networks with 10+ layers.
What happens as we go deeper?


He et al, "Deep Residual Learning for Image Recognition", CVPR 2016

Residual Networks

Once we have Batch Normalization, we can train networks with 10+ layers.
What happens as we go deeper?


Deeper model does worse than shallow model!

Initial guess: Deep model is **overfitting** since it is much bigger than the other model

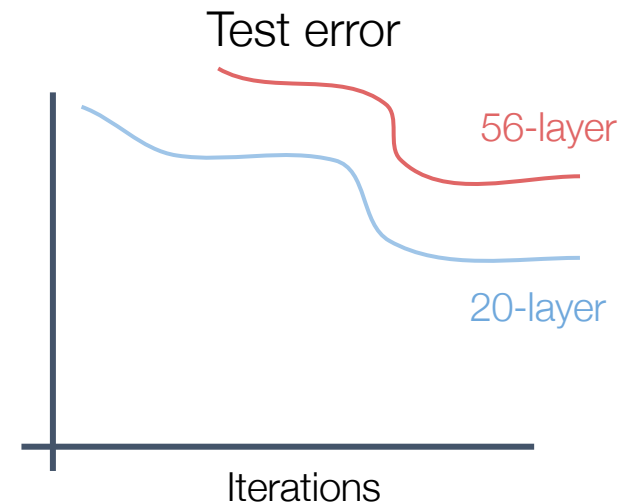

Residual Networks

Once we have Batch Normalization, we can train networks with 10+ layers. What happens as we go deeper?

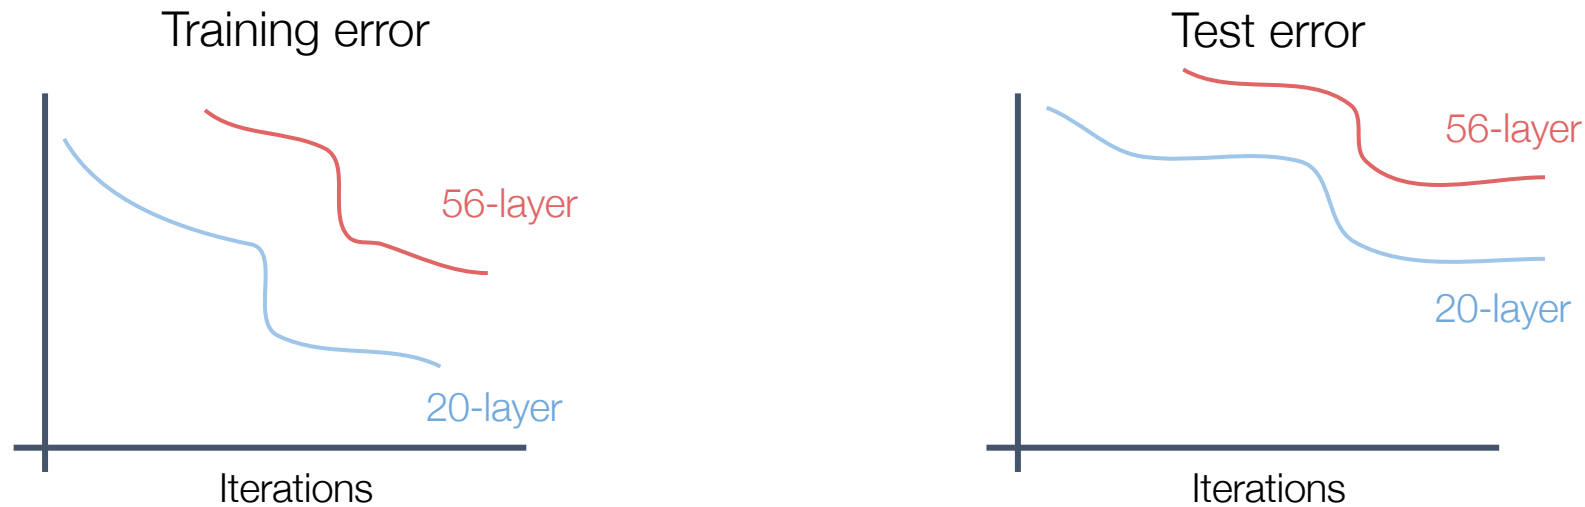

In fact the deep model seems to be **underfitting** since it also performs worse than the shallow model on the training set! It is actually **underfitting**

Residual Networks

A deeper model can emulate a shallower model: copy layers from shallower model, set extra layers to identity

Thus deeper models should do at least as good as shallow models

Hypothesis: This is an optimization problem. Deeper models are harder to optimize, and in particular don't learn identity functions to emulate shallow models

Residual Networks

A deeper model can emulate a shallower model: copy layers from shallower model, set extra layers to identity



Thus deeper models should do at least as good as shallow models

Hypothesis: This is an optimization problem. Deeper models are harder to optimize, and in particular don't learn identity functions to emulate shallow models

Solution: Change the network so learning identity functions with extra layers is easy!


Residual Networks

Solution: Change the network so learning identity functions with extra layers is easy!

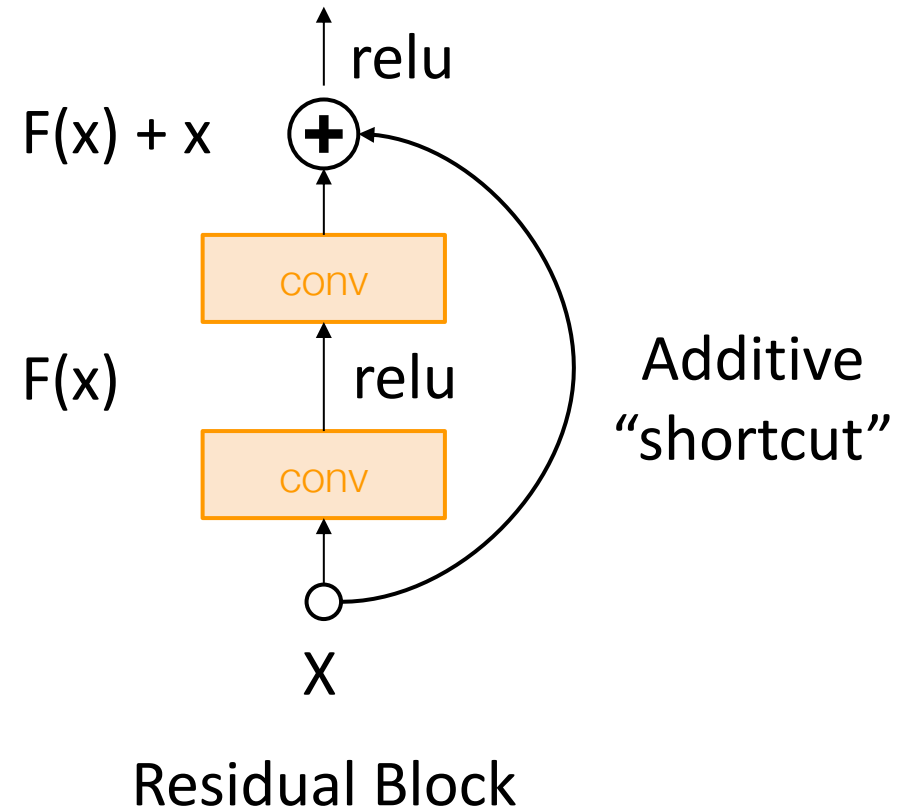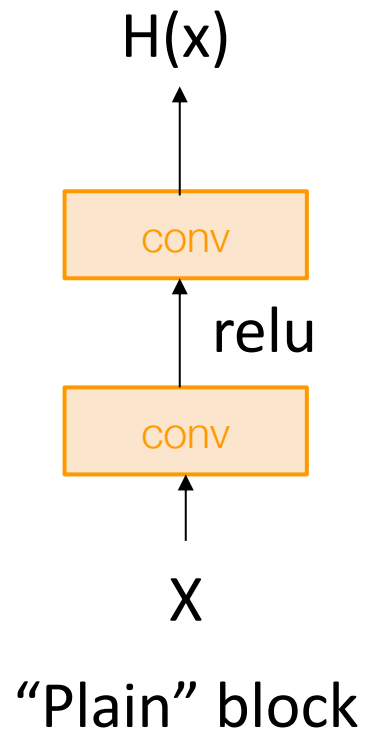

Residual Networks

Solution: Change the network so learning identity functions with extra layers is easy!

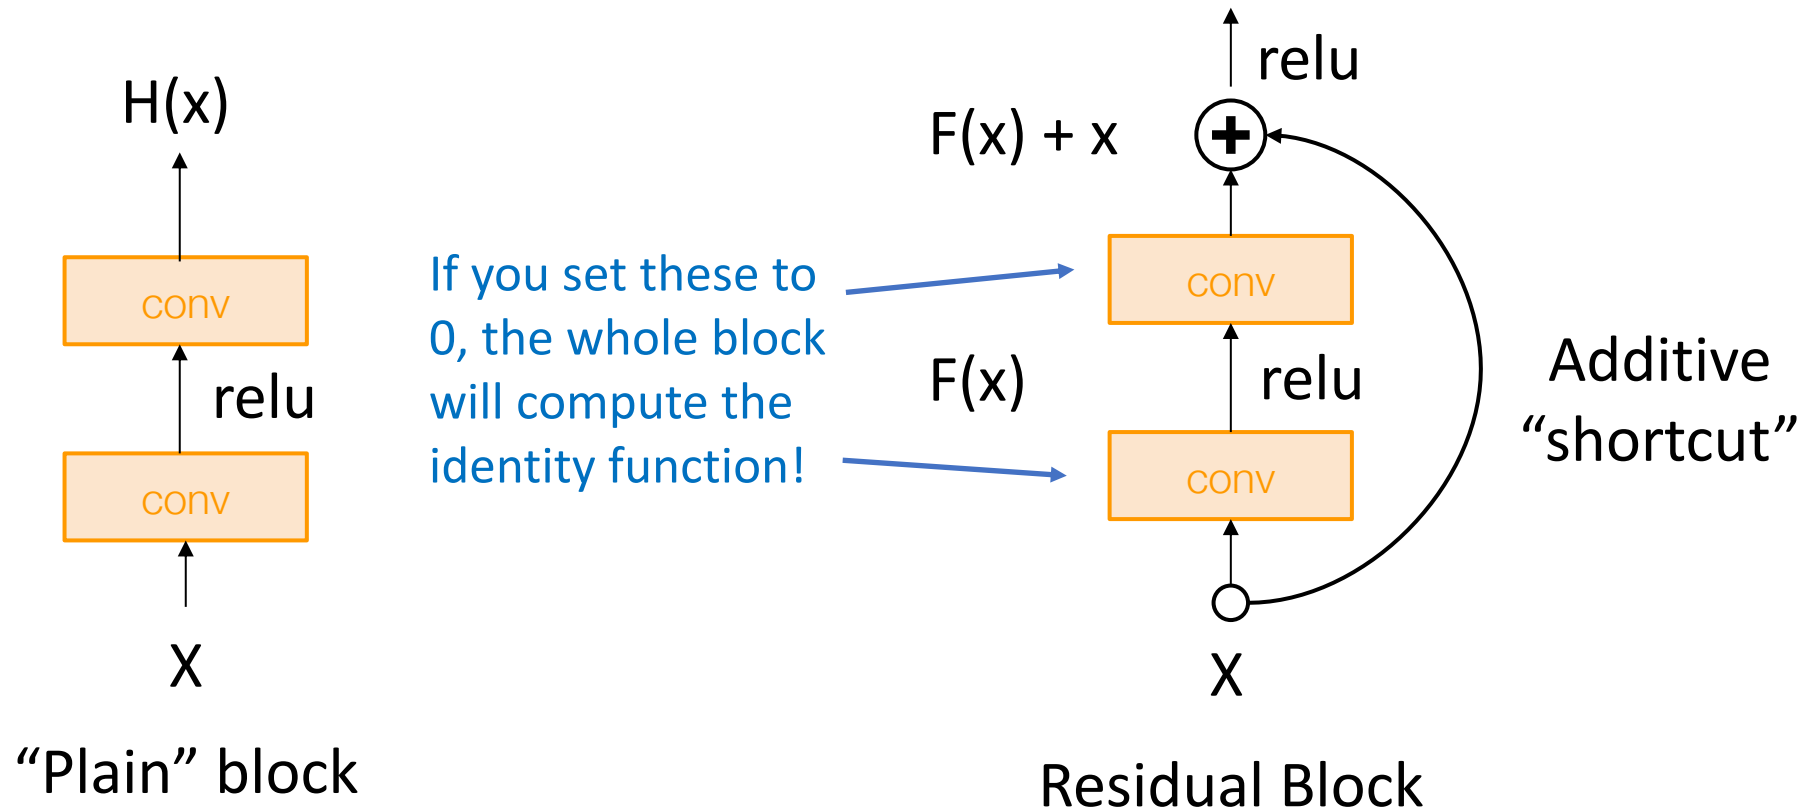


He et al, “Deep Residual Learning for Image Recognition”, CVPR 2016

Residual Networks

A residual network is a stack of many residual blocks

Regular design, like VGG: each residual block has two 3x3 conv

Network is divided into **stages**: the first block of each stage halves the resolution (with stride-2 conv) and doubles the number of channels

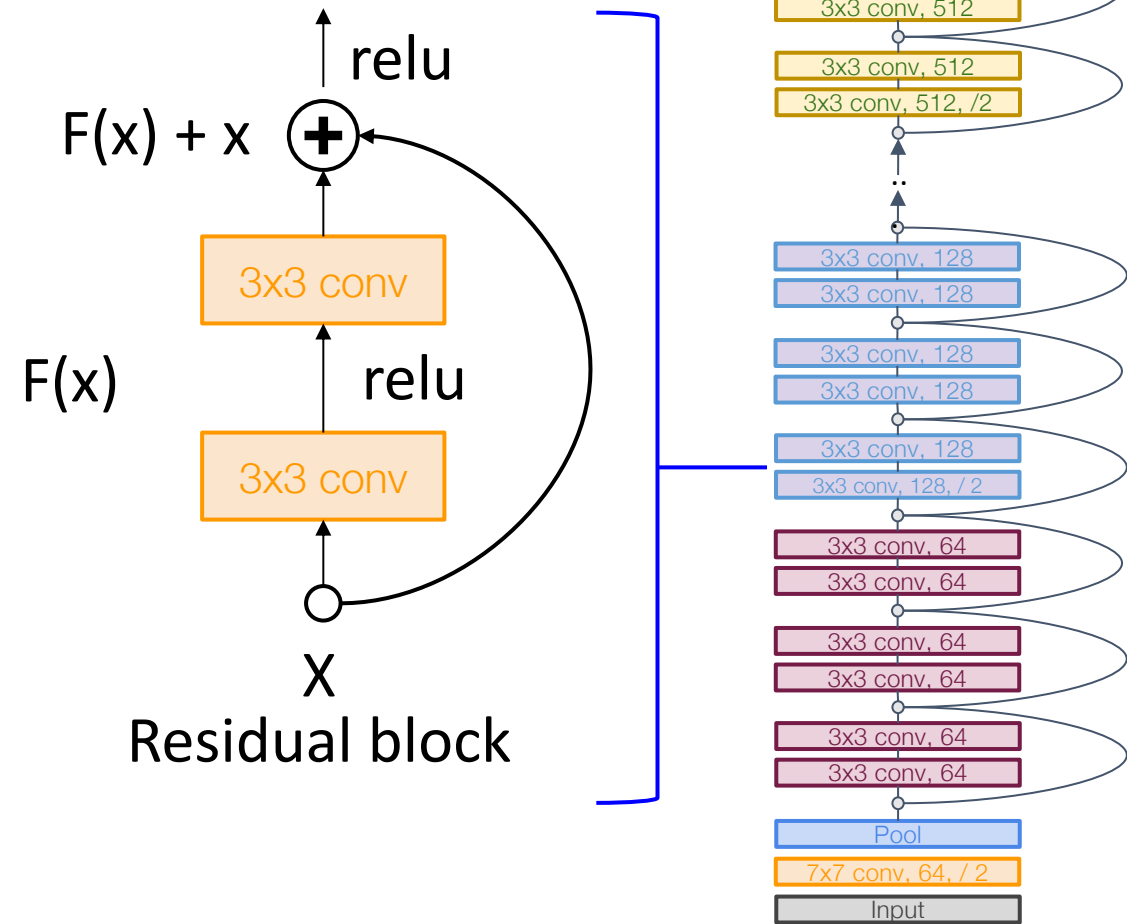


He et al, "Deep Residual Learning for Image Recognition", CVPR 2016

Residual Networks

Uses the same aggressive **stem** as GoogleNet to downsample the input 4x before applying residual blocks:


Layer	Input size		Layer				Output size		memory (KB)	params (k)	flop (M)
	C	H/W	filters	kernel	stride	pad	C	H/W			
conv	3	224	64	7	2	3	64	112	3136	9	118
max-pool	64	112		3	2	1	64	56	784	0	2

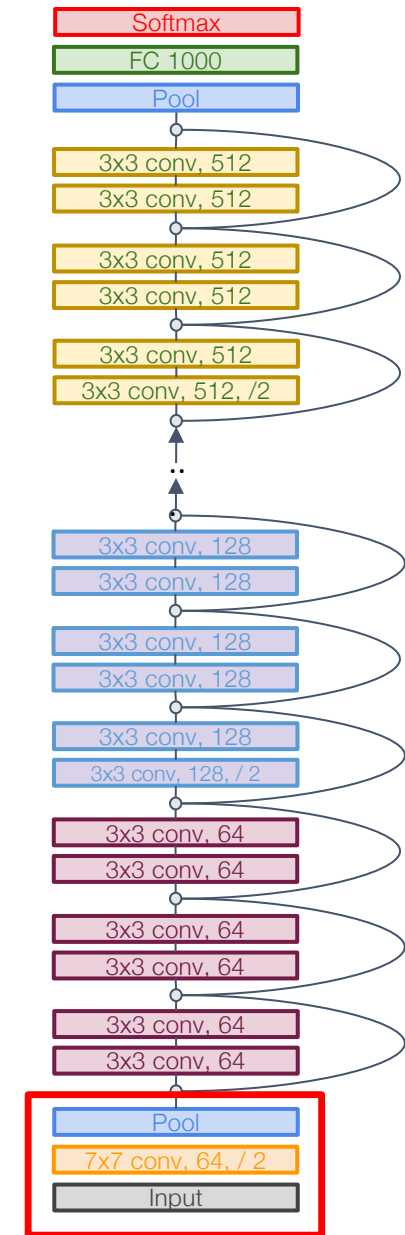

He et al, "Deep Residual Learning for Image Recognition", CVPR 2016

Residual Networks

Like GoogLeNet, no big fully-connected-layers: instead use **global average pooling** and a single linear layer at the end

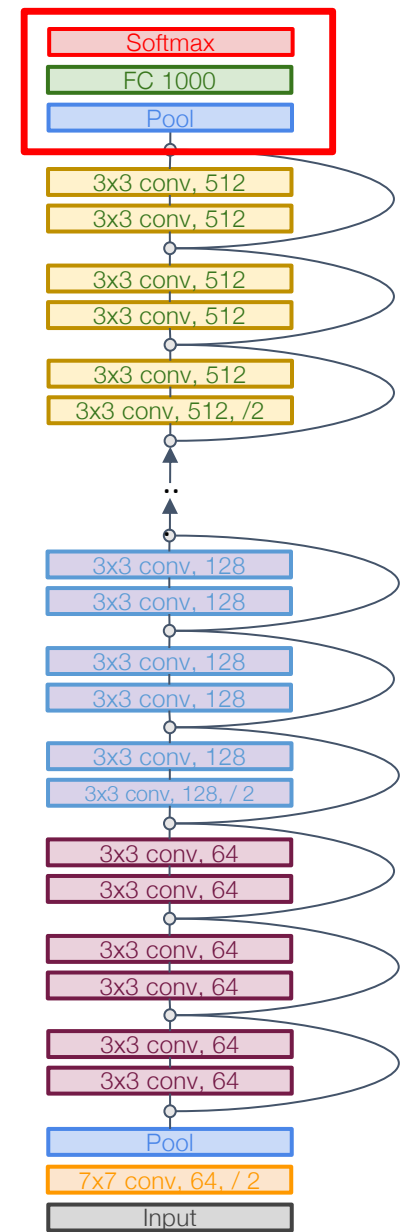

He et al, "Deep Residual Learning for Image Recognition", CVPR 2016

Residual Networks

ResNet-18:

Stem: 1 conv layer

Stage 1 (C=64): 2 res. block = 4 conv

Stage 2 (C=128): 2 res. block = 4 conv

Stage 3 (C=256): 2 res. block = 4 conv


Stage 4 (C=512): 2 res. block = 4 conv

Linear

ImageNet top-5 error: 10.92

GFLOP: 1.8

He et al, "Deep Residual Learning for Image Recognition", CVPR 2016
Error rates are 224x224 single-crop testing, reported by [torchvision](#)

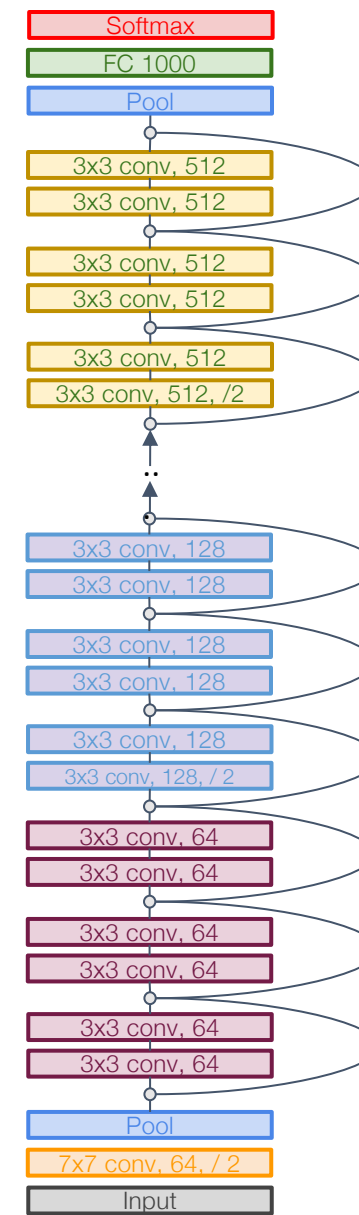

Residual Networks

ResNet-18:

Stem: 1 conv layer

Stage 1 (C=64): 2 res. block = 4 conv

Stage 2 (C=128): 2 res. block = 4 conv

Stage 3 (C=256): 2 res. block = 4 conv

Stage 4 (C=512): 2 res. block = 4 conv

Linear

ImageNet top-5 error: 10.92

GFLOP: 1.8

ResNet-34:

Stem: 1 conv layer

Stage 1: 3 res. block = 6 conv

Stage 2: 4 res. block = 8 conv


Stage 3: 6 res. block = 12 conv

Stage 4: 3 res. block = 6 conv

Linear

ImageNet top-5 error: 8.58

GFLOP: 3.6

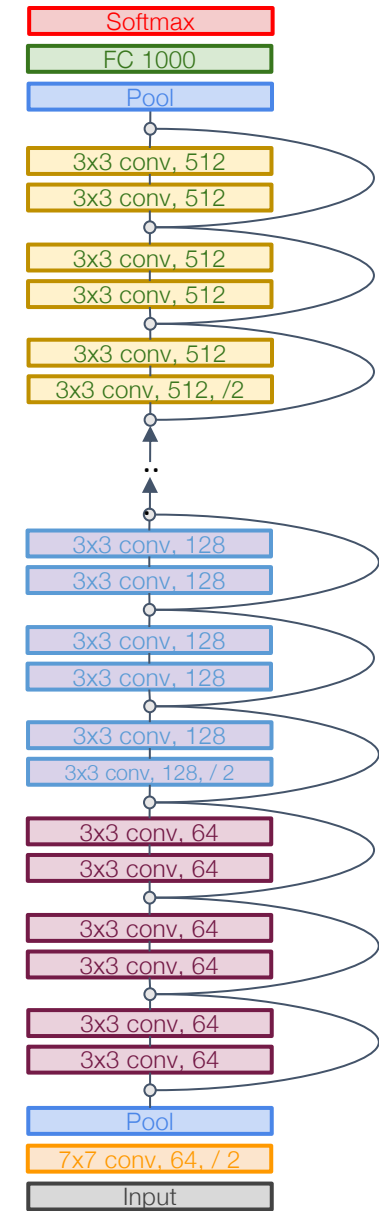

He et al, "Deep Residual Learning for Image Recognition", CVPR 2016
Error rates are 224x224 single-crop testing, reported by [torchvision](https://pytorch.org/torchvision/)

Residual Networks

ResNet-18:

Stem: 1 conv layer

Stage 1 (C=64): 2 res. block = 4 conv

Stage 2 (C=128): 2 res. block = 4 conv

Stage 3 (C=256): 2 res. block = 4 conv

Stage 4 (C=512): 2 res. block = 4 conv

Linear

ImageNet top-5 error: 10.92

GFLOP: 1.8

ResNet-34:

Stem: 1 conv layer

Stage 1: 3 res. block = 6 conv

Stage 2: 4 res. block = 8 conv

Stage 3: 6 res. block = 12 conv

Stage 4: 3 res. block = 6 conv

Linear


ImageNet top-5 error: 8.58

GFLOP: 3.6

VGG-16:


ImageNet top-5 error: 9.62

GFLOP: 13.6

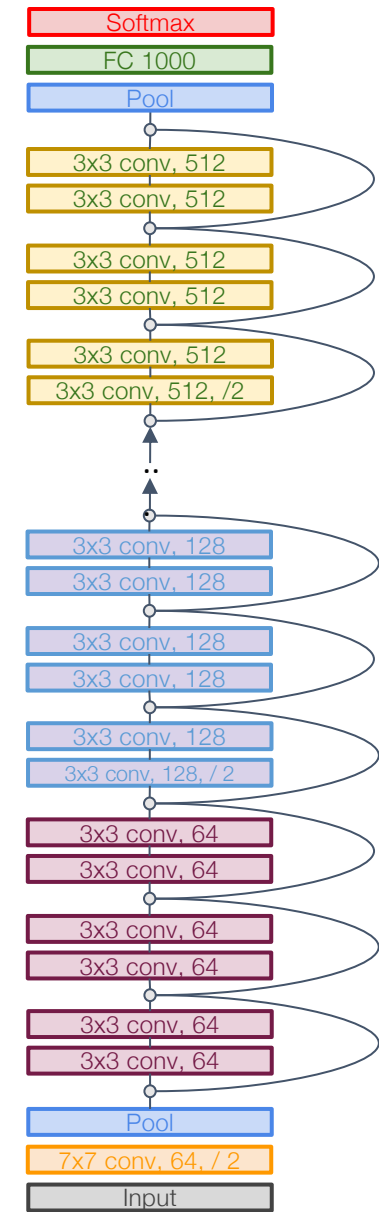

He et al, "Deep Residual Learning for Image Recognition", CVPR 2016
Error rates are 224x224 single-crop testing, reported by [torchvision](https://pytorch.org/torchvision/)


Residual Networks: Basic Block

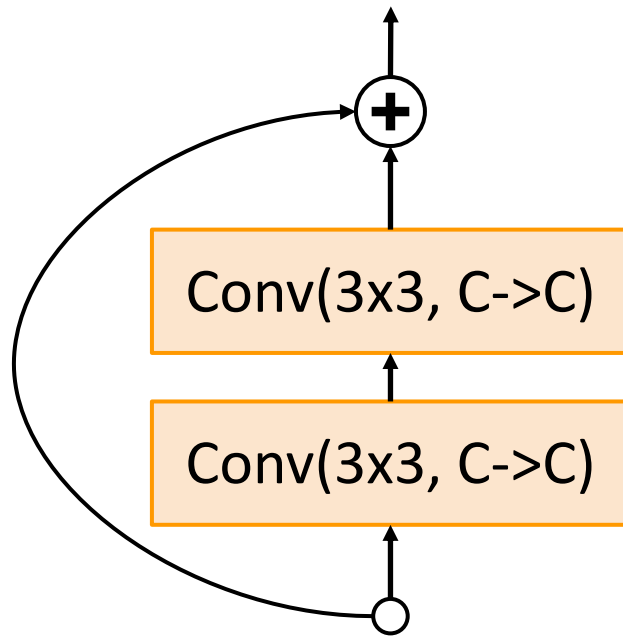

“Basic”
Residual block



He et al, “Deep Residual Learning for Image Recognition”, CVPR 2016

Residual Networks: Basic Block

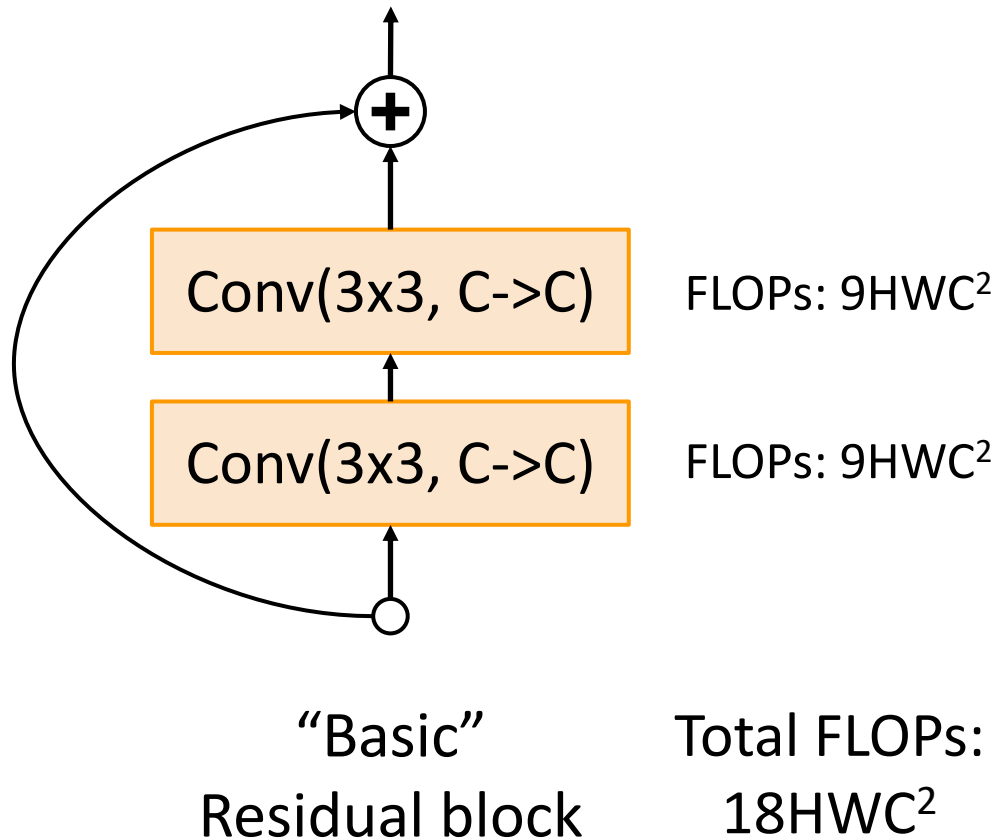

He et al, "Deep Residual Learning for Image Recognition", CVPR 2016



Residual Networks: Bottleneck Block

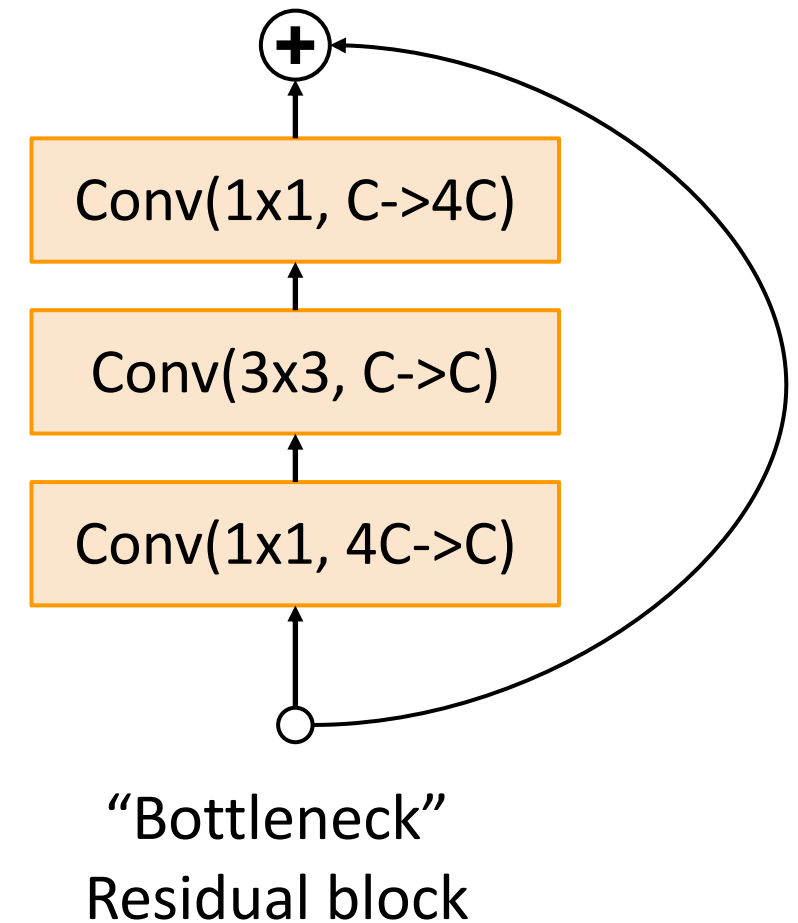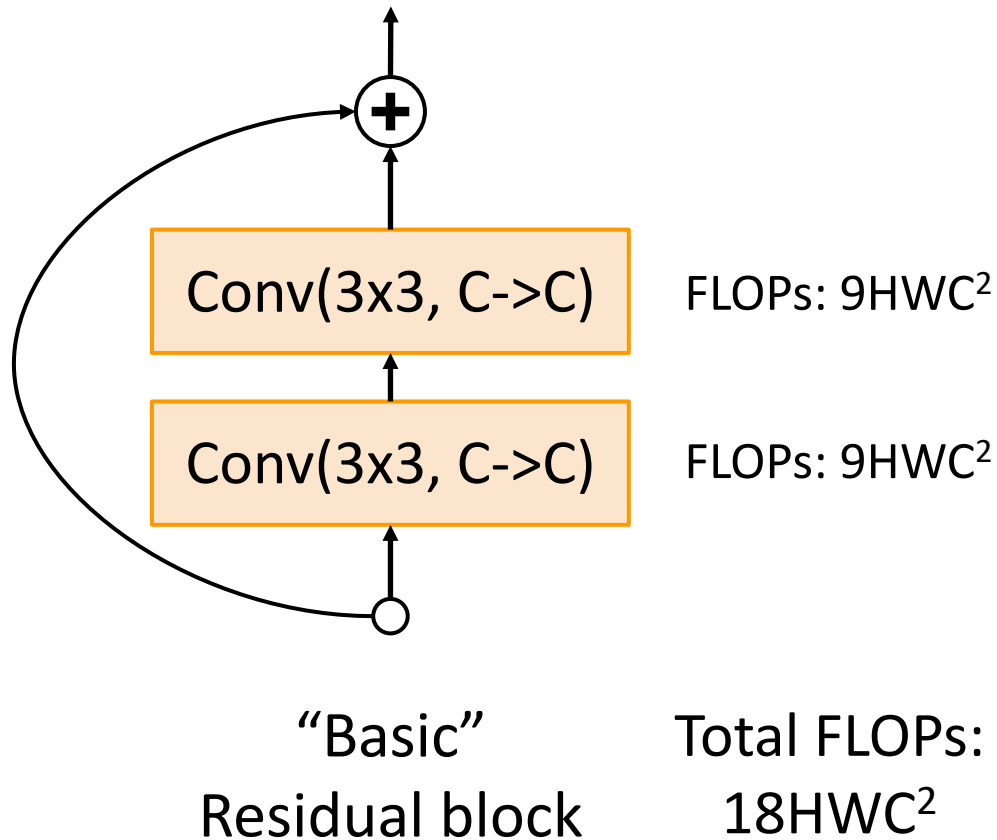

He et al, “Deep Residual Learning for Image Recognition”, CVPR 2016

Residual Networks: Bottleneck Block


More layers, less computational cost!

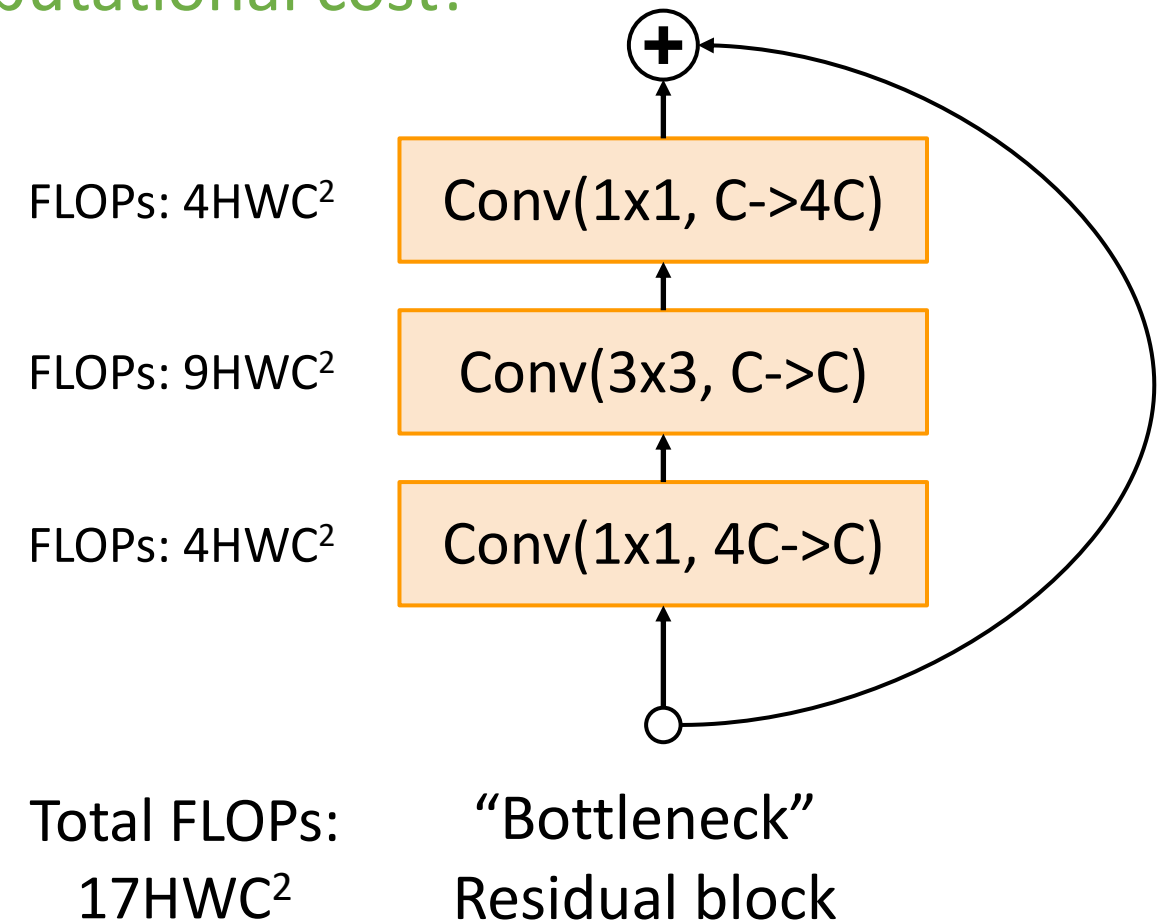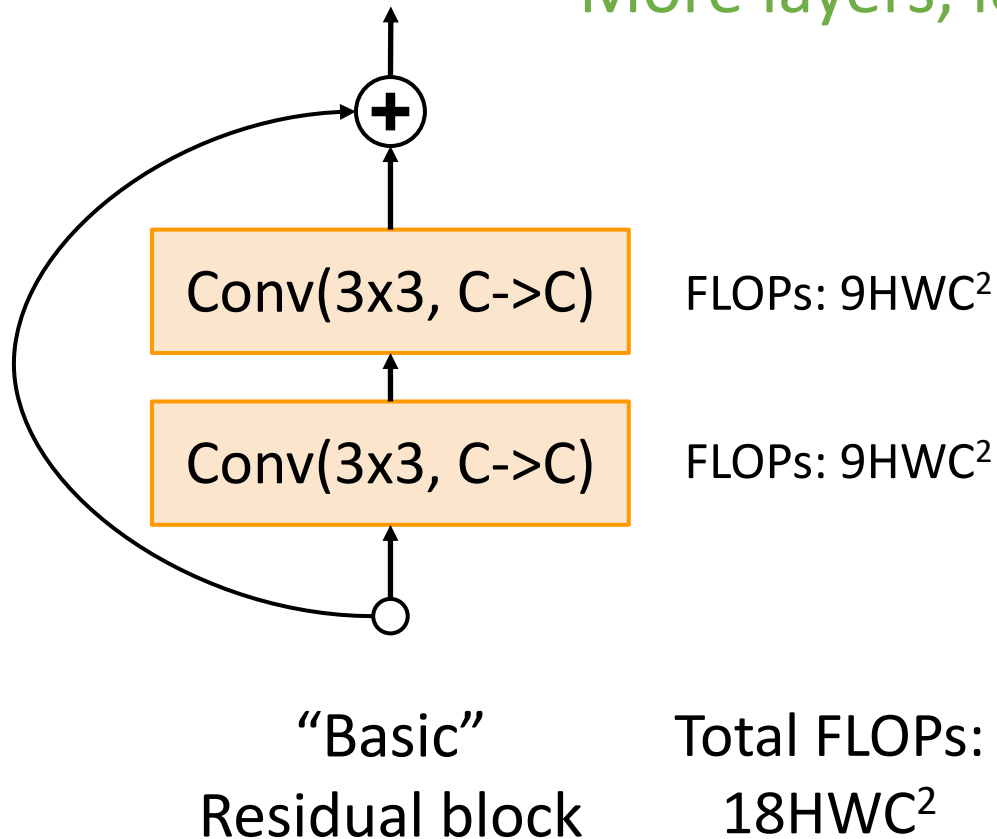

He et al, “Deep Residual Learning for Image Recognition”, CVPR 2016

Residual Networks

			Stage 1		Stage 2		Stage 3		Stage 4				
	Block type	Stem layers	Blocks	Layers	Blocks	Layers	Blocks	Layers	Blocks	Layers	FC layers	GFLOP	ImageNet top-5 error
ResNet-18	Basic	1	2	4	2	4	2	4	2	4	1	1.8	10.92
ResNet-34	Basic	1	3	6	4	8	6	12	3	6	1	3.6	8.58

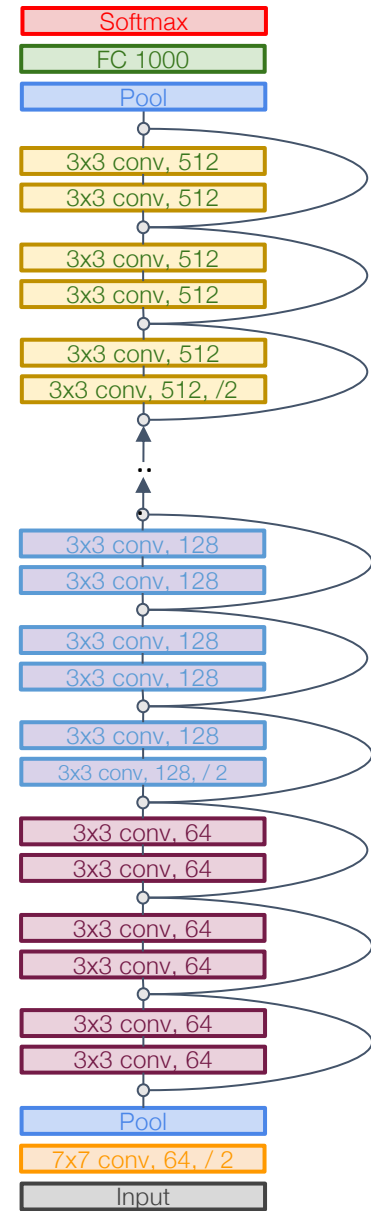


He et al, "Deep Residual Learning for Image Recognition", CVPR 2016
 Error rates are 224x224 single-crop testing, reported by [torchvision](https://pytorch.org/torchvision/)

Residual Networks

ResNet-50 is the same as ResNet-34, but replaces Basic blocks with Bottleneck Blocks.
This is a great baseline architecture for many tasks even today!

			Stage 1		Stage 2		Stage 3		Stage 4				
	Block type	Stem layers	Blocks	Layers	Blocks	Layers	Blocks	Layers	Blocks	Layers	FC layers	GFLOP	ImageNet top-5 error
ResNet-18	Basic	1	2	4	2	4	2	4	2	4	1	1.8	10.92
ResNet-34	Basic	1	3	6	4	8	6	12	3	6	1	3.6	8.58
ResNet-50	Bottle	1	3	9	4	12	6	18	3	9	1	3.8	7.13

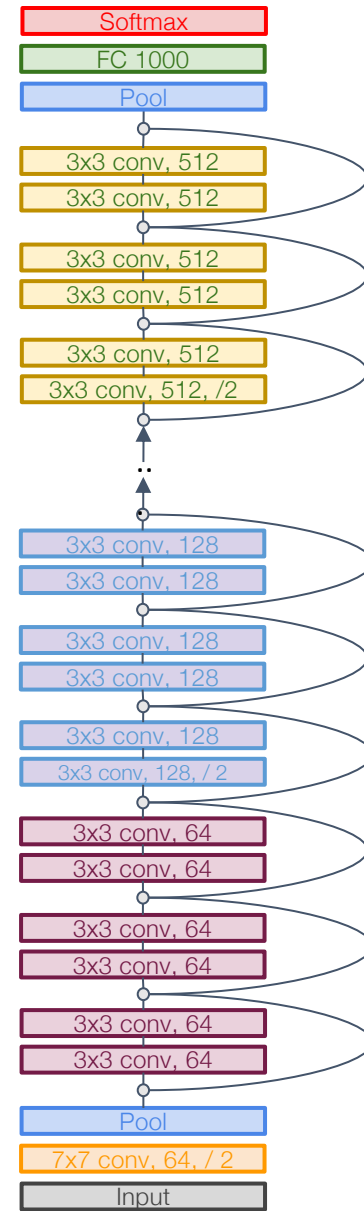


He et al, "Deep Residual Learning for Image Recognition", CVPR 2016
Error rates are 224x224 single-crop testing, reported by [torchvision](https://pytorch.org/torchvision/)

Residual Networks

Deeper ResNet-101 and ResNet-152 models are more accurate, but also more computationally heavy

			Stage 1		Stage 2		Stage 3		Stage 4				
	Block type	Stem layers	Blocks	Layers	Blocks	Layers	Blocks	Layers	Blocks	Layers	FC layers	GFLOP	ImageNet top-5 error
ResNet-18	Basic	1	2	4	2	4	2	4	2	4	1	1.8	10.92
ResNet-34	Basic	1	3	6	4	8	6	12	3	6	1	3.6	8.58
ResNet-50	Bottle	1	3	9	4	12	6	18	3	9	1	3.8	7.13
ResNet-101	Bottle	1	3	9	4	12	23	69	3	9	1	7.6	6.44
ResNet-152	Bottle	1	3	9	8	24	36	108	3	9	1	11.3	5.94

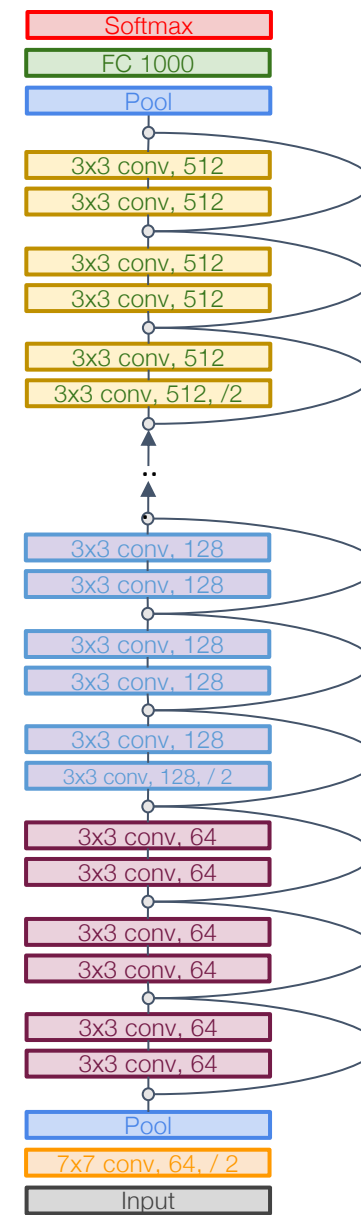

He et al, "Deep Residual Learning for Image Recognition", CVPR 2016
Error rates are 224x224 single-crop testing, reported by [torchvision](#)

Residual Networks

- Able to train very deep networks
- Deeper networks do better than shallow networks (as expected)
- Swept 1st place in all ILSVRC and COCO 2015 competitions
- Still widely used today!

MSRA @ ILSVRC & COCO 2015 Competitions


- **1st places in all five main tracks**

- ImageNet Classification: *"Ultra-deep"* (quote Yann) **152-layer** nets
- ImageNet Detection: **16%** better than 2nd
- ImageNet Localization: **27%** better than 2nd
- COCO Detection: **11%** better than 2nd
- COCO Segmentation: **12%** better than 2nd

He et al, "Deep Residual Learning for Image Recognition", CVPR 2016

Improving Residual Networks: Block Design

Original ResNet block

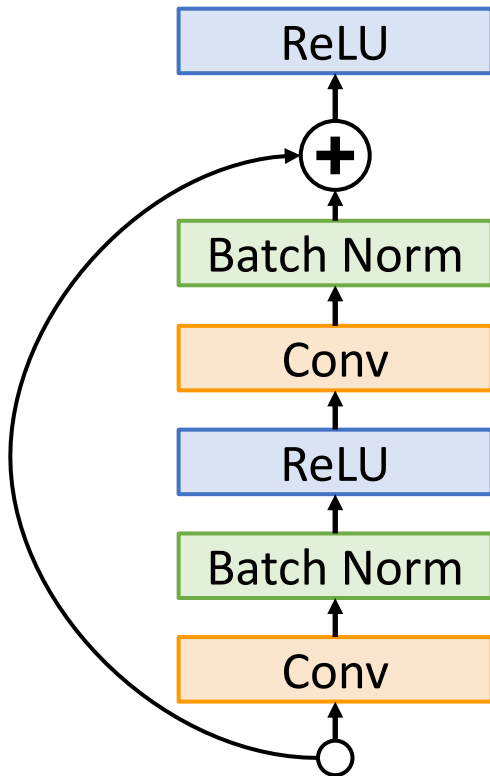


Note ReLU **after** residual:

Cannot actually learn identity function since outputs are nonnegative!

Note ReLU **inside** residual:


Can learn true identity function by setting Conv weights to zero!

“Pre-Activation” ResNet Block

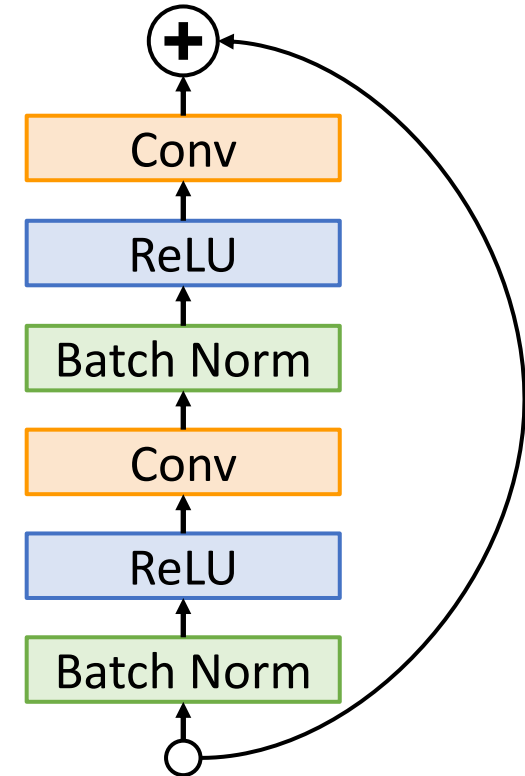

Improving Residual Networks: Block Design

Original ResNet block

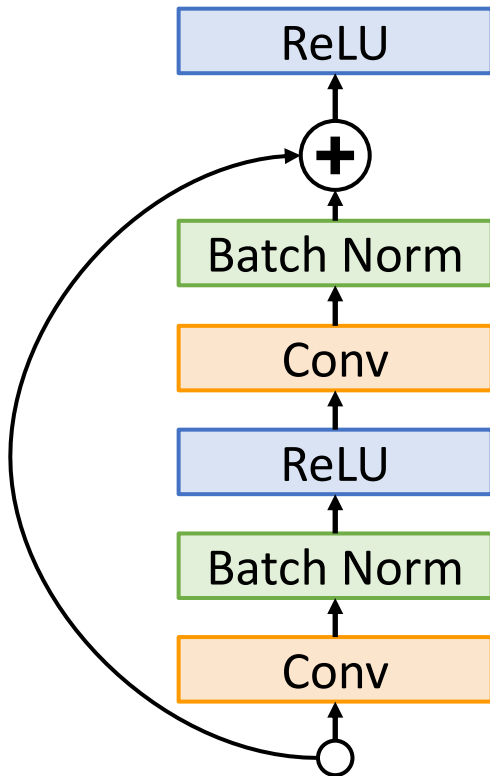


Slight improvement in accuracy
(ImageNet top-1 error)

ResNet-152: 21.3 vs **21.1**



ResNet-200: 21.8 vs **20.7**

Not actually used that much in
practice

“Pre-Activation” ResNet Block

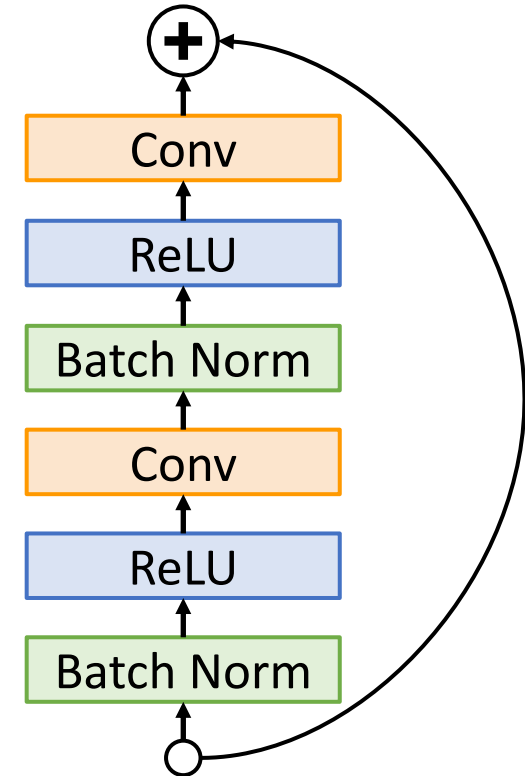



Comparing Complexity

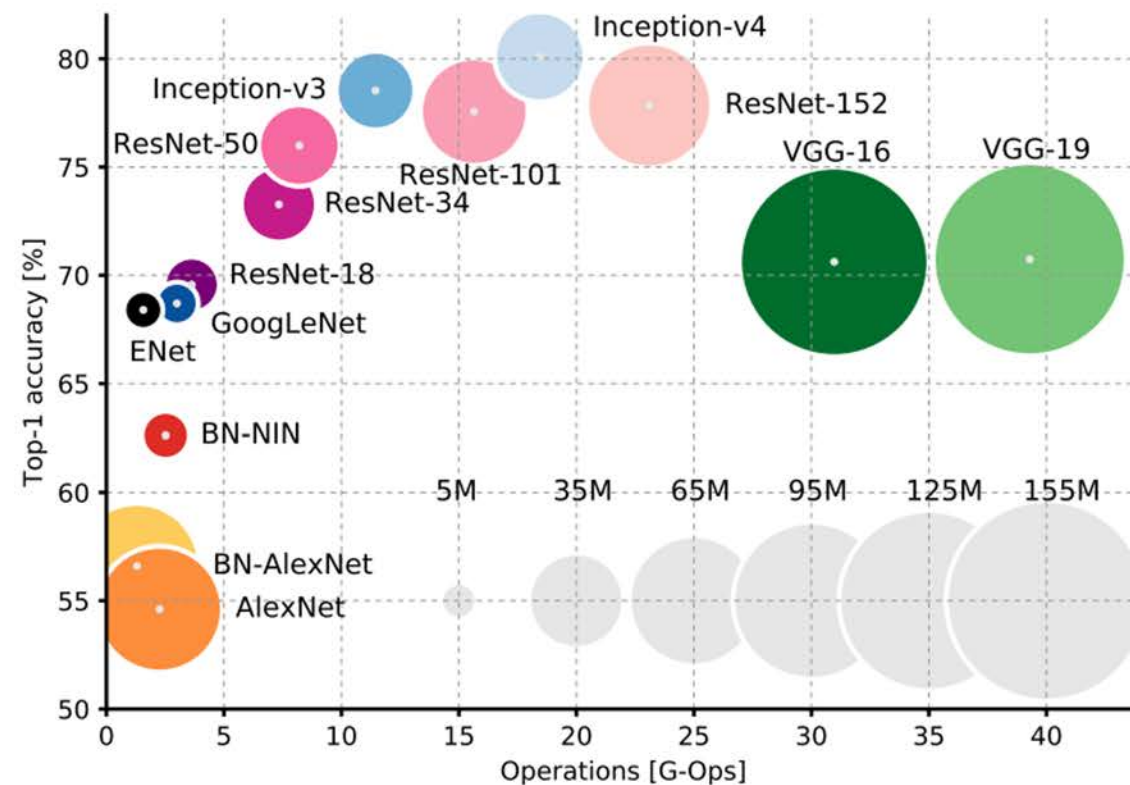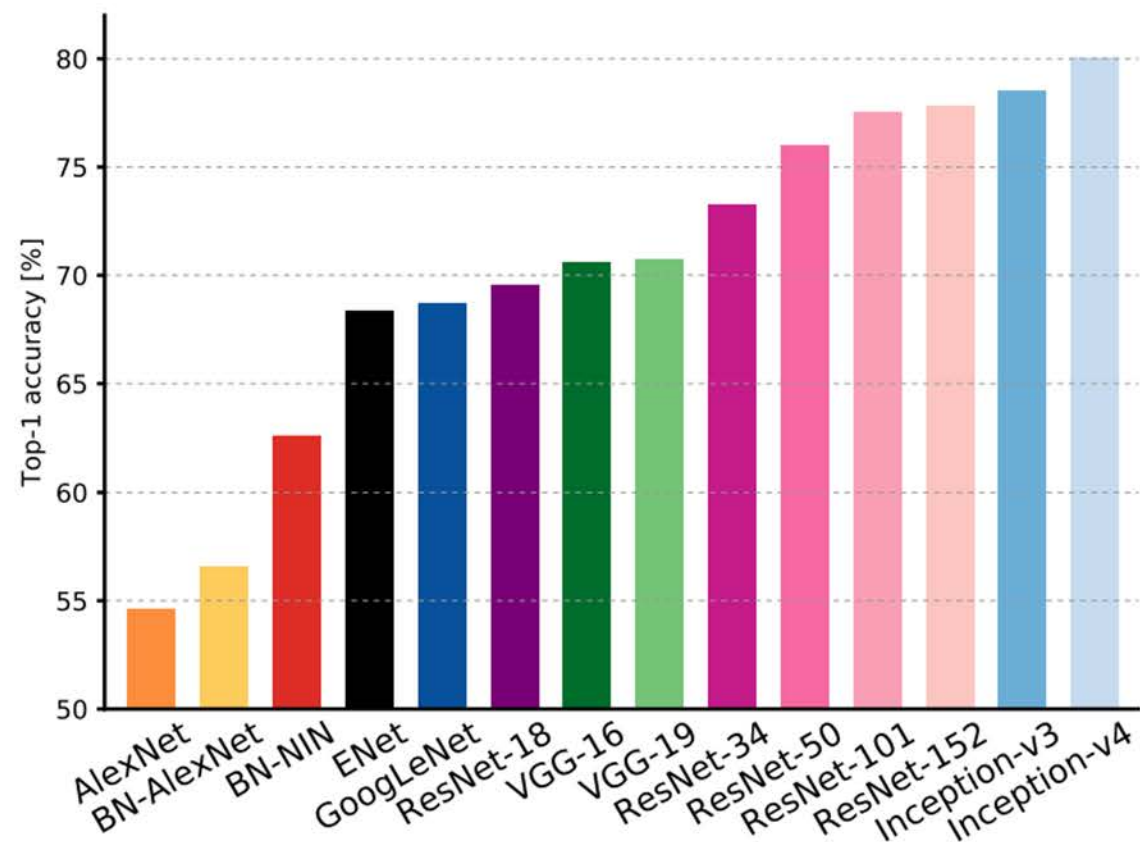

Canziani et al, "An analysis of deep neural network models for practical applications", 2017



Comparing Complexity

Inception-v4: Resnet + Inception!

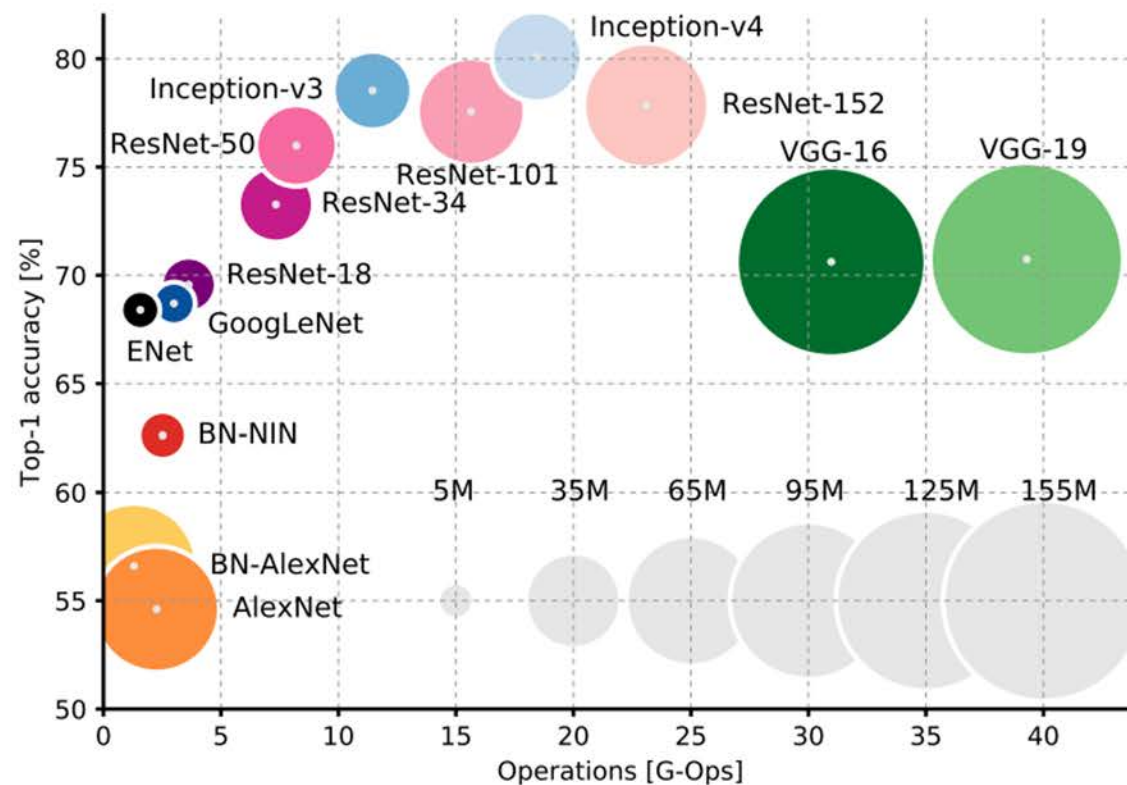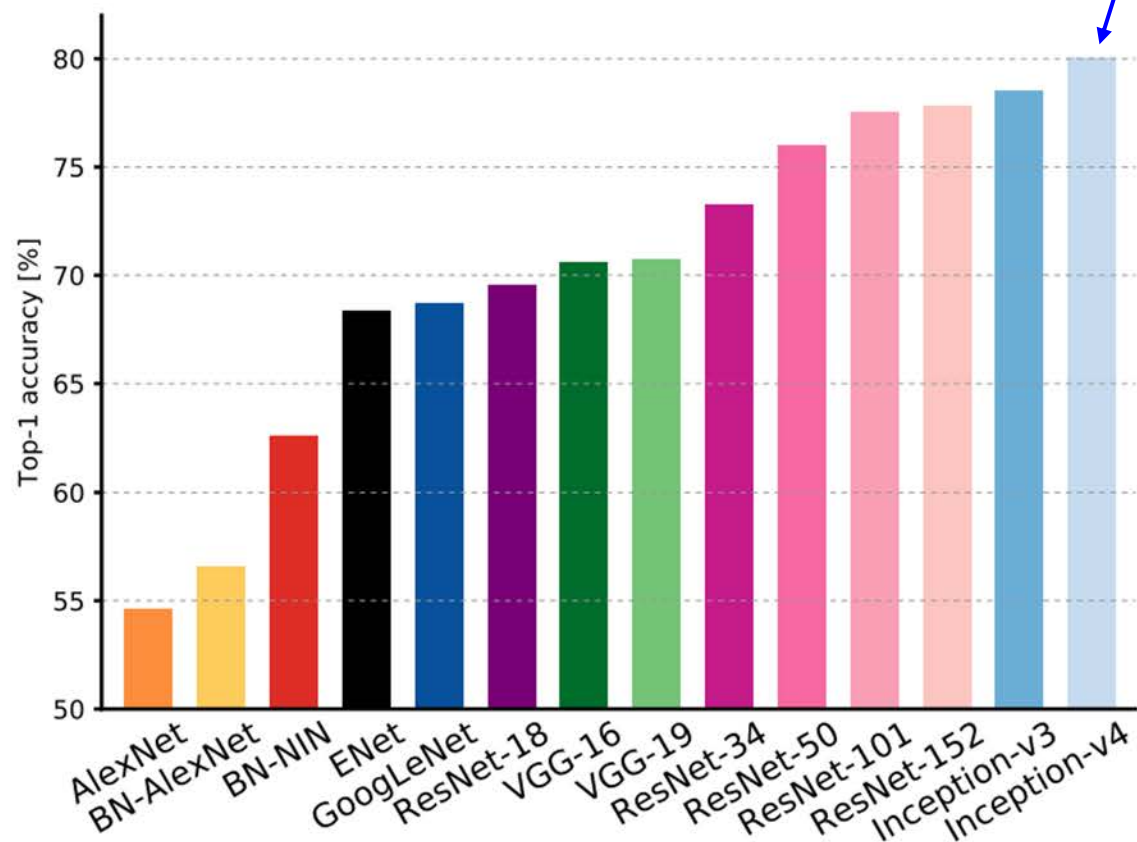

Canziani et al, "An analysis of deep neural network models for practical applications", 2017


Comparing Complexity

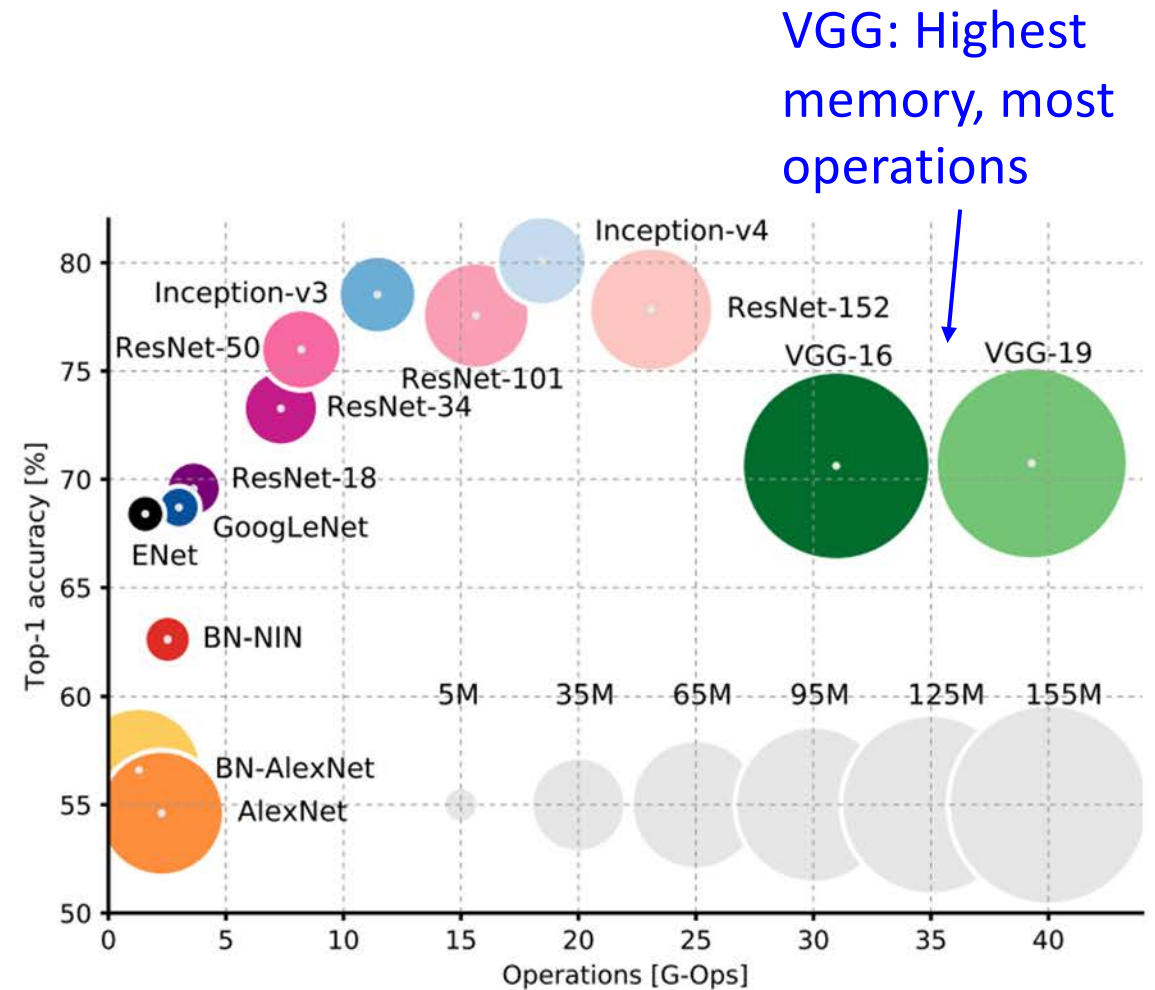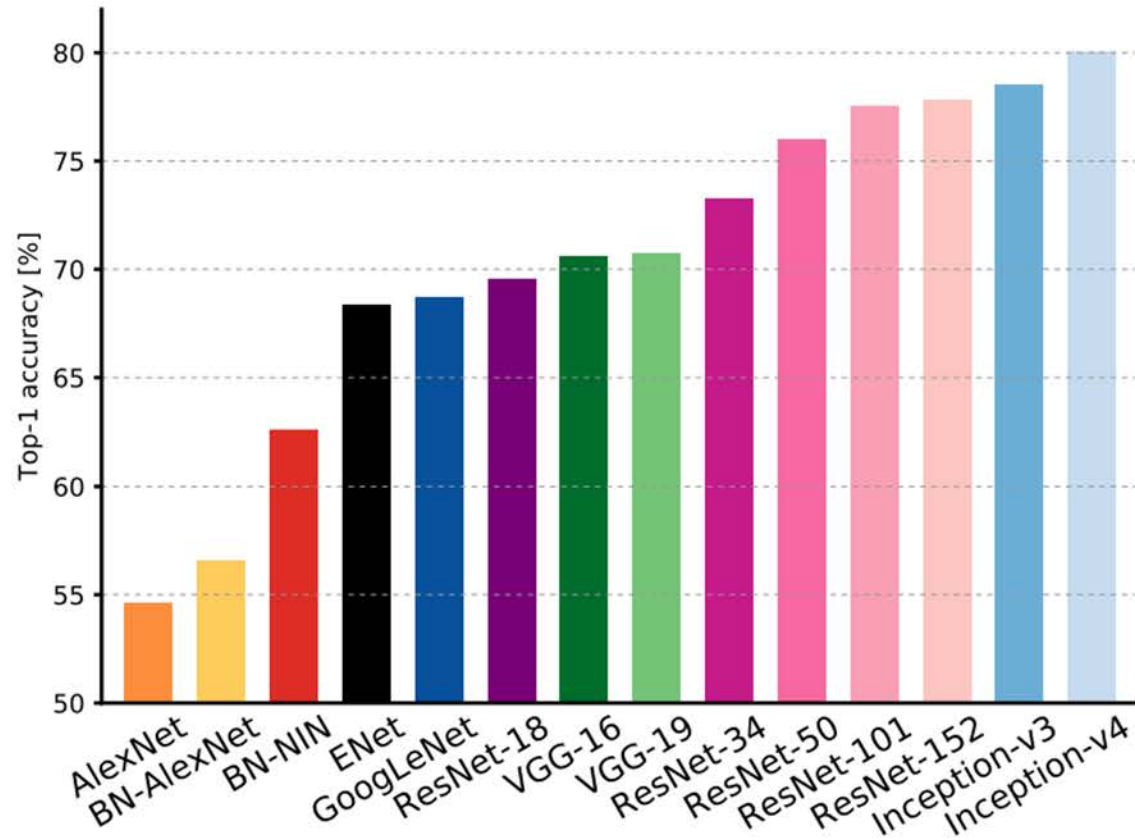


VGG: Highest
memory, most
operations

Canziani et al, "An analysis of deep neural network models for practical applications", 2017

Comparing Complexity

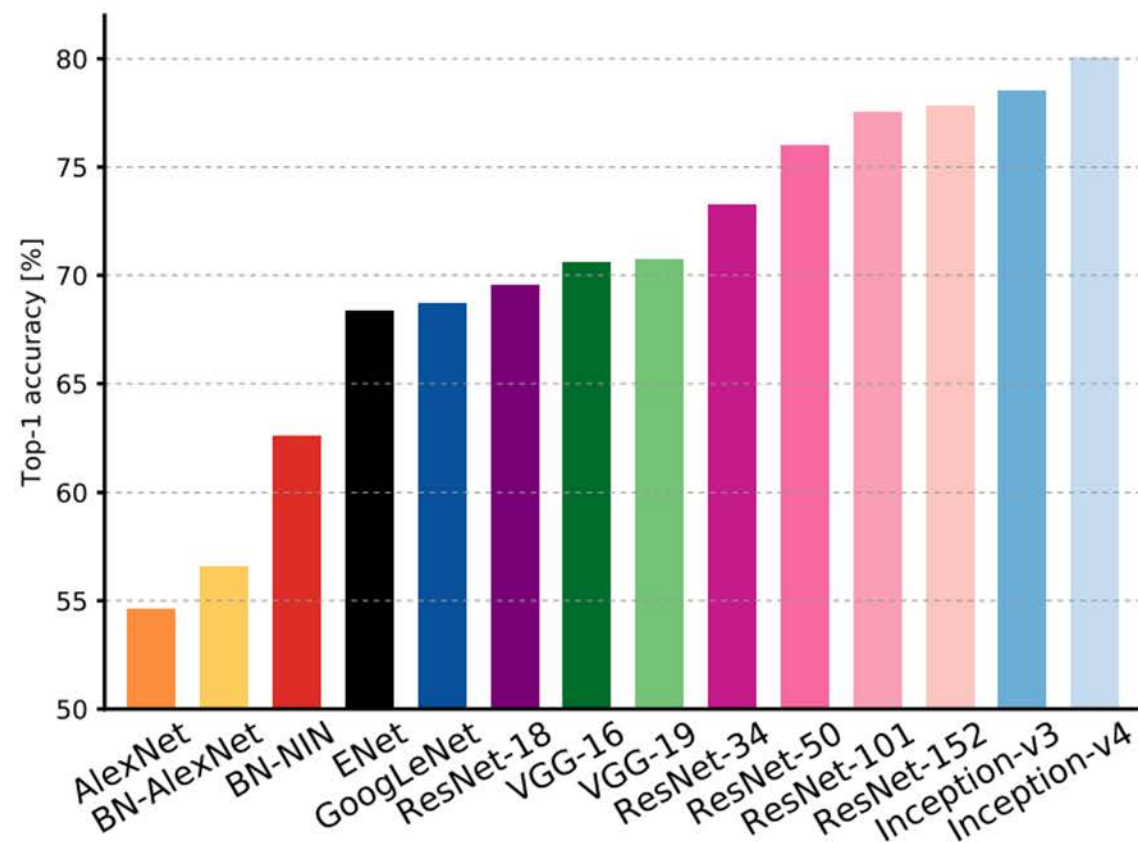


GoogLeNet:
Very efficient!

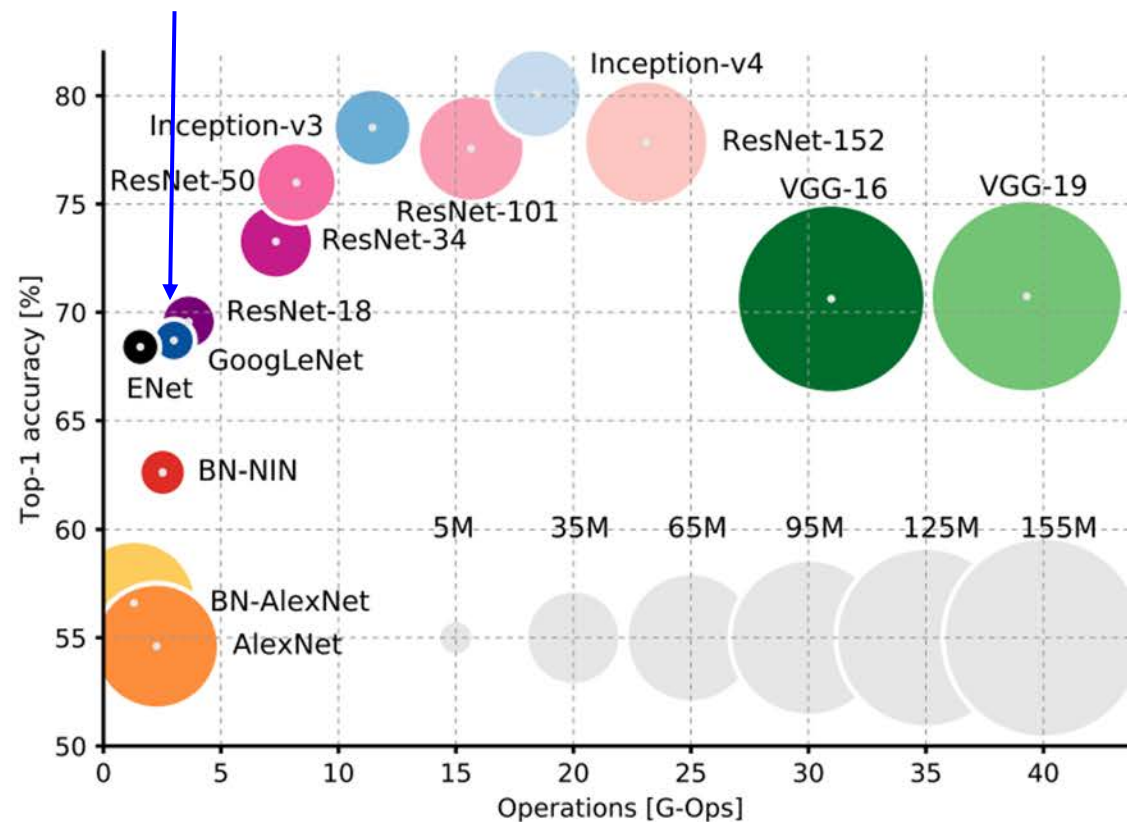


Canziani et al, "An analysis of deep neural network models for practical applications", 2017

Comparing Complexity


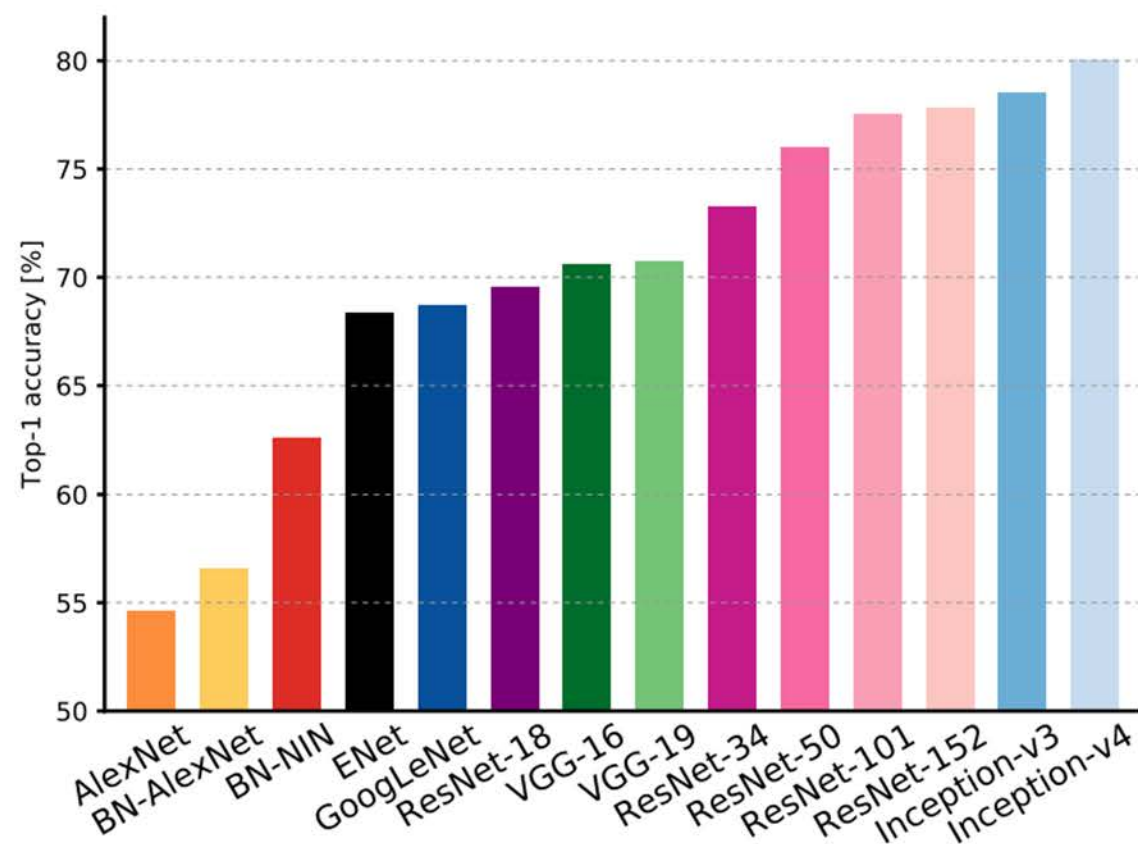


AlexNet: Low
compute, lots
of parameters

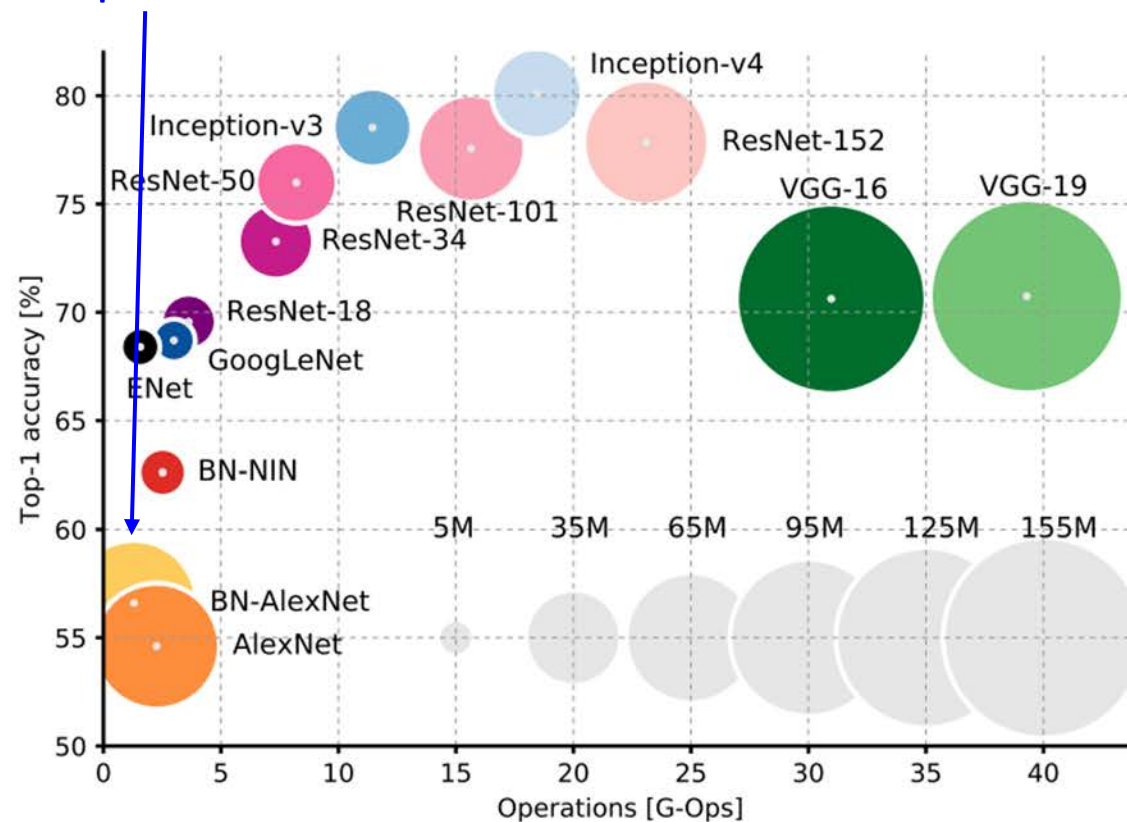


Canziani et al, "An analysis of deep neural network models for practical applications", 2017

Comparing Complexity

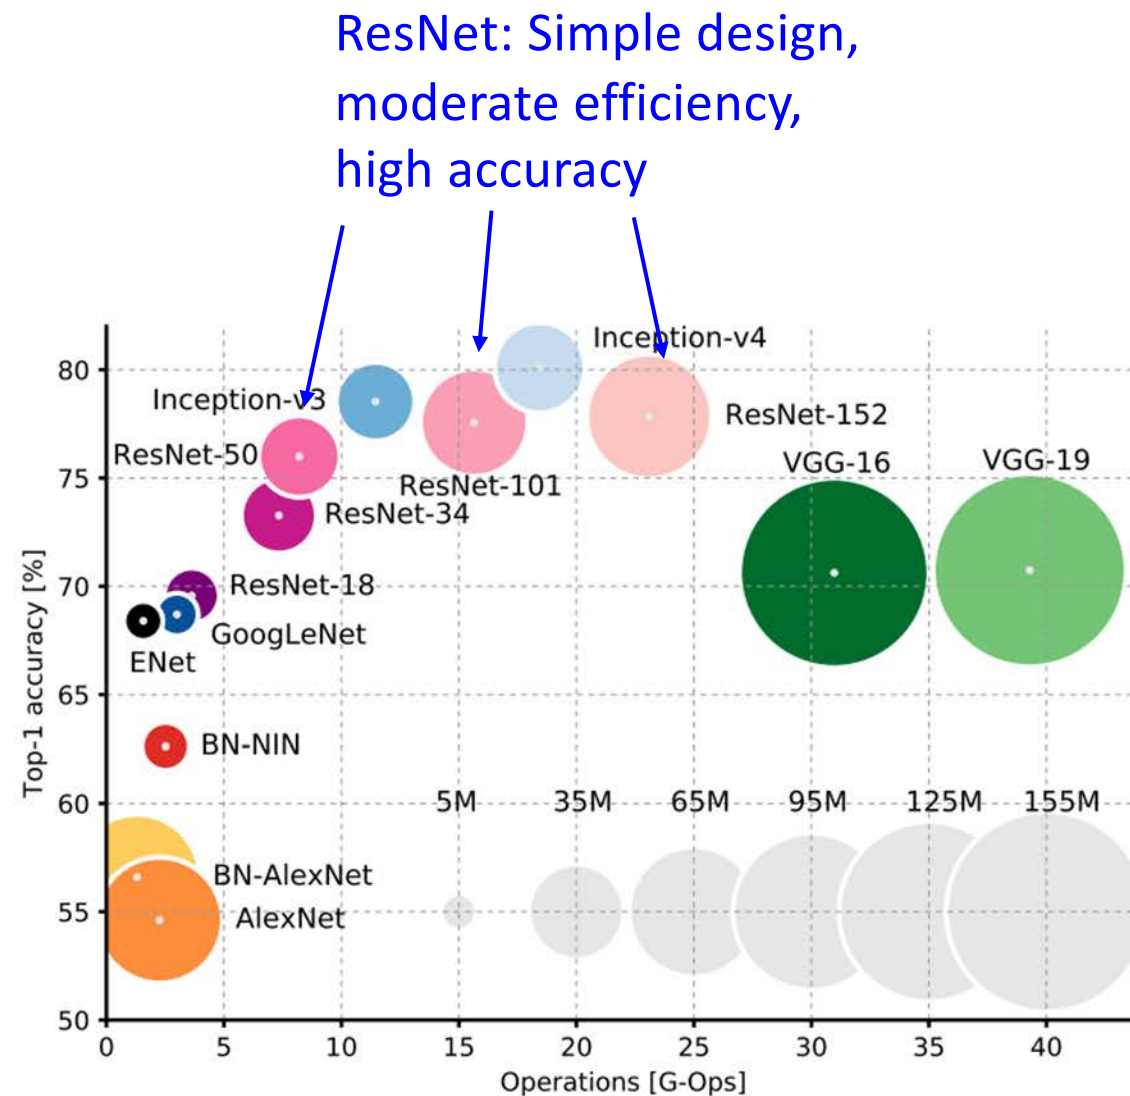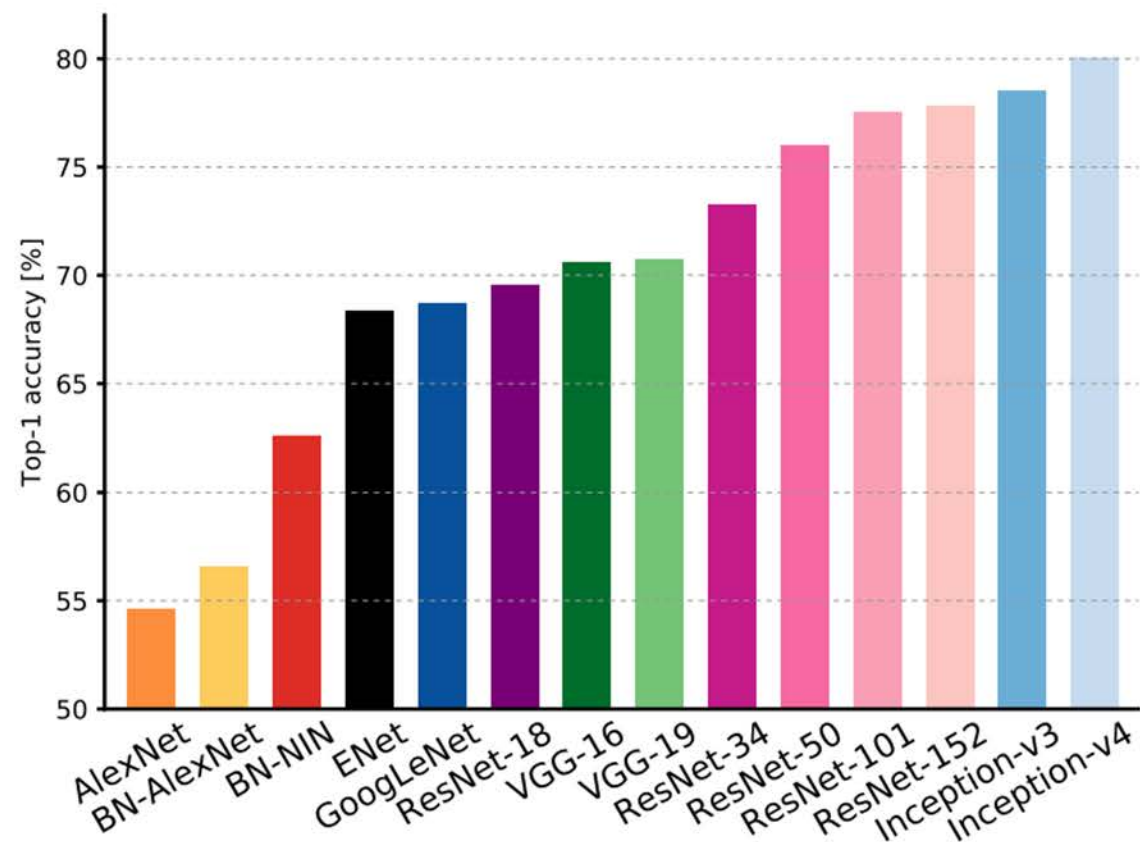


Canziani et al, "An analysis of deep neural network models for practical applications", 2017

ImageNet Classification Challenge

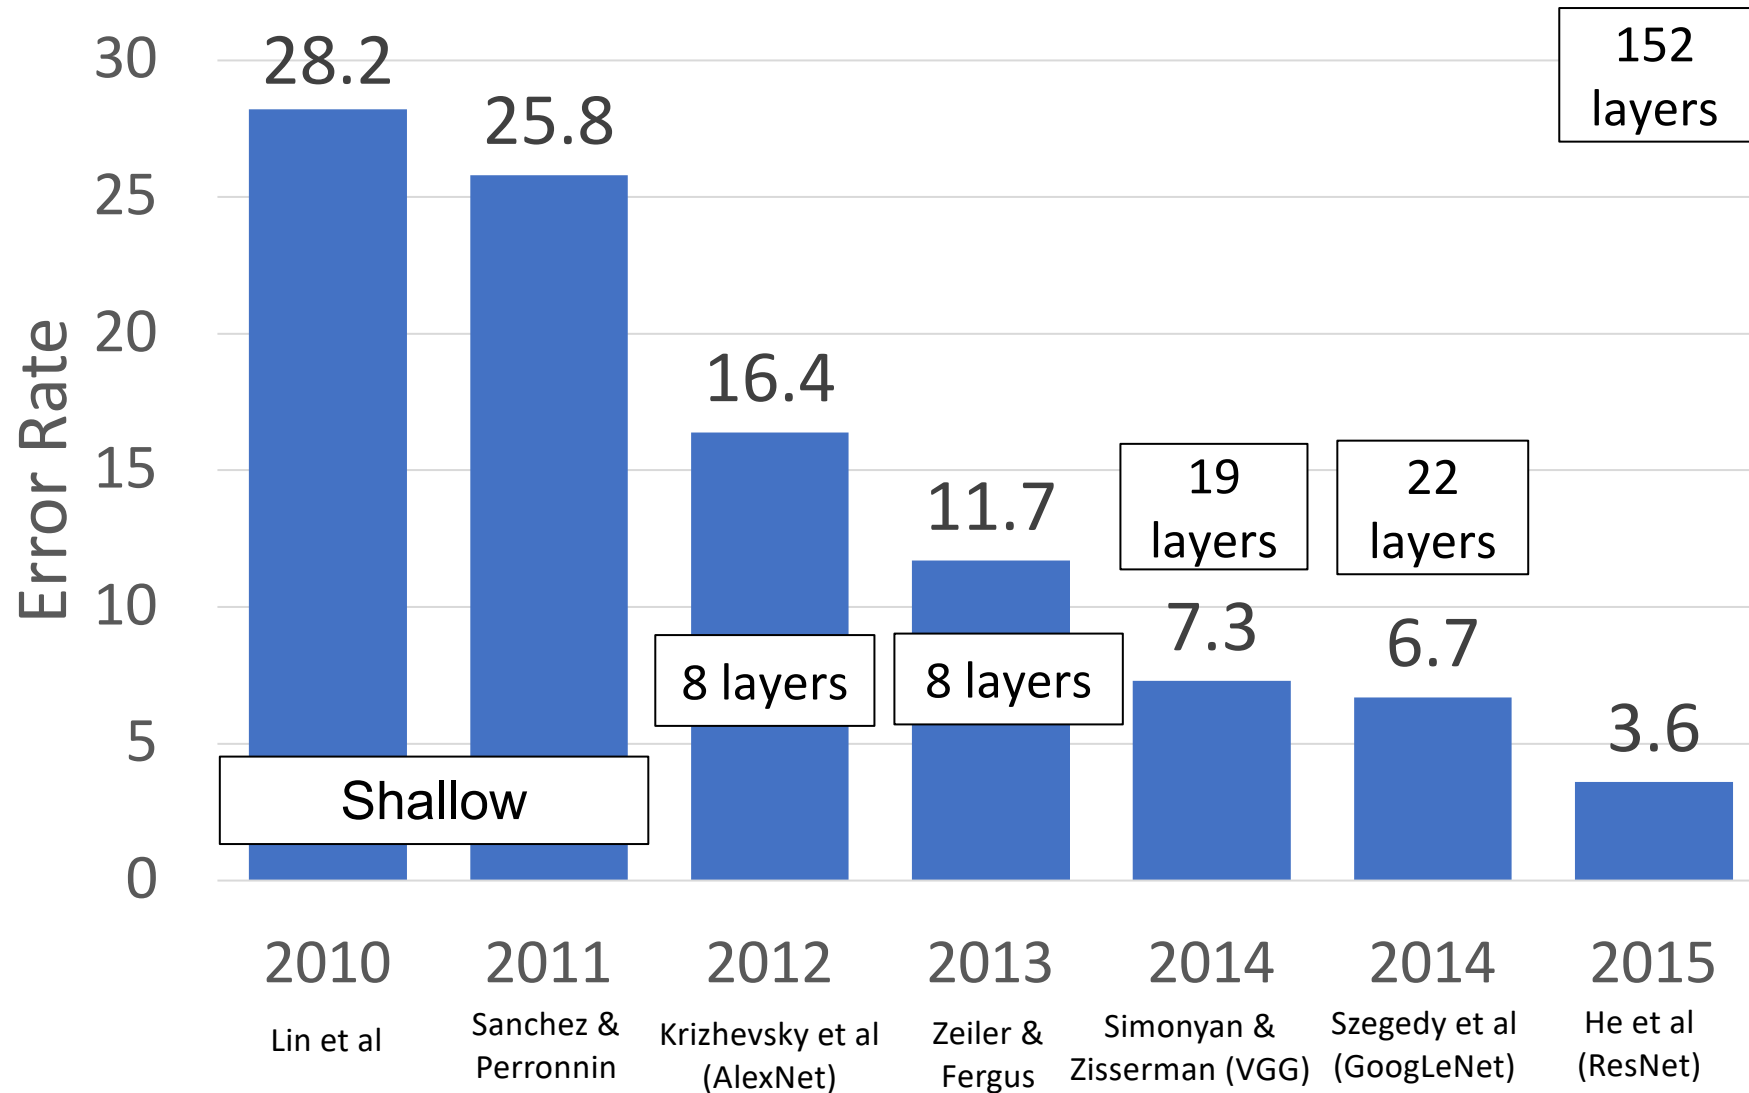

ImageNet Classification Challenge

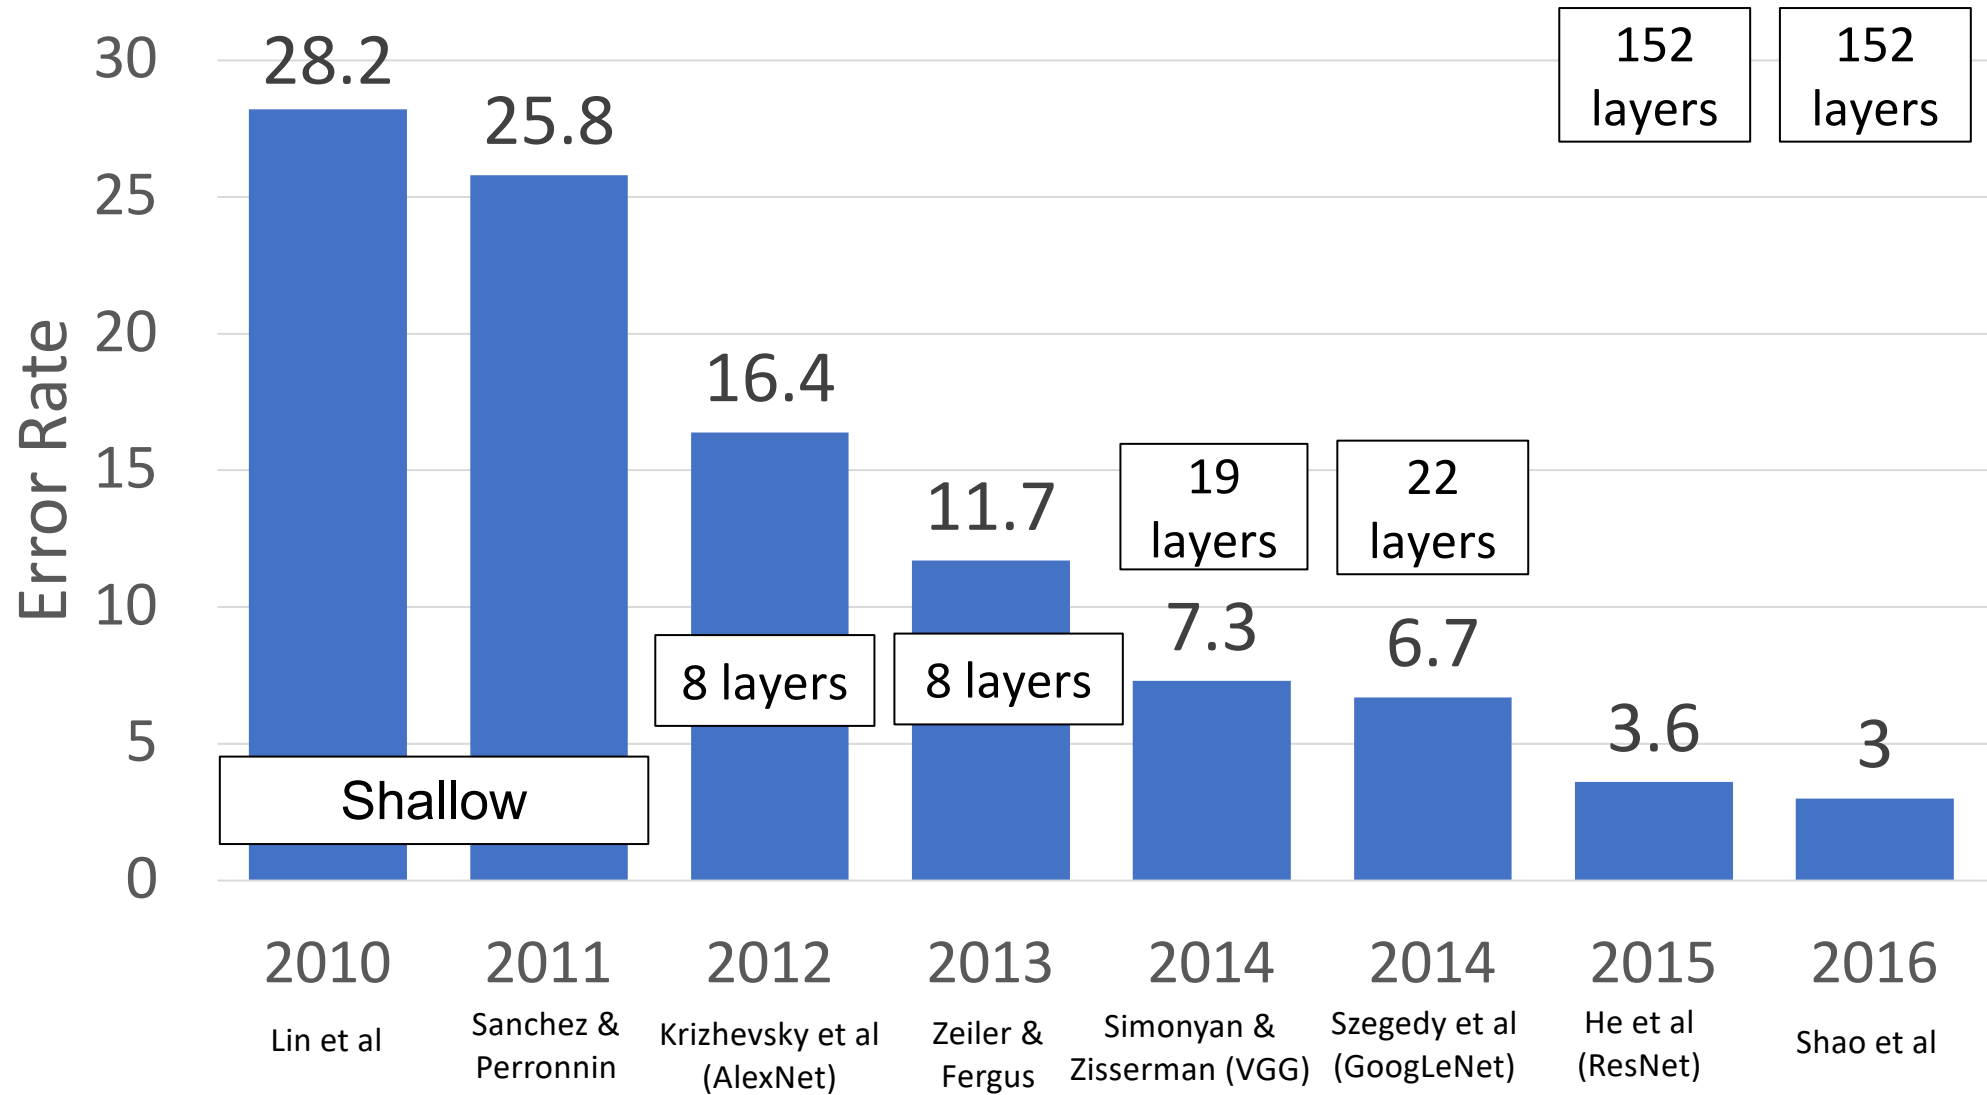


ImageNet 2016 winner: Model Ensembles



Multi-scale ensemble of Inception, Inception-Resnet, Resnet, Wide Resnet models

	Inception-v3	Inception-v4	Inception-Resnet-v2	Resnet-200	Wrn-68-3	Fusion (Val.)	Fusion (Test)
Err. (%)	4.20	4.01	3.52	4.26	4.65	2.92 (-0.6)	2.99



Improving ResNets

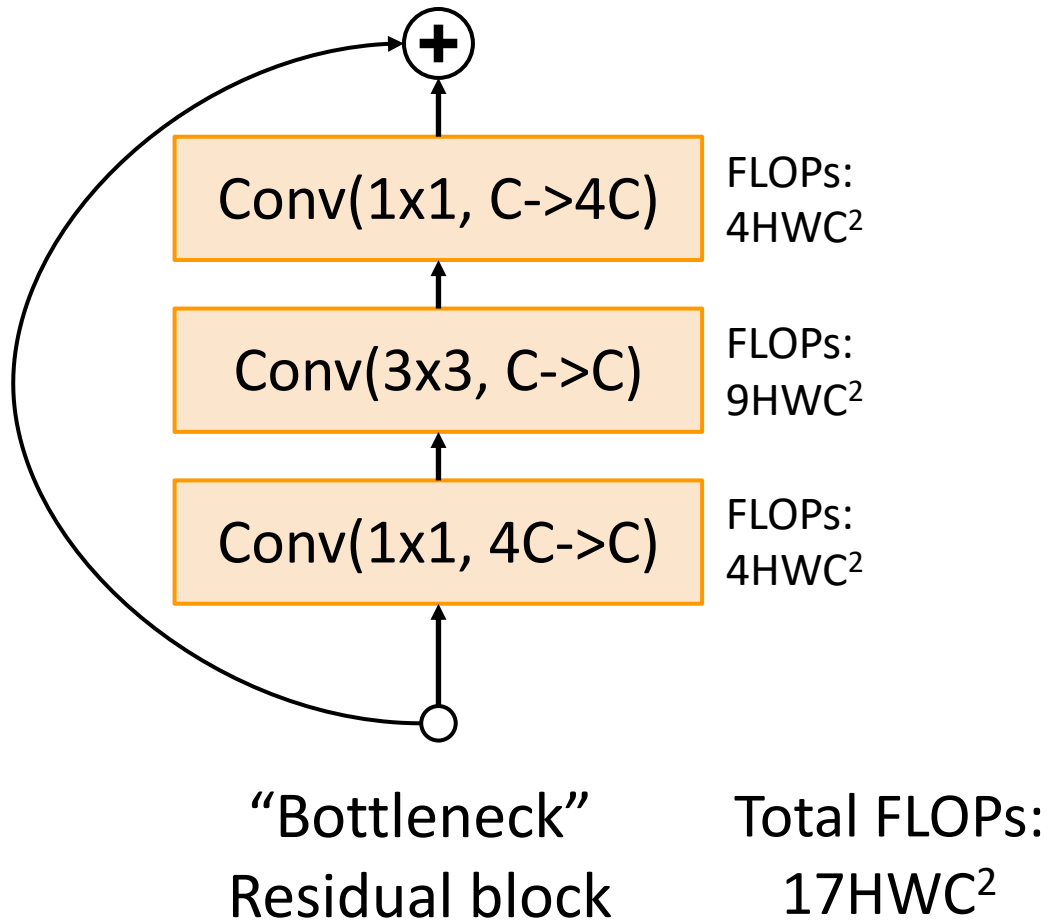



Improving ResNets: ResNeXt

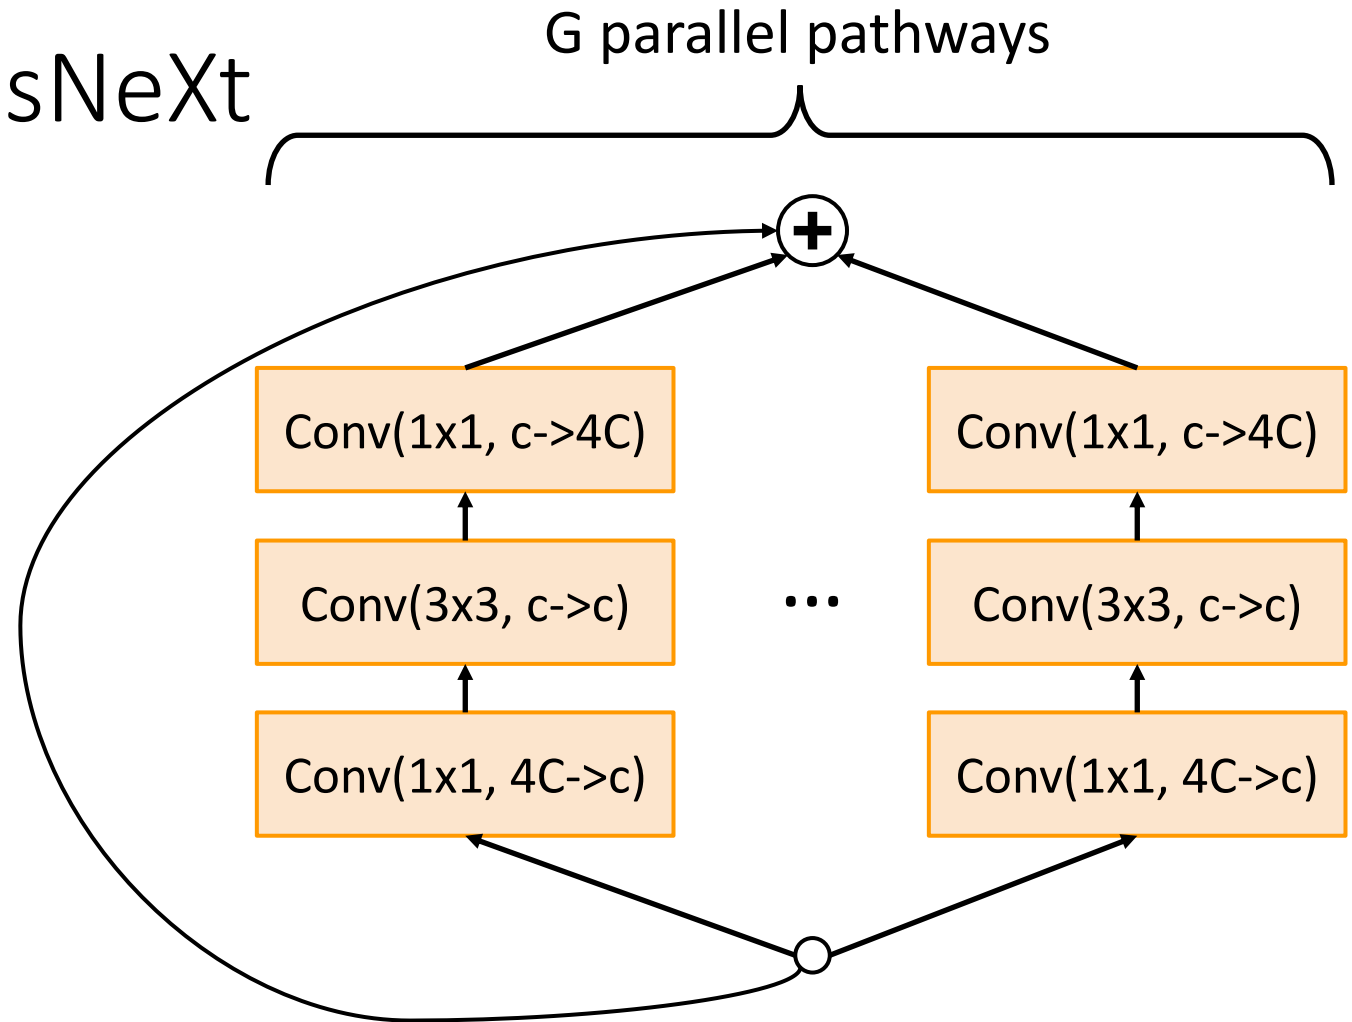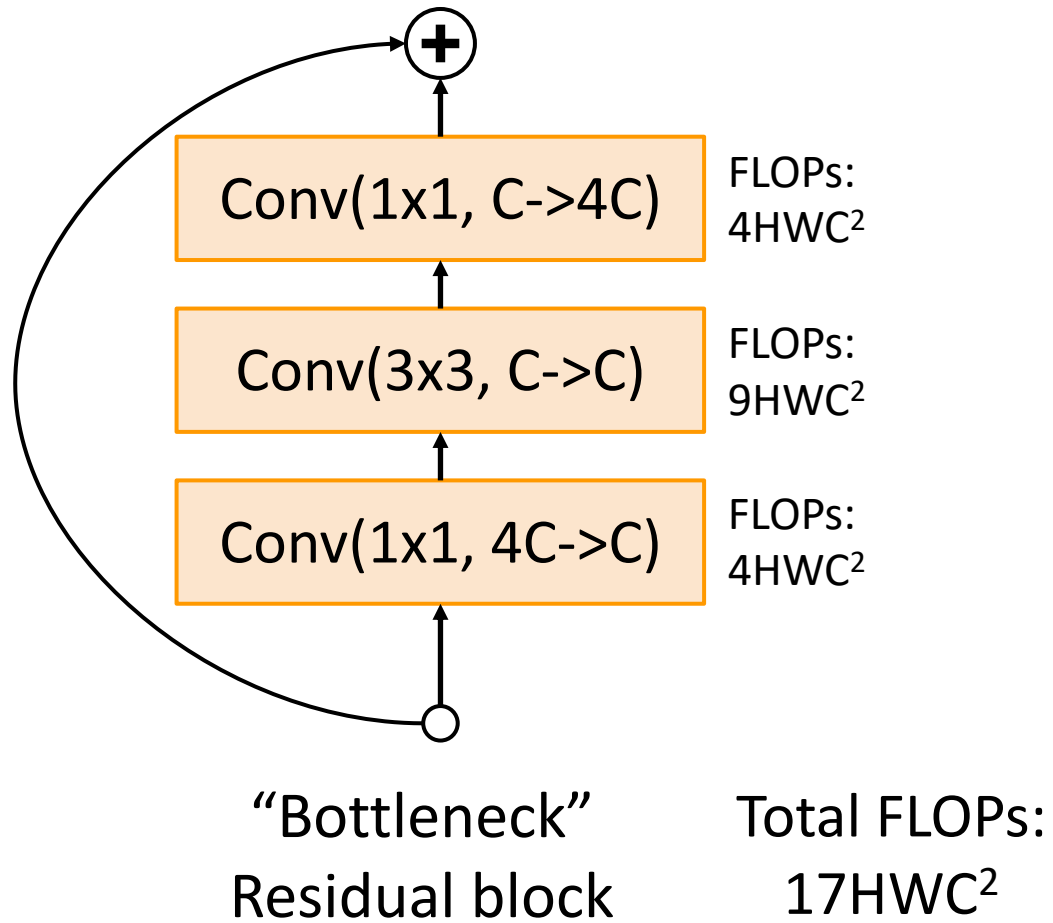

Improving ResNets: ResNeXt

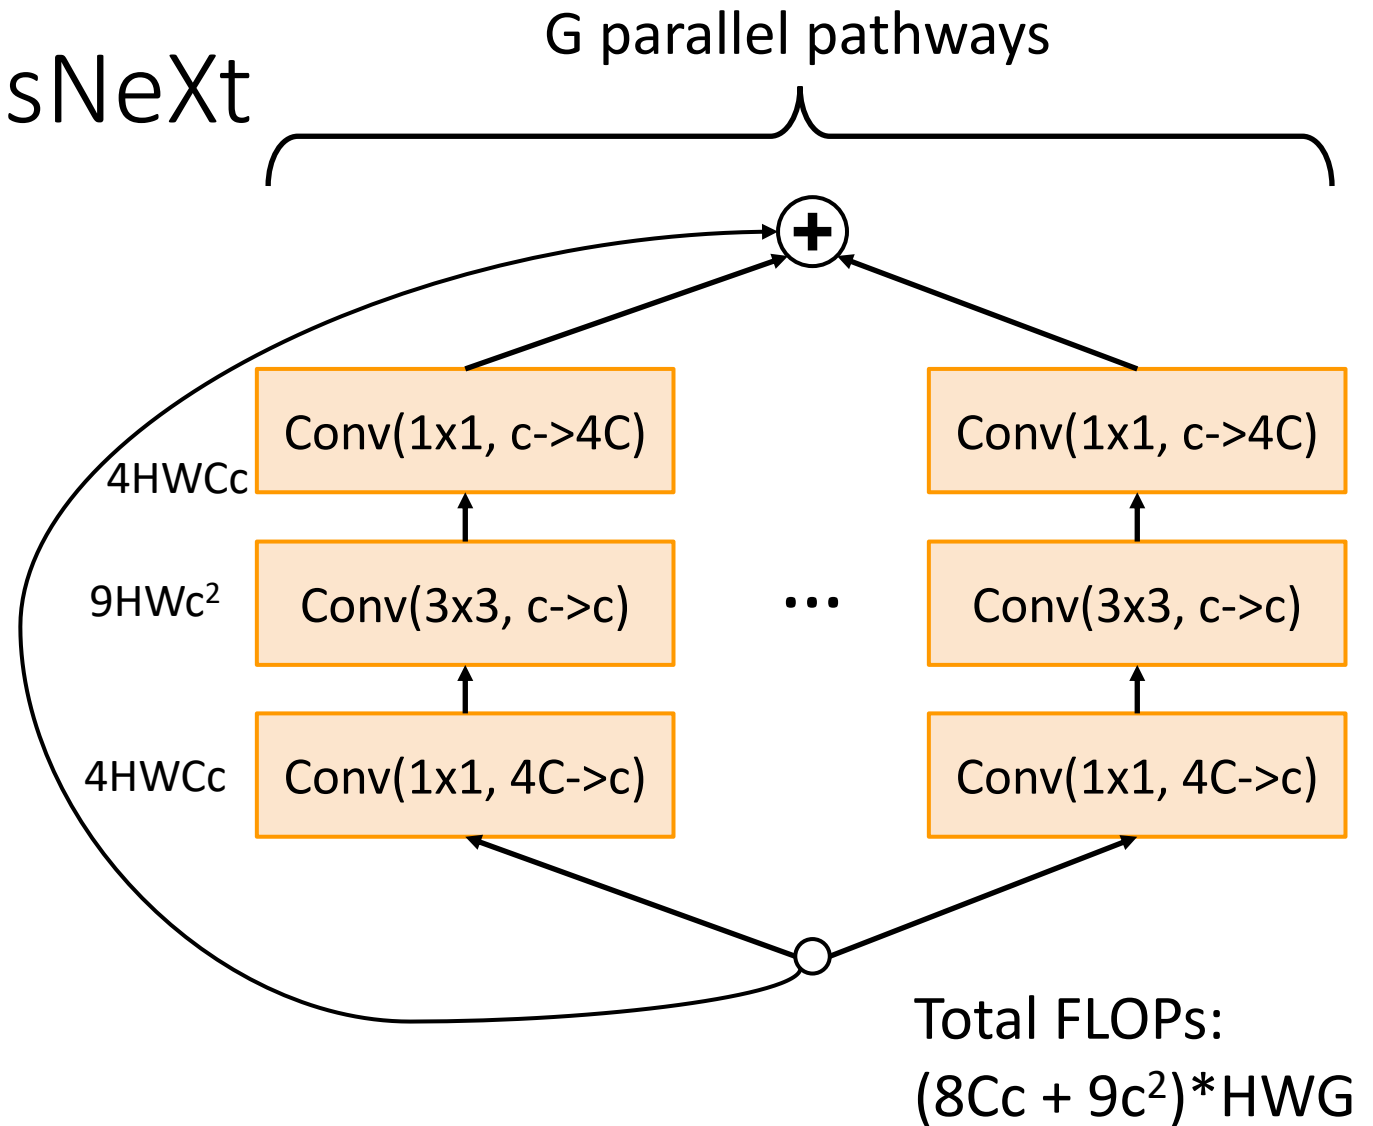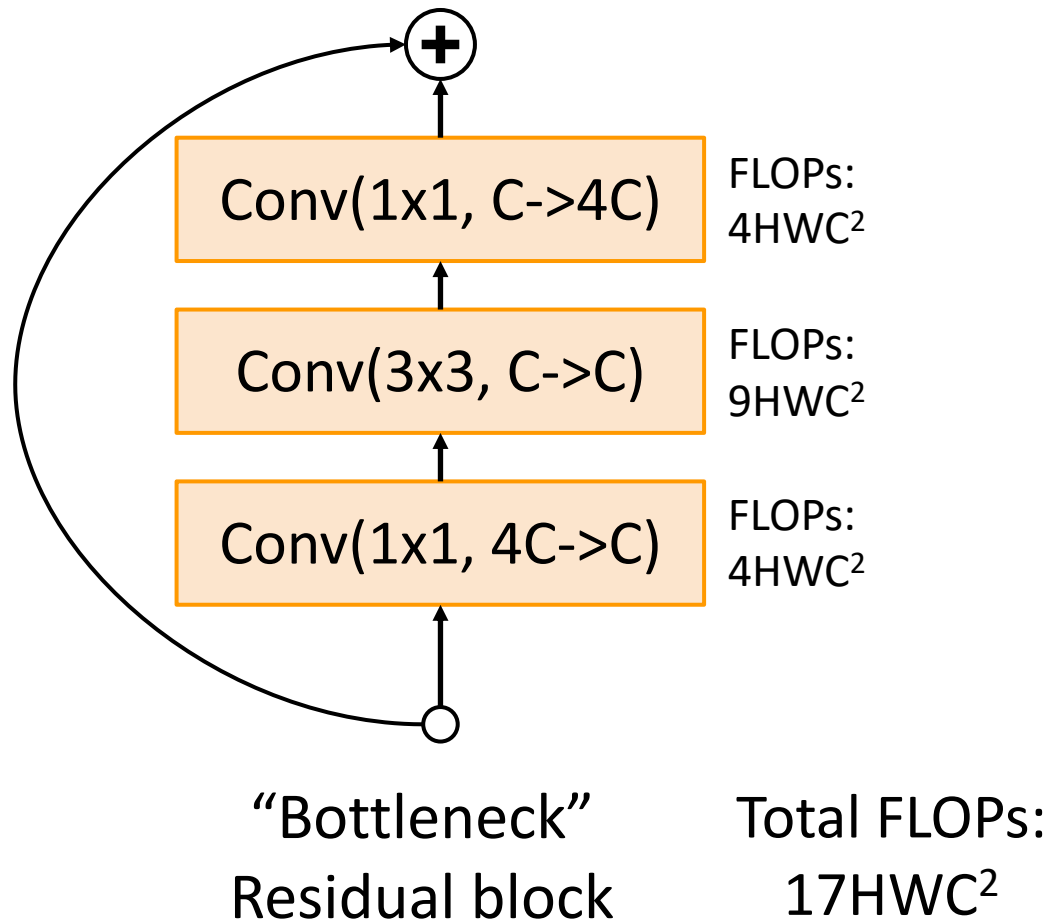

Improving ResNets: ResNeXt

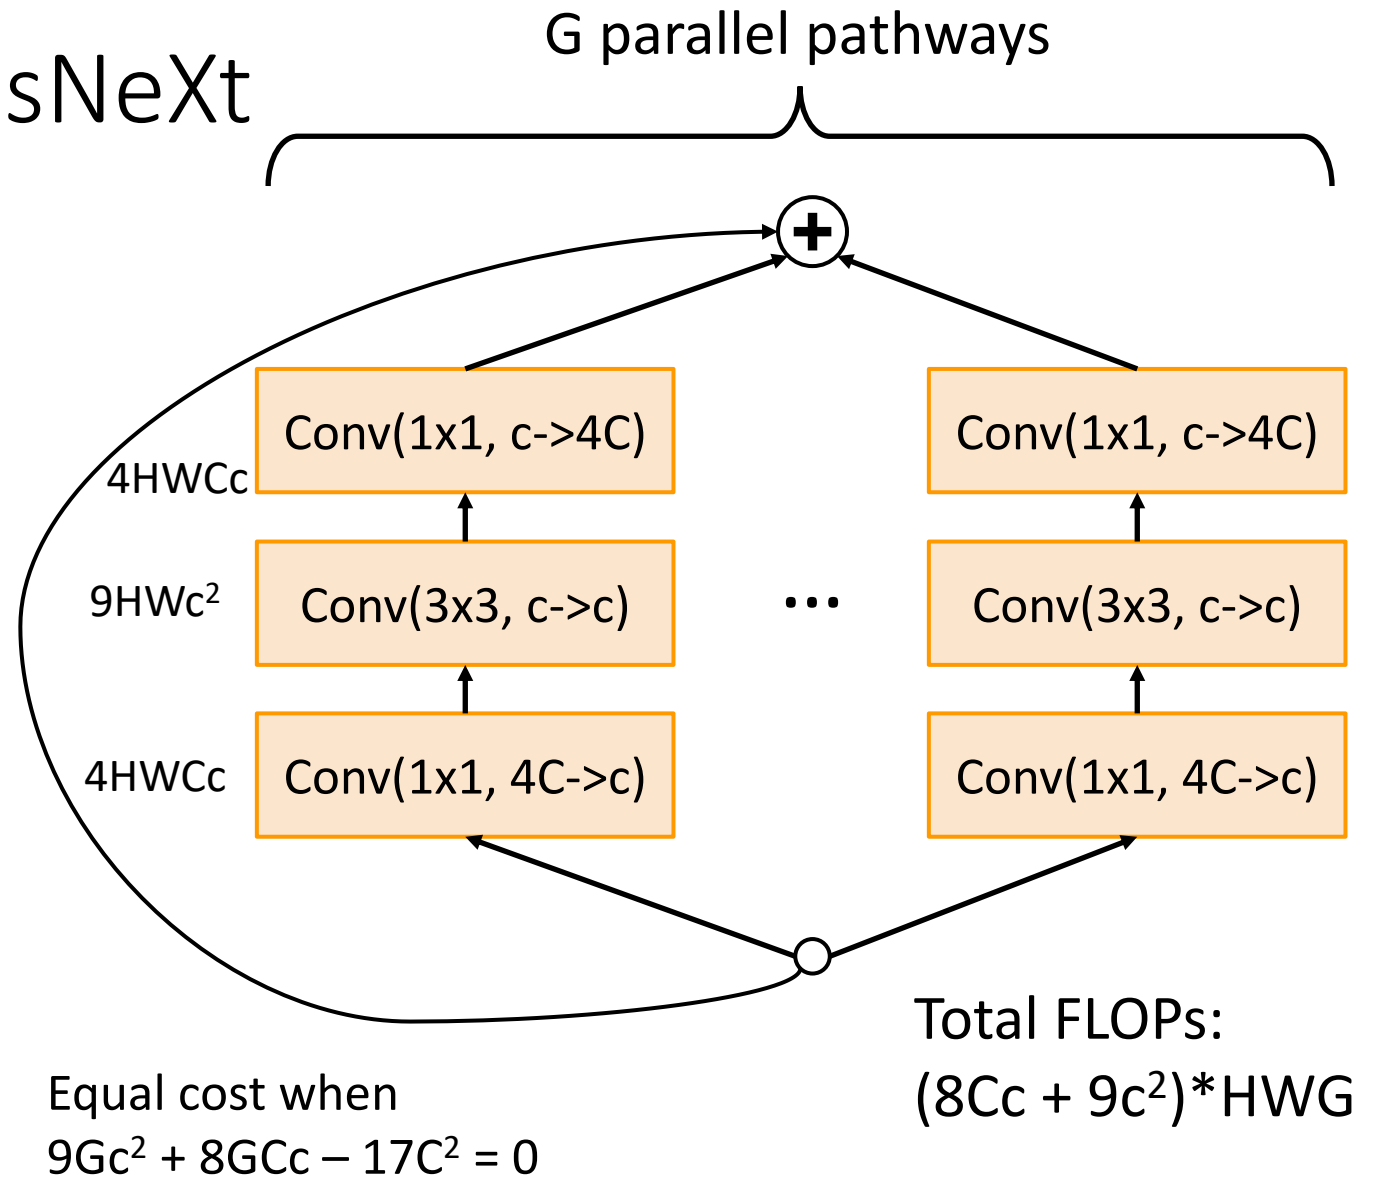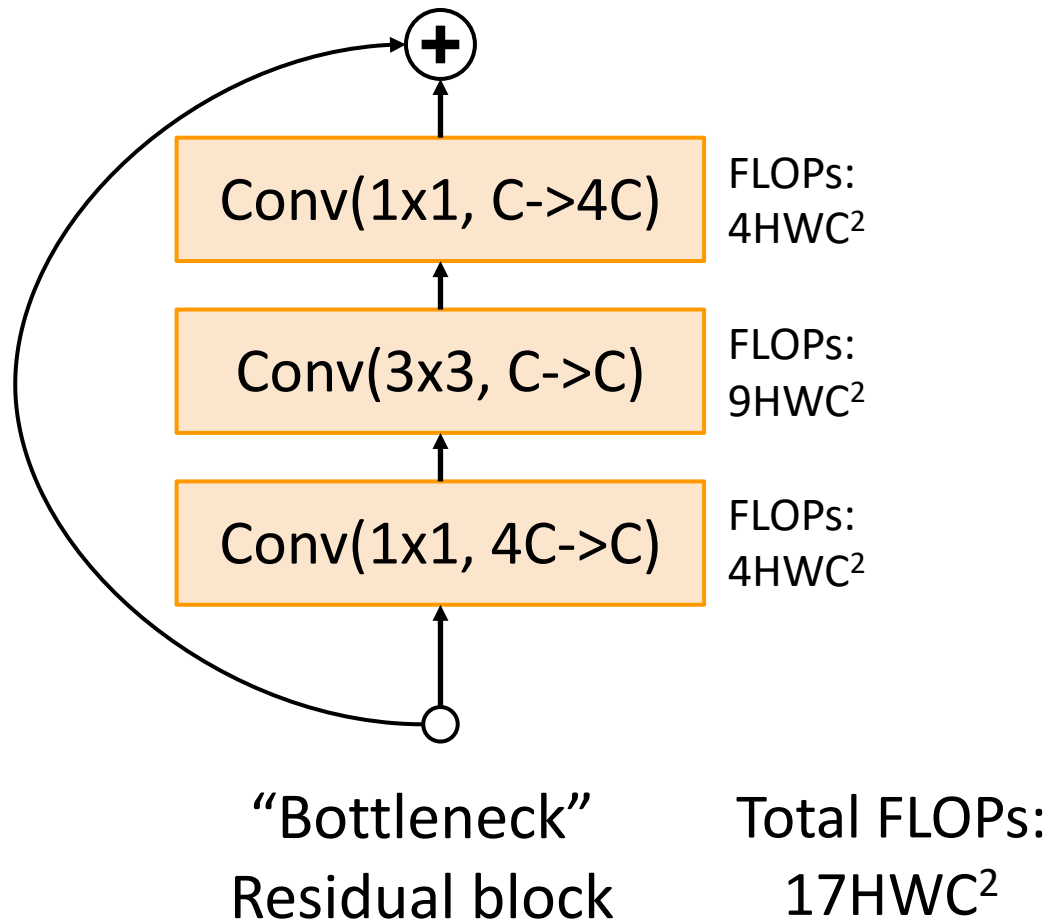

Example: $C=64, G=4, c=24$; $C=64, G=32, c=4$

Grouped Convolution

Convolution with groups=1:

Normal convolution

Input: $C_{in} \times H \times W$

Weight: $C_{out} \times C_{in} \times K \times K$

Output: $C_{out} \times H' \times W'$

FLOPs: $C_{out} C_{in} K^2 HW$

All convolutional kernels touch
all C_{in} channels of the input

Grouped Convolution

Convolution with groups=1:

Normal convolution

Input: $C_{in} \times H \times W$


Weight: $C_{out} \times C_{in} \times K \times K$

Output: $C_{out} \times H' \times W'$

FLOPs: $C_{out} C_{in} K^2 H W$

All convolutional kernels touch
all C_{in} channels of the input

Convolution with groups=2:
Two parallel convolution layers that
work on half the channels

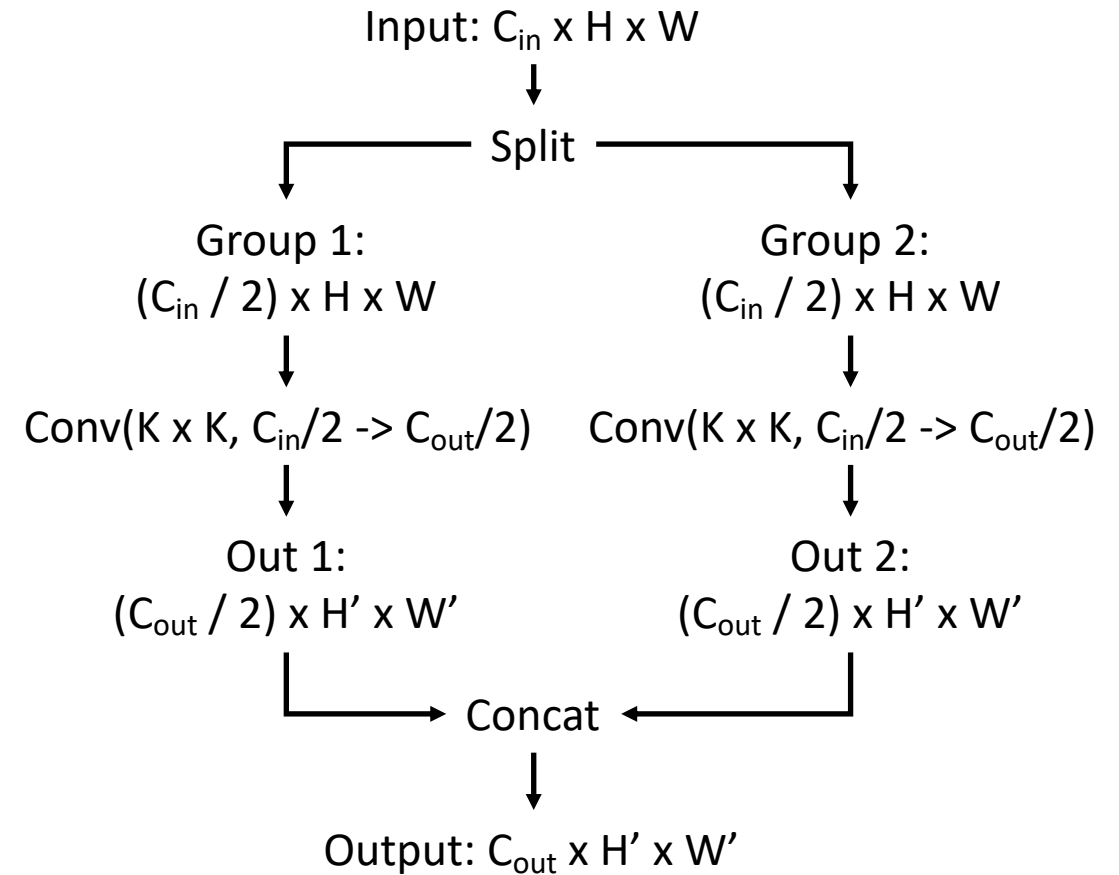

Grouped Convolution

Convolution with groups=1:

Normal convolution

Input: $C_{in} \times H \times W$

Weight: $C_{out} \times C_{in} \times K \times K$

Output: $C_{out} \times H' \times W'$

FLOPs: $C_{out} C_{in} K^2 H W$

All convolutional kernels touch
all C_{in} channels of the input

Convolution with groups=G:

G parallel conv layers; each “sees”
 C_{in}/G input channels and produces
 C_{out}/G output channels

Input: $C_{in} \times H \times W$

Split to $G \times [(C_{in} / G) \times H \times W]$

Weight: $G \times (C_{out} / G) \times (C_{in} \times G) \times K \times K$

G parallel convolutions

Output: $G \times [(C_{out} / G) \times H' \times W']$

Concat to $C_{out} \times H' \times W'$

FLOPs: $C_{out} C_{in} K^2 H W / G$

Grouped Convolution

Convolution with groups=1:

Normal convolution

Input: $C_{in} \times H \times W$

Weight: $C_{out} \times C_{in} \times K \times K$

Output: $C_{out} \times H' \times W'$

FLOPs: $C_{out} C_{in} K^2 H W$

All convolutional kernels touch
all C_{in} channels of the input

Depthwise Convolution

Special case: $G=C_{in}$, $C_{out} = nC_{in}$

Each input channel is convolved
with n different $K \times K$ filters to
produce n output channels

Convolution with groups=G:

G parallel conv layers; each “sees”
 C_{in}/G input channels and produces
 C_{out}/G output channels

Input: $C_{in} \times H \times W$

Split to $G \times [(C_{in} / G) \times H \times W]$

Weight: $G \times (C_{out} / G) \times (C_{in} \times G) \times K \times K$

G parallel convolutions

Output: $G \times [(C_{out} / G) \times H' \times W']$

Concat to $C_{out} \times H' \times W'$

FLOPs: $C_{out} C_{in} K^2 H W / G$

Grouped Convolution in PyTorch

PyTorch convolution gives an option for groups!



Conv2d

```
CLASS torch.nn.Conv2d(in_channels, out_channels, kernel_size,  
stride=1, padding=0, dilation=1, groups=1, bias=True,  
padding_mode='zeros')
```

[\[SOURCE\]](#)

Improving ResNets: ResNeXt

Equivalent formulation
with **grouped convolution**

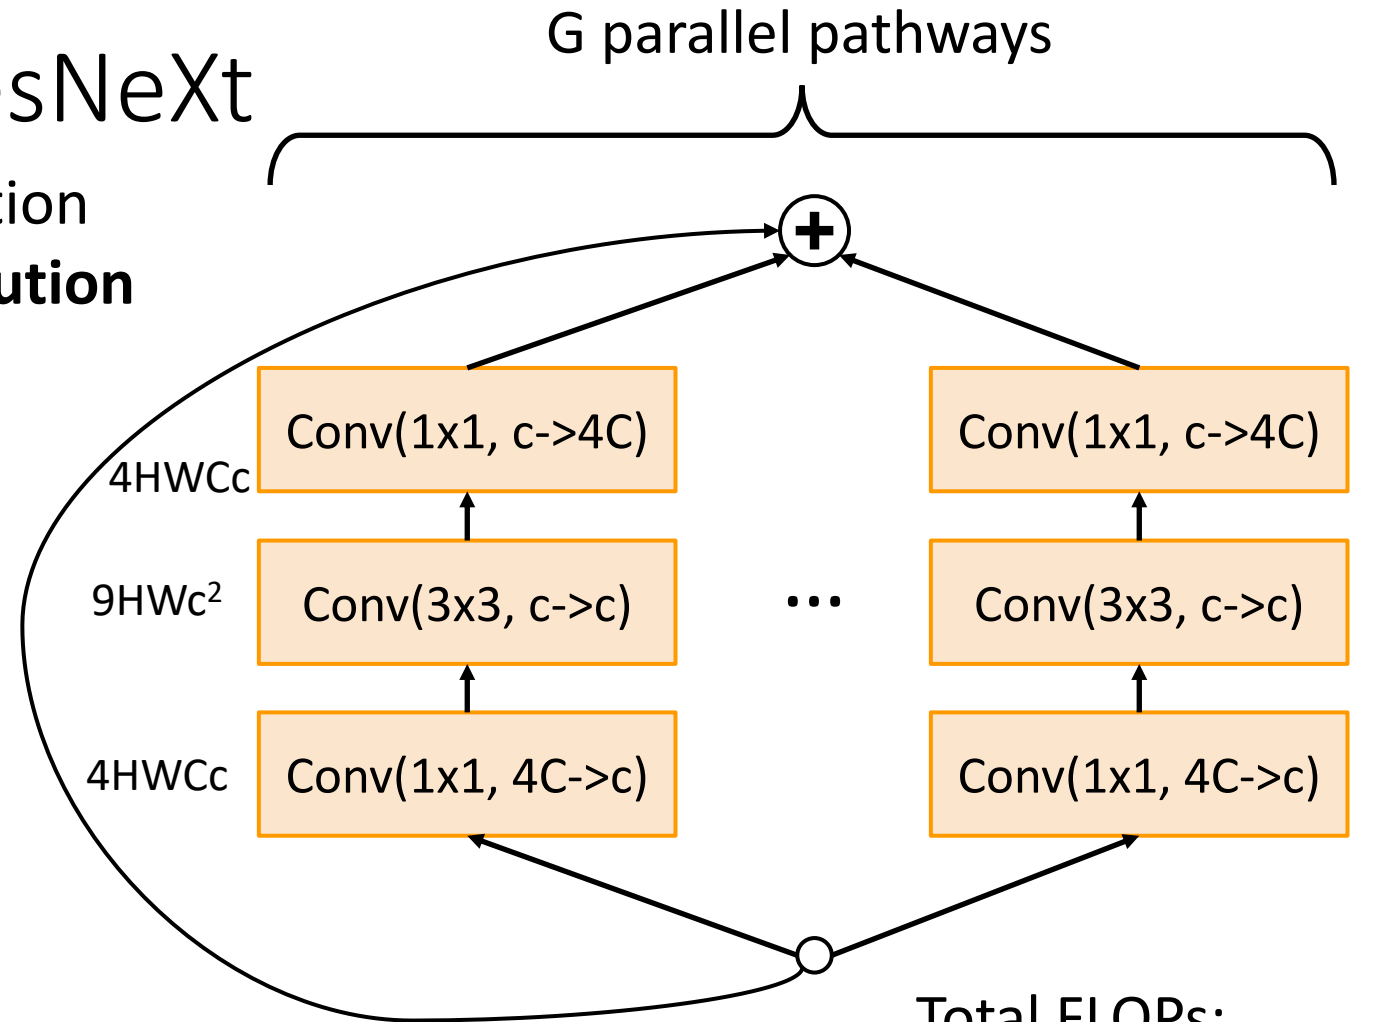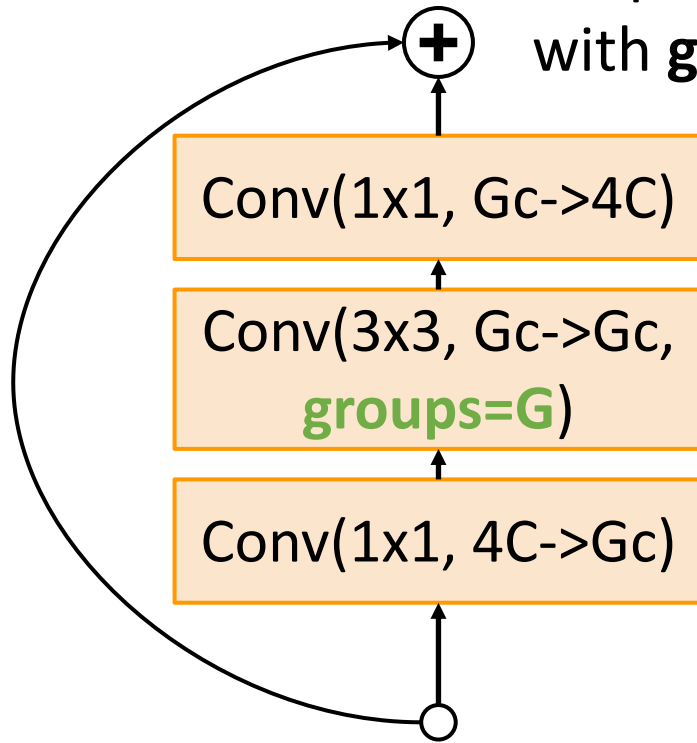

Equal cost when
 $9Gc^2 + 8GCc - 17C^2 = 0$

Example: $C=64, G=4, c=24$; $C=64, G=32, c=4$


ResNeXt: Maintain computation by adding groups!

Model	Groups	Group width	Top-1 Error
ResNet-50	1	64	23.9
ResNeXt-50	2	40	23
ResNeXt-50	4	24	22.6
ResNeXt-50	8	14	22.3
ResNeXt-50	32	4	22.2

Model	Groups	Group width	Top-1 Error
ResNet-101	1	64	22.0
ResNeXt-101	2	40	21.7
ResNeXt-101	4	24	21.4
ResNeXt-101	8	14	21.3
ResNeXt-101	32	4	21.2

Adding groups improves performance **with same computational complexity!**

ImageNet Classification Challenge

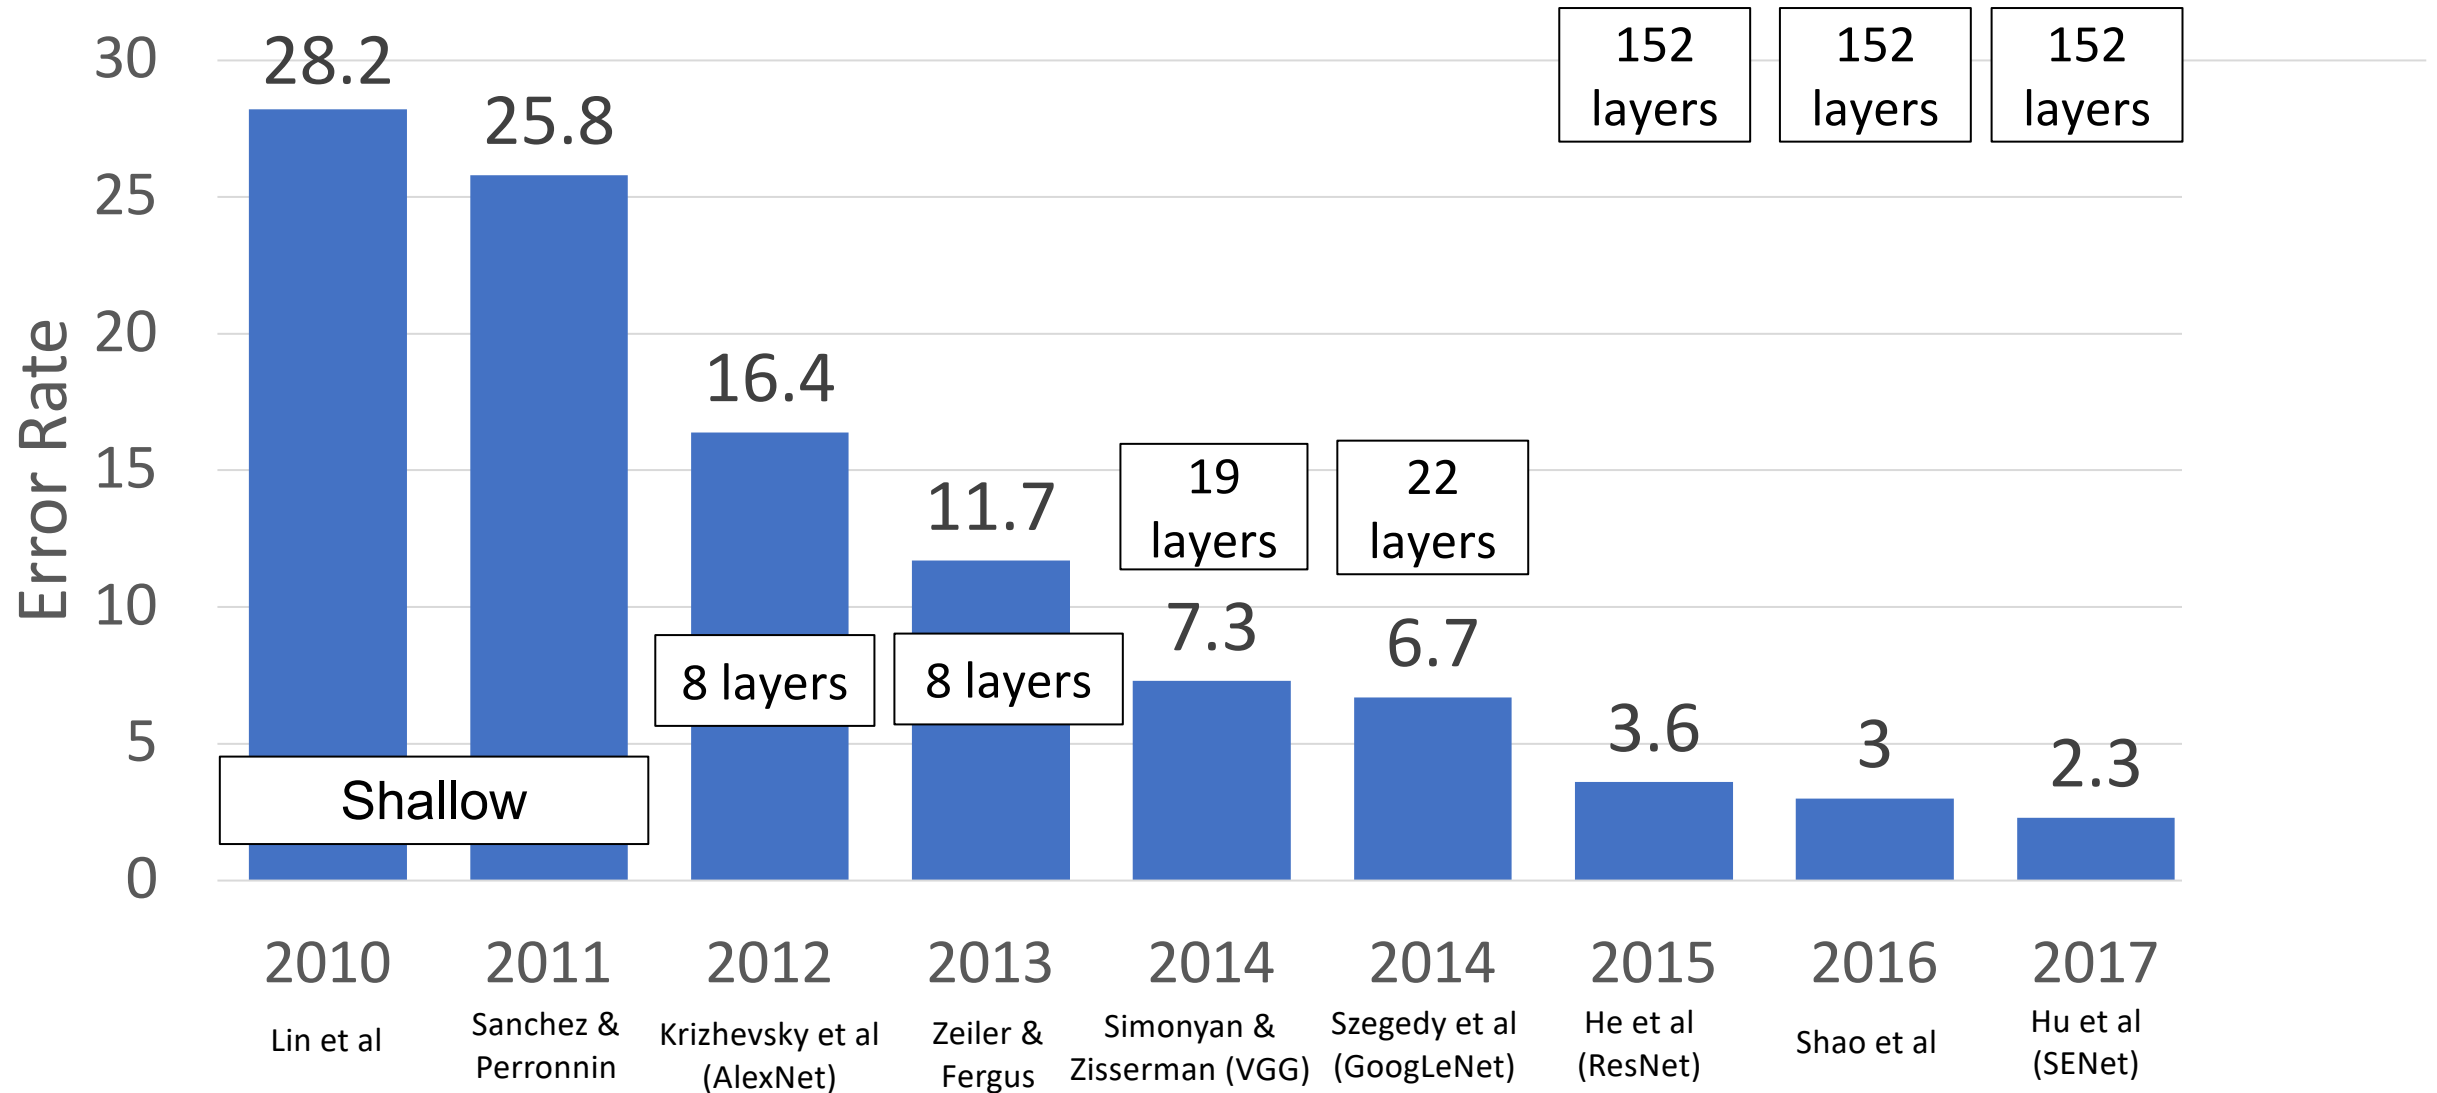


Squeeze-and-Excitation Networks


Adds a "Squeeze-and-excite" branch to each residual block that performs global pooling, full-connected layers, and multiplies back onto feature map

Adds **global context** to each residual block!

Won ILSVRC 2017 with ResNeXt-152-SE

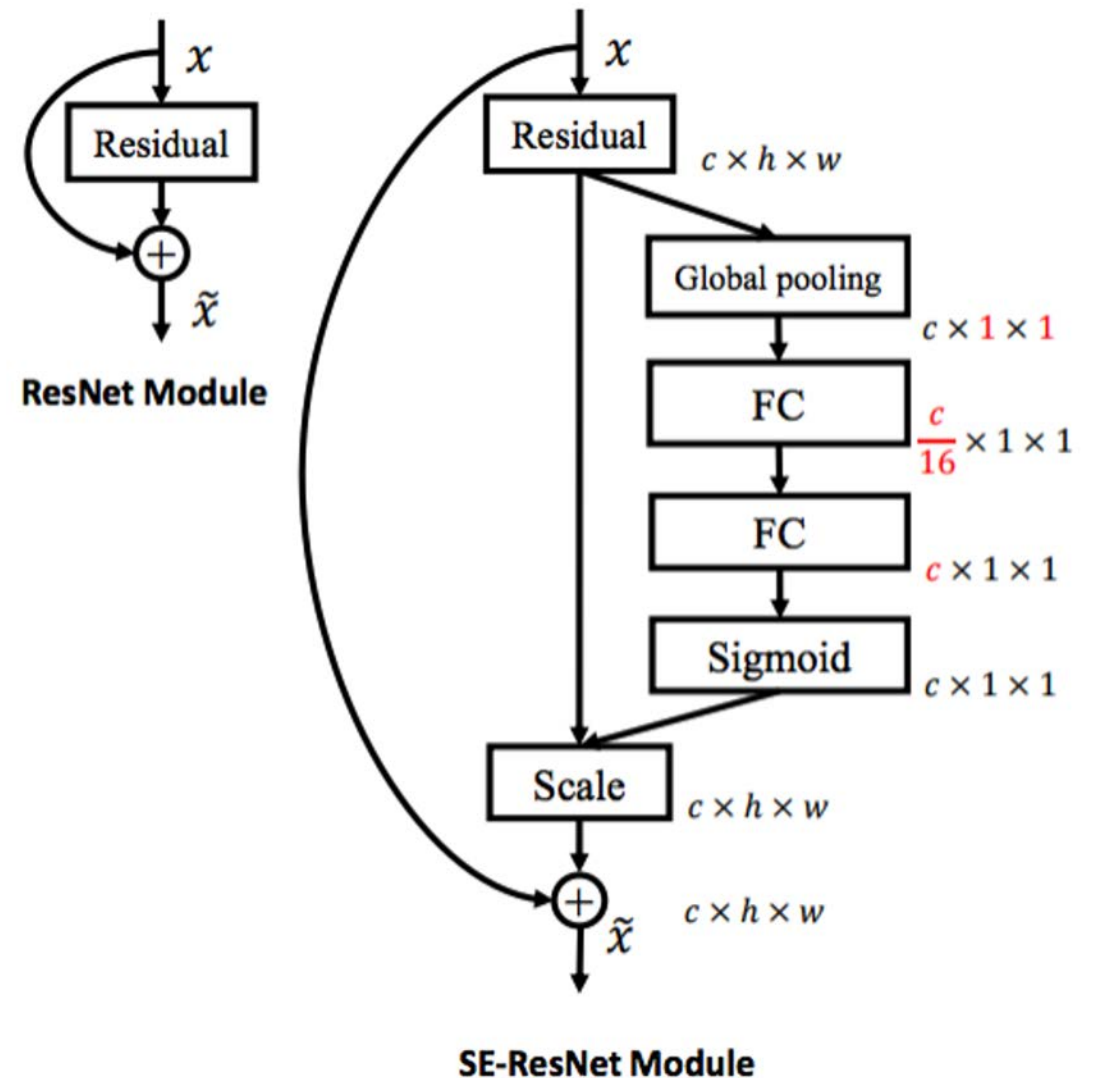


ImageNet Classification Challenge

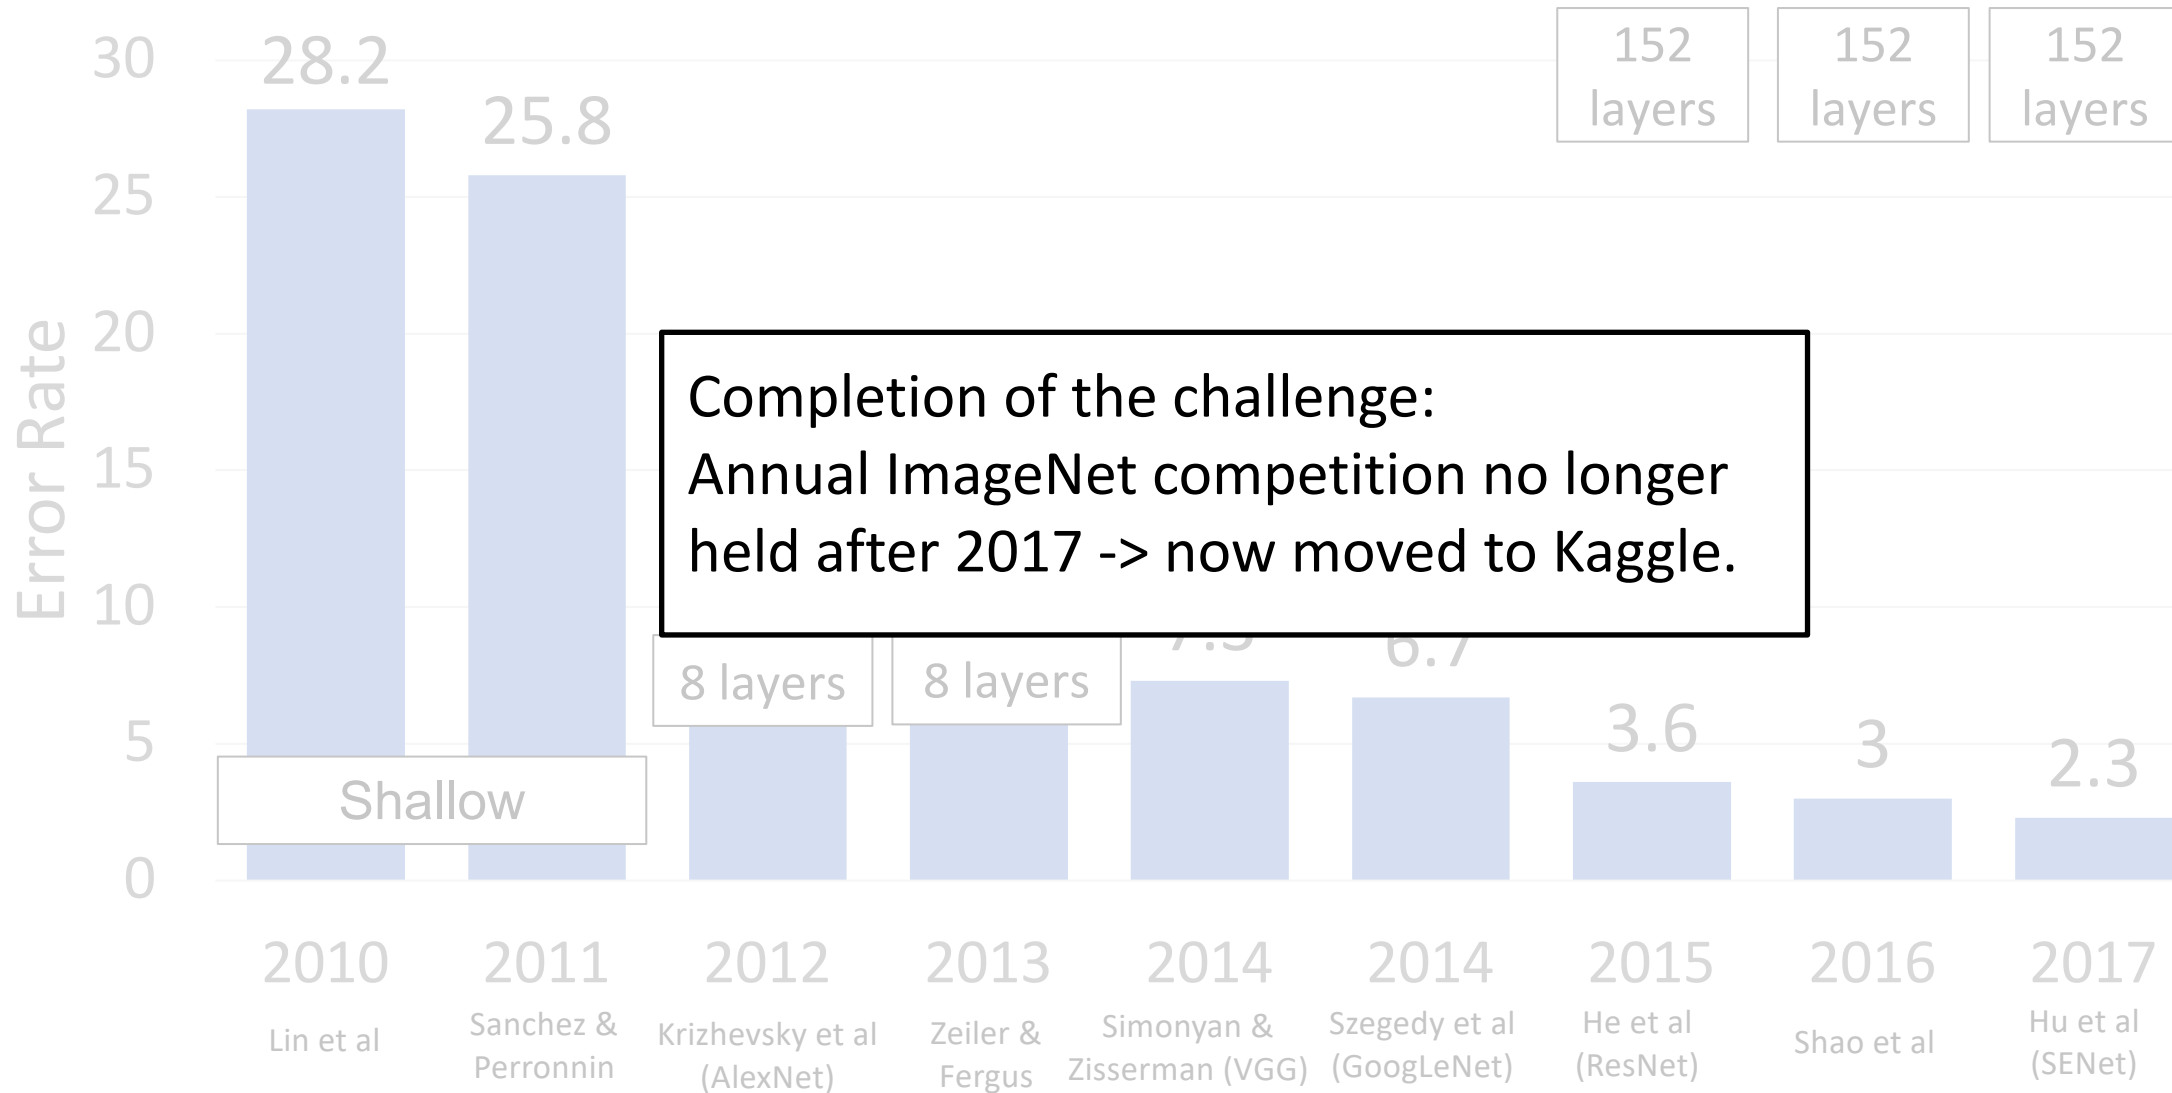

Densely Connected Neural Networks

Dense blocks where each layer is connected to every other layer in feedforward fashion


Alleviates vanishing gradient, strengthens feature propagation, encourages feature reuse

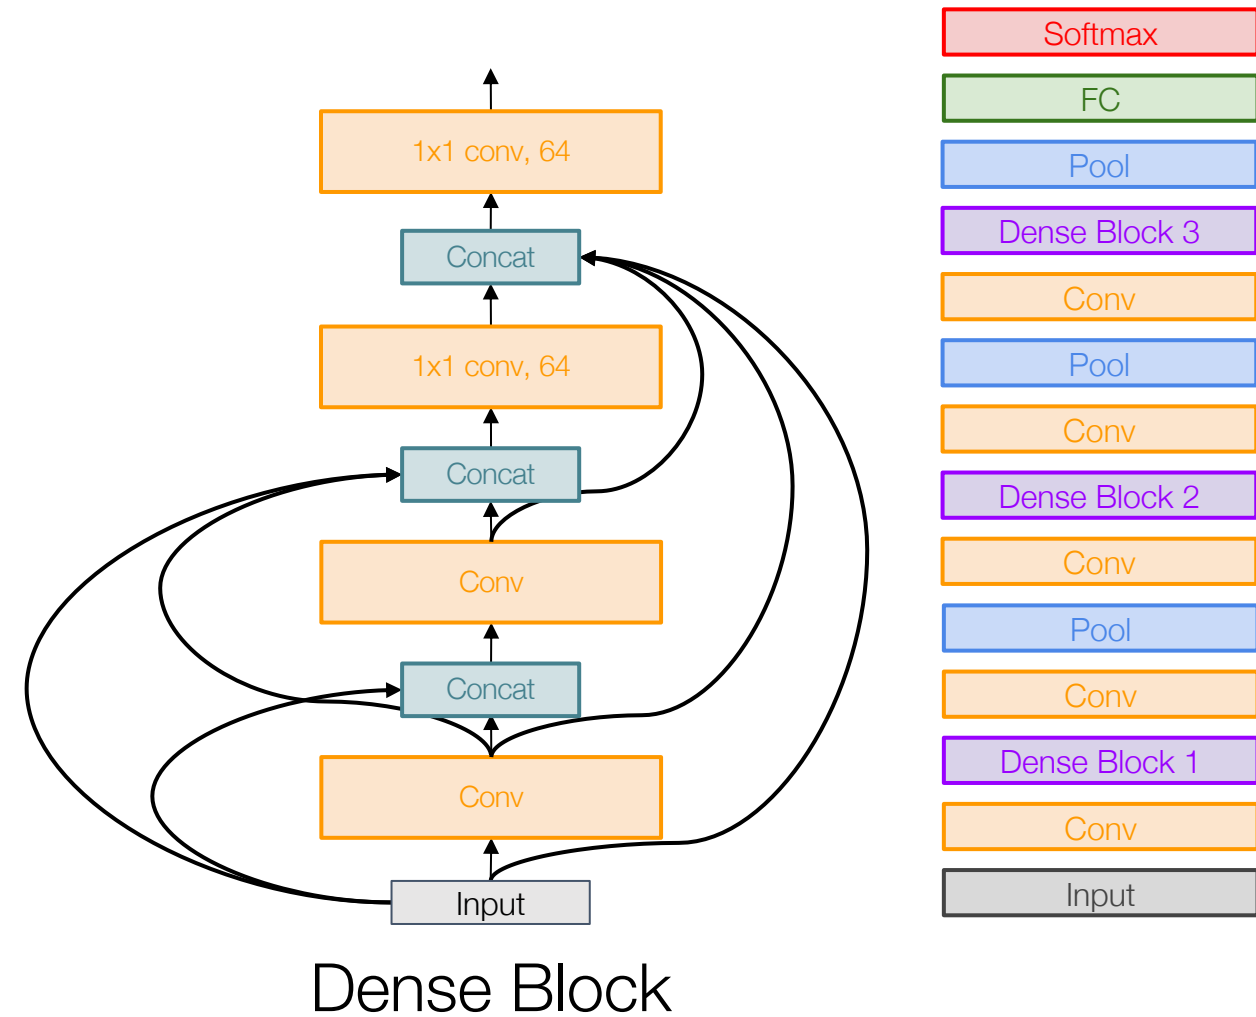

MobileNets: Tiny Networks (For Mobile Devices)

Standard Convolution Block


Total cost: $9C^2HW$

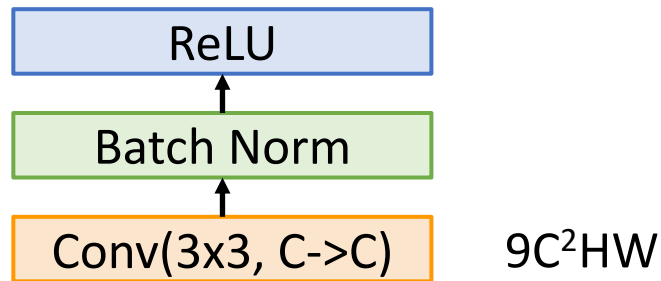

$$\begin{aligned}\text{Speedup} &= 9C^2 / (9C + C^2) \\ &= 9C / (9 + C) \\ &\Rightarrow 9 \text{ (as } C \rightarrow \infty)\end{aligned}$$

Depthwise Separable Convolution

Total cost: $(9C + C^2)HW$

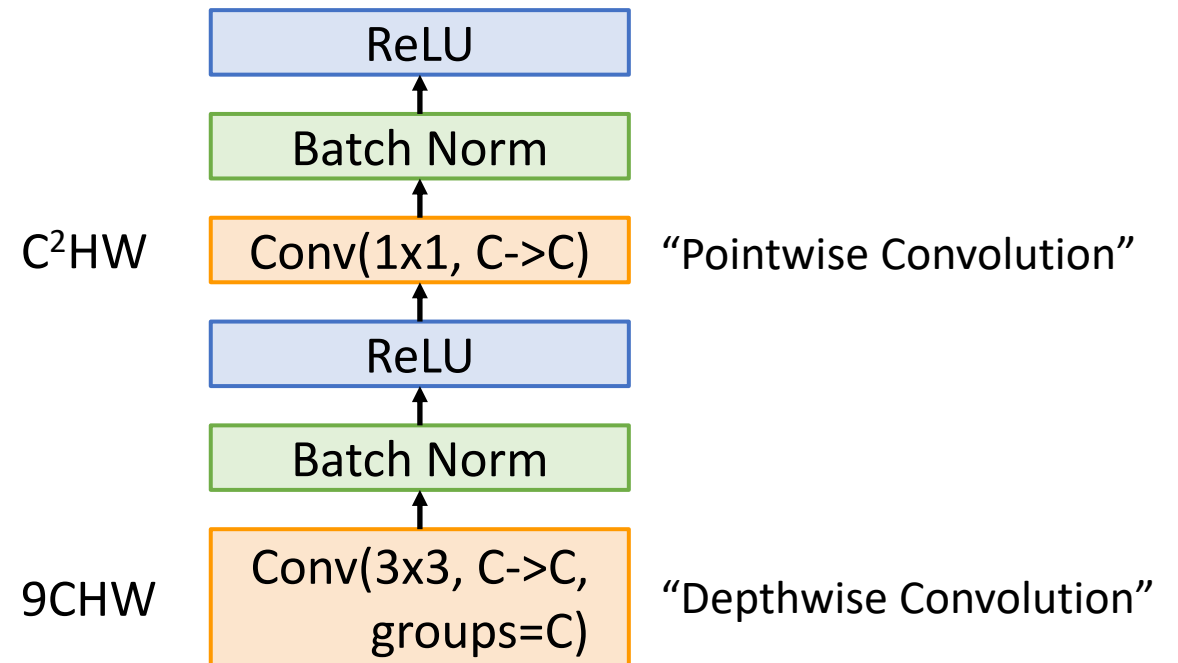

MobileNets: Tiny Networks (For Mobile Devices)

Also related:


ShuffleNet: Zhang et al, CVPR 2018

MobileNetV2: Sandler et al, CVPR 2018

ShuffleNetV2: Ma et al, ECCV 2018

Depthwise Separable Convolution


Total cost: $(9C + C^2)HW$

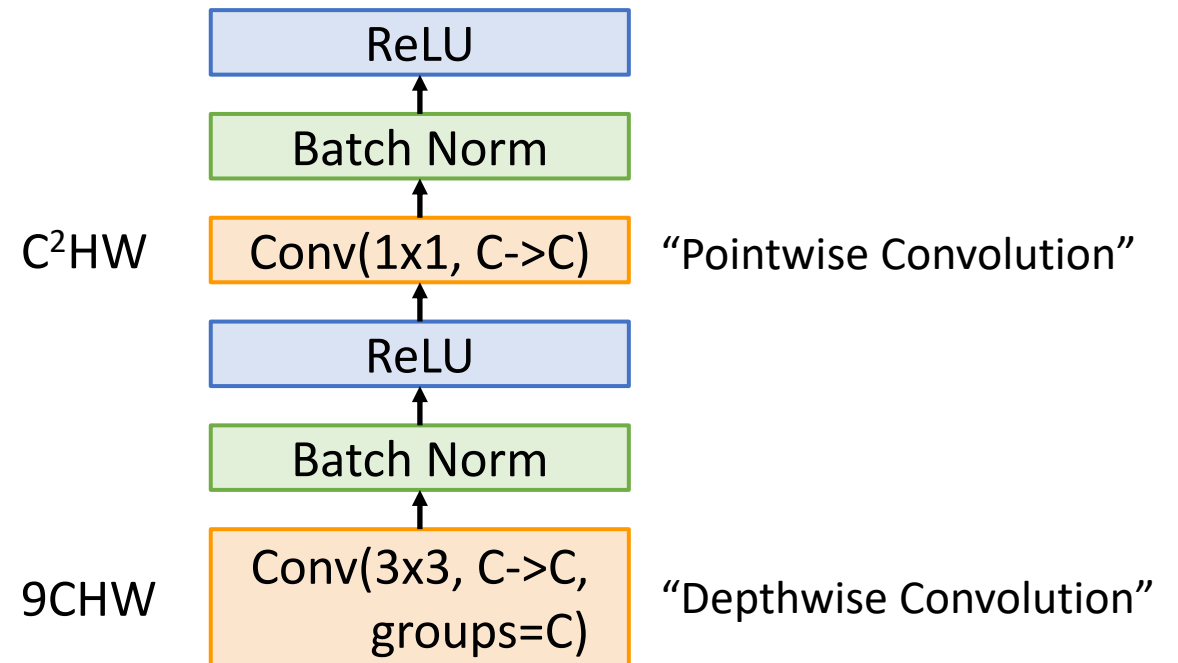

Neural Architecture Search

Designing neural network architectures is hard – let's automate it!


- One network (**controller**) outputs network architectures
- Sample **child networks** from controller and train them
- After training a batch of child networks, make a gradient step on controller network (Using **policy gradient**)
- Over time, controller learns to output good architectures!

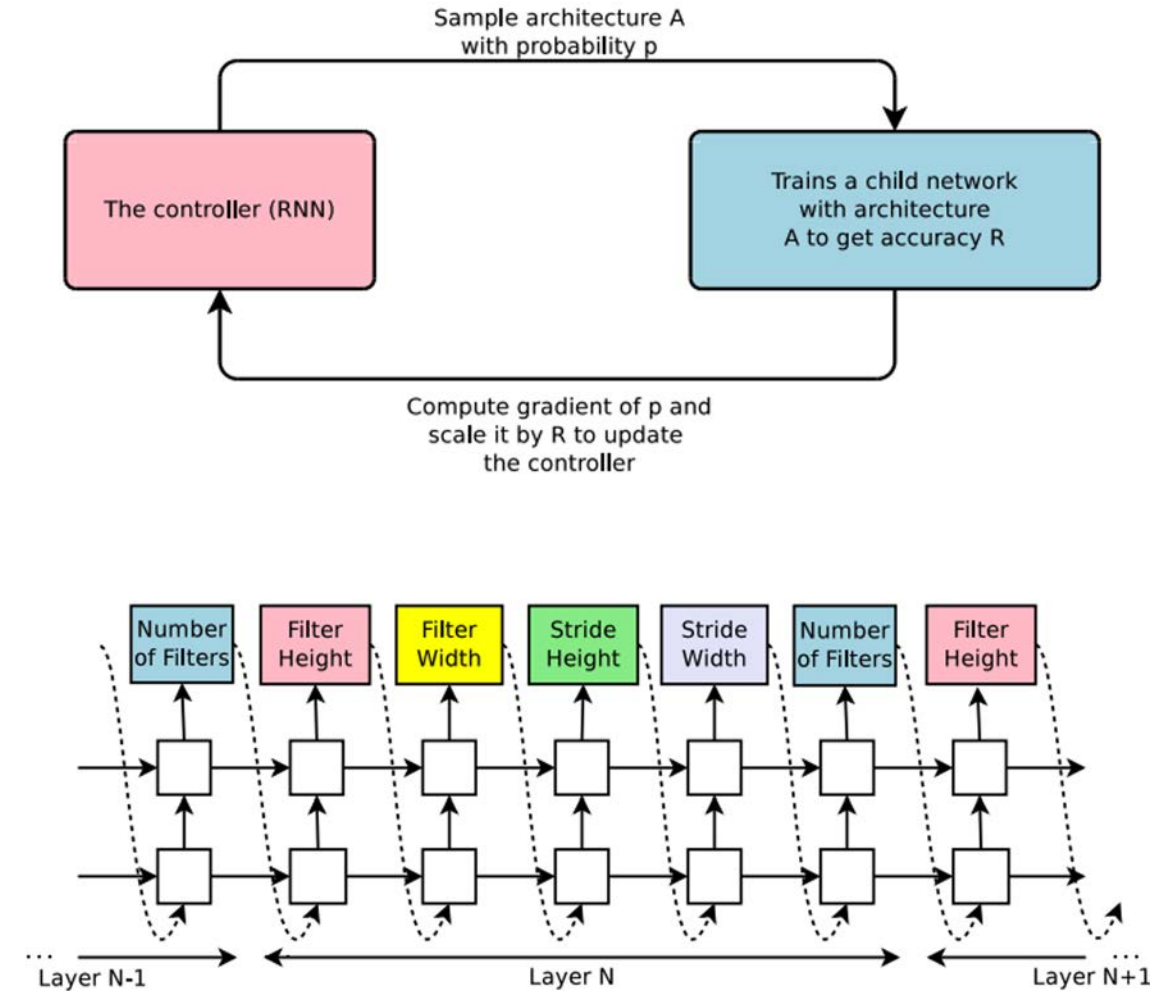

Neural Architecture Search



Designing neural network architectures is hard – let's automate it!

- One network (**controller**) outputs network architectures
- Sample **child networks** from controller and train them
- After training a batch of child networks, make a gradient step on controller network (Using **policy gradient**)
- Over time, controller learns to output good architectures!
- **VERY EXPENSIVE!! Each gradient step on controller requires training a batch of child models!**
- **Original paper trained on 800 GPUs for 28 days!**
- **Followup work has focused on efficient search**

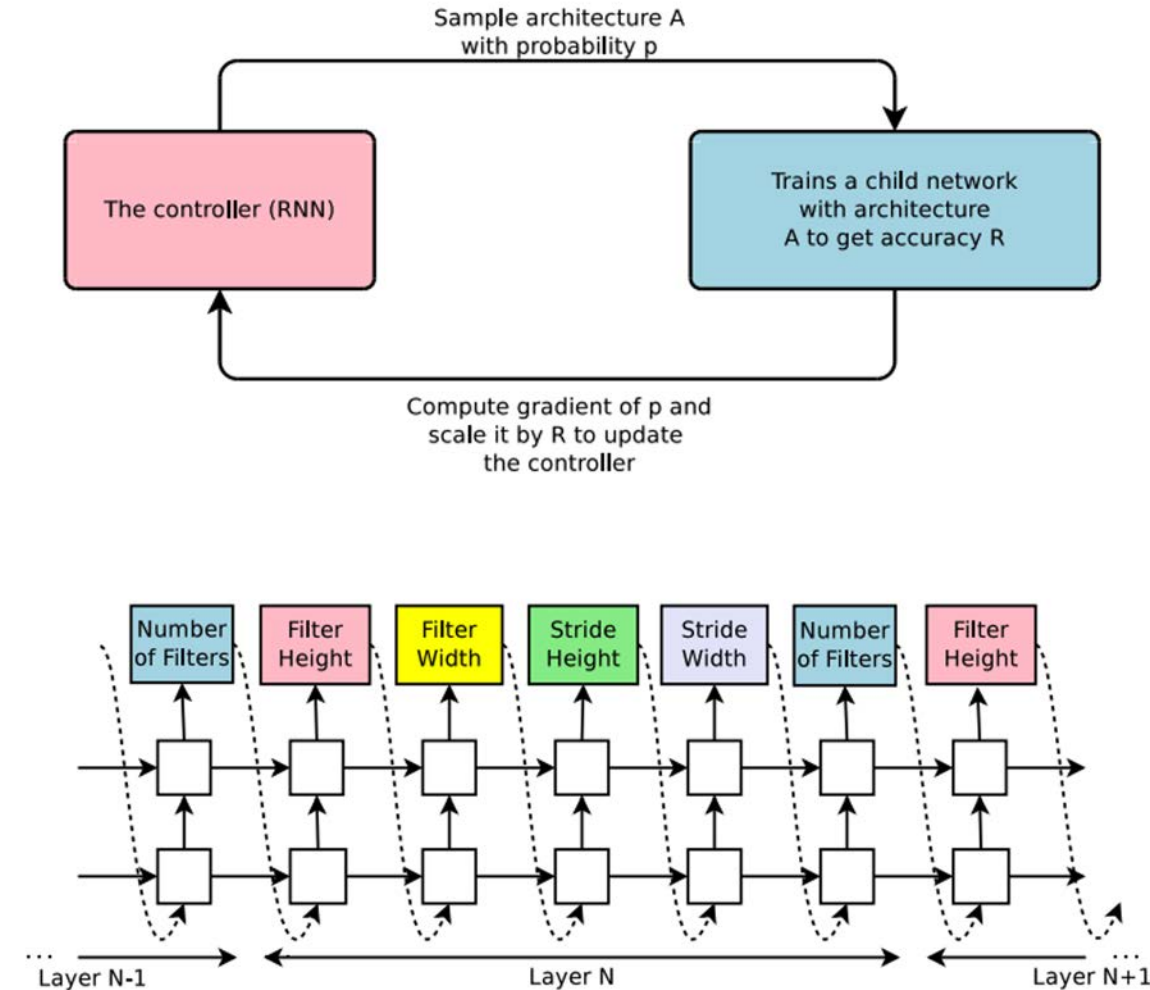

Neural Architecture Search

Neural architecture search can be used to find efficient CNN architectures!

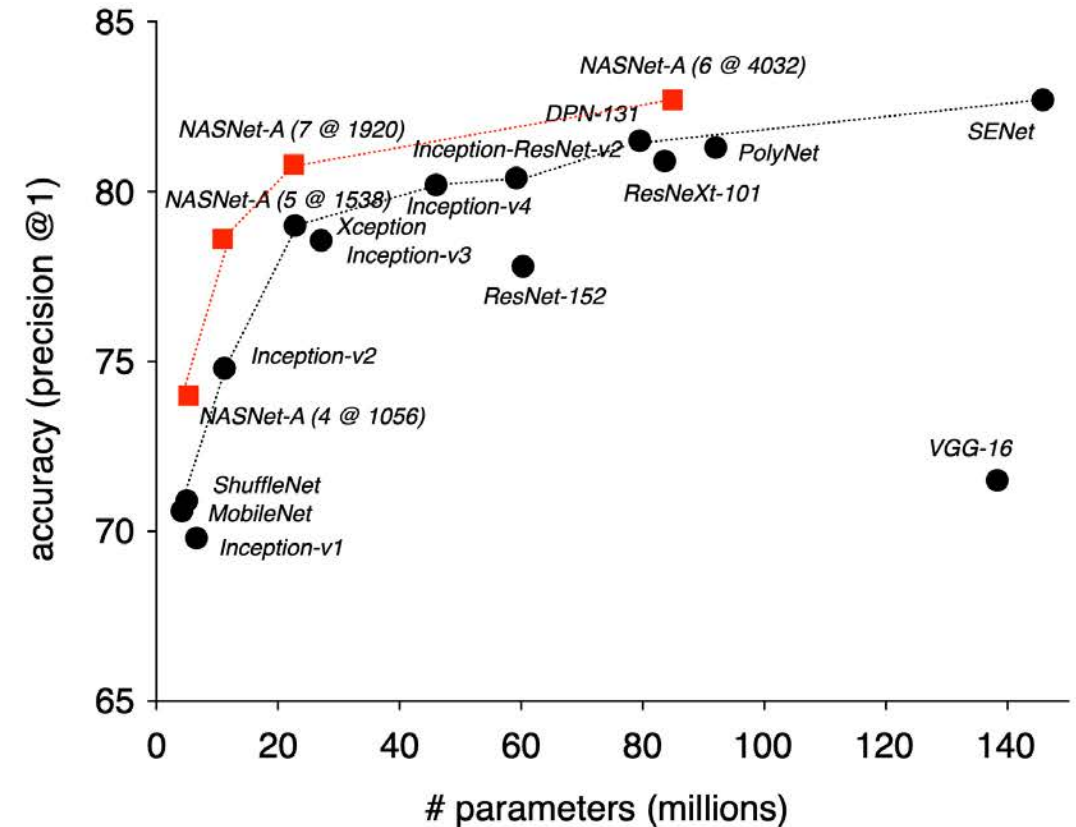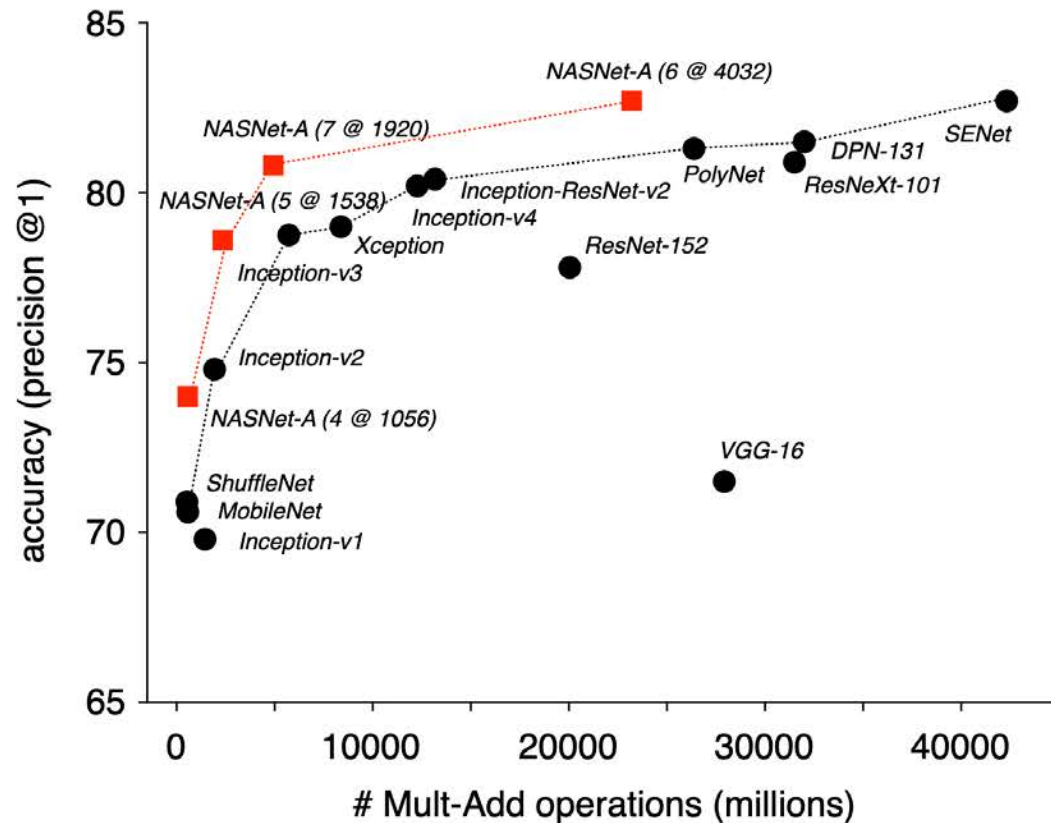

Zoph et al, "Learning Transferable Architectures for Scalable Image Recognition", CVPR 2018

CNN Architectures Summary

Early work (AlexNet -> ZFNet -> VGG) shows that **bigger networks work better**

GoogLeNet one of the first to focus on **efficiency** (aggressive stem, 1x1 bottleneck convolutions, global avg pool instead of FC layers)

ResNet showed us how to train extremely deep networks – limited only by GPU memory! Started to show diminishing returns as networks got bigger

After ResNet: **Efficient networks** became central: how can we improve the accuracy without increasing the complexity?

Lots of **tiny networks** aimed at mobile devices: MobileNet, ShuffleNet, etc

Neural Architecture Search promises to automate architecture design

Which Architecture should I use?

Don't be a hero. For most problems you should use an off-the-shelf architecture; don't try to design your own!

If you just care about accuracy, **ResNet-50** or **ResNet-101** are great choices

If you want an efficient network (real-time, run on mobile, etc) try **MobileNets** and **ShuffleNets**

Next Time: Deep Learning Hardware and Software