

Figure 1: Using default dot filter to place nodes

|   |   |   |   |
|---|---|---|---|
| A | B | C | E |
|   |   | D |   |




Figure 2: Using `neato` filter to place nodes




Figure 3: Using `twopi` filter to place nodes

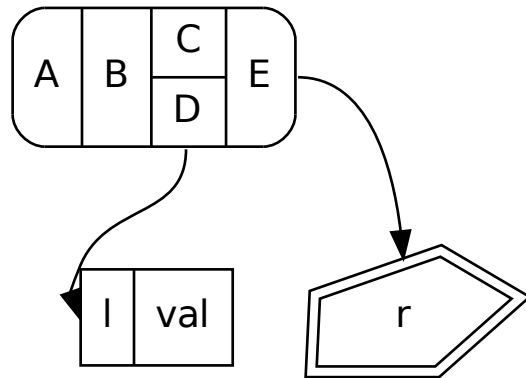


Figure 4: `includedot` command test

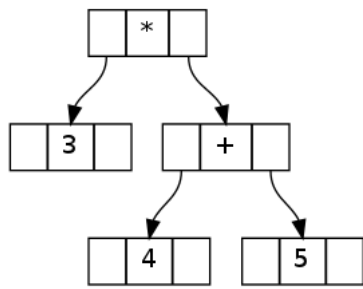


Figure 5: Output to PNG format