

Figure 1: Using default dot filter to place nodes




Figure 2: Using `neato` filter to place nodes, output will be stored in `graphviz` directory




Figure 3: testing shapes, `scale=0.5`

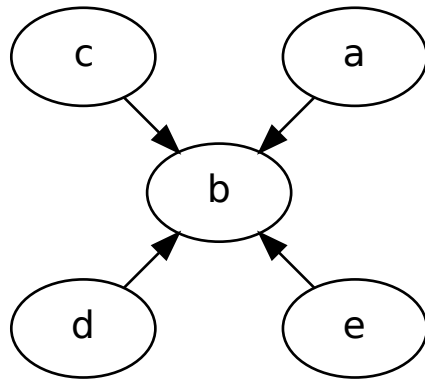


Figure 4: Using `twopi` filter to place nodes

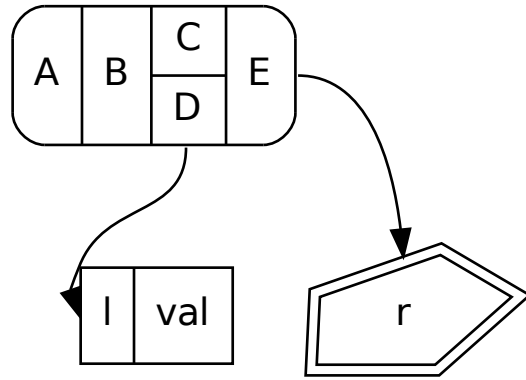


Figure 5: `includedot` command test

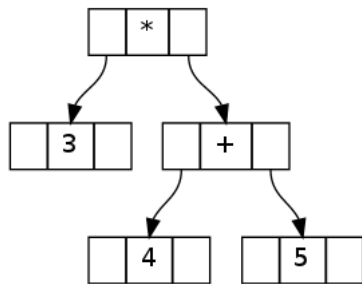


Figure 6: Output to PNG format

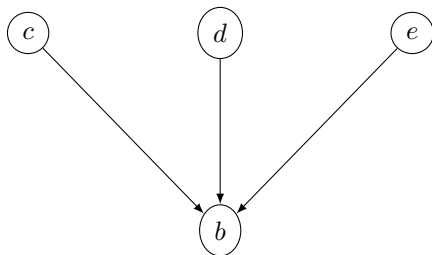


Figure 7: digraph with option `output=tex`, `dot2tex` is used for conversion

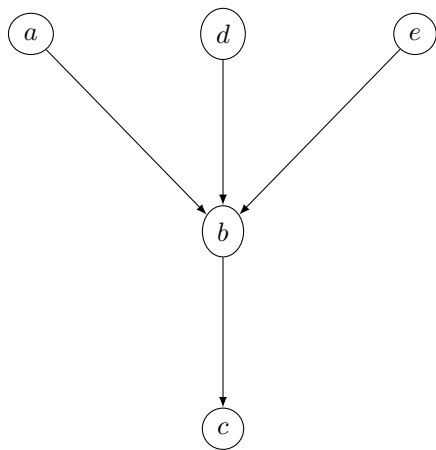


Figure 8: `includedot` command test