




NOTES:-

1. TIMBER TO BE BALTIC REDWOOD, SCOTS PINE (PINUS SYLVESTRIS) OR FRENCH MARITIME PINE GENERALLY IN ACCORDANCE WITH BS 1990
2. BLOCKS TO BE CUT FROM SAWN TIMBER
3. THE LONGITUDINALLY CUT SURFACES OF BLOCKS SHALL BE STRAIGHT AND CLEAN CUT AND THE ANNULAR RINGS SHALL BE APPROX, PARALLEL TO THE WIDE FACE. PLANING IS NOT REQUIRED. WANE IS PERMISSABLE ON ONE FACE
4. BLOCKS SHALL BE TREATED AFTER FABRICATION WITH
 - A) CREOSOTE TO BS913 (RUEPING PROCESS)
 - OR
 - B) WATER-BORNE SALTS (TANALITH C) TO BS4072

ALL DIMENSIONS SHOWN ARE IN MILLIMETRES UNLESS OTHERWISE STATED

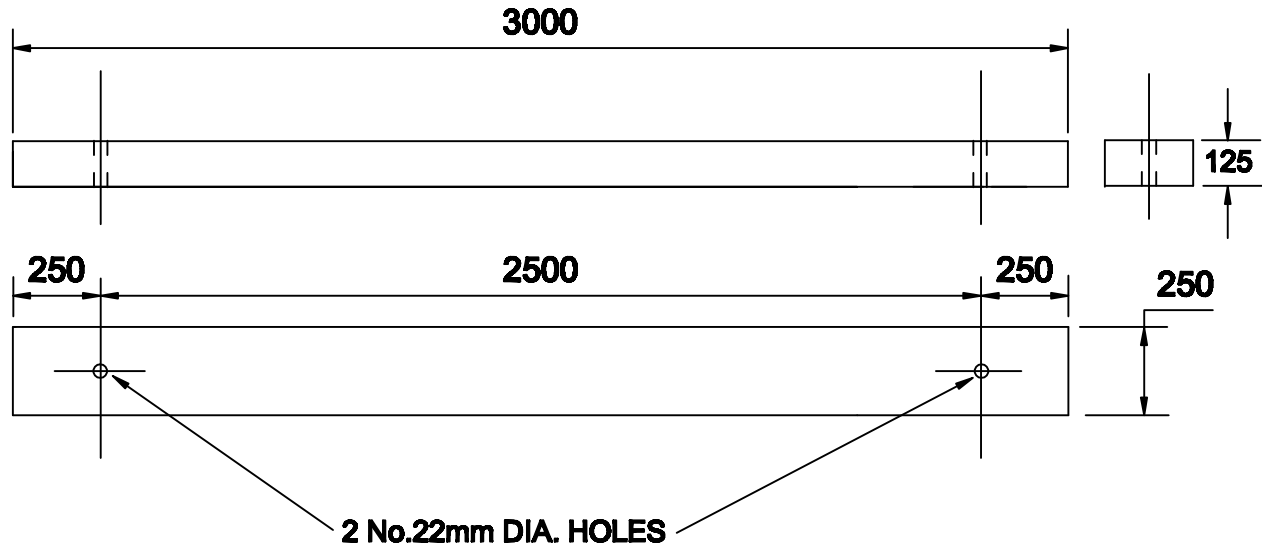

Prepared By

J.L.W.

Checked

G.H.

Date issued

APR 82

Lloyds Court, 78, Grey Street, Newcastle Upon Tyne, NE1 6AF

WOOD BRACE BLOCK (250 x 125 SECTION)
FOR 'H' POLES 2500 CENTRES

Drg.No.

1 00 043 9112

Mods.

A B C D

Sheet No.

2

Revised.

23.2.2005

Scale

1 : 20